


EXPLANATION

- 7000 —
- - - 6800 - - -
- STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval is 200 feet (61 m). Datum is mean sea level.
- 6010
- DRILL HOLE - Showing altitude of top of coal bed, in feet.
- ▲ 7000
- POINT OF MEASUREMENT - Showing altitude of top of coal bed, in feet.
- Av-1A - Adaville No. 1A (upper split)
- Av-1 - Adaville No. 1
- Sv - Spring Valley
- COAL BED SYMBOLS AND NAMES - Coal beds identified by bracketed numbers are not formally named, but are numbered for identification purposes in this quadrangle only.
- ↑ SV[ ]
- TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred.
- 15° -----
- SUBSURFACE MINING LIMIT - Showing areas where dips of coal beds are greater than 15° and subsurface mining by conventional methods is not considered feasible. Reserve base tonnages are calculated beyond limit; Reserve tonnages are not. Arrow points toward area where dips are greater than 15°.
- To convert feet to meters, multiply feet by 0.3048.

NOTE: Dips in this area exceed 15°

NOTE: Structure contours are not drawn beyond dotted line because of insufficient data.

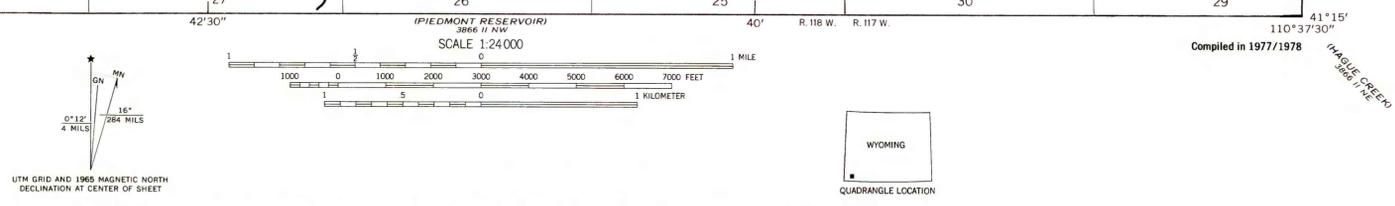

**COAL RESOURCE OCCURRENCE MAP OF THE RAGAN QUADRANGLE, UINTA COUNTY, WYOMING**  
BY  
**DAMES & MOORE**  
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.