

EXPLANATION

----- 7000
----- 6800

STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval is 200 feet (61 m). Datum is mean sea level.

○ 6706

DRILL HOLE - Showing altitude of top of coal bed, in feet.

RS-7 1/2 - Rock Springs No. 7 1/2
COAL BED SYMBOL AND NAME


----- RS-7 1/2 -----

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Short dashed where inferred by present authors.

----- 15° -----

SUBSURFACE MINING LIMIT - Showing areas where dips of coal beds are greater than 15° and subsurface mining by conventional methods is not considered feasible. Reserve Base tonnages are calculated beyond limit; Reserve tonnages are not. Arrow points toward area where dips are greater than 15°.

To convert feet to meters, multiply feet by 0.3048.

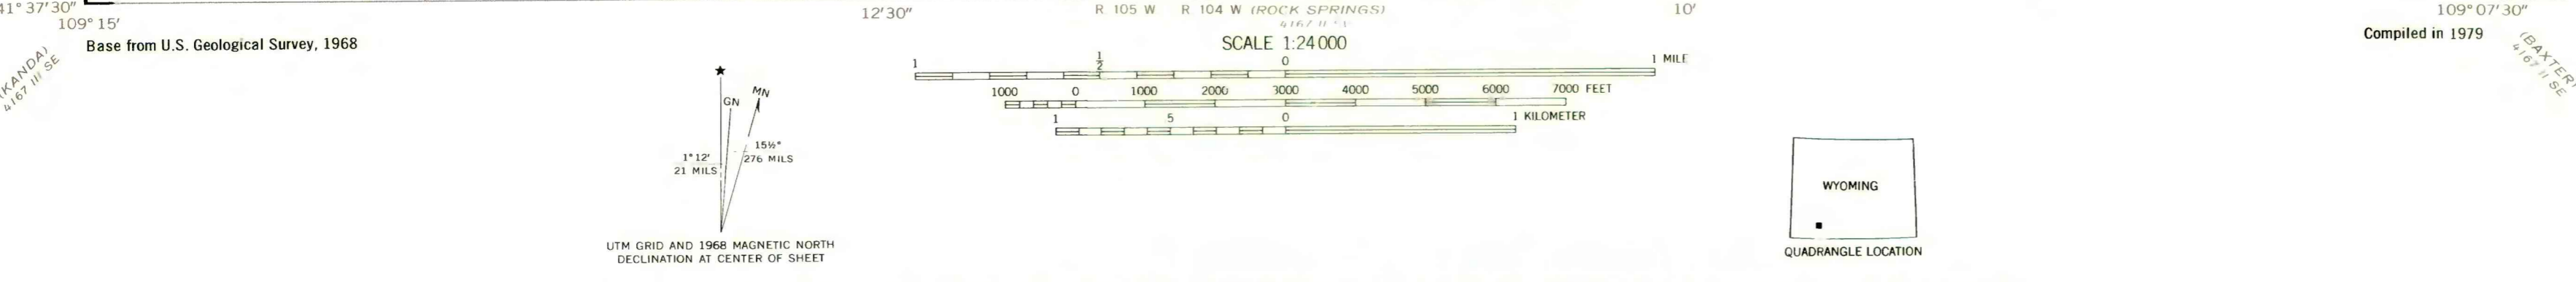

**COAL RESOURCE OCCURRENCE MAP OF THE RELIANCE
QUADRANGLE, SWEETWATER COUNTY, WYOMING**
BY
DAMES & MOORE
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.