

EXPLANATION

————— 10 —————
ISOPACHS - Showing thickness of coal, in feet. Long dashed where inferred. Isopach interval 5 feet.

○ 5
DRILL HOLE - Showing thickness of coal, in feet.

▲ 13.5
POINT OF MEASUREMENT - Showing thickness of coal, in feet. Includes all points of measurement other than drill holes.

4/3
INTERBEDDED COAL AND ROCK - Showing total coal thickness/total rock thickness.


RS-1 - Rock Springs No. 1
COAL BED SYMBOL AND NAME

----- RS-1 -----
TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Short dashed where inferred by present authors.

..... C
INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.

To convert feet to meters, multiply feet by 0.3048.

NOTE: Isopachs are not drawn beyond dotted line because of insufficient data.

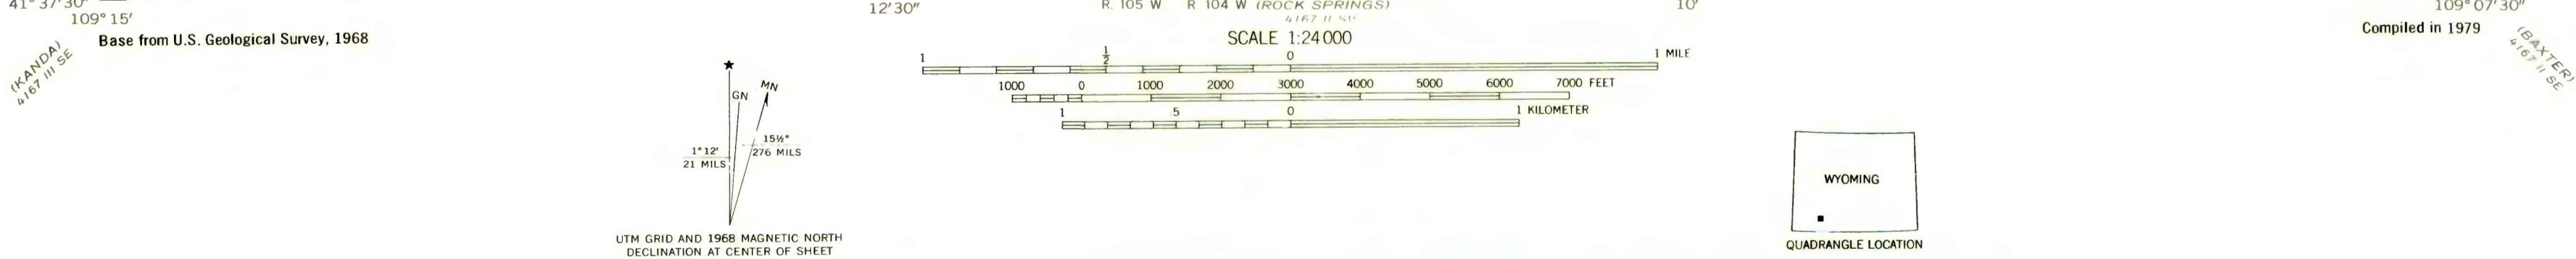

COAL RESOURCE OCCURRENCE MAP OF THE RELIANCE QUADRANGLE, SWEETWATER COUNTY, WYOMING
BY
DAMES & MOORE
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.