

EXPLANATION

5 ————
ISOPACHS - Showing thickness of coal, in feet. Long dashed where inferred. Isopach interval 5 feet.

○ 3
DRILL HOLE - Showing thickness of coal, in feet.

▲ 4
POINT OF MEASUREMENT - Showing thickness of coal, or coal and rock, in feet. Includes all points of measurement other than drill holes.


6/3
INTERBEDDED COAL AND ROCK - Showing total coal thickness/total rock thickness.

RS-3 - Rock Springs No. 3
COAL BED SYMBOL AND NAME

---▲--- RS-3 ---▲---
TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Short dashed where inferred by present authors.

To convert feet to meters, multiply feet by 0.3048.

41° 37' 30" 109° 15' Base from U.S. Geological Survey, 1968 12° 30' R 105 W R 104 W (ROCK SPRINGS) 4167.1 (BOARS TUSK 1:62,500) 10' 109° 07' 30" 41° 37' 30" Compiled in 1979

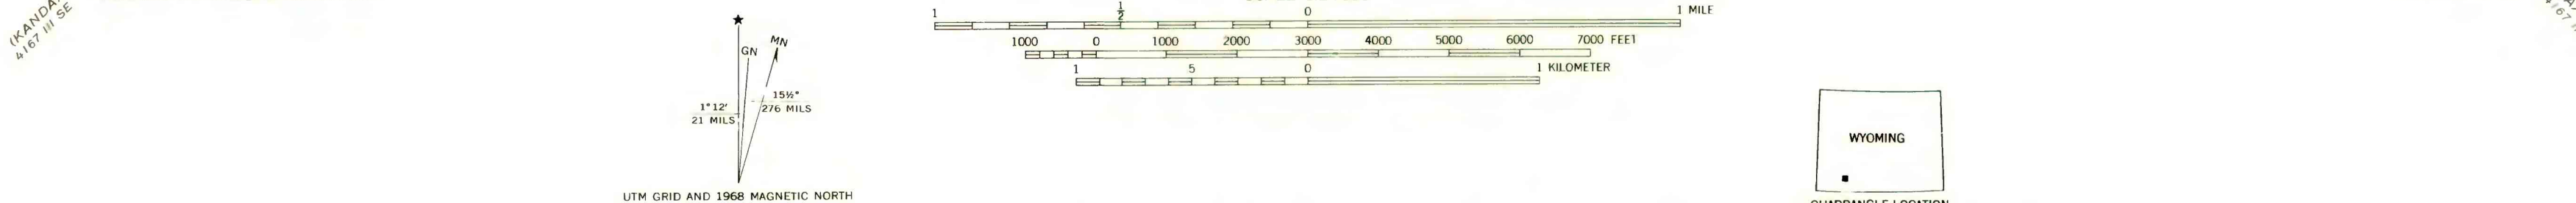

COAL RESOURCE OCCURRENCE MAP OF THE RELIANCE QUADRANGLE, SWEETWATER COUNTY, WYOMING
BY
DAMES & MOORE
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.