

**EXPLANATION**

——— 10 ———  
ISOPACHS - Showing thickness of coal, in feet. Long dashed where inferred. Isopach interval 1 foot.

○ 10  
DRILL HOLE - Showing thickness of coal, in feet.

▲ 14  
POINT OF MEASUREMENT - Showing thickness of coal, in feet. Includes all points of measurement other than drill holes.

FR - Fillmore Ranch  
COAL BED SYMBOL AND NAME

↑ FR  
TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred.

——— 3000 ———  
3,000-FOOT OVERBURDEN ISOPACH - Showing depth limit beyond which resources are not considered. Arrow points toward area where overburden is 3,000 feet or less thick.



..... C .....  
INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.

—●—  
TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1970

Compiled in 1977/1978

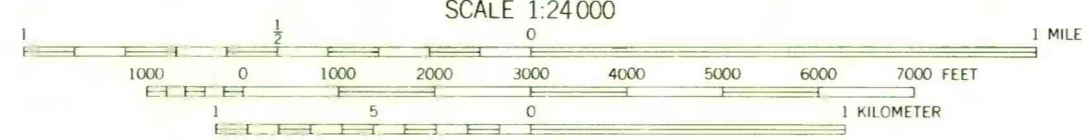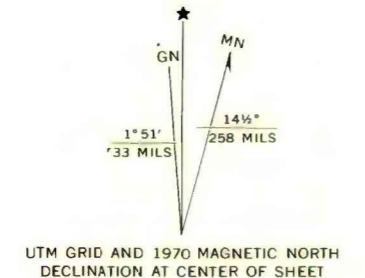

**COAL RESOURCE OCCURRENCE MAP OF THE MEXICAN FLATS  
QUADRANGLE, CARBON COUNTY, WYOMING**  
BY  
**DAMES & MOORE**  
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.