




EXPLANATION

- 5  
6
- ISOPACHS - Showing thickness of coal, in feet. Long dashed where inferred; short dashed where projected beyond coal-bearing area. Isopach interval 1 foot.
- 6000  
6200
- STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval 200 feet (61 m). Datum is mean sea level.
- 6245  
3.5
- DRILL HOLE - Showing altitude of top of coal bed, and thickness of coal, in feet.
- 10/4
- INTERBEDDED COAL AND ROCK - Showing total coal thickness/total rock thickness.
- RS-17 - Rock Springs No. 17
- COAL BED SYMBOL AND NAME
- RS-17
- TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Short dashed where inferred by present authors.
- TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.
- To convert feet to meters, multiply feet by 0.3048.

NOTE: Structure contours are not drawn beyond those shown because of insufficient data.

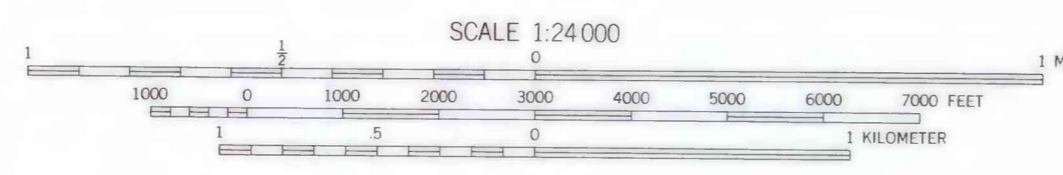

COAL RESOURCE OCCURRENCE MAP OF THE SOUTHWEST QUARTER OF THE BOARS TUSK  
15-MINUTE QUADRANGLE, SWEETWATER COUNTY, WYOMING

BY  
DAMES & MOORE  
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.