
PLATE 4 OF 27



ISOPACHS - Showing thickness of coal, in feet. Isopach interval 1 foot.

# 6200

STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval 200 feet (61 m). Datum is mean sea level.

## 0 39

DRILL HOLE - Showing altitude of top of coal bed, and thickness of coal, in feet.

### 6.

POINT OF MEASUREMENT - Showing altitude of top of coal bed, and thickness of coal, in feet. Includes all points of measurement other than drill holes.

# 14/1.3 INTERBEDDED COAL AND ROCK - Showing total

coal thickness/rock thickness.

#### RR - Red Rim La[3] - Lance [3]

COAL BED SYMBOLS AND NAMES - Coal beds identified by bracketed numbers are not formally named, but are numbered for identification purposes in this quadrangle only.

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred; short dashed where inferred by present authors.

#### 3,000-F00T OVERBURDEN ISOPACH - Showing the depth limit beyond which resources are not considered.


-----15°-----

SUBSURFACE MINING LIMIT - Showing areas where dips of coal beds are greater than 15° and subsurface mining by conventional methods is not considered feasible. Reserve Base tonnages are calculated beyond limit; Reserve tonnages are not. Arrow points toward area where dips are greater

than 15°.

#### TRACE OF FAULT - Bar and ball on downthrown side when direction of movement is known. Dashed where inferred or approximately located.

To convert feet to meters, multiply feet by 0.3048.

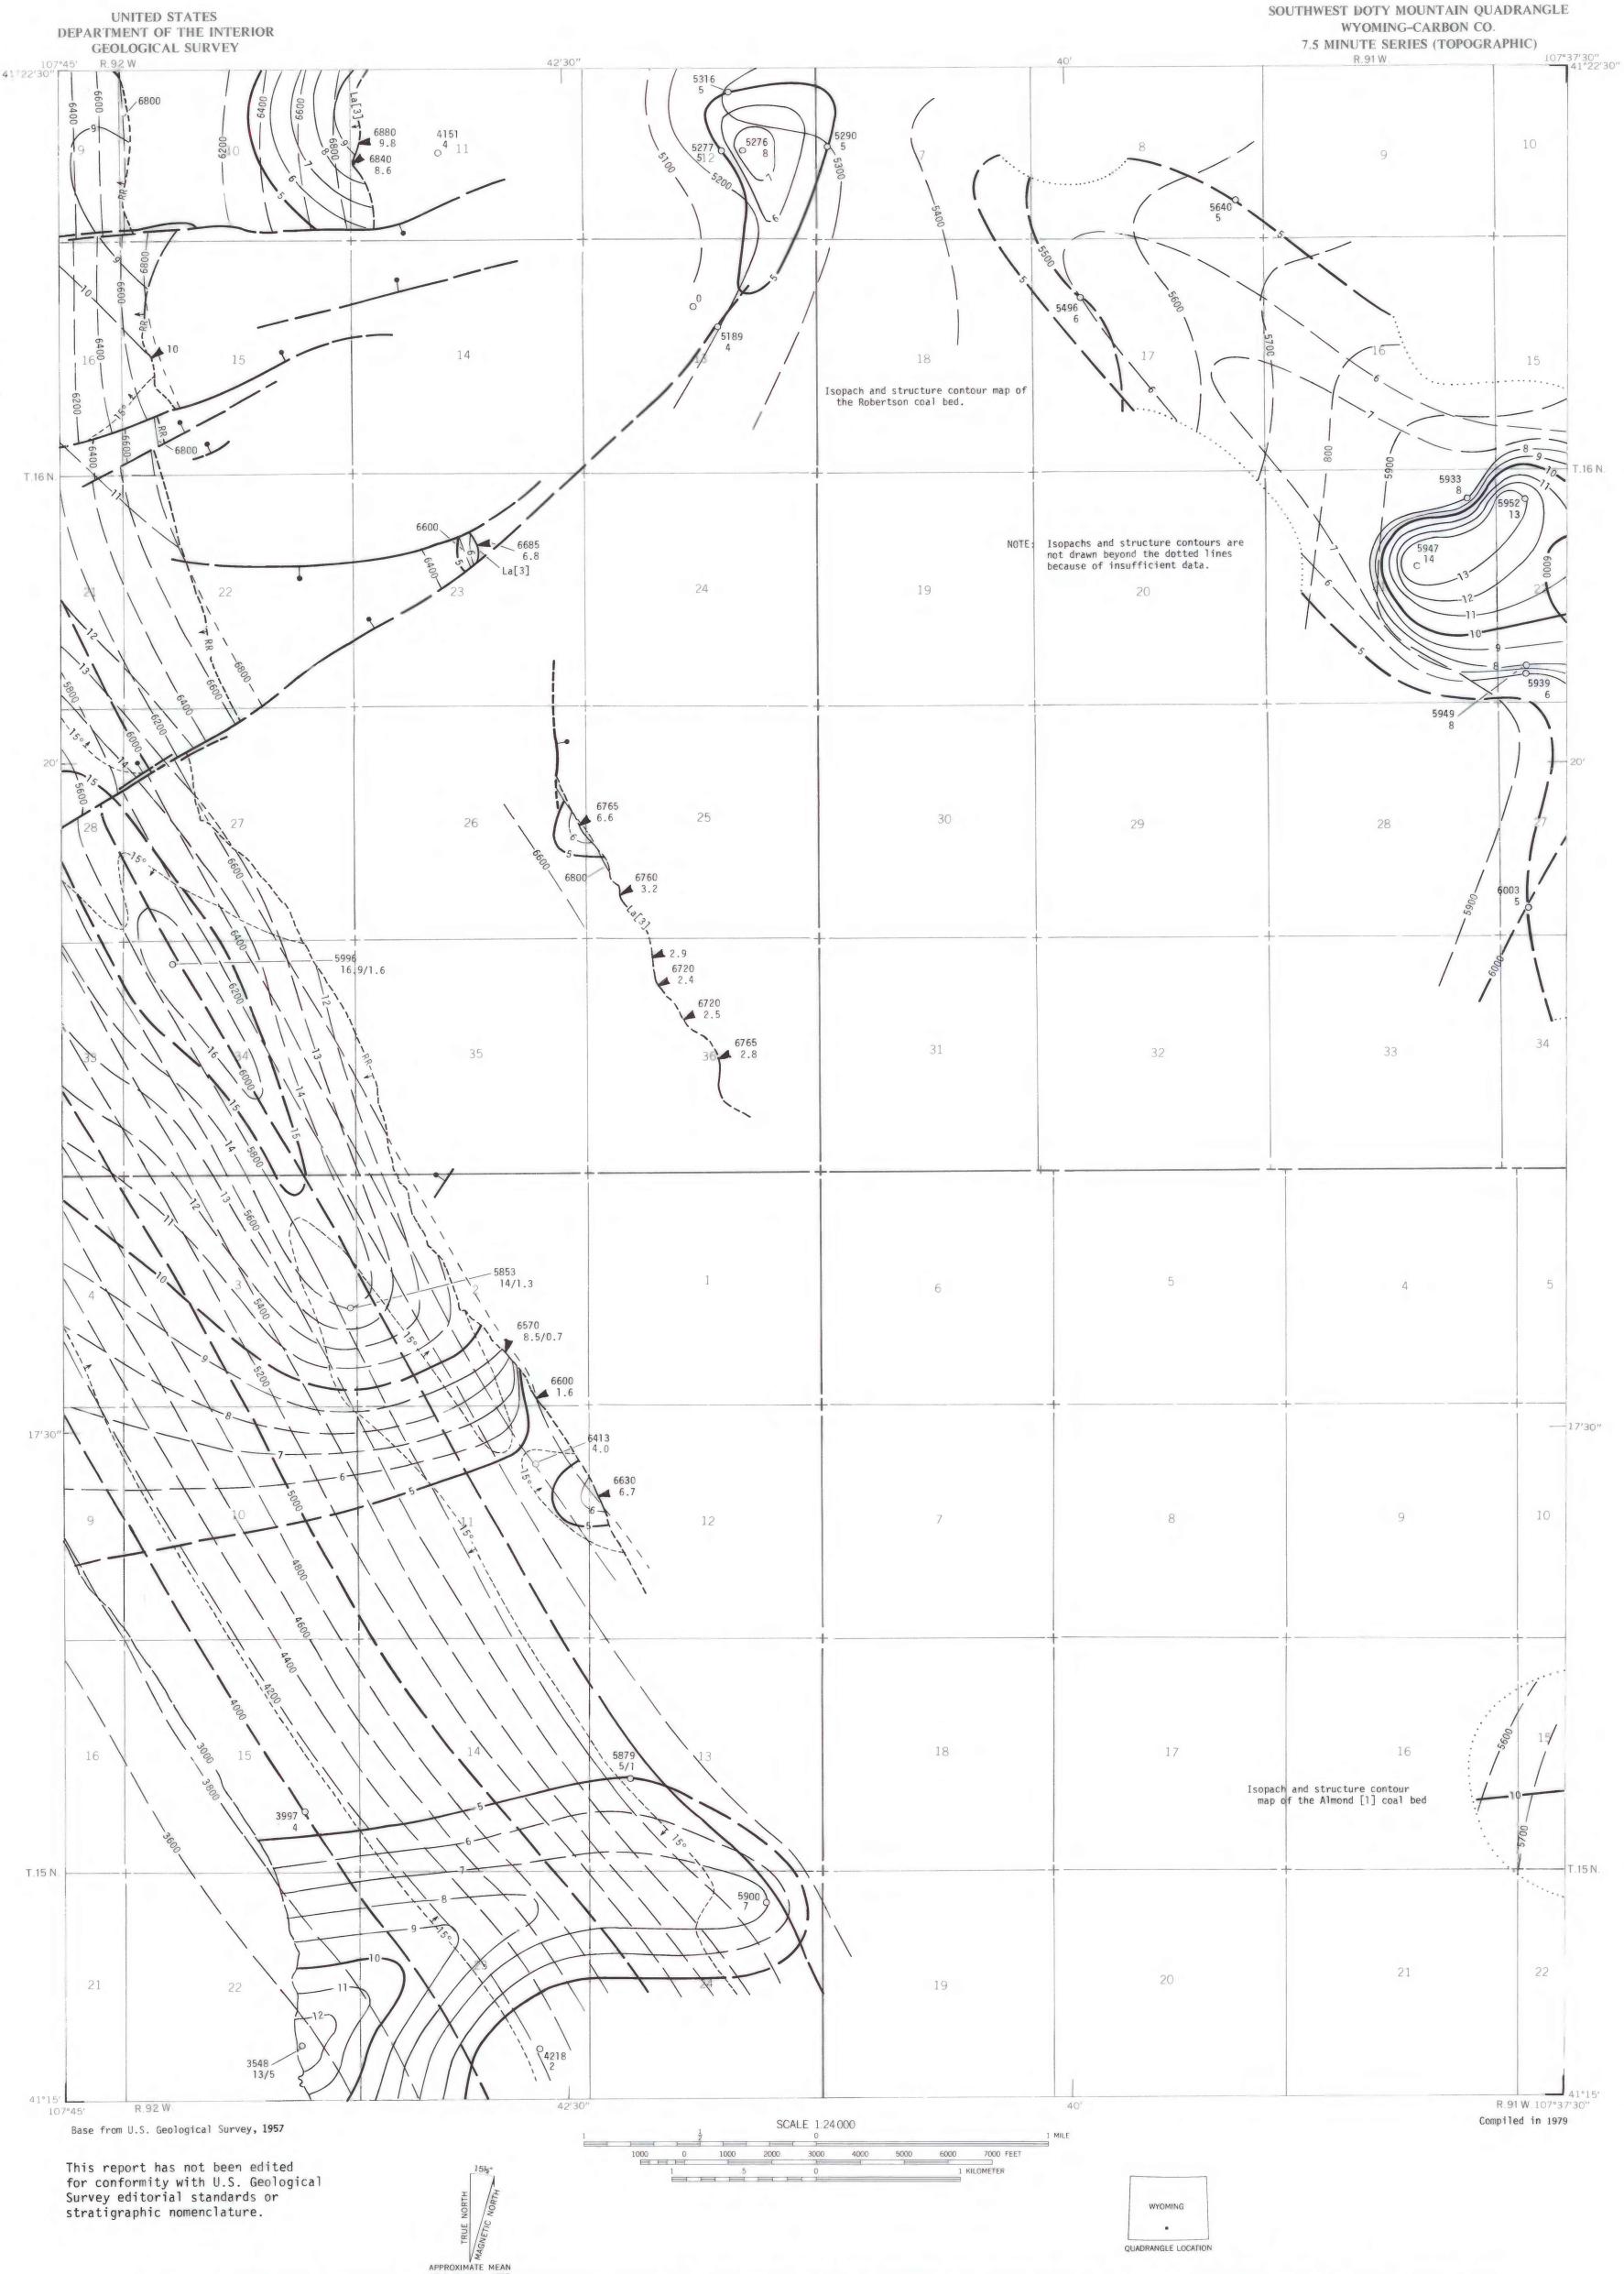

COAL RESOURCE OCCURRENCE MAP OF THE SOUTHWEST QUARTER OF THE DOTY MOUNTAIN 15-MINUTE QUADRANGLE, CARBON COUNTY, WYOMING