

EXPLANATION

800

OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet from the surface to the top of the Menefee Cleary coal zone. (Refer to CRO plate 14). Isopach interval 200 feet (61 meters). Isopachs dashed where inferred.

400

INTERBURDEN ISOPACHS—Showing rock thickness, in feet, between the top of the Menefee Cleary coal member and the top of the lowermost coal bed in the zone. Isopach interval is 50 feet (15.2 meters). Isopachs dashed where inferred.

841
467.5


DRILL HOLE—Showing thickness of overburden, in feet (upper number), and thickness of interburden, in feet (lower number), of the Menefee Cleary coal zone. NR indicates no record.

FAULT—Dashed where approximately located; bar and bell on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1961

Compiled in 1978

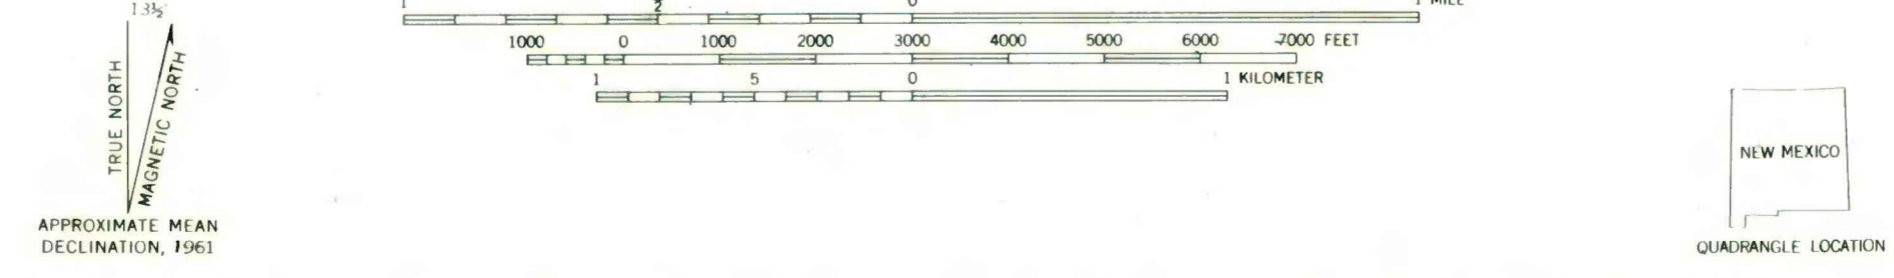

COAL RESOURCE OCCURRENCE MAP OF THE WOLF STAND QUADRANGLE, SANDOVAL COUNTY, NEW MEXICO
BY
BERGE EXPLORATION, INC.
1979

This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.