



This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.

EXPLANATION

1500
OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to the base of the Menefee Allison coal member (refer to CRO plate 5). Isopach interval 100 feet (30.5 meters). Isopachs dashed where inferred. Stripping limit is 200 feet (61 meters). **200**

150
INTERBURDEN ISOPACHS—Showing thickness, in feet, between the Menefee Allison zone coal beds. Isopach interval 50 feet (15.2 meters). Isopachs dashed where inferred.



1010
209
DRILL HOLE—Showing thickness of overburden, in feet, (upper number), and thickness of interburden, in feet (lower number), of the Menefee Allison coal member.

To convert feet to meters, multiply feet by 0.3048.

NAVAJO
INDIAN RESERVATION

Base from U.S. Geological Survey, 1966

Compiled in 1978

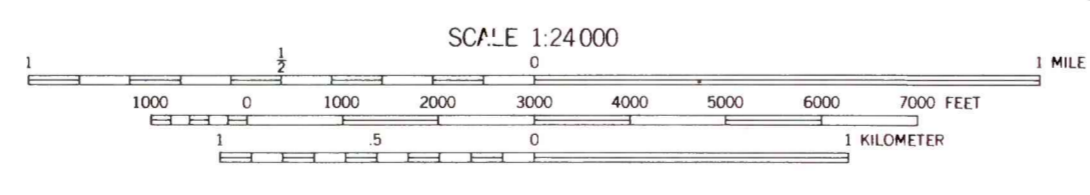

COAL RESOURCE OCCURRENCE MAP OF THE PILLAR 3 SE QUADRANGLE, SAN JUAN AND MCKINLEY COUNTIES, NEW MEXICO
BY
BERGE EXPLORATION, INC.
1979

PLATE 6
ISOPACH MAP OF OVERBURDEN AND INTERBURDEN OF THE MENEFEE ALLISON COAL ZONE