

EXPLANATION



- 200 —
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal zone. Dashed where vertical accuracy possibly not within 40 feet. Isopach interval 200 feet (61 m).
- 163
DRILL HOLE - Showing thickness of overburden, in feet, from surface to top of coal zone.
- 10 —
MINING-RATIO CONTOUR - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas underlain by coal of Reserve Base thickness within the stripping-limit (in this quadrangle, the 200-foot-overburden isopach). To convert mining ratio to cubic meters of overburden per metric ton of recoverable coal, multiply mining ratio by 0.8428.
- LG3 - Lower Coal Group, zone 3
COAL ZONE SYMBOL AND NAME
- LG3 -----
TRACE OF COAL ZONE OUTCROP - Showing symbol of name of coal zone as listed above. Short dashed where inferred by present authors.
- |—
TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.

To convert feet to meters, multiply feet by 0.3048.

NOTE: Overburden isopachs are not drawn beyond dotted line because of insufficient data.

Base from U.S. Geological Survey, 1971

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

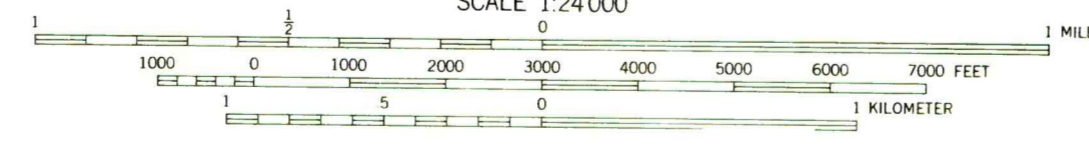

COAL RESOURCE OCCURRENCE MAP OF THE RATTLESNAKE BUTTE QUADRANGLE, ROUTT COUNTY, COLORADO

BY
DAMES & MOORE
1979