

EXPLANATION

— 200 —  
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal bed or zone. Dashed where vertical accuracy possibly not within 40 feet. Isopach interval 200 feet (61 m).


○ 337  
DRILL HOLE - Showing thickness of overburden, in feet, from surface to top of coal bed or zone.

— 15 —  
MINING-RATIO CONTOUR - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas underlain by coal of Reserve Base thickness within the stripping-limit (in this quadrangle, the 200-foot-overburden isopach). To convert mining ratio to cubic meters of overburden per metric ton of recoverable coal, multiply mining ratio by 0.8428.

Fa - Fairfield coal group  
COAL BED SYMBOLS AND NAMES - Coal beds or zones identified by bracketed numbers are not formally named, but are numbered for identification purposes in this quadrangle only.

.....  
INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.


To convert feet to meters, multiply feet by 0.3048.

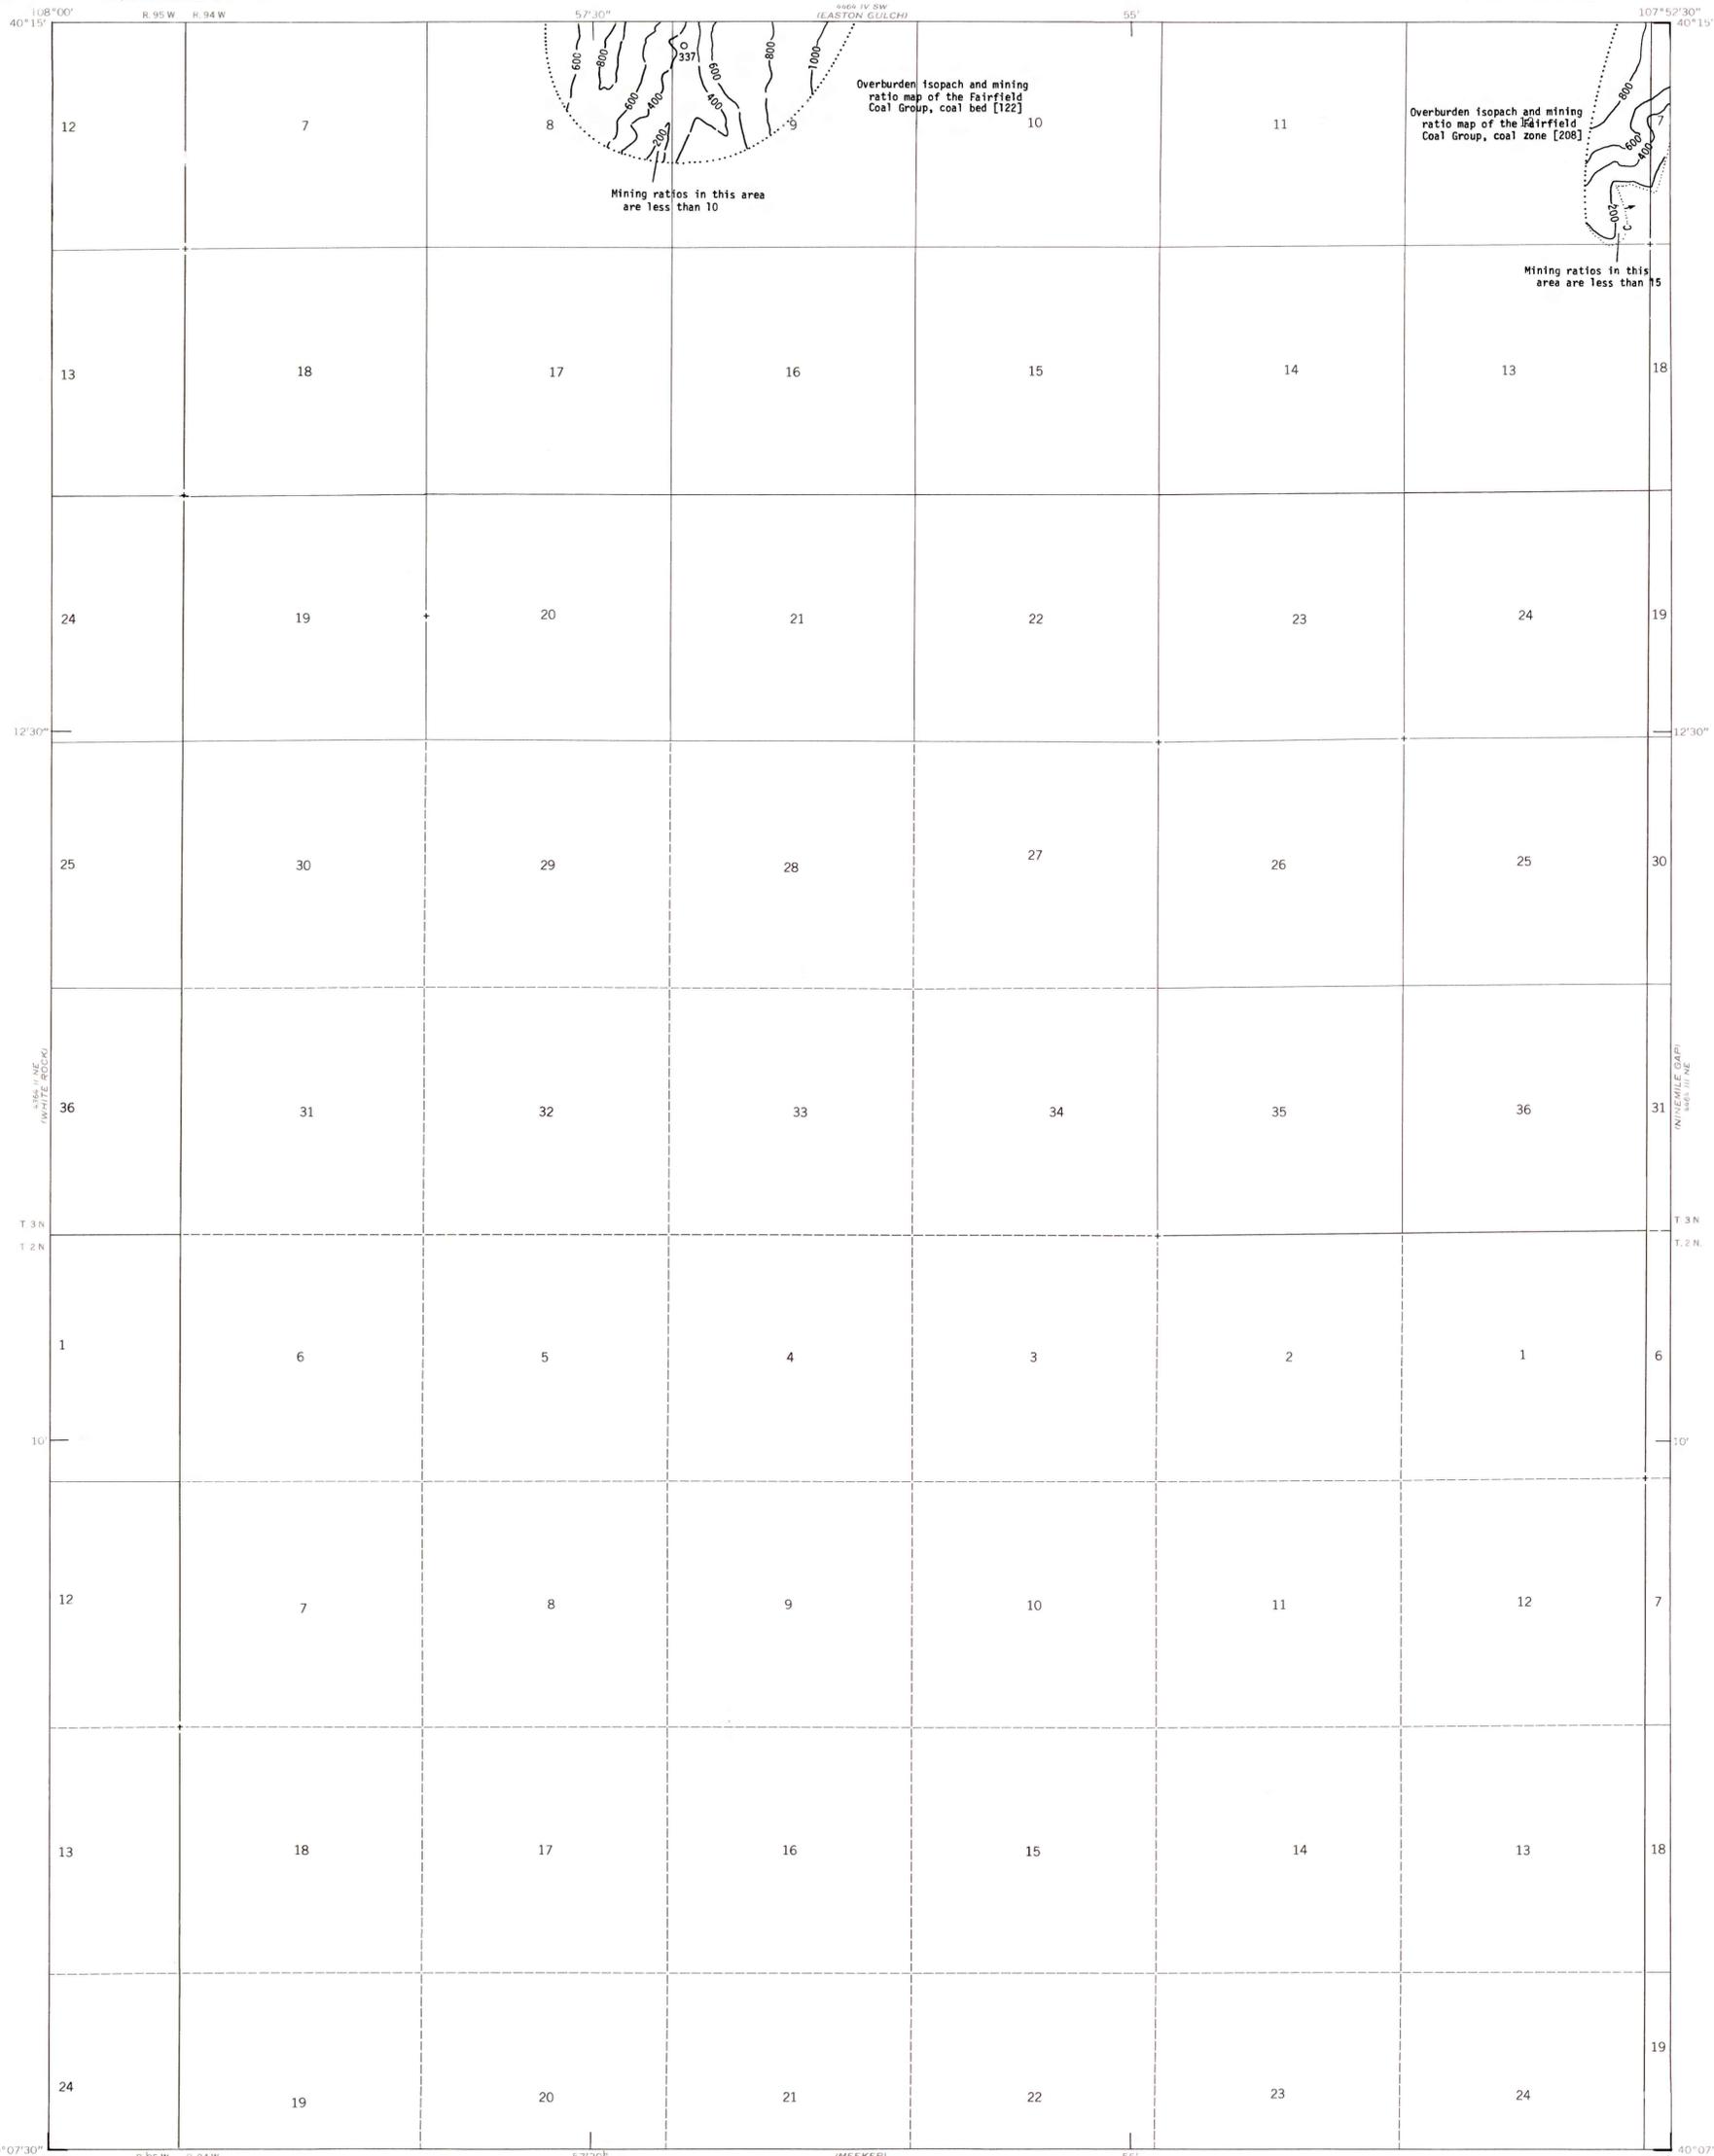

Base from U.S. Geological Survey, 1966

Compiled in 1979.

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.



COAL RESOURCE OCCURRENCE MAP OF THE DEVILS HOLE GULCH QUADRANGLE,  
RIO BLANCO AND MOFFAT COUNTIES, COLORADO

BY  
DAMES & MOORE  
1979

PLATE 8

OVERBURDEN ISOPACH AND  
MINING RATIO MAPS OF  
THE FAIRFIELD COAL GROUP,  
COAL ZONE [208] AND COAL BED [122]