

EXPLANATION

80
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal bed. Isopach interval 80 feet (24 m).

SL
STRIPPING-LIMIT LINE - Boundary for surface mining (in this quadrangle, the 100-foot-overburden isopach). Arrow points toward strippable area.

10
MINING-RATIO CONTOUR - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas underlain by coal of Reserve Base thickness within the stripping-limit. To convert mining ratio to cubic meters of overburden per metric ton of recoverable coal, multiply mining ratio by 0.8428.

Em - Emery coal zone


COAL BED SYMBOL AND NAME - Coal bed identified by bracketed number is not formally named, but is numbered for identification purposes in this quadrangle only.

Em
TRACE OF COAL ZONE OUTCROP - Showing symbol of name of coal zone as listed above. Arrow points toward coal-bearing area. Dashed where inferred.

C
INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1962

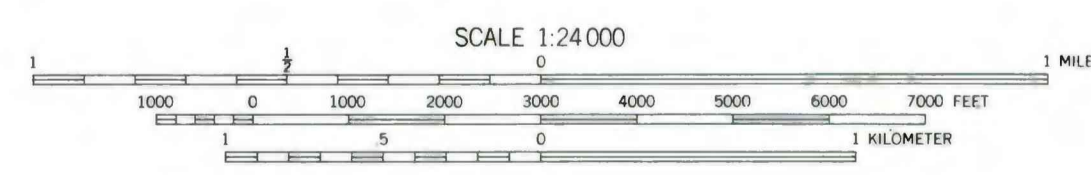

Compiled in 1978/79

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

**COAL RESOURCE OCCURRENCE MAP OF THE SOUTHWEST QUARTER OF THE
MT. ELLEN 15-MINUTE QUADRANGLE, GARFIELD COUNTY, UTAH
BY
DAMES AND MOORE
1979**