

EXPLANATION

This map is one of a series of preliminary hydrogeologic maps of selected Paleozoic rock units in the Northern Great Plains of Montana, North and South Dakota, and Wyoming. The maps were prepared as part of a study to determine the water-resources potential of the Mississippian Madison Limestone and associated rocks. These maps help describe the basic hydrologic conditions in the rocks, which can be used to develop predictive models of the geologic and geochronological flow systems.

The map shows the altitudes of freshwater heads that were determined from shut-in pressures of drill-stem tests according to the procedure outlined by Miller (1976, p. 177). The following equation was used:

$$h = (FPSP \times C) - PSD + LSP \quad (1)$$

where h is the altitude of the water surface, in feet above sea level; $FPSP$ is the final bottom-hole shut-in pressure, in pounds per square inch, measured by the pressure-recording device; C is a factor to convert $FPSP$ to equivalent feet of water; PSD is the depth of the pressure-recording device, in feet below the measuring point; and LSP is the altitude of the measuring point, in feet above sea level. The factor C for this map equals 2.307 feet of water per pressure increment of 1 lb/in² (pound per square inch). It assumes pure water at a temperature of 39.2°F (4°C) having a density of 1.00 g/cm³ (gram per cubic centimeter). The resultant map indicates the altitude at which water levels would stand in tightly cased wells penetrating the Mission Canyon and Lodgepole limestones or equivalent rocks of Mississippian age if the water in the well had a density of 1.00 g/cm³. Gradients of freshwater head in a variable-density ground-water system are not always proportional to the magnitude of flow nor do they always indicate the actual direction of flow.

To show the altitude to which water would actually rise in a tightly cased well, the heads would have to be corrected for density variations due to increases in temperature and dissolved-solids concentration. Equation 1 can be modified to reflect density corrections as:

$$h = (2.307 + C_c - C_p)FPSP - PSD + LSP \quad (2)$$

where C_c is the temperature correction, C_p is the dissolved-solids correction, and the other symbols are as given in equation 1. The temperature correction, C_c , is positive and in the subsurface system increases from 0.0001 foot/(lb/in²) for each 1°F change at 50°F to 0.0011 foot/(lb/in²) for each 1°F change at 250°F.

The dissolved-solids correction, C_p , is negative and is 0.007 foot/(lb/in²) for each 1,000 mg/l (milligram per liter) change in dissolved solids, assuming sodium and chloride are the major constituents.

The net result of correcting the data for density would be a map similar to the one shown, but the surface on the west side of the area would be elevated because temperature in the aquifer increases faster than the dissolved-solids concentration, and the surface to the northeast would be depressed because the dissolved-solids concentration increases more rapidly than the temperature. The resultant map could be used to indicate actual water-level altitudes or depths to water in wells but would not show the true hydraulic gradient.

Most of the data are from drill-stem tests of exploration and development wells drilled by the petroleum industry from 1946 to 1976. Some data are from bottom-hole pressure measurements in cased oil wells. Water-level data from production wells in Wyoming and altitudes of springs issuing from the Mission Canyon and Lodgepole limestones or equivalent rocks of Mississippian age were also used in contouring. The locations of all known data points have been plotted on the map to show the relative control in the area, but the data are not shown.

The drill-stem-test data can be divided into seven categories of reliability, based on the probability that the shut-in pressures are close to the original formation pressure. They are, from most to least reliable:

1. Tests with charts that can be extrapolated to an apparent original formation pressure or tests that flowed at land surface with charts indicating that the shut-in pressures had stabilized.
2. Tests that flowed at land surface or had large fluid recovery from the drill pipe and that had reported initial and final shut-in pressures that were nearly equal.
3. Tests that flowed at land surface but had only one flow and one shut-in period.
4. Tests that flowed at land surface but had relatively large fluid recovery from the drill pipe and that had a reported initial shut-in pressure greater than or equal to the reported final shut-in pressure.
5. Tests with relatively large fluid recovery from the drill pipe but had only one flow and one shut-in period.
6. Tests with poor to moderate fluid recovery from the drill pipe and with the reported initial shut-in pressure greater than or equal to the reported final shut-in pressure.
7. Tests that do not fit the above categories. These tests are probably unreliable, but factors such as length of flow and shut-in periods and the type and amount of fluid recovery from the drill pipe can be used to evaluate the utility of the data as a guide to contouring.

This preliminary map was contoured using all data except those from categories 6 and 7 and those obviously in error due to packer failure. The map was contoured using present-day geologic-structure maps (D. L. Brown, USGS, written commun., 1979; Carlson, 1969; Barton, 1951; Love and others, 1955; Ross and others, 1955; Stone, 1969; Thomas, 1974) and U.S. Geological Survey and American Association of Petroleum Geologists (1974) and geochronological maps (Quinn-Jones, American Stratigraphic Company, written commun., 1979; J. A. A. Peterson, USGS, written commun., 1979) as guides but independent of paleostructure and lithofacies maps. Data points that would create apparently anomalous highs and lows without an obvious relation to known recharge and discharge areas were assumed to be valid and were used in contouring. The resulting freshwater-head map shows a series of linear highs and lows that are similar to linear trends evident on paleostructure and lithofacies maps.

The number of anomalies and the tortuosity and complexity of the contours are obviously related to the amount of control. Other factors that can affect the anomalies and the contour complexity and tortuosity are:

1. The occurrence of producing oil fields and subsequent depletion or repressurization.
2. The magnitude of the possible error due to both instrumentation and shut-in pressure extrapolation approaching or exceeding that of the contour interval.
3. The effect of density differentials between fluids within the system, such as brines, fresher water, and hydrocarbons.
4. The effect of temperature and depth of burial on the compaction of argillaceous material and the subsequent expulsion of fluids (water and hydrocarbons). The mechanism is probably a combination of abnormal geothermal gradients, geochemical reactions, reduction in porosity, and expulsion of water by compaction or conversion of nonmineralite to illite, differential osmotic pressure across semipermeable membranes, and the generation of hydrocarbons.
5. The effect of areally extensive evaporites and low-permeability shales which impede the movement of fluids and, in essence, act as seals in a dynamic system.
6. The effect of facies changes and the related changes in porosity and the effect of heterogeneous and anisotropic permeability distribution.
7. The effect of paleostructure and present-day structure and whether fracturing has enhanced the permeability or has created barriers to fluid movement.

Most of these factors have been described in the literature by the American Association of Petroleum Geologists (1974), Bradley (1973), Houston Geological Society (1971), and Meissner (1978).

REFERENCES

American Association of Petroleum Geologists, 1974, Abnormal subsurface pressure. Reprint Series No. 11, Selected papers reprinted from AAPG bulletins, 205 p.

Bradley, J. R., 1975, Abnormal formation pressures: American Association of Petroleum Geologists Bulletin, v. 59, no. 6, p. 957-973.

Carlson, C. G., 1969, Bedrock geologic map of North Dakota: North Dakota Geological Survey Miscellaneous Map 10, scale 1:1,500,000.

Darton, N. S., 1951, Geologic map of South Dakota: U.S. Geological Survey, scale 1:500,000.

Houston Geological Society, 1971, Abnormal subsurface pressure—a study group report 1969-1971; 92 p.

Love, J. D., Weitz, J. L., and Rose, R. K., 1955, Geologic map of Wyoming: U.S. Geological Survey, scale 1:500,000.

Meissner, F. P., 1978, Petroleum geology of the Bakken Formation, Williston Basin, North Dakota and Montana: Montana Geological Society 24th Annual Conference, 1978 Williston Basin Symposium, Billings, Mont., p. 207-227.

Miller, K. R., 1976, Water in carbonate rocks of the Madison Group in southeastern Montana—a preliminary evaluation: U.S. Geological Survey Water-Supply Paper 2043, 51 p.

Ross, C. P., Andrews, D. A., and Witkind, J. J., 1955, Geologic map of Montana: U.S. Geological Survey, scale 1:500,000.



Rocky Mountain Association of Geologists, 1972, Geologic atlas of the Rocky Mountain region, United States of America: Denver, Colo., 331 p.

Stone, D. S., 1969, Wrench faulting and Rocky Mountain tectonics: Wyoming Geological Association Earth Science Bulletin, v. 2, no. 2, p. 27-41.

1974, Limestones: Their role in tectonics of central Rocky Mountains: Wyoming Geological Association Earth Science Bulletin, v. 7, no. 4, p. 1-21.


Thomas, G. K., 1974, Limestone-block tectonics Williston-Blood Creek Basin: American Association of Petroleum Geologists Bulletin, v. 58, no. 7, p. 1305-1322.

U.S. Geological Survey and American Association of Petroleum Geologists, 1962, Tectonic map of the United States: U.S. Geological Survey map, scale 1:2,500,000.

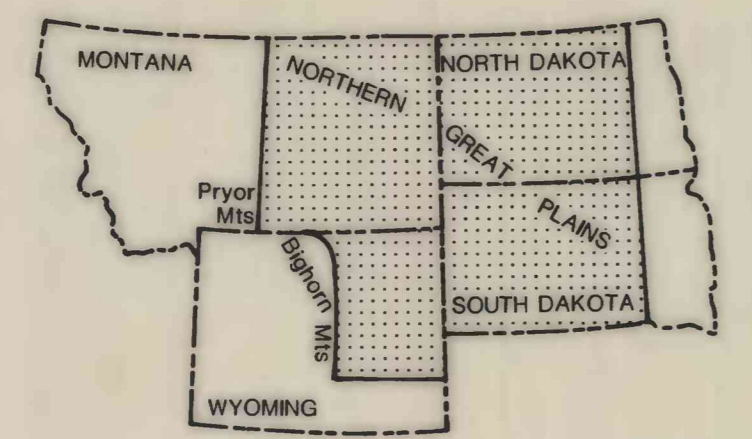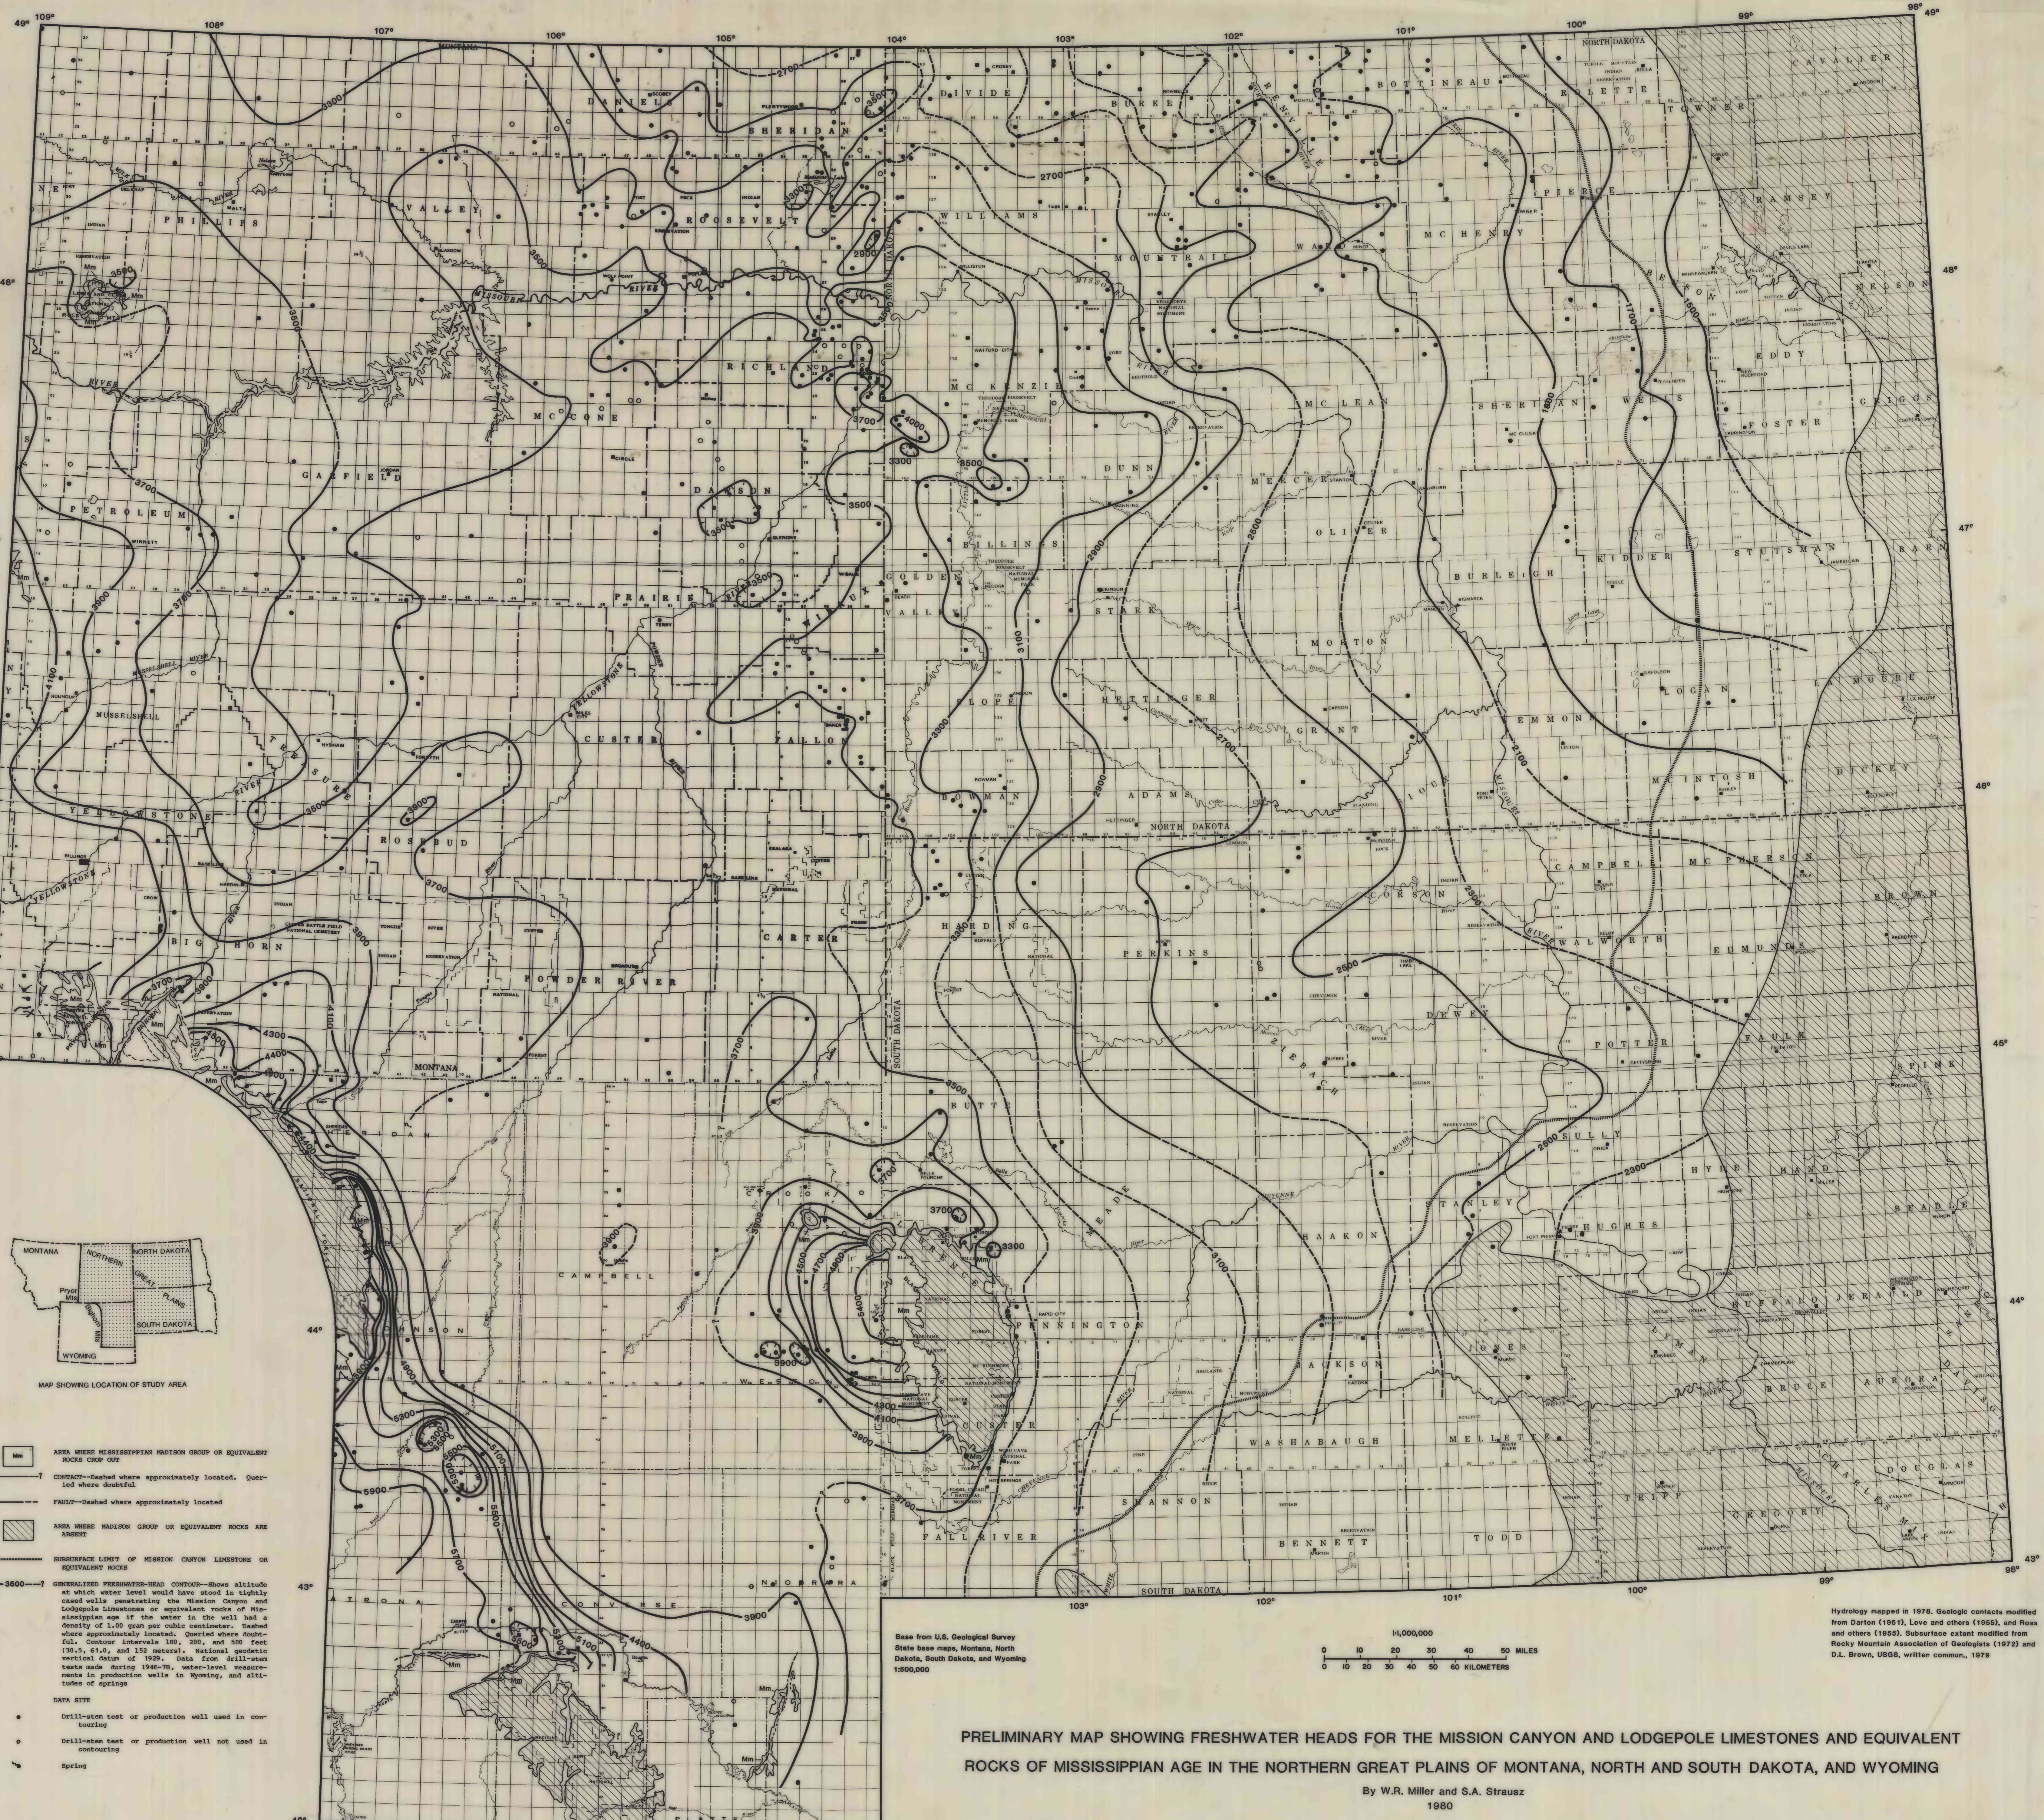

- LEGEND**
- AREA WHERE MISSISSIPPIAN MADISON GROUP OR EQUIVALENT ROCKS CROP OUT
 - CONTACT—Dashed where approximately located. Queried where doubtful
 - FAULT—Dashed where approximately located
 - AREA WHERE MADISON GROUP OR EQUIVALENT ROCKS ARE ABSENT
 - SUBSURFACE LIMIT OF MISSION CANYON LIMESTONE OR EQUIVALENT ROCKS
 - 3600—GENERALIZED FRESHWATER-HEAD CONTOUR—Shows altitude at which water level would have stood in tightly cased wells penetrating the Mission Canyon and Lodgepole limestones or equivalent rocks of Mississippian age if the water in the well had a density of 1.00 gram per cubic centimeter. Dashed where approximately located. Queried where doubtful. Contour intervals 100, 200, and 500 feet (30.5, 61.0, and 152 meters). National geodetic vertical datum of 1929. Data from drill-stem tests made during 1946-78, water-level measurements in production wells in Wyoming, and altitudes of springs
 - DATA SITE
 - Drill-stem test or production well used in contouring
 - Drill-stem test or production well not used in contouring
 - Spring

Base on U.S. Geological Survey State base maps, Montana, North Dakota, South Dakota, and Wyoming 1:500,000

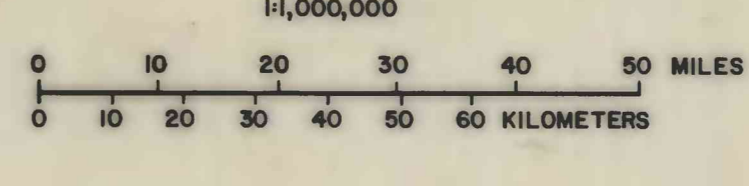

Hydrology mapped in 1976. Geologic contacts modified from Darton (1951), Love and others (1955), and Ross and others (1955). Subsurface extent modified from Rocky Mountain Association of Geologists (1972) and D.L. Brown, USGS, written commun., 1979

PRELIMINARY MAP SHOWING FRESHWATER HEADS FOR THE MISSION CANYON AND LODGEPOLE LIMESTONES AND EQUIVALENT ROCKS OF MISSISSIPPIAN AGE IN THE NORTHERN GREAT PLAINS OF MONTANA, NORTH AND SOUTH DAKOTA, AND WYOMING

By W.R. Miller and S.A. Strausz
1980