

UNITED STATES DEPARTMENT OF THE INTERIOR
MINERALS MANAGEMENT SERVICE
AND
GEOLOGICAL SURVEY

CHEMICAL ANALYSES OF COAL SAMPLES CORED DURING 1979
FROM THE WASATCH AND FORT UNION FORMATIONS,
CAMPBELL COUNTY, WYOMING

By
Rodney J. Noah and Thomas P. Lonnie

Open-File Report 82-29

1982

This report has not been edited for conformity
with Minerals Management Service and U.S. Geol-
ogical Survey editorial standards or strati-
graphic nomenclature.

CONTENTS

	Page
Introduction-----	1
Acknowledgments-----	2
References-----	2

ILLUSTRATION

Figure 1. Location of core holes drilled during 1979 in Campbell County, Wyoming-----	4
--	---

TABLES

Table 1. <u>Core-hole locations and sample data from drilling in the Wasatch and Fort Union Formations, Campbell County, Wyoming-----</u>	5
2. Coal analyses of core samples from the Wyodak and unnamed beds, Wasatch and Fort Union Formations, Campbell County, Wyoming-----	6

CONVERSION TABLE

To convert ENGLISH UNITS	Multiply by	To obtain METRIC UNITS
Feet	0.3048	Meters
Btu/lb	2.324	Joule/Kilogram
Btu/lb	.5556	Kcal/Kilogram
Fahrenheit	$(^{\circ}\text{F} - 32)$ 1.8	Celsius

CHEMICAL ANALYSES OF COAL SAMPLES CORED DURING 1979
FROM THE WASATCH AND FORT UNION FORMATIONS,
CAMPBELL COUNTY, WYOMING

By Rodney J. Noah and Thomas P. Lonnie

INTRODUCTION

During 1979, eight core holes were drilled and coal samples were obtained from the Tertiary Wasatch and Fort Union Formations in Campbell County, Wyo. (fig. 1). The drilling was done as part of the U.S. Geological Survey's (USGS) program to evaluate and classify mineral lands in the public domain. The purpose of the program is to gather data on the thickness, quality, extent, and recoverability of coal beds, and the lithologic characteristics of the surrounding rocks in the Wasatch and Fort Union Formations of the Powder River Basin, Wyo., for pre-lease tract evaluation. Similar information has been reported in earlier reports (Babcock and Hobbs, 1979; Hobbs, 1980a, 1980b; Kistner, 1977, 1980; Kistner and others 1979, 1980; Lonnie and others, 1980; U.S. Geological Survey and Montana Bureau of Mines and Geology, 1973, 1974, 1976a, 1976b, 1977, 1978).

The core holes are located by section, township, range, and distance (in ft) from the nearest section lines (fig. 1). Surface elevations were obtained by hand leveling from known elevations on USGS 7 1/2-minute topographic maps (table 1).

Core samples were collected using a conventional rotary-drill rig, with water as the usual drilling fluid. A pilot hole was drilled first and a geophysical log containing natural gamma-ray, resistance, and spontaneous potential was obtained (Lonnie and others, 1980). The geophysical log was then used to determine the depth and thickness of each coal bed (table 1). The drill rig was then moved a short distance and a new hole was drilled with only the coal intervals being cored. The core recovered was 2 1/8 in. in diameter and a maximum of 15 ft in length.

Core samples were sealed in plastic core sleeves, placed in waxed core boxes, and shipped as soon as possible to the USGS Analytical Laboratory in Denver, Colo. Sample numbers were assigned and representative splits were made from each sample--one for routine coal analysis and the other for major composition and trace-element composition of the coal ash (Swanson and Huffman, 1976, fig. 1, p. 5).

Coal analyses (U.S. Bureau of Mines, 1967) by the U.S. Department of Energy, Pittsburgh, Penn., include proximate, ultimate, heating value, sulfur forms, and ash-fusion temperature for coal as received, moisture free, and moisture and ash free (table 2). Determinations of major- and trace-element compositions of the coal ash by the USGS Analytical Laboratory have not been completed.

Caution should be used when viewing the results of the coal analyses presented in this report. Although the core samples were collected and sealed carefully, changes in moisture content are possible, and recirculated drilling fluid is a possible source of contamination for moisture, ash, and sulfur contents. It should also be noted that coal beds are not homogeneous and that the coal analysis from a 2 1/8-in.-diameter core sample may be atypical of the surrounding coal bed.

ACKNOWLEDGMENTS

Fieldwork was done by the following USGS personnel: Thomas P. Lonnie, Harold E. Corley, Alex J. Donatich, Beth M. Wrege, geologists; Greg A. Hollomon, technician; and Harry R. Curston, driller. Coal analysis was coordinated by Rick T. Hildebrand.

REFERENCES

- Babcock, R. N., and Hobbs, R. G., 1979, Geophysical logging of water wells for coal occurrences in northern Campbell County and eastern Sheridan County, Wyoming: U.S. Geological Survey Open-File Report 79-1213, 11 p.
- Hobbs, R. G., 1980a, 1976 coal exploratory drilling, core description, and coal analyses, Recluse Geologic Analysis area, northern Campbell County, Wyoming: U.S. Geological Survey Open-File Report 80-1160, 55 p.
- _____, 1980b, Analyses of coal and selected rock samples from the USGS 1975 drilling, Recluse Geologic Analysis area, northern Campbell County, Wyoming: U.S. Geological Survey Open-File Report 80-1161, 83 p.
- Kistner, F. B., 1977, Preliminary report of coal drill-hole data in the southern Powder River Basin, Converse County, Wyoming: U.S. Geological Survey Open-File Report 77-774, 25 p.
- _____, 1980, Geophysical and lithologic logs of 35 wells in Converse and Campbell Counties, Wyoming: U.S. Geological Survey Open-File Report 80-125, 69 p.
- Kistner, F. B., Donatich, A. J., and Hollomon, G. A., 1980, Geophysical and lithologic logs and coal analyses from test holes drilled during 1978 in Campbell and Converse Counties, Wyoming: U.S. Geological Survey Open-File Report 80-851, 183 p.

- Kistner, F. B., Hollomon, G. A., and Coppock, D. G., 1979, Lithologic and geophysical logs and coal analyses from test holes drilled during 1977 in Converse and Campbell Counties, Wyoming: U.S. Geological Survey Open-File Report 79-1173, 88 p.
- Lonnie, T. P., Corley, H. E., and Noah, R. J., 1980, Geophysical and lithologic logs from coal test holes drilled during 1979 in Converse and Campbell Counties, Wyoming: U.S. Geological Survey Open-File Report 80-1041, 102 p.
- Swanson, V. E., and Huffman, Claude, Jr., 1976, Guidelines for sample collecting and analytical methods used in the U.S. Geological Survey for determining chemical composition of coal: U.S. Geological Survey Circular 735, 11 p.
- U.S. Bureau of Mines, Office of Coal Research, 1967, Methods of analyzing and testing coal and coke: Bulletin 638, 82 p.
- U.S. Geological Survey and Montana Bureau of Mines and Geology, 1973, Preliminary report of coal drill-hole data and chemical analyses of coal beds in Sheridan and Campbell Counties, Wyoming, and Big Horn County, Montana: U.S. Geological Survey Open-File Report, 57 p.
- _____, 1974, Preliminary report of coal drill-hole data and chemical analyses of coal beds in Campbell County, Wyoming: U.S. Geological Survey Open-File Report 74-97, 241 p.
- _____, 1976a, Preliminary report of coal drill-hole data and chemical analyses of coal beds in Campbell and Sheridan Counties, Wyoming, Custer, Prairie, and Garfield Counties, Montana, and Mercer County, North Dakota: U.S. Geological Survey Open-File Report 76-319, 377 p.
- _____, 1976b, Preliminary report of coal drill-hole data and chemical analyses of coal beds in Campbell, Converse, and Sheridan Counties, Wyoming, and Big Horn, Richland, and Dawson Counties, Montana: U.S. Geological Survey Open-File Report 76-450, 382 p.
- U.S. Geological Survey and Montana Bureau of Mines and Geology, 1977, Preliminary report of 1976 drilling of coals in Campbell and Sheridan Counties, Wyoming, and Big Horn, Dawson, McCone, Richland, Roosevelt, Rosebud, Sheridan, and Wibaux Counties, Montana: U.S. Geological Survey Open-File Report 77-283, 403 p.
- _____, 1978, Geophysical logs for Campbell and Converse Counties, Wyoming, chapter E of Preliminary report of 1977 coal drilling in eastern Montana and northeastern Wyoming: U.S. Geological Survey Open-File Report 77-721-E, 202 p.

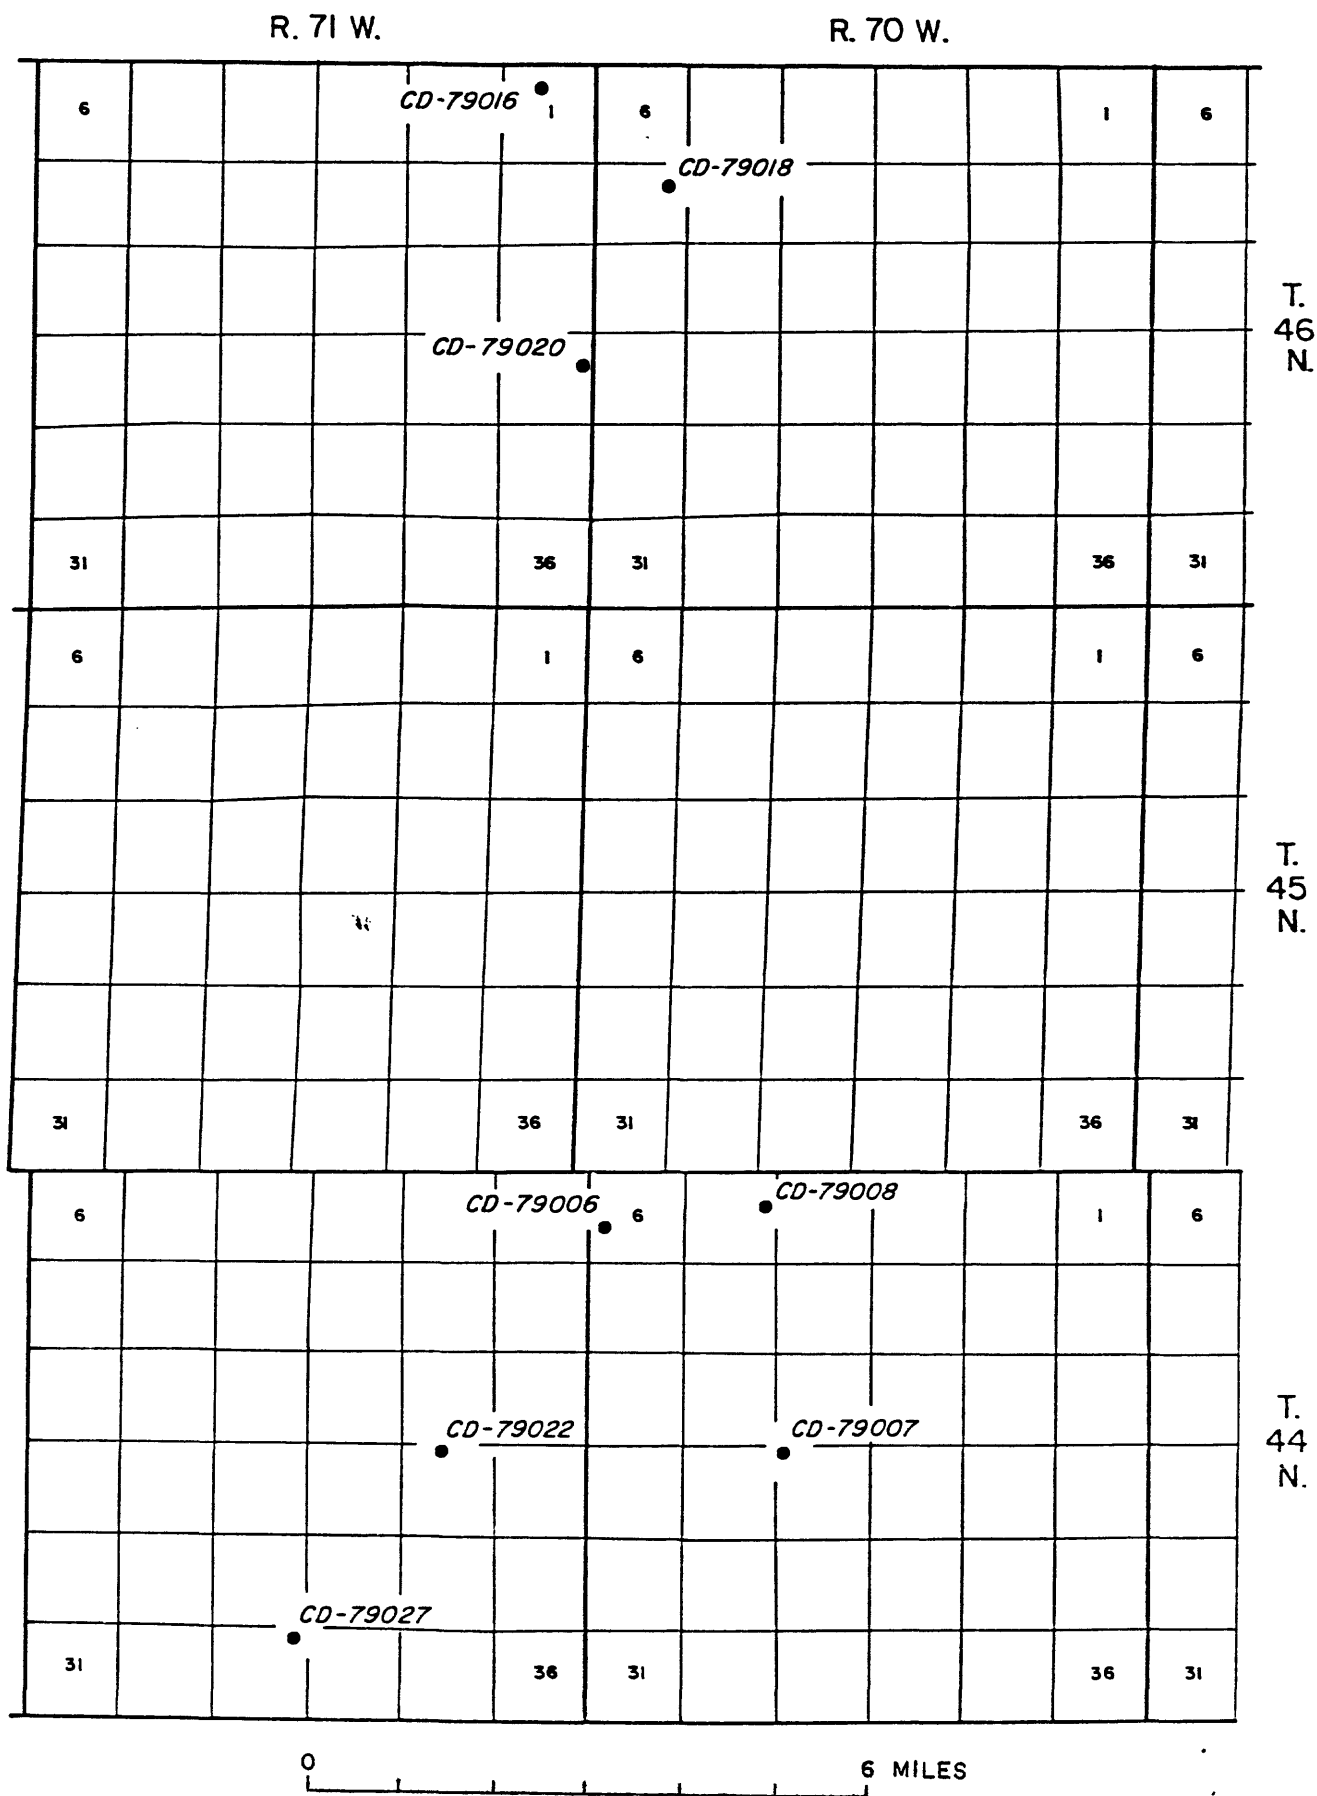


Figure 1. Location of core holes drilled during 1979
in Campbell County, Wyoming

Table 1.--Core-hole locations and sample data from drilling in the Wasatch
and Fort Union Formations, Campbell County, Wyoming

Core-hole No.	Location			Eleva- tion (ft)	USGS sample No.	Cored interval (ft)	Coal bed name
CD-79018	7	46	70	4,793	D218908	25 - 29.5	Unnamed
	1,990 FNL		1,240 FEL		D218909	47 - 53.6	Unnamed
					D218910	90 -114.6	Wyodak
					D218911	115.2-132	Wyodak
					D218912	134.8-136.3	Wyodak
CD-79022	23	44	71	4,812	D218913	309.4-315.5	Wyodak
	80 FNL		2,520 FWL		D218914	316 -326.1	Wyodak
					D218915	331 -359	Wyodak
					D218916	359 -381.5	Wyodak
CD-79020	24	46	71	4,598	D218917	25 - 29.5	Unnamed
	2,045 FNL		575 FEL		D218918	47 - 53.6	Unnamed
					D218919	90 -114.6	Wyodak
					D218920	115.2-132	Wyodak
					D218921	134.8-136.3	Wyodak
CD-79016	1	46	71	4,550	D218922	37.5- 43.9	Unnamed
	1,520 FNL		2,360 FWL		D218923	60.1- 77	Unnamed
					D218924	80 -100.8	Wyodak
					D218925	100.8-114.6	Wyodak
CD-79008	5	44	70	4,816	D218926	75 - 79	Unnamed
	2,200 FNL		515 FEL		D218927	98.5-107.7	Unnamed
					D218928	108.9-134.5	Wyodak
CD-79006	6	44	70	4,839	D218929	175 -176	Unnamed
	1,930 FSL		700 FWL		D218930	184.1-198.2	Wyodak
					D218931	198.1-220.9	Wyodak
CD-79007	21	44	70	4,935	D218932	262.9-263.9	Unnamed
	80 FNL		300 FWL		D218933	265.4-276.4	Unnamed
					D218934	280 -302.5	Wyodak
					D218935	305 -308.1	Wyodak
					D218936	308.8-310.8	Wyodak
					D218937	318.2-323.3	Wyodak
CD-79027	33	44	71	4,776	D221583	402 -445.6	Wyodak
	500 FNL		500 FEL		D221584	450 -503.1	Wyodak
					D221585	503.6-509.3	Wyodak

Table 2.--Coal analyses of coal samples from the Wyodak and unnamed beds, Wasatch and Fort Union Formations, Campbell County, Wyoming.

[Analyses by U.S. Department of Energy, Pittsburgh, Pa. Type of analysis: A, as received; B, moisture free; C, moisture and ash free; ---, no data]

Sample No.	Type of analysis	Proximate analysis (percent)				Ultimate analysis (percent)				Heating value (Btu/lb)	Forms of sulfur (percent)		Ash-fusion temp. (°F)
		Mois- ture	Volatile matter	Fixed carbon	Ash	Hydro- gen	Carbon	Nitro- gen	Oxy- gen		Sulfate	Pyritic	
D218908	A	26.9	32.8	32.6	7.7	6.7	48.6	1.1	35.1	0.9	0.01	0.15	2,010
	B	---	44.9	44.6	10.5	5.1	66.4	1.5	15.3	1.2	.01	.20	2,130
	C	---	50.1	49.9	---	5.7	74.2	1.7	17.1	1.3	.01	.23	2,230
D218909	A	26.9	27.6	29.9	15.6	6.1	41.3	1.0	35.5	.5	.01	.03	2,200
	B	---	37.7	41.0	21.3	4.2	56.5	1.4	15.8	.7	.01	.04	2,320
	C	---	47.9	52.1	---	5.4	71.8	1.8	20.1	.9	.01	.05	2,440
D218910	A	24.2	32.6	37.2	6.0	6.5	51.9	1.1	34.1	.5	.01	.10	2,030
	B	---	43.0	49.1	7.9	5.0	68.4	1.5	16.6	.6	.01	.13	2,110
	C	---	46.6	53.4	---	5.4	74.3	1.6	18.0	.7	.01	.14	2,200
D218911	A	29.5	28.1	36.6	5.8	6.4	48.1	1.1	38.2	.5	.01	.08	1,910
	B	---	39.8	52.0	8.2	4.5	68.2	1.5	16.9	.7	.01	.11	2,000
	C	---	43.4	56.6	---	4.9	74.3	1.7	18.4	.7	.01	.12	2,110
D218912	A	25.1	29.3	32.4	13.2	6.1	44.9	1.1	34.1	.5	.01	.06	2,390
	B	---	39.1	43.2	17.7	4.5	59.9	1.5	15.7	.7	.01	.07	2,460
	C	---	47.5	52.5	---	5.4	72.8	1.8	19.1	.9	.01	.09	2,530
D218913	A	20.5	34.8	37.5	7.2	6.3	53.4	1.1	30.8	1.1	.01	1.03	2,040
	B	---	43.8	47.1	9.1	5.1	67.2	1.4	15.9	1.4	.01	1.29	2,160
	C	---	48.1	51.9	---	5.6	73.9	1.5	17.4	1.6	.01	1.42	2,250
D218914	A	22.7	32.5	38.4	6.4	6.3	52.8	1.1	32.7	.7	.01	.12	2,040
	B	---	42.0	49.7	8.3	4.9	68.3	1.4	16.2	.9	.01	.15	2,130
	C	---	45.8	54.2	---	5.4	74.5	1.5	17.6	1.0	.01	.16	2,240
D218915	A	22.7	32.6	40.3	4.4	6.3	54.1	1.0	33.9	.3	.00	.03	2,340
	B	---	42.2	52.1	5.7	4.9	70.0	1.3	17.8	.4	.01	.04	2,420
	C	---	44.8	55.2	---	5.2	74.2	1.4	18.8	.4	.01	.05	2,490
D218916	A	23.9	30.9	39.7	5.5	6.2	52.8	1.0	34.2	.3	.01	.02	2,140
	B	---	40.7	52.1	7.2	4.7	69.5	1.4	17.0	.3	.01	.03	2,260
	C	---	43.8	56.2	---	5.0	74.9	1.5	18.3	.4	.01	.03	2,340

Table 2.--Coal analyses of coal samples from the Wyodak and unnamed beds, Wasatch and Fort Union Formations, Campbell County, Wyoming--Continued

Sample No.	Type of analysis	Proximate analysis (percent)				Ultimate analysis (percent)				Heating value (Btu/lb)	Forms of sulfur		Organic	Initial deformation	Ash-fusion temp. (°F)	
		Moisture	Volatile matter	Fixed carbon	Ash	Hydrogen	Carbon	Nitrogen	Oxygen		Sulfate	Pyritic			Softening	Fluid
D218917	A	19.8	31.2	29.9	19.1	5.7	44.3	1.1	28.6	1.1	0.00	0.31	0.83	2,260	2,370	2,440
	B	---	38.9	37.3	23.8	4.4	55.3	1.3	13.7	1.4	.01	.39	1.03			
	C	---	51.1	48.9	---	5.7	72.6	1.7	18.0	1.9	.01	.51	1.36			
D218918	A	23.6	33.6	33.1	9.7	6.4	49.3	1.1	32.8	.8	.01	.07	.72	2,100	2,180	2,270
	B	---	44.0	43.4	12.6	4.9	64.5	1.4	15.5	1.0	.01	.09	.94			
	C	---	50.4	49.6	---	5.6	73.8	1.6	17.8	1.2	.01	.10	1.08			
D218919	A	25.8	30.9	37.3	6.0	6.5	50.7	1.1	35.3	.4	.00	.05	.37	2,030	2,120	2,200
	B	---	41.6	50.4	8.0	4.9	68.4	1.5	16.7	.6	.00	.06	.50			
	C	---	45.3	54.7	---	5.3	74.4	1.6	18.1	.6	.00	.07	.54			
D218920	A	26.3	29.8	37.8	6.1	6.3	50.3	1.1	35.9	.3	.00	.02	.28	2,180	2,250	2,330
	B	---	40.5	51.2	8.3	4.6	68.2	1.5	17.0	.4	.00	.03	.37			
	C	---	44.1	55.9	---	5.0	74.4	1.6	18.5	.4	.00	.04	.41			
D218921	A	25.7	31.7	35.4	7.2	6.5	49.5	1.2	34.8	.8	.00	.02	.78	2,360	2,420	2,500
	B	---	42.6	47.7	9.7	4.9	66.6	1.5	16.2	1.1	.01	.02	1.05			
	C	---	47.2	52.8	---	5.4	73.8	1.7	17.9	1.2	.01	.02	1.16			
D218922	A	21.3	34.7	35.4	8.6	6.2	51.2	1.1	32.1	.9	.00	.08	.81	2,260	2,340	2,420
	B	---	44.1	45.0	10.9	4.9	65.0	1.4	16.7	1.1	.00	.10	1.03			
	C	---	49.5	50.5	---	5.5	73.0	1.6	18.7	1.3	.00	.11	1.16			
D218923	A	27.4	29.4	32.2	11.0	6.3	45.2	1.0	36.1	.5	.00	.05	.44	2,320	2,410	2,500
	B	---	40.5	44.4	15.1	4.5	62.2	1.3	16.2	.7	.01	.07	.60			
	C	---	47.7	52.3	---	5.3	73.2	1.6	19.0	.8	.01	.09	.71			
D218924	A	29.4	29.4	34.8	6.4	6.7	47.8	1.0	37.7	.4	.00	.09	.31	2,190	2,250	2,320
	B	---	41.6	49.3	9.1	4.8	67.7	1.4	16.4	.6	.01	.12	.44			
	C	---	45.8	54.2	---	5.3	74.5	1.5	18.0	.6	.01	.14	.48			
D218925	A	28.9	28.6	36.2	6.3	6.6	48.0	1.0	37.7	.3	.00	.02	.32	2,010	2,120	2,210
	B	---	40.3	50.8	8.9	4.7	67.6	1.4	16.9	.5	.00	.03	.45			
	C	---	44.3	55.7	---	5.2	74.2	1.6	18.6	.5	.00	.04	.49			
D218926	A	27.2	30.3	29.7	12.8	6.4	44.1	1.4	34.4	1.4	.00	.75	.39	2,170	2,250	2,340
	B	---	41.6	40.8	17.6	4.6	60.6	1.5	14.1	1.6	.01	1.03	.53			
	C	---	50.5	49.5	---	5.6	73.5	1.8	17.1	1.9	.01	1.25	.64			

Table 2.--Coal analyses of coal samples from the Wyodak and unnamed beds, Wasatch and Fort Union Formations, Campbell County, Wyoming--Continued

Sample No.	Type of analysis	Proximate analysis (percent)				Ultimate analysis (percent)				Heating value (Btu/lb)	Forms of sulfur (percent)			Ash-fusion temp. (°F)	
		Moisture	Volatiles	Fixed carbon	Ash	Hydrogen	Carbon	Nitrogen	Oxygen		Sulfate	Pyritic	Organic	Initial deformation	Softening fluid
D218927	A	28.0	30.1	31.5	10.4	6.5	45.8	1.0	34.9	1.5	0.00	0.89	0.58	1,860	1,950 2,040
	B	---	41.8	43.8	14.4	4.7	63.6	1.4	13.9	2.0	.01	1.23	.81		
	C	---	48.8	51.2	---	5.4	74.3	1.6	16.2	2.4	.01	1.44	.95		
D218928	A	29.5	32.1	33.0	5.4	6.7	48.7	1.1	37.8	.4	.01	.06	.38	2,170	2,260 2,370
	B	---	45.5	46.9	7.6	4.8	69.0	1.5	16.4	.6	.01	.09	.54		
	C	---	49.3	50.7	---	5.2	74.7	1.6	17.7	.7	.01	.09	.58		
D218929	A	21.6	37.8	30.6	10.0	6.7	51.7	1.2	28.9	1.5	.00	1.09	.45	1,860	1,950 2,060
	B	---	48.2	39.1	12.7	5.5	65.9	1.5	12.3	2.0	.00	1.40	.58		
	C	---	55.2	44.8	---	6.3	75.5	1.8	14.2	2.3	.00	1.60	.66		
D218930	A	27.9	32.9	31.6	7.6	6.5	48.0	1.0	36.1	.8	.03	.14	.66	1,970	2,080 2,190
	B	---	45.7	43.8	10.5	4.8	66.6	1.4	15.6	1.2	.04	.19	.92		
	C	---	51.0	49.0	---	5.3	74.4	1.6	17.4	1.3	.05	.21	1.03		
D218931	A	29.2	32.9	33.0	4.9	6.6	48.8	1.0	38.3	.4	.01	.03	.33	2,090	2,170 2,290
	B	---	46.5	46.5	7.0	4.8	68.9	1.4	17.5	.5	.02	.04	.47		
	C	---	50.0	50.0	---	5.1	74.0	1.5	18.8	.6	.02	.05	.50		
D218932	A	20.1	35.1	29.6	15.2	6.2	47.5	1.1	27.8	2.3	.01	1.63	.63	2,070	2,160 2,280
	B	---	43.9	37.1	18.0	5.0	59.4	1.3	12.5	2.8	.01	2.04	.79		
	C	---	54.2	45.8	---	6.1	73.4	1.6	15.4	3.5	.01	2.52	.98		
D218933	A	24.4	32.1	34.3	9.2	6.2	49.1	1.1	33.4	1.1	.01	.18	.88	2,050	2,170 2,260
	B	---	42.5	45.4	12.1	4.7	65.0	1.4	15.4	1.4	.01	.24	1.16		
	C	---	48.3	51.7	---	5.3	74.0	1.6	17.6	1.6	.01	.27	1.32		
D218934	A	28.8	29.5	37.1	4.6	6.5	49.5	1.1	38.1	.3	.01	.04	.27	2,260	2,340 2,430
	B	---	41.3	52.3	6.4	4.6	69.4	1.5	17.7	.5	.02	.05	.38		
	C	---	44.2	55.8	---	4.9	74.2	1.6	18.9	.5	.02	.06	.40		
D218935	A	25.5	30.0	29.6	14.9	6.3	43.6	1.0	33.7	.5	.01	.02	.52	2,380	2,490 2,580
	B	---	40.3	39.7	20.0	4.6	58.5	1.4	14.8	.7	.01	.03	.69		
	C	---	50.4	49.6	---	5.8	73.1	1.8	18.5	.9	.01	.04	.87		
D218936	A	26.8	28.6	36.3	8.3	6.2	47.6	1.0	35.3	1.6	.00	1.44	.12	1,890	2,000 2,100
	B	---	39.1	49.5	11.4	4.4	65.0	1.4	15.8	2.1	.01	1.97	.16		
	C	---	44.1	55.9	---	5.0	73.3	1.5	17.8	2.4	.01	2.22	.18		

Table 2.--Coal analyses of coal samples from the Wyodak and unnamed beds, Wasatch and Fort Union Formations, Campbell County, Wyoming--Continued

Sample No.	Type of analysis	Proximate analysis (percent)				Ultimate analysis (percent)				Heating value (Btu/lb)	Forms of sulfur (percent)		Ash-fusion temp. (°F)
		Moisture	Volatile matter	Fixed carbon	Ash	Hydrogen	Carbon	Nitrogen	Oxygen		Sulfate	Pyritic	
D218937	A	29.3	28.7	36.9	5.1	6.5	49.1	1.1	37.9	0.3	0.01	0.04	1,920
	B	---	40.6	52.1	7.3	4.5	69.4	1.5	16.8	.5	.01	.05	2,010
	C	---	43.8	56.2	---	4.9	74.9	1.6	18.2	.5	.01	.06	2,090
D221583	A	21.4	33.7	34.2	10.7	5.3	51.0	.7	31.8	.6	.03	.26	2,230
	B	---	43.8	43.6	13.6	3.7	64.8	.9	16.3	.7	.04	.33	2,290
	C	---	49.6	50.4	---	4.2	75.0	1.0	18.9	.8	.05	.38	2,370
D221584	A	22.7	32.9	40.1	4.3	5.4	55.6	.8	33.7	.2	.00	.05	2,040
	B	---	42.6	51.8	5.6	3.8	71.9	1.0	17.5	.3	.01	.06	2,120
	C	---	45.1	54.9	---	4.0	76.1	1.0	18.6	.3	.01	.07	2,210
D221585	A	18.9	33.6	39.8	7.7	5.4	55.8	.8	29.3	1.0	.01	.48	1,940
	B	---	41.4	49.2	9.4	4.1	68.8	1.0	15.5	1.2	.01	.59	2,030
	C	---	45.7	54.3	---	4.5	76.0	1.1	17.1	1.3	.01	.65	2,150