

(200)
R290
no. 82-78

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



LOW-LEVEL RADIOACTIVE-WASTE BURIAL AT
THE PALOS FOREST PRESERVE, ILLINOIS:

PART II. Geology and Hydrology of the
glacial drift, as related to the
migration of tritium

CHAMPAIGN, ILLINOIS





LOW-LEVEL RADIOACTIVE-WASTE BURIAL AT
THE PALOS FOREST PRESERVE, ILLINOIS:


PART II. Geology and Hydrology of the
glacial drift, as related to the
migration of tritium

By Julio C. Olimpio

Open-file report
(Geological Survey
(U.S.))

U.S. GEOLOGICAL SURVEY

Open-File Report 82-78

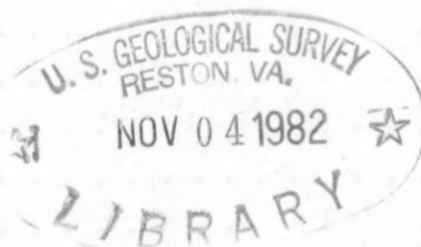

tuana

August 1982

338196

UNITED STATES DEPARTMENT OF THE INTERIOR

JAMES G. WATT, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

111791 517-0900
U.S. Geological Survey
(U.S.G.)

For additional information
write to:

District Chief, WRD
U.S. Geological Survey
4th Floor
102 East Main Street
Urbana, IL 61801

Copies of this report can be
purchased from:

Open-File Services Section
Western Distribution Branch
U.S. Geological Survey
Box 25425, Federal Center
Denver, CO 80225
(Telephone: [303] 234-5888)

CONTENTS

	Page
Abstract	1
Introduction	2
Problems and objectives.	2
General method of investigation.	4
Acknowledgments.	4
Description of the Plot M site	5
Location and geographic setting	5
History	5
Drilling and subsurface exploration program.	7
Regional geology	16
Drift at Plot M.	16
Geology	16
Lithology and mineralogy	17
Lithostratigraphy.	22
Hydrogeology.	30
Sources of water	30
Precipitation	30
Evapotranspiration.	32
Local runoff.	32
Ground-water flow	32
Ground water	33
The unsaturated zone.	33
The saturated zone.	33
Hydraulic conductivity.	39
Total head and ground-water flow.	40
Ground water in the Niagara dolomite	42
Tritium migration.	42
Studies at Plot M	42

CONTENTS

	Page
Tritium migration--Continued	
The tritium plume at Plot M	42
Section E-E'	42
Section B-B'	46
Section A-A'	46
Discussion	47
The single slug theory.	47
Tritium migration rate.	48
Factors favoring tritium migration at the Plot M site	48
Factors limiting tritium migration at the Plot M site	49
Summary and conclusions.	49
References	51

ILLUSTRATIONS

Figure 1. Map showing location of Plot M in the Palos Forest Preserve, Cook County, Illinois.	3
2. Map of the Plot M burial site showing topography, intermittent streams, test well locations, and lines of cross-sections A-A' through E-E'	6
3. Graph showing the tritium content of water from the Red Gate Woods well (Forest Preserve well No. 5167)	8
4. Graph showing the comparison of three different geophysical logs to lithology in test well 28.	15
5. Cross section showing correlation of natural-gamma logs from test wells 4, 5, and 11.	23
6. Geologic section E-E' of the Plot M site	25
7. Geologic section D-D' of the Plot M site	26
8. Geologic section C-C' of the Plot M site	27

ILLUSTRATIONS

	Page
Figure 9. Geologic section B-B' of the Plot M site	28
10. Geologic section A-A' of the Plot M site	29
11. Hydrographs showing monthly variation in precipitation and water levels in test wells at the Plot M site, August 1976 to April 1980.	31
12. Cross-section E-E' through the Plot M site showing the hydrau- lic head distribution and principal ground-water flow direction--May 1980.	41
13. Cross-section E-E' through the Plot M site showing the extent of tritium migration and levels of concentration in soil moisture collected from core samples of the drift.	43
14. Cross-section B-B' on the north side of the Plot M site show- ing the extent of tritium migration and levels of concentration in soil moisture collected from core samples of the drift	44
15. Cross-section A-A' 50 meters north of the Plot M site showing the extent of tritium migration and levels of concen- tration in the drift in soil moisture collected from core samples of the drift.	45

TABLES

Table 1. Test well construction data and lithologic description of cores of test well 26 at Plot M.	9
2. Site and well construction data of bedrock test wells in the forest preserve near Plot M.	13
3. Geologic time-stratigraphic classification, rock-stratigraphic classification, and general description of the drift at the Plot M site.	18
4. Grain size and composition data from samples of glacial drift at Plot M.	19
5. Hydraulic conductivity of glacial drift at Plot M.	34
6. Total porosity, bulk density, specific gravity, and surface area data of samples of glacial drift at Plot M.	38

LOW-LEVEL RADIOACTIVE-WASTE BURIAL AT THE PALOS FOREST PRESERVE, ILLINOIS

Part II. Geology and hydrology of the glacial drift, as related to the migration of tritium

by Julio C. Olimpio

ABSTRACT

A low-level radioactive-waste burial site is located in the Palos Forest Preserve, about 22 kilometers southwest of Chicago, Illinois. Between 1943 and 1949 the site, named Plot M, was filled with radioactive waste derived from the first Argonne National Laboratory and from the University of Chicago Metallurgical Laboratory. Since 1973, tritium concentration levels up to 14 nanocuries per liter have been measured in water samples collected from a well 360 meters from the burial site.

The U.S. Geological Survey is studying the geologic, hydrologic, and geochemical properties of the glacial drift and underlying bedrock at the Plot M site to determine the factors that control the movement of radionuclides. Thirty-three test wells were drilled into the drift to collect water and core samples for laboratory analysis, gather geologic and hydrologic data, and conduct geophysical surveys.

Plot M is constructed in drift that ranges in thickness from 35 to 50 meters. The drift is a stratified sequence of clay- and silt-rich sediments that contain thin, interstratified sand layers. The silt content of the drift increases with depth. The permeability of the drift, as indicated by field and laboratory hydraulic conductivity tests, ranges from 1.0×10^{-6} to 1.0×10^{-8} centimeters per second.

A tritium plume, the contaminated zone in the drift in which tritium concentration levels exceed 10 nanocuries per liter of water, extends horizontally northward from Plot M at least 50 meters and vertically downward to bedrock. The center of the plume, where tritium concentration levels are as high as 50,000 nanocuries per liter, is approximately 15 meters beneath the burial site. The size, shape, and "bulls-eye" concentration pattern indicate that the plume is a single slug and that the site no longer releases tritium into the drift. The leading edge, or front of the plume (the 10 nanocuries per liter boundary) left the burial site either in the late 1940's or early 1950's and intersected the underlying bedrock surface before 1973. The calculated movement rate of the front is 6.3×10^{-6} centimeters per second.

Several key factors that control both the concentration level and extent of migration of tritium in the drift at Plot M are:

- 1. The limited amount of tritiated waste buried at Plot M.*
- 2. The long elapsed period of waste burial (30-35 years) relative to the radioactive half-life of tritium (12.3 years).*
- 3. The extensive thickness and low permeability of the glacial drift at the site.*

INTRODUCTION

In early 1943, the U.S. Army Corps of Engineers leased land from the Cook County Forest Preserve District to build a radioisotope research facility. The facility formed part of the Metallurgical Laboratory operated by the University of Chicago for the Manhattan Engineer District (the Manhattan Project). The facility, known as Site A, housed three of the world's first nuclear reactors. Plot M was the burial site for the low-level radioactive waste derived from Metallurgical Laboratory operations (fig. 1).

From 1943 to 1948, radioactive waste delivered to Plot M was placed in simple 2.5-meter-deep trenches. Soil was used to cover the waste and to reduce the level of radiation. During 1948-49, waste was placed into steel bins, which, in turn, were placed in trenches and also covered with soil. In June 1949, the bins were removed and burial operations were discontinued. Work at Plot M ended in 1956 when an inverted concrete box was constructed to cover the burial site.

The Argonne National Laboratory (ANL) has conducted a radiological monitoring program at Plot M since 1948. In 1954, at the request of ANL, the U.S. Geological Survey studied the geologic, hydrologic, and chemical characteristics of the glacial drift at Plot M (W. J. Drescher, written commun., 1954) and advised ANL on its environmental monitoring program. In 1973, tritium was detected in water from a dolomite bedrock well at the Red Gate Woods picnic area, and the ANL monitoring program was expanded to include the Red Gate Woods well and the other nearby forest preserve wells. This study of ground-water flow and tritium migration at Plot M began in 1978.

PROBLEMS AND OBJECTIVES

The study attempts to answer several questions that arose after the discovery of tritium in the water at the Red Gate Woods well. Assuming that Plot M is the tritium source, how does it migrate from Plot M to the Red Gate Woods well? Does tritium move with ground water along pathways entirely within the glacial drift or along pathways through both the drift and underlying bedrock? What is the rate

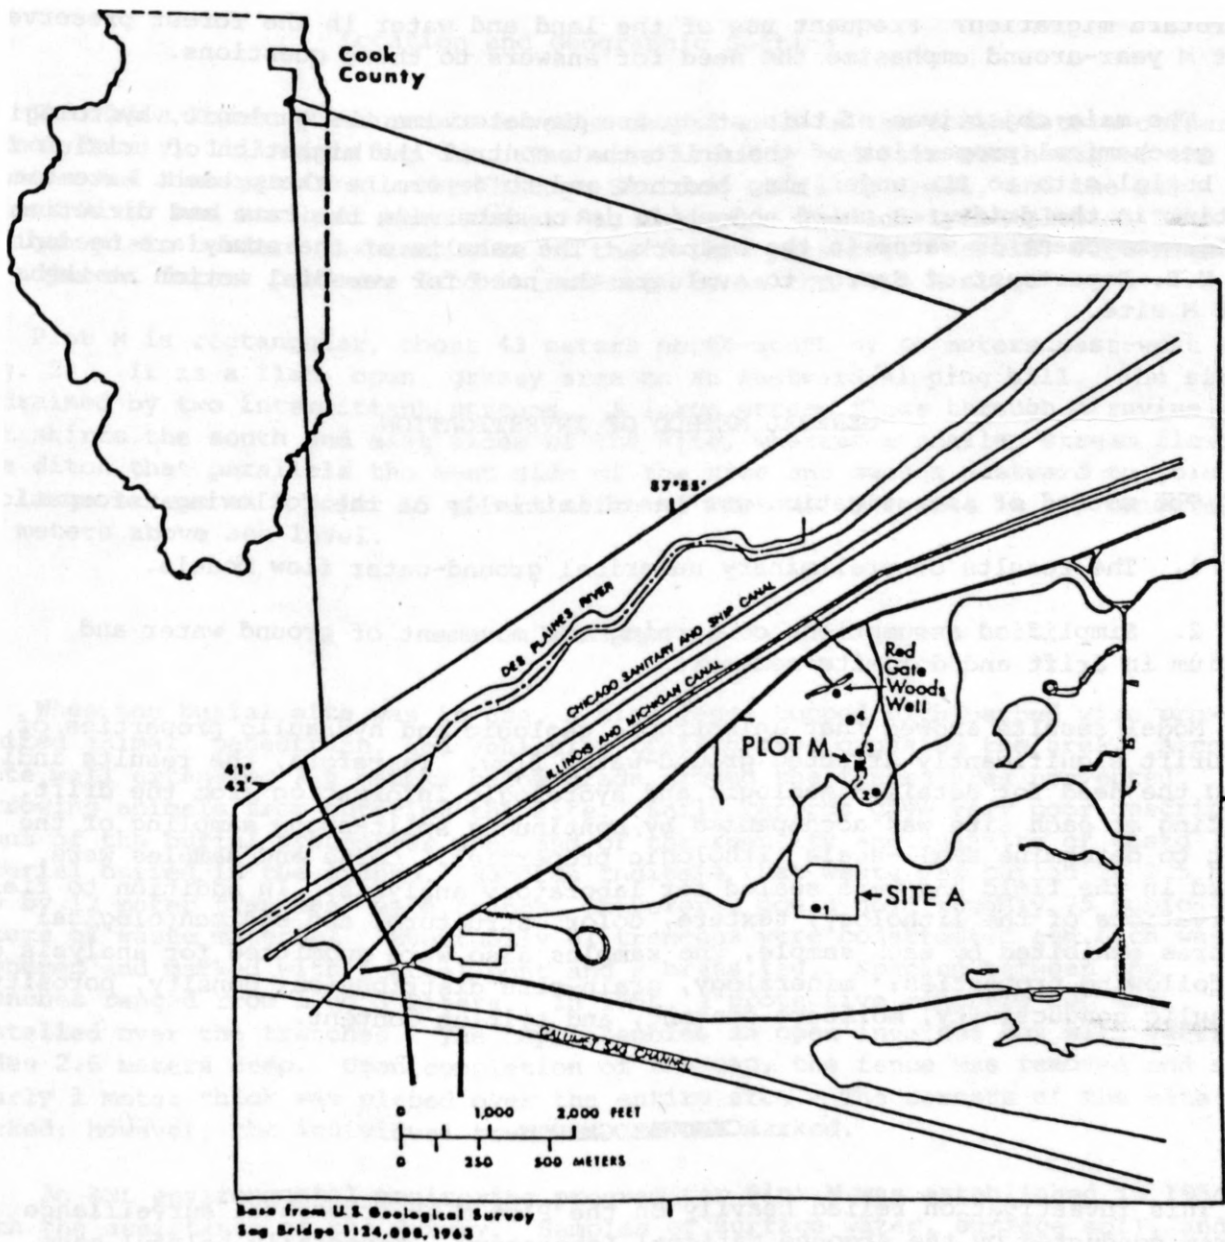


Figure 1.--Location of Plot M in the Palos Forest Preserve, Cook County, Illinois. Wells 1 through 4 and the Red Gate Woods well are finished in the underlying dolomite bedrock.

and extent of tritium migration in the drift and bedrock? Do surface and sub-surface conditions at the site promote migration? Are there conditions that work to retard migration? Frequent use of the land and water in the forest preserve at Plot M year-around emphasize the need for answers to these questions.

The main objectives of this study are to determine the geologic, hydrologic, and geochemical properties of the drift that control the migration of tritium from the burial site to the underlying bedrock and to determine the present extent of tritium in the drift. A third objective is to determine the rate and direction of tritium movement in water in the bedrock. The results of the study are needed by the U.S. Department of Energy to evaluate the need for remedial action at the Plot M site.

GENERAL METHOD OF INVESTIGATION

The method of investigation was based initially on the following information:

1. The results of preliminary numerical ground-water flow models.
2. Simplified assumptions concerning the movement of ground water and tritium in drift and dolomite bedrock.

Model results showed that anisotropic geologic and hydraulic properties of the drift significantly affected ground-water flow. Therefore, the results indicated the need for detailed geologic and hydrologic information from the drift. Drilling at each site was accompanied by continuous split-spoon sampling of the drift to determine small-scale lithologic properties. Cores and samples were logged in the field and were sealed for laboratory analysis. In addition to field observations of the lithology, texture, color, structure, and sedimentological features exhibited by each sample, the samples also were submitted for analysis of the following properties: mineralogy, grain-size distribution, density, porosity, hydraulic conductivity, moisture content, and tritium content.

ACKNOWLEDGMENTS

This investigation relied heavily on the Plot M environmental surveillance program conducted by the Argonne National Laboratory. Especially helpful have been J. Sedlet, N. W. Golchert, and H. C. Svoboda of the Health Safety Section of ANL who have provided administrative and technical assistance throughout the project.

DESCRIPTION OF THE PLOT M SITE

Location and Geographic Setting

The Palos Forest Preserve is a wedge-shaped area in the southwestern corner of Cook County, Illinois (fig. 1). The area is hilly and lies southeast of the Illinois and Michigan Canal, the Chicago Sanitary and Ship Canal, and the Des Plaines River and north of the Calumet Sag Channel. The low-lying glacial Lake Michigan plain borders the east side of the forest preserve. Herein, Plot M and the adjacent forest preserve land is referred to as the Plot M site.


Plot M is rectangular, about 43 meters north-south by 46 meters east-west (fig. 2). It is a flat, open, grassy area on an eastward-sloping hill. The site is drained by two intermittent streams. A large stream flows through a ravine that skirts the south and east sides of the site, whereas a smaller stream flows in a ditch that parallels the west side of the site and swings eastward to join the large stream at a point 65 meters north of Plot M. The site is approximately 215 meters above sea level.

History

When the burial site was in use, a high fence topped with barbed wire prohibited animal, pedestrian, and vehicular traffic from crossing the area. A concrete wall extending 2.5 meters below grade around the fenced area prevented burrowing animals from entering the site. Early records give very poor descriptions of the burial procedures used and of the identity and quantity of waste material buried in the ground. Records indicate that waste was buried in 2.5 by 2.5 by 12 meter trenches; each trench, therefore, could hold roughly 75 cubic meters of waste material. Eventually 41 trenches were constructed and each was numbered and marked with a steel post and a brass tag. Spacing between the trenches ranged from 1 to 3 meters. In 1956, a protective concrete cap was installed over the trenches. The cap resembles an open inverted box with vertical sides 2.6 meters deep. Upon completion of the cap, the fence was removed and soil nearly 1 meter thick was placed over the entire area. The corners of the site are marked; however, the individual trenches are not marked.

An ANL environmental monitoring program for Plot M was established in 1954 with the assistance of the Survey. Samples of surface water, surface soil, and augered soil core samples were collected for analyses. Samples collected through 1961 contained normal radioactivity for the Chicago area. During 1963-69 abnormally high alpha and beta activity was detected in surface soil samples collected 17 meters northwest of the site (Golchert and Sedlet, 1978).

The first indication of subsurface movement of radionuclides was in 1973 when tritium concentration levels higher than background levels were detected in the water in the bedrock well at the Red Gate Woods picnic area. Since then the water

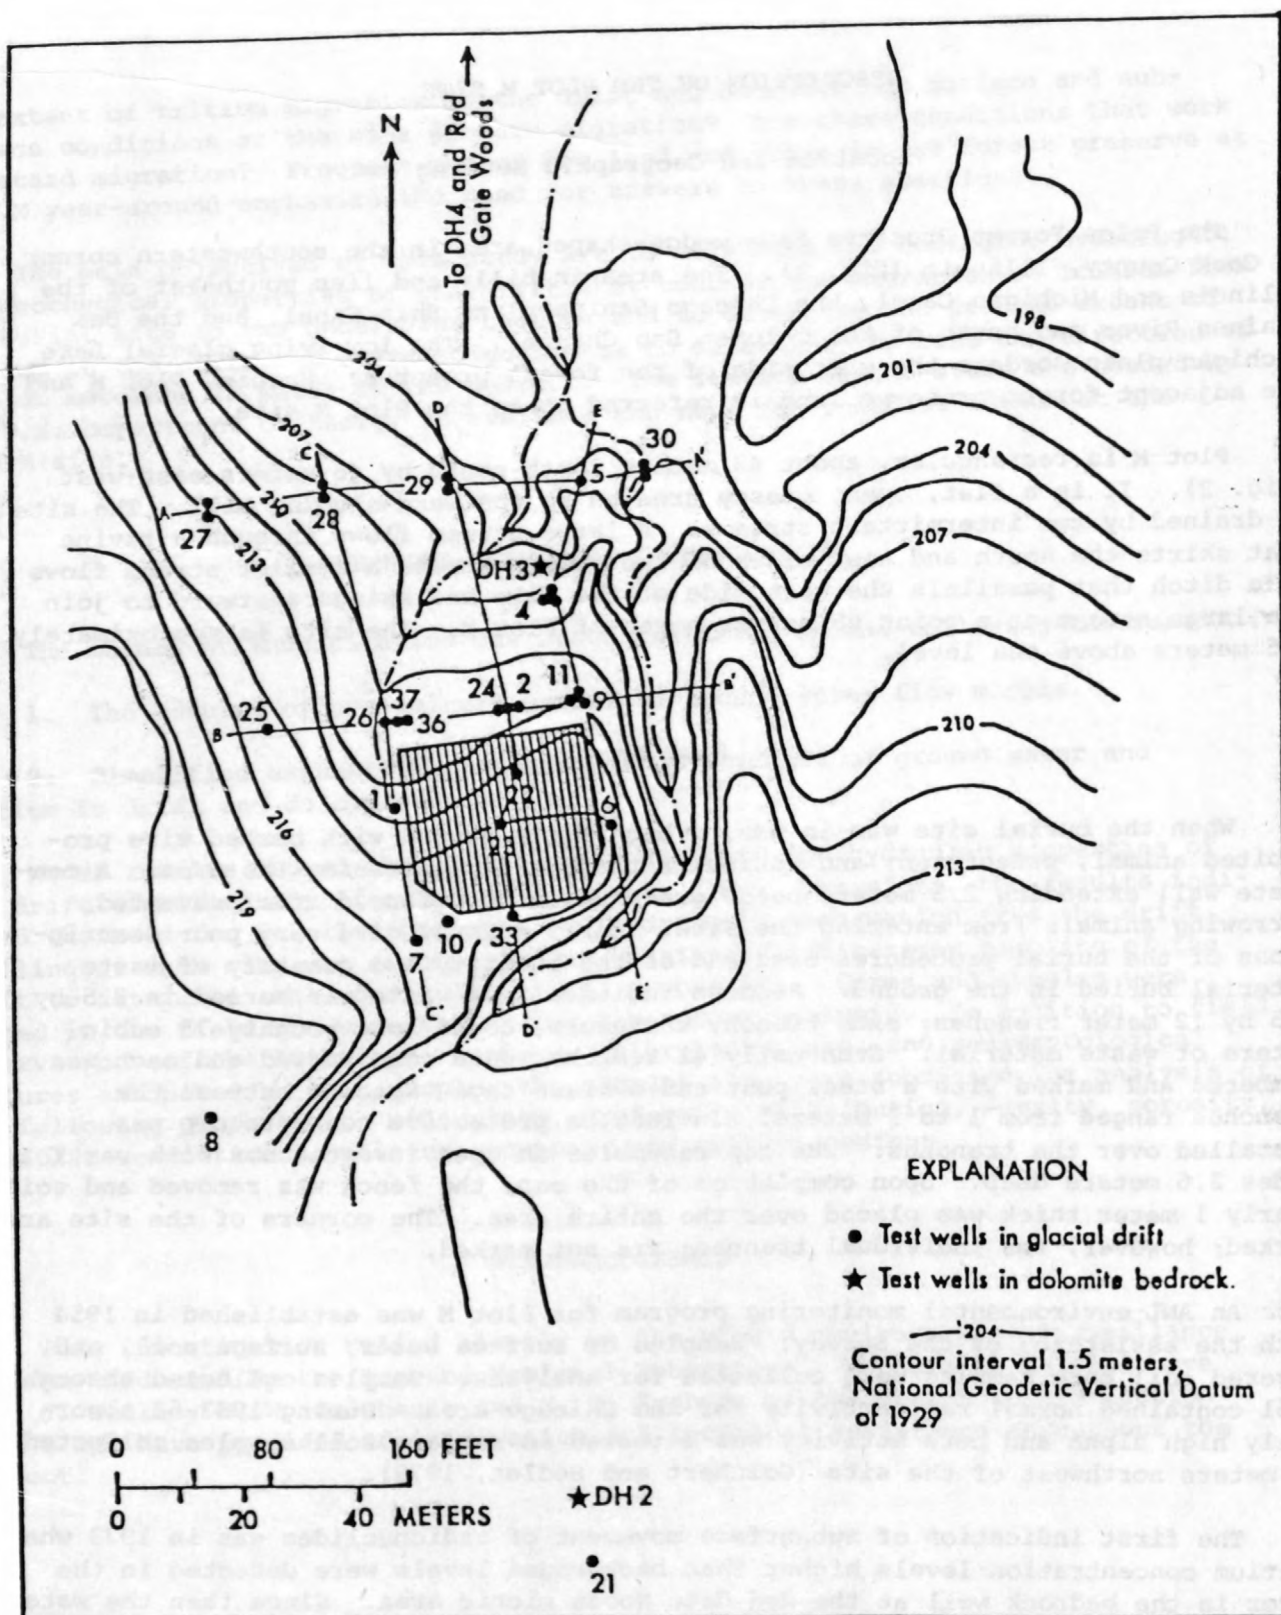

in the well has been sampled periodically and analyzed for tritium and other radionuclides. Tritium concentration levels range from 0.25 nanocuries per liter of water (nCi/L) to 14 nCi/L (fig. 3). The pattern of fluctuating tritium concentration levels, maximum during the winter and minimum during the summer, has been observed since 1973.

DRILLING AND SUBSURFACE EXPLORATION PROGRAM

Under Survey supervision, ANL began construction of a network of monitoring piezometers in the drift in 1976. Ten piezometers were installed in test wells that were constructed to a maximum depth of 12 meters (test wells 1-10, fig. 2). Core samples were collected from two test wells (22, 23, fig. 2) drilled through the concrete cap of the burial site in 1977. In late 1977 and early 1978, nested piezometers were installed at well locations 11 and 24. Well-completion data, length of core recovered, and the geologic log of each test well are given by Olimpio (1982). As an example, the log of test well 26 is given in table 1. Table 2 gives the well-completion information for four bedrock test wells (DH1-DH4, fig. 1) drilled near Plot M in 1976. A complete description of the techniques used to drill the pre-1979 wells, together with the results of the radionuclide analyses of all the core samples collected, is given by Golchert and Sedlet (1978).

All the test wells drilled before 1979 were either next to or downgradient from Plot M between the two intermittent streams that drain the site. Furthermore, all but a few of the piezometers were located in the upper 10-15 meters of the drift. In September 1979 and June 1980, the Survey drilled a total of 15 wells in an effort to expand and deepen the downgradient ground-water-monitoring network. Piezometers were installed in each test well (locations 25-30, 33-37, fig. 2, table 1). The 15 new piezometers, together with the pre-1979 piezometers, provide a monitoring grid delineated by two east-west lines (A-A', B-B', fig. 2) and three north-south lines (C-C', D-D', E-E', fig. 2).

The geologic and hydrologic data obtained from the 15 test wells were used to define the lithologic and stratigraphic characteristics of the drift, locate the approximate position of the water table, and determine the hydraulic head distribution of the saturated zone in the drift.

Three types of borehole geophysical logs were run on each test well: natural-gamma, gamma-gamma, and neutron-epithermal neutron (fig. 4). The logs, which qualitatively identify lithology, indicate borehole and casing conditions, and aid stratigraphic correlation, were used as follows:

1. The natural-gamma logs were used to aid identification of less-radioactive sand layers in the clay- and silt-rich drift. Log identification of sand layers made it possible to correlate sandy strata (and also silty or gravelly strata) from well to well and thus played an important role in determining drift stratigraphy at the site.

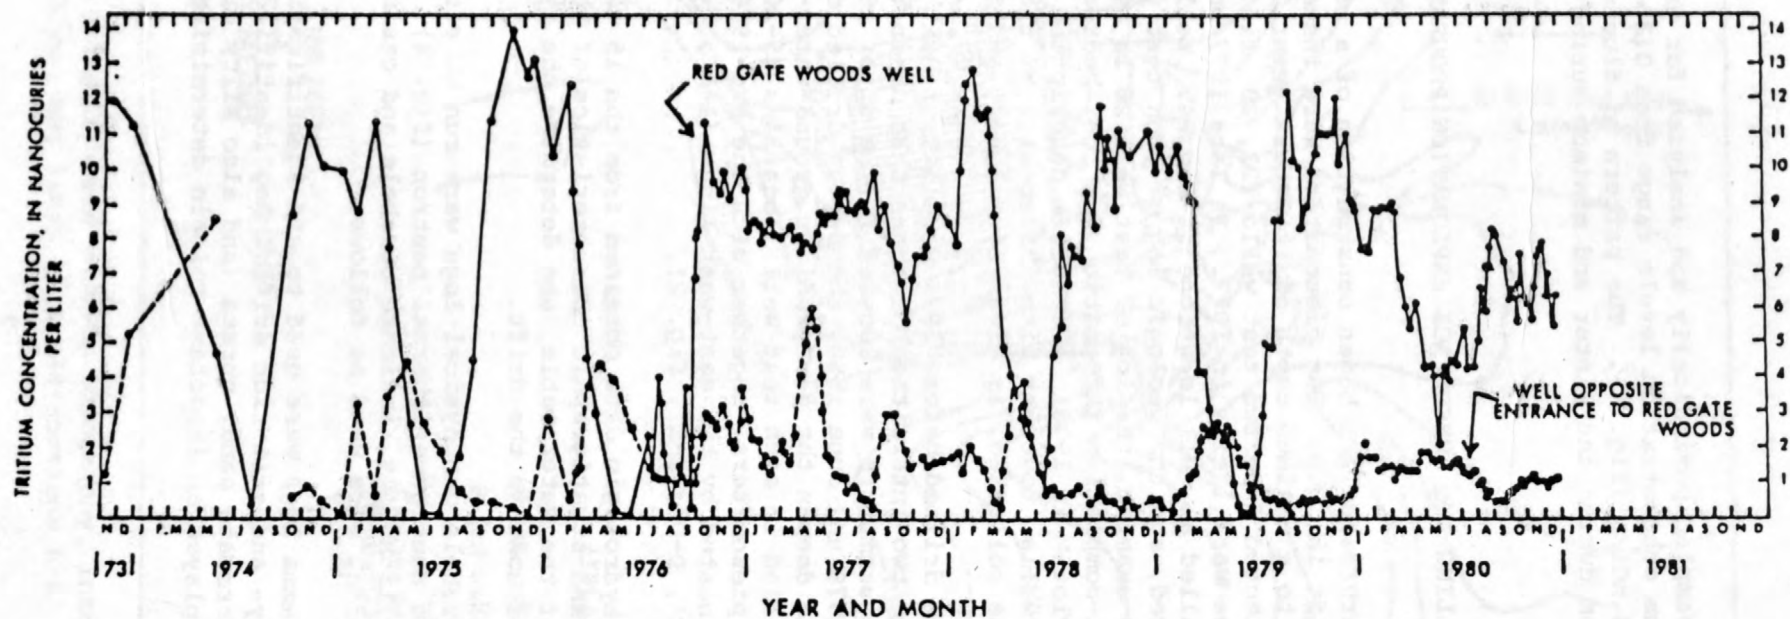


Figure 3.--Tritium content of water from the Red Gate Woods well (Forest Preserve well 5167) and from the well opposite the entrance to Red Gate Woods (Forest Preserve well 5159).

Table 1.--Test well construction data and lithologic description
of cores of test well 26 at Plot M

Completion date: October 9, 1979

Location: 10 meters northeast of the northeast corner of Plot M

Site and well construction data (values are in meters):

Altitude of land surface 210.77

Altitude of measuring point (top of casing). 210.99

Depth of bottom of piezometer from land surface. . . . 18.22

Type of piezometer: 1.22 m slotted PVC-pipe, 5.08 cm diameter

Unit No.	Sample number	Depth interval (meters)	Blow counts	Recovery (cm)	Description
1	79S221	0- .46	8-12-15	15.2	brown stoney clay soil
1	79S222	.46- .91	11-10-18	15.2	brown clayey soil, root tubes, plant frag
1	79S223	.91- 1.37	20-20-24	25.4	brown clayey soil w/stones, plant frag; 2.5 cm dry yellow sand layer @ 1.16 m
1	79S224	1.37- 1.83	13-18-21	25.4	yellow-brown silty clay w/pebbles, mottled, hard, dry, flaky, brittle
1	79S225	1.83- 2.29	23-25-29	25.4	yellow-brown silty clay w/pebbles (lg. variety), flaky, brittle; plant frags., Fe oxidation, pyrite; 45° fracture @ 1.83 m
1	79S226	2.29- 2.74	14-20-25	61.0	yellow-brown silty clay w/pebbles (lg. variety); vertical fracture (25.4 cm) oxidized w/plant debris
1	79S227	2.74- 3.20	14-20-26	45.7	brown silty clay w/pebbles, hard, dry
1	79S228	3.20- 3.66	20-21-25	40.6	brown silty clay w/pebbles, hard, dry; wet spot @ 2.35 m; moist vertical fracture @ 3.51 m
1	79S229	3.66- 4.12	9-11-15	35.6	brown silty clay w/pebbles, soft, moist, mottled; Fe oxidation

Table 1.--Test well construction data and lithologic description
of cores of test well 26 at Plot M--Continued

Unit No.	Sample number	Depth interval (meters)	Blow counts	Recovery (cm)	Description
1	79S230	4.12- 4.57	7-7-10	35.6	brown silty clay w/pebbles, soft, moist, mottled; Fe oxidation
1	79S231	4.57- 5.03	11-13-13	30.5	brown silty clay, soft, moist, mottled
1	79S232	5.03- 5.49	9-13-18	50.8	brown silty clay, soft, moist
1	79S233	5.49- 5.94	24-27-27	50.8	brown silty clay, soft, moist; 5.1 cm water bearing sand layer @ 5.94 m
1	79S234	5.94- 6.40	13-19-50	35.6	brown silty clay; 30.5 cm water bearing sand layer w/stones @ 6.10 m
1	79S235	6.40- 6.86	19-15-16	45.7	watery sand to 6.55 m; contact w/brown silty clay w/pebbles and stones
1	79S236	6.86- 7.32	37-32-27	40.6	brown clayey silt w/pebbles and stones
1	79S237	7.32- 7.77	9-12-17	45.7	brown clayey silt grading to brown-gray clayey silt w/pebbles, stones, mottled
2	79S238	7.77- 8.23	18-20-28	35.6	brown-gray clayey silt w/numerous pebbles and stones, moist, iron oxidation
2	79S239	8.23- 8.69	11-13-18	30.5	brown-gray clayey silt w/pebbles, gritty
2	79S240	8.69- 9.14		NR	
2	79S241	9.14- 9.60	25-18-18	30.5	brown-gray clayey silt w/pebbles, gritty
2	79S242	9.60-10.06	12-13-16	40.6	brown-gray clayey silt to 9.75 m; contact dark gray clayey silt w/pebbles, dry, hard, dense

Table 1.--Test well construction data and lithologic description
of cores of test well 26 at Plot M--Continued

Unit No.	Sample number	Depth interval (meters)	Blow counts	Recovery (cm)	Description
2	79S243	10.06-10.52	10-15-19	30.5	dark gray silt to 10.21 m; contact w/brown silt w/pebbles and stones
2	79S244	10.52-10.97	12-15-17	40.6	brown silt w/few pebbles, gritty, clean
2	79S245	10.97-11.43	39-25-23	30.5	brown silt w/few pebbles, gritty, moist, dense
2	79S246	11.43-11.89	9-12-16	40.6	brown clayey silt w/pebbles, stones, gritty; 5.1 cm oxidized zone @ 11.43 m
2	79S247	11.89-12.34	12-11-13	25.4	gray-brown clayey silt w/pebbles, stones, gritty, moist, soft
2	79S248	12.34-12.80	18-48-12	15.2	gray-brown clayey silt
2	79S249	12.80-13.26	10-12-45	20.3	wet gravelly clayey silt w/pebbles, stones
2	79S250	13.26-13.72	7-8-11	40.6	wet gravelly clayey silt grading to brown-gray clayey silt
2	79S251	13.72-14.17	6-11-13	30.5	brown-gray clay; grading to pink- brown silt, moist, clean
2	79S252	14.17-14.63	5-7-24	35.6	pink-brown silt w/stones, pebbles, clean
2	79S253	14.63-15.09	18-11-23	20.3	pink-brown silt to 14.69 m; contact w/brown silt; graded layers of silt and sand
2	79S254	15.09-15.55	10-14-26	40.6	brown clayey silt w/pebbles, gritty, moist, soft
3	79S255	15.55-16.00	26-22-22	40.6	brown clayey silt; grading to brown- gray clayey silt

Table 1.--Test well construction data and lithologic description
of cores of test well 26 at Plot M--Continued

Unit No.	Sample number	Depth interval (meters)	Blow counts	Recovery (cm)	Description
3	79S256	16.00-16.46	10-20-21	35.6	brown-gray clayey silt; grading to gray-brown clayey silt w/pebbles; stones
3	79S257	16.46-16.92	15-24-50/4	35.6	gray-brown clayey silt grading to silt w/pebbles, large stones, soft, moist
3	79S258	16.92-17.37	26-20-20	NR	rocks
3	79S259	17.37-17.83	12-16-17	15.2	gray-brown clayey silt w/pebbles, mottled
3	79S260	17.83-18.29	19-15-16	30.5	brown-gray clayey silt; grading to gray clayey silt w/pebbles, gritty, moist, soft
EOB 19.81 m					

Table 2.--Site and well construction data of bedrock test wells
in the forest preserve near Plot M

DH1

Completion date: September 17, 1976

Location: Site A, at the top of the ridge in the Palos Forest Preserve

Site and well construction data (values are in meters):

Altitude of land surface	226.46
Altitude of measuring point (top of casing).	227.06
Depth to bedrock from land surface	51.81
Depth to bottom of casing from land surface.	53.34
Depth to bottom of borehole from land surface.	65.53

Type of casing: black steel, 12.7 cm diameter

DH2

Completion date: September 20, 1976

Location: 160 meters south of Plot M on the north side of the forest preserve road; near SB21

Site and well construction data (values are in meters):

Altitude of land surface	219.79
Altitude of measuring point (top of casing).	220.39
Depth to bedrock from land surface	46.93
Depth to bottom of casing from land surface.	48.77
Depth to bottom of borehole from land surface.	61.26

Type of casing: black steel, 12.7 cm diameter

DH3

Completion date: September 23, 1976

Location: 30 meters north-northwest of the northeast corner of Plot M; near SB4

Site and well construction data (values are in meters):

Altitude of land surface	207.08
Altitude of measuring point (top of casing).	207.68
Depth to bedrock from land surface	37.18
Depth to bottom of casing from land surface.	39.01
Depth to bottom of borehole from land surface.	52.73

Type of casing: black steel, 12.7 cm diameter

Table 2.--Site and well construction data of bedrock test wells
in the forest preserve near Plot M--Continued

DH4

Completion date: September 28, 1976

Location: Approximately 200 meters north of Plot M next to
forest preserve road

Site and well construction data (values are in meters):

Altitude of land surface	205.64
Altitude of measuring point (top of casing).	206.24
Depth to bedrock from land surface	33.22
Depth to bottom of casing from land surface.	35.35
Depth to bottom of borehole from land surface.	85.34

Type of casing: black steel, 12.7 cm diameter

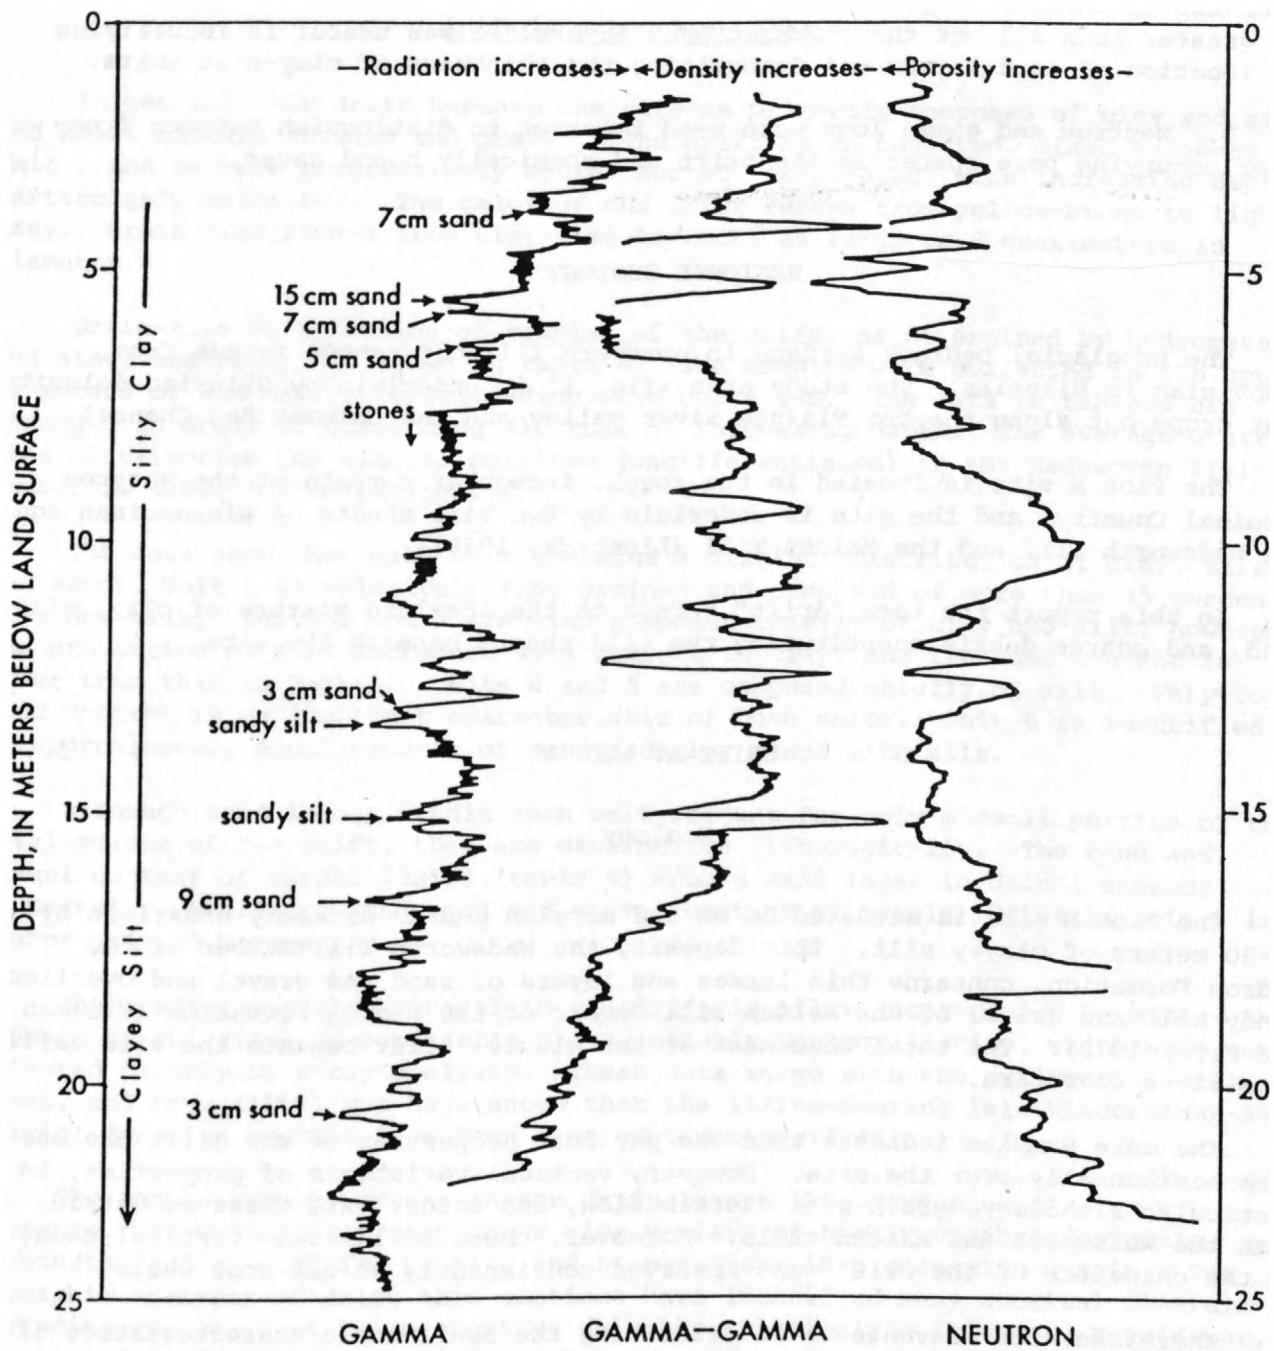


Figure 4.--Comparison of three different geophysical logs to lithology in test well 28.

2. Gamma-gamma logs measured the drift's capacity to reduce and attenuate induced radiation. Bulk density decreases to the right on the logs shown in figure 4; therefore, the response to a layer of sand is opposite to that of the natural-gamma log. Although the gamma-gamma log did not accurately measure the thickness of the sand layers because the radius of detection of the nuclear probe was greater than all but the thickest sand layers, it was useful in identifying the location of sand layers and determining the thickness of clay-silt units.

3. Neutron and gamma logs were used together to distinguish between free-water occupying pore spaces in the drift and chemically bound water.

REGIONAL GEOLOGY

The preglacial bedrock surface in northern Illinois ranges in age from Ordovician to Silurian. The study area (fig. 1) is underlain by Silurian dolomite that crops out along the Des Plaines River valley and the Calumet Sag Channel.

The Plot M site is located in the rough, irregular terrain of the Wheaton Morainal Country; and the site is underlain by two till sheets of Wisconsinan age, the Wadsworth Till and the Malden Till (Lineback, 1979).

In this report the term "drift" refers to the ice-laid mixture of clay, silt, sand, and coarse debris constituting the till sheets beneath the site.

DRIFT AT PLOT M

Geology

The Plot M site is situated on an end moraine and is directly underlain by 25-30 meters of clayey silt. This deposit, the Wadsworth Till Member of the Wedron Formation, contains thin lenses and layers of sand and gravel and overlies sandy silt and gravel of the Malden Till Member of the Wedron Formation (Willman and Frye, 1970). The total thickness of the glacial drift beneath the site varies from 25 to 45 meters.

The core samples indicate that the physical properties of the drift are uniform horizontally over the site. However, vertical variations of properties, in particular lithology, grain-size distribution, and color, were observed within both the Wadsworth and Malden tills. Moreover, these small-scale vertical changes in the character of the drift were observed consistently at all test wells.

Therefore, for convenience in describing the small-scale characteristics of the drift, the vertical variation in lithology, grain-size distribution, and color within each till sheet were used to subdivide the drift into seven lithostrati-

graphic units. The units are referred to, from the surface downwards, as Units 1 through 7 (table 3). Units 1-5 represent the Wadsworth Till Member and Units 6 and 7 represent the Malden Till Member.

Lithology and Mineralogy

In general, the drift beneath the site is primarily composed of clay and silt and small amounts of sand and gravel. The drift is an unsorted, mixed sediment in Unit 1 and becomes progressively better sorted, or layered, with increasing depth, particularly Units 5-7. The color of the drift ranges from yellow-brown to light gray. Grain size ranges from clay-size to rocks as large as 8 centimeters in diameter.

Grain-size distribution of samples of the drift, as determined by hydrometer and sieve analyses, are shown in table 4. The samples were collected in the upper 35 meters of the drift, corresponding with Units 1-6. The data in table 4 are arranged in order of descending altitude or increasing depth. The average grain-size distribution for glacial moraines (undifferentiated) in the Wadsworth Till Member is shown for comparison.

The data show that each unit contains a distinct distribution of clay, silt, and sand. Unit 1 is relatively fine grained and composed of more than 75 percent clay and silt. Units 2 and 3 are also composed chiefly of clay and silt; however, the proportion of silt increases with respect to clay, and the sand content is lower than that in Unit 1. Units 4 and 5 are composed chiefly of silt. Very low sand content is an important characteristic of both units. Unit 6 is identified by approximately equal amounts of sand and clay mixed with silt.

Although sand layers within each unit account for only a small portion of the total volume of the drift, they are distinctive lithologically. The sand and gravel content of sample 79S113 (table 4) from a sand layer in Unit 1 exceeds 65 percent. Similarly, the sand and gravel content of sample 79S144 in Unit 2 is higher than 50 percent.

The predominant clay mineral in the drift is illite accompanied by minor amounts of chlorite and expandable clays, notably montmorillonite, which were not detected clearly by X-ray analysis. These data agree with the analyses of Willman, Glass, and Frye (1963) who have shown that the illite-bearing late Wisconsinan-age glacial deposits contain less than 5 percent montmorillonite.

The composition of grains in the drift larger than sand size is highly variable. In Unit 1, for example, a wide variety of highly weathered clastic, carbonate, and crystalline pebbles and stones occur in a clay-rich matrix. Petrographic analyses of drift thin sections have identified many detrital minerals including quartz, biotite, muscovite, chlorite, plagioclase feldspar, K-feldspar, calcite, dolomite, pyrite, and several opaque minerals. Rock fragments in Unit 1 include quartzite, dolomite, black and green shale, and weathered igneous and/or metamorphic rock.

Table 3.--Geologic time-stratigraphic classification, rock stratigraphic classification, and general description of the drift at the Plot M site

System	Series	Stage	Substage	Formation	Member	Unit (this report)	Depth (m)	Thick- ness (m)	Description
Quater- nary	Pleisto- cene	Wiscon- sinan	Woodford- ian	Wedron	Wadsworth Till ¹	1	5	5	Yellow-brown silty clay containing pebbles, stones; wide variety of mineral and rock fragments, oxidized fractures, discontinuous sand layers
						2	10	5	Alternating sequence of brown and gray-brown clayey silts containing pebbles, stones, and rocks; mostly dolomite and black shale grains, discontinuous sand and gravel layers
						3	15	5	Alternating sequence of brown and gray-brown clayey silts containing pebbles, stones; mostly dolomite and black shale grains, relatively low density, easy to drill and sample
						4	20	5	Alternating sequence of gray and gray-brown silts, few or no pebbles and stones; very dry and hard, relatively high density, difficult to drill and sample
						5	25	5	Gray and light gray silt and sand, no pebbles, dry, stiff, brittle, extremely hard, difficult to drill and sample
					Malden Till ¹	6	30	5	Gray-brown gravelly sandy silt, moist, all grains are dolomite
						7	35	5-7	Dark brown gravelly, clayey silt containing pebbles and stones, moist; only encountered in test well 36
Silurian	Niagaran						40	50	

¹ Willman and Frye, 1970.

Table 4.--Grain-size and composition data from samples
of glacial drift at Plot M

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Particle-size distribution (percent of total amount)				Clay minerals ¹ (<0.004 mm fraction)		
			Top	Bottom	Sand ²	Silt	Clay	Gravel	Expand- able clays	Illite	Chlorite/ Kaolinite
1	27	79S111	210.92	210.46	18	52	30	0	--	--	--
1	25	79S212	210.16	209.70	--	--	--	--	7	69	24
1	27	79S113	210.01	209.55	65	25	10	10	--	--	--
1	26	³ 79S227	208.03	207.57	11	48	45	0	18	62	20
1	26	79S227	208.03	207.57	10	58	32	0	18	62	20
1	28	79S2	207.78	207.32	--	--	--	--	17	59	23
1	28	79S3	207.32	206.88	--	--	--	--	13	58	29
1	27	79S110	206.81	206.35	25	40	35	0	--	--	--
1	29	79S5	206.41	205.95	--	--	--	--	14	72	14
1	26	79S233	205.28	204.82	17	53	30	--	4	74	22
1	27	79S125	204.52	204.06	15	62	23	0	--	--	--
1	29	79S59	203.60	203.15	25	50	25	14	--	--	--
1	28	79S12	203.21	202.75	--	--	--	--	5	75	20
1	25	79S217	202.38	201.93	9	72	19	4	--	--	--
2	27	79S132	201.32	200.86	16	34	50	0	--	--	--
2	27	³ 79S133	200.86	200.41	15	58	26	9	--	--	--
2	27	79S133	200.86	200.41	27	50	23	0	--	--	--
2	27	79S243	200.71	200.25	20	51	28	2	2	70	28
2	29	³ 79S66	200.40	199.95	13	46	41	3	--	--	--
2	29	79S66	200.40	199.95	26	47	27	0	--	--	--
2	28	79S19	199.64	199.18	13	45	42	0	--	--	--
2	29	79S69	199.03	198.57	28	49	23	0	--	--	--
2	27	79S138	198.58	198.12	--	--	--	--	7	65	28
2	27	79S141	197.21	196.75	3	70	27	0	42	32	26
2	26	79S251	197.05	196.60	--	--	--	--	7	66	27

Table 4.--Grain-size and composition data from samples
of glacial drift at Plot M--Continued

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Particle-size distribution (percent of total amount)				Clay minerals ¹ (<0.004 mm fraction)		
			Top	Bottom	Sand ²	Silt	Clay	Gravel	Expand- able clays	Illite	Chlorite/ Kaolinite
2	28	79S25	196.90	196.44	23	39	38	0	--	--	--
2	30	³ 79S175	196.44	195.99	30	53	17	16	--	--	--
2	30	79S175	196.44	195.99	31	47	22	--	--	--	--
2	30	79S176	195.99	195.53	--	--	--	--	47	20	33
2	27	79S144	195.84	195.38	43	46	11	8	--	--	--
2	29	79S79	194.46	194.00	8	31	61	0	--	--	--
2	28	79S34	192.78	192.32	18	48	34	0	--	--	--
3	26	79S256	194.77	194.31	15	46	39	0	--	--	--
3	29	79S82	193.09	192.63	16	59	25	3	3	69	28
3	27	79S151	192.63	192.18	8	78	13	3	--	--	--
3	27	79S37	191.41	190.95	8	47	45	0	--	--	--
3	29	79S87	190.80	190.35	--	--	--	--	20	55	25
3	29	79S88	190.35	189.89	11	61	28	0	--	--	--
3	27	79S156	190.35	189.89	13	66	21	0	--	--	--
3	30	79S188	190.20	189.74	11	61	28	0	--	--	--
3	36	80S235	190.05	189.59	3	63	36	0	--	--	--
3	30	79S189	189.74	189.28	--	--	--	--	27	45	28
3	30	79S190	189.28	188.82	9	40	51	0	3	69	28
3	28	79S42	189.12	188.67	5	40	55	0	--	--	--
3	28	79S44	188.21	187.75	15	29	56	0	--	--	--
3	29	³ 79S96	186.69	186.23	20	62	18	0	--	--	--
3	29	79S96	186.69	186.23	11	71	16	11	--	--	--
4	36	80S239	188.21	187.76	11	33	56	0	--	--	--
4	30	79S195	187.00	186.54	--	--	--	--	6	67	27
4	29	79S103	183.49	183.03	12	70	18	0	6	67	27

Table 4.--Grain-size and composition data from samples
of glacial drift at Plot M--Continued

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Particle-size distribution (percent of total amount)				Clay minerals ¹ (<0.004 mm fraction)		
			Top	Bottom	Sand ²	Silt	Clay	Gravel	Expand- able clays	Illite	Chlorite/ Kaolinite
4	30	79S203	183.34	182.88	2	81	17	0	--	--	--
4	30	79S205	182.43	181.97	4	76	20	0	--	--	--
4	30	79S207	181.24	181.05	1	83	16	0	10	61	29
4	30	79S209	180.60	180.14	4	73	23	0	3	74	23
5	36	80S253	181.81	181.36	4	76	20	0	--	--	--
5	35	80S202	181.64	181.15	6	79	19	0	--	--	--
5	35	80S204	180.72	180.27	3	71	26	0	--	--	--
5	36	80S259	179.07	178.61	1	84	15	0	--	--	--
6	36	80S268	174.96	174.50	23	55	22	0	--	--	--
6	36	80S269	174.50	174.04	24	52	24	0	--	--	--
Wadsworth Till Member of the Wedron Fm. ⁴					16	27	57	--	--	--	--

¹ Identified by qualitative X-ray analyses.

² Hydrometer and sieve analysis: silt-clay boundary 0.004 mm, sand-silt boundary 0.062 mm.

³ Duplicate analyses by separate laboratories.

⁴ From Willman and Frye (1970, p. 168); data are percentages of whole sample, gravel is included in the sand determination.

Below Unit 1, the composition of the pebbles, stones, and rocks in the drift is less variable. Dolomite, black and green shale, and quartzite grains are most common. Pyrite occurs in the drift in Units 1-4.

Lithostratigraphy

The lithostratigraphic sequence within the drift was determined chiefly from the geologic properties of the drift described above. Interstratified sand layers and lenses were used to identify individual units and, in places, mark the contacts between units.

Natural-gamma logs distinguished sand layers within the clay- and silt-rich units and also indicated sandy and gravelly zones within the drift. The logs further aided lithologic correlation of units between test wells. A cross section through well sites 4, 5, and 11 (fig. 5) demonstrates the use of the logs for correlation purposes by showing the identification and correlation of sand layers in Units 1, 2, and 3. The logs support the geological data in several ways:

1. Correlation of low intensity (sand) peaks, in the middle of Unit 2 for example, indicate that the units (and thus the till sheets) are not horizontal, but dip slightly to the north and west.
2. Highest radiation intensity (the highest clay content) is measured in Unit 1 and this agrees with the grain-size-distribution data. Clay content of the drift decreases with increasing depth in Unit 1 and seems to be relatively constant throughout Unit 2.
3. The natural-gamma logs show that the sand layers are variable in thickness and in some places discontinuous from well to well. For example, in test well 5, the response of the log to a prominent sand layer in the middle of Unit 2 is much less, and of slightly lower intensity, than the response of the log of test well 4 to the same layer. The log of test well 11 indicates that the same sand layer extends at least as far south as well 11; however, the geologic log of the well is incomplete, thus the presence of the sand layer cannot be confirmed. Several low-intensity peaks in Unit 2 indicate sandy zones in the clay-silt sediment.
4. The logs are an indication of the degree of sorting of the sediments comprising the drift. In Unit 1, the small uniform peaks on the log (test well 11) indicate the uniform distribution of natural-gamma emitters as represented by the clay content in the drift. Conversely, the log of Unit 2 is less uniform and displays three prominent low-intensity peaks. The log reflects geologic data that indicate that the sediments in Unit 2 are better sorted and contain less clay than the sediments in Unit 1.

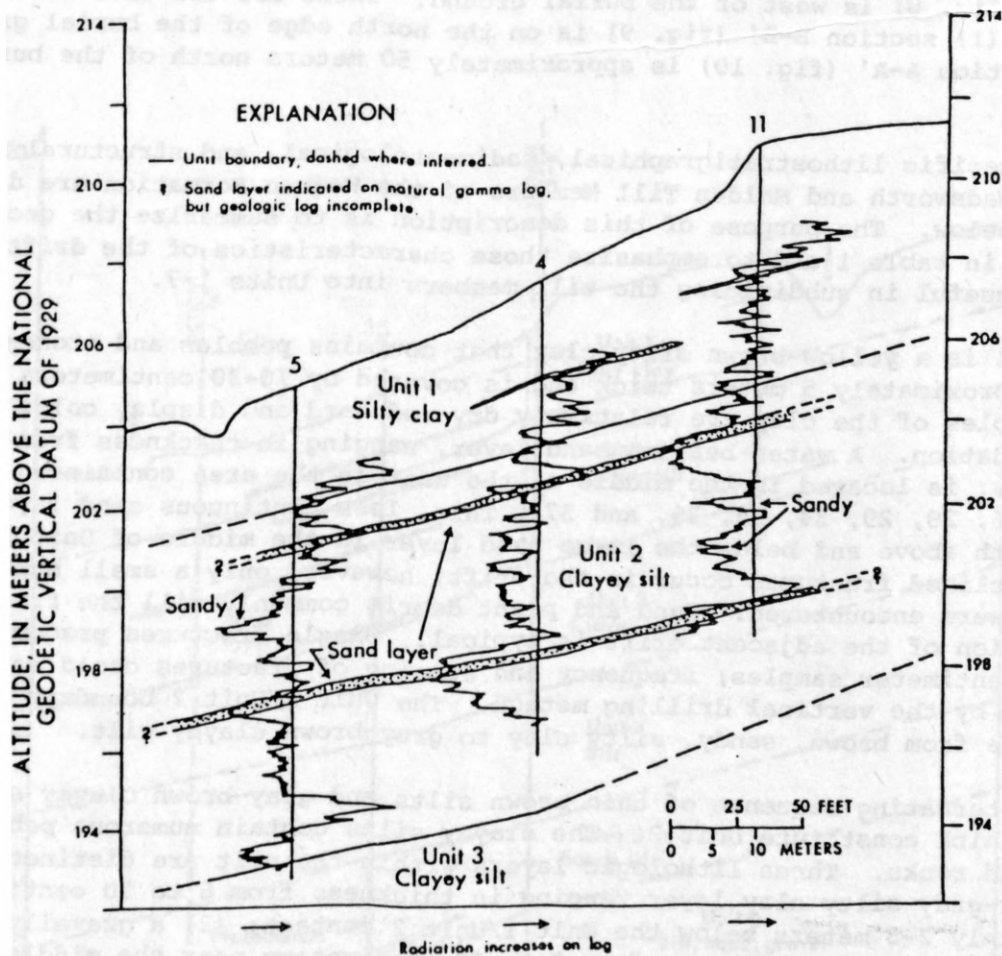


Figure 5.--Correlation of natural-gamma logs from test wells 4, 5, and 11.

The stratigraphy of the drift beneath Plot M is illustrated in five geologic sections shown on figures 6, 7, 8, 9, and 10. As indicated on figure 2, there are three north-south sections: (1) section E-E' (fig. 6) is east of the burial ground, (2) section D-D' (fig. 7) passes through the burial ground, and (3) section C-C' (fig. 8) is west of the burial ground. There are two east-west cross sections: (1) section B-B' (fig. 9) is on the north edge of the burial ground, and (2) section A-A' (fig. 10) is approximately 50 meters north of the burial ground.

The specific lithostratigraphical, sedimentological, and structural characteristics of Wadsworth and Malden Till Members of the Wedron Formation are described in detail below. The purpose of this description is to summarize the geologic data given in table 1 and to emphasize those characteristics of the drift that were most useful in subdividing the till members into Units 1-7.

Unit 1 is a yellow-brown silty clay that contains pebbles and stones. The unit is approximately 5 meters thick and is covered by 10-30 centimeters of topsoil. Samples of the clay are relatively dry and hard and display color mottling due to oxidation. A water-bearing sand layer, ranging in thickness from 6 to 30 centimeters, is located in the middle of the unit in the area containing test wells 4, 26, 28, 29, 34, 35, 36, and 37. Thin, less continuous sand layers are present both above and below the large sand layer in the middle of Unit 1. Vertical and inclined fractures occur in the drift; however, only a small number of fractures were encountered. Sand and plant debris commonly fill the fractures and oxidation of the adjacent drift is typical. Single fractures predominate in most 100-centimeter samples; frequency and spacing of fractures could not be determined by the vertical drilling method. The Unit 1/Unit 2 boundary is marked by a change from brown, sandy, silty clay to gray-brown clayey silt.

An alternating sequence of thin brown silts and gray-brown clayey silts 5 meters thick constitute Unit 2. The clayey silts contain numerous pebbles, stones, and rocks. Three lithologic layers within the unit are distinctive: (1) a dark-gray silty clay layer ranging in thickness from 6 to 20 centimeters approximately 2-3 meters below the Unit 1/Unit 2 contact; (2) a gravelly, sandy silt layer ranging in thickness from 2 to 30 centimeters near the middle of the unit; and (3) a unique pinkish-brown layer ranging in thickness from 10 to 25 centimeters located 1-2 meters below the gravel layer. These three layers occur beneath most of the Plot M site. The Unit 2/Unit 3 boundary is gradational; however, it is most often marked by the contact between a soft brown gravelly silt and a gray-brown clayey silt.

Unit 3 is an alternating sequence of brown and gray-brown clayey silts and closely resembles Unit 2; however, Unit 3 is more silty. The unit is 4-5 meters thick and contains a few pebbles and stones. Numerous sand layers and thin sand partings are common. Gamma-gamma logs indicate that the sediments in Unit 3 are less dense than those in either the overlying or the underlying units. The Unit 3/Unit 4 boundary is marked by a transition from soft brown silt to gray-brown silt containing a few pebbles.

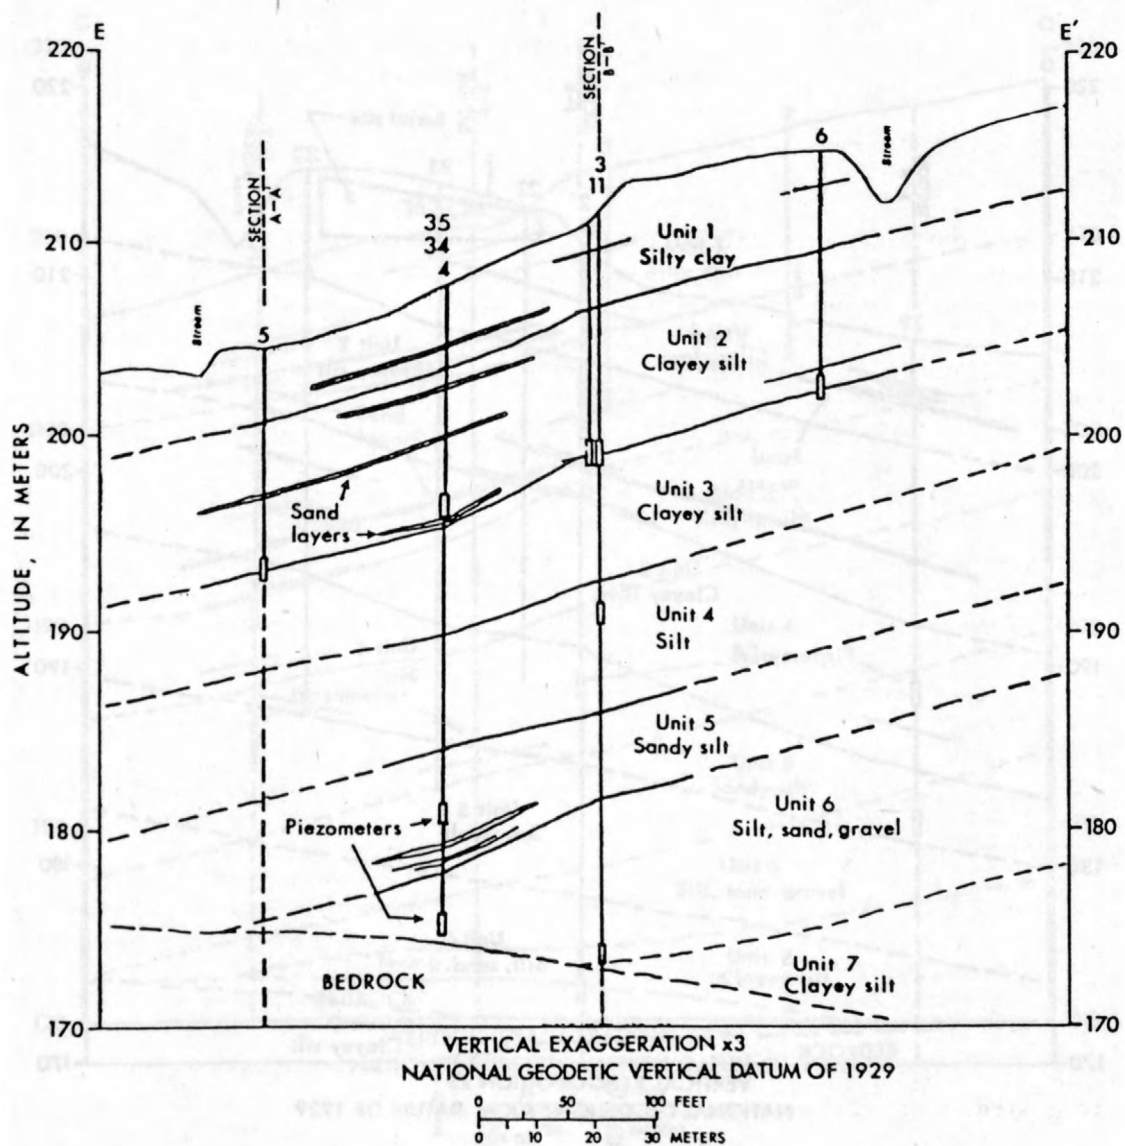


Figure 6.--Geologic section E-E' of the Plot M site.
Dashed lines represent approximate litho-
stratigraphic contacts in the drift.

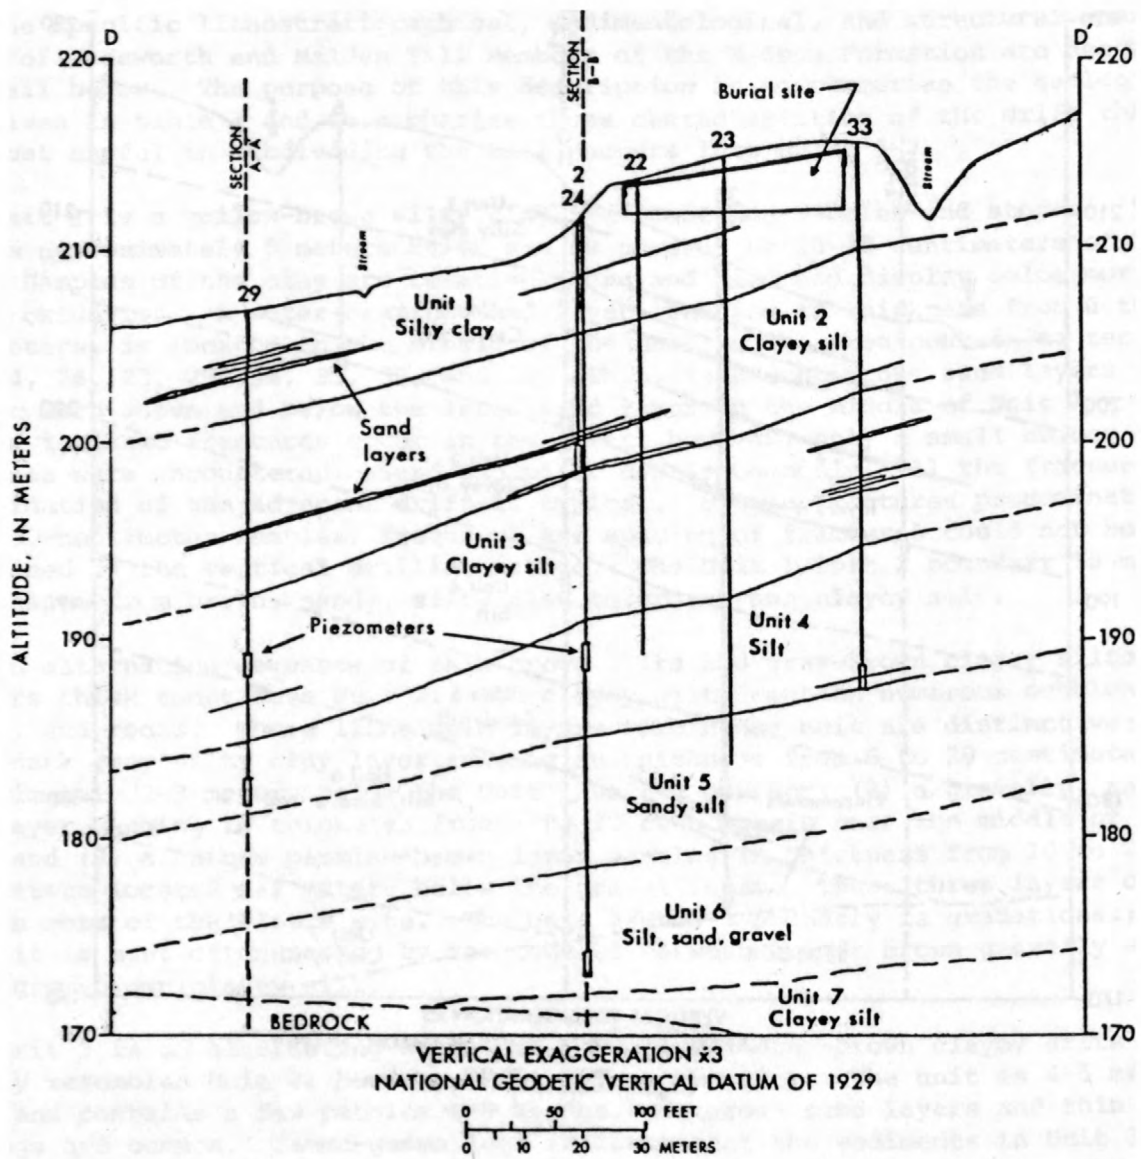


Figure 7.--Geologic section D-D' of the Plot M site.

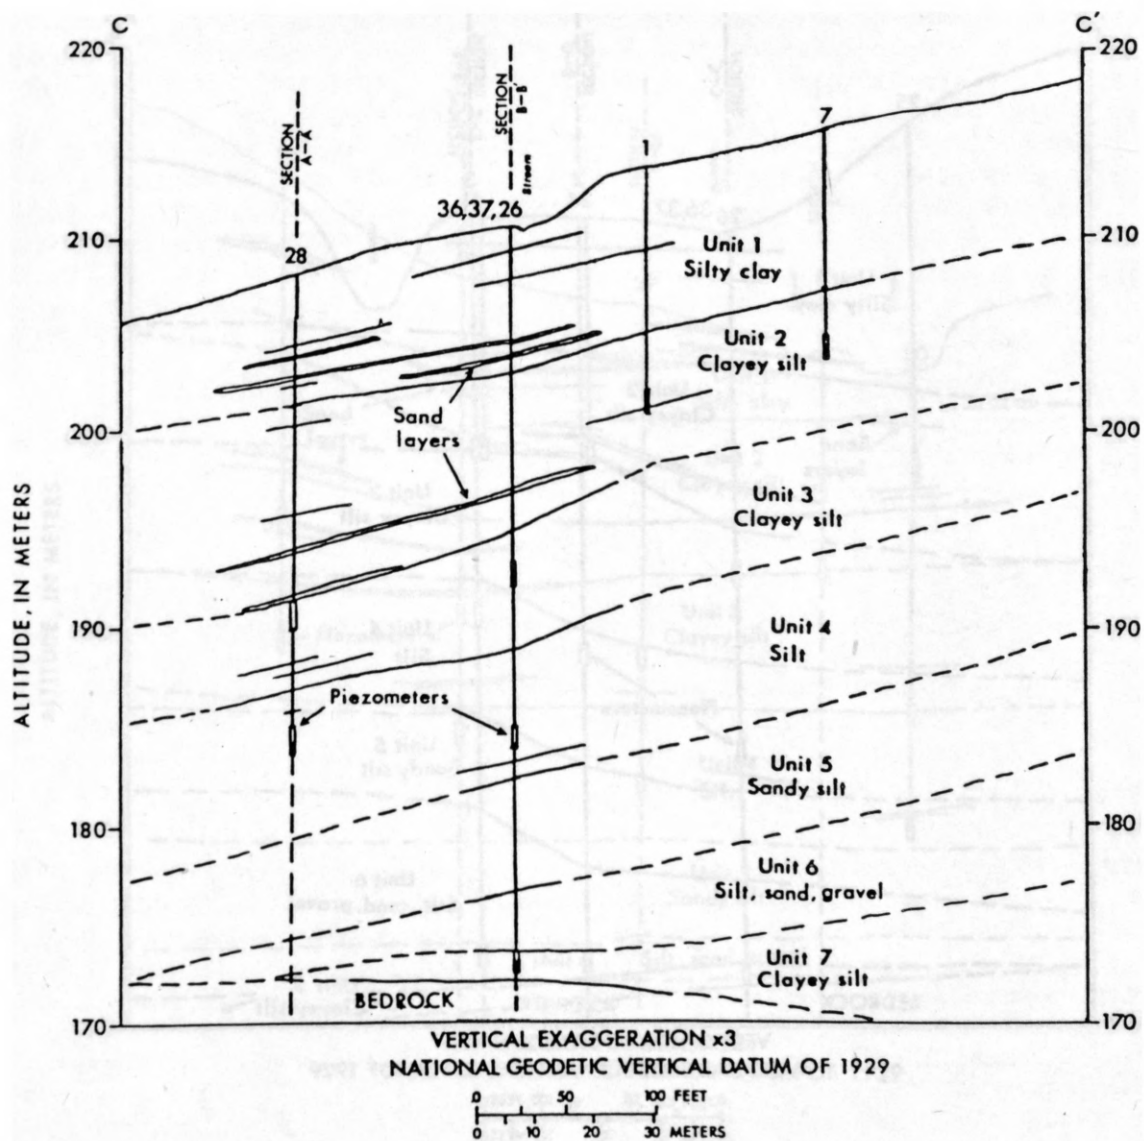


Figure 8.--Geologic section C-C' of the Plot M site.

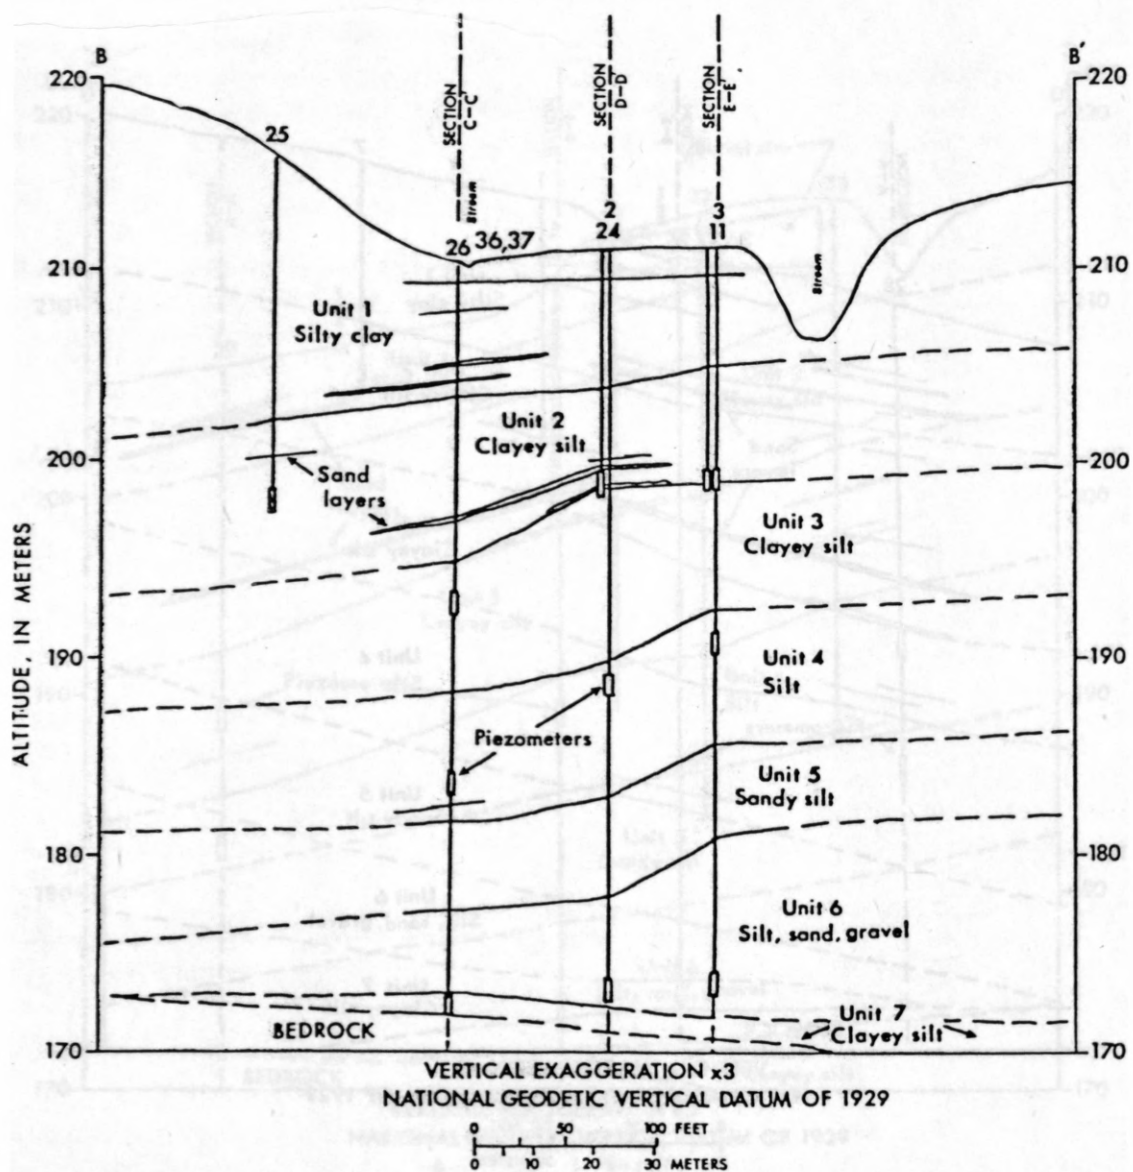


Figure 9.--Geologic section B-B' of the Plot M site.

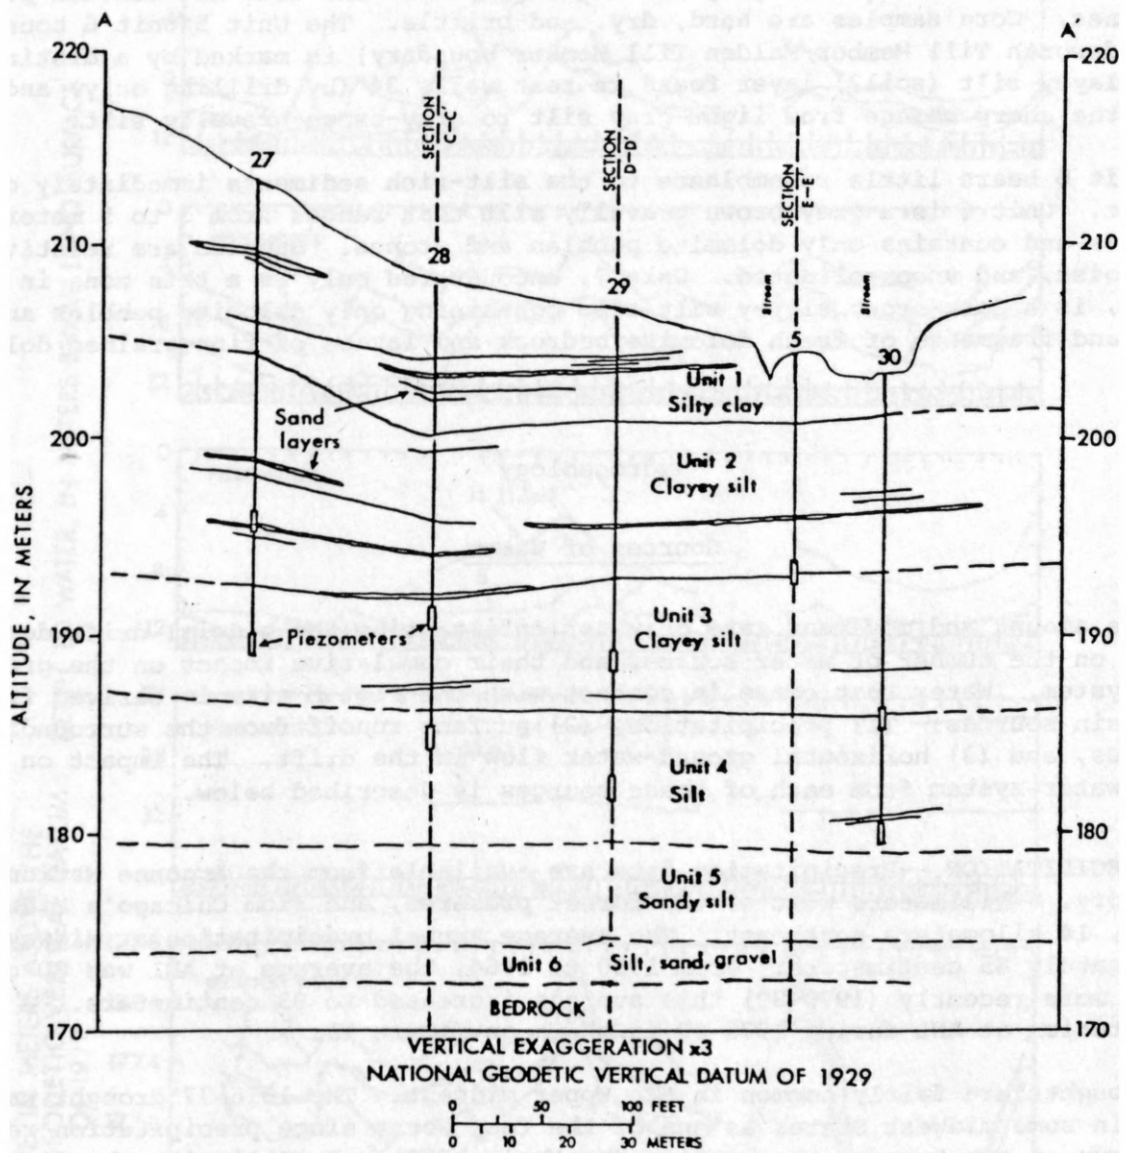


Figure 10.--Geologic section A-A' of the Plot M site.

Gamma-gamma logs of Unit 4 show an increase in density and decrease in porosity relative to Unit 3. Unit 4 is dense, hard, brittle gray and gray-brown silt that contains few dolomite and black shale pebbles and only a small number of thin sand partings. Gamma-gamma logs show that the lower part of Unit 4 is the densest section of drift beneath the Plot M site. This 5-meter-thick section of drift was found to be a hard dry silt which caused very difficult drilling and sampling.

Unit 5 is 4-5 meters of gray and light-gray silt and does not contain pebbles and stones. Core samples are hard, dry, and brittle. The Unit 5/Unit 6 boundary (the Wadsworth Till Member/Malden Till Member boundary) is marked by a distinctive black clayey silt (soil?) layer found in test wells 34 (by drilling only) and 36 and by the sharp change from light-gray silt to gray-brown gravelly silt.

Unit 6 bears little resemblance to the silt-rich sediments immediately overlying it. Unit 6 is a gray-brown gravelly silt that ranges from 3 to 5 meters in thickness and contains only dolomite pebbles and stones. Samples are relatively soft, moist, and unconsolidated. Unit 7, encountered only as a thin zone in test well 36, is a dark-brown clayey silt also containing only dolomite pebbles and stones and fragments of fresh dolomite bedrock and layers of fine-grained dolomite sand.

Hydrogeology

Sources of Water

The amount and movement rate of water infiltrating the glacial drift depends largely on the number of water sources and their cumulative impact on the ground-water system. Water that comes in contact with the Plot M site is derived from three main sources: (1) precipitation, (2) surface runoff from the surrounding hillsides, and (3) horizontal ground-water flow in the drift. The impact on the ground-water system from each of these sources is described below.

PRECIPITATION.--Precipitation data are available from the Argonne National Laboratory, 6 kilometers west of the forest preserve, and from Chicago's Midway Airport, 14 kilometers northeast. The average annual precipitation at Midway is approximately 85 centimeters. From 1950 to 1964, the average at ANL was 80 centimeters; more recently (1970-80) this average increased to 93 centimeters. Precipitation at ANL during 1976-80 is shown on figure 11.

Droughts are fairly common in the Upper Midwest. The 1976-77 drought was ranked in some midwest States as one of the four worst since precipitation records were begun at the turn of the century (Matthai, 1979). In Illinois, the drought was somewhat less severe than in the surrounding States. Precipitation at Argonne in 1976 totaled 77 centimeters, 83 percent of the annual average. Below normal precipitation, streamflow, and ground-water levels persisted in Illinois from early 1976 to mid-1977 (Matthai, 1979).

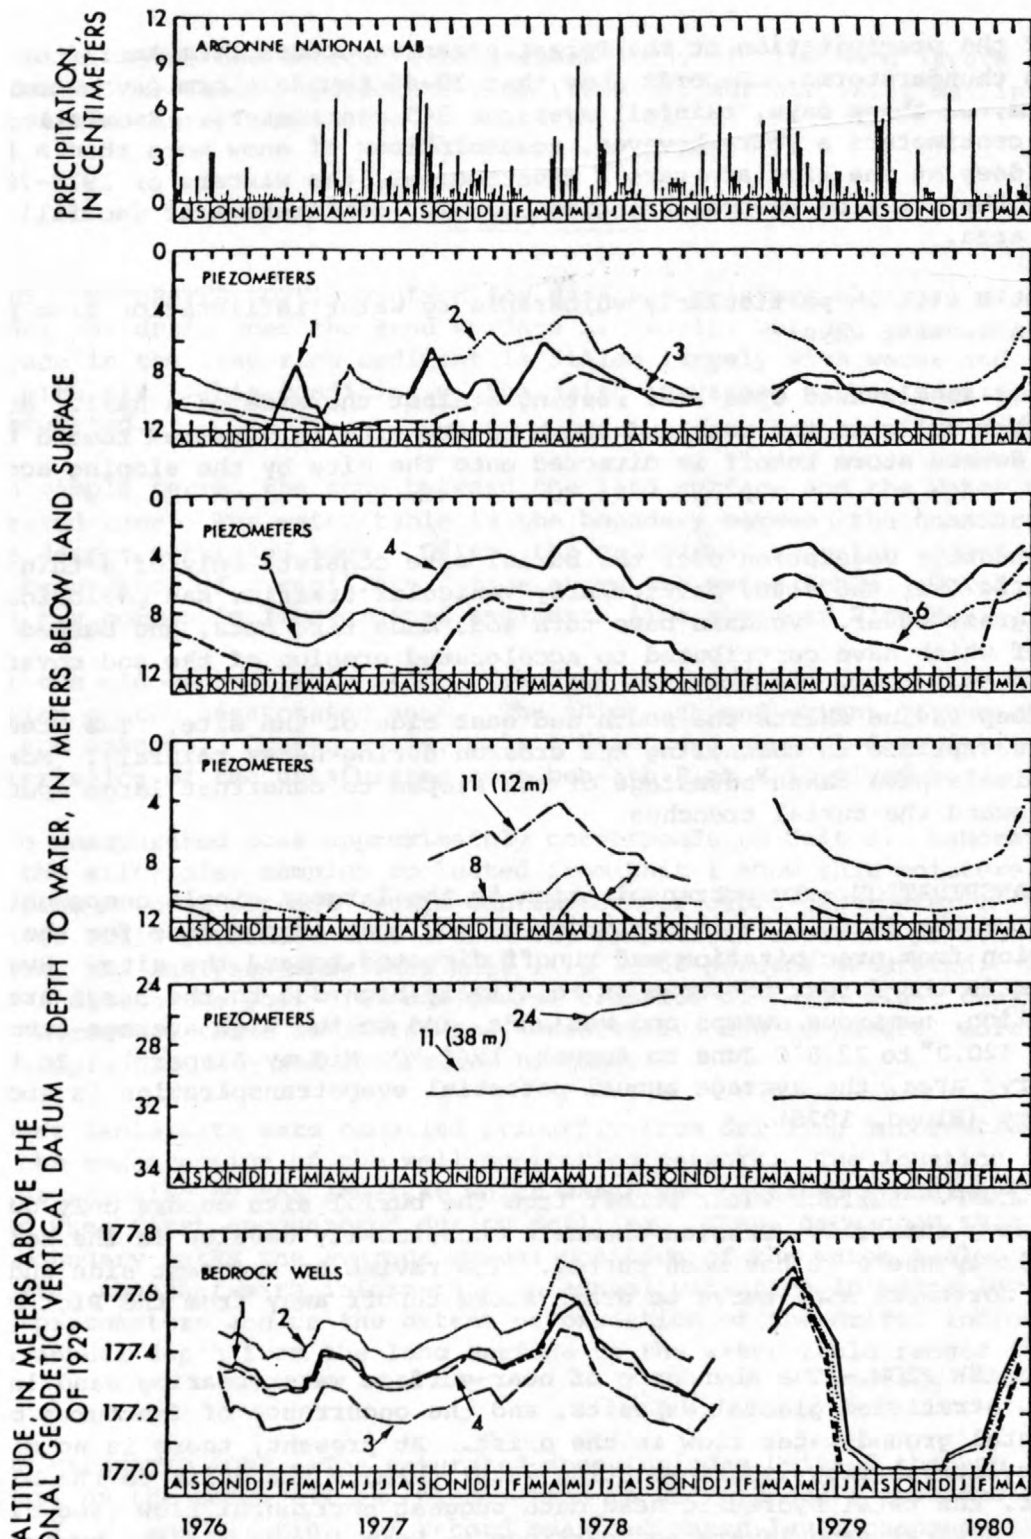


Figure 11.--Monthly variation in precipitation and water levels in test wells at the Plot M site, August 1976–April 1980. Water-level data were not collected during January–February 1979.

Most of the precipitation at the forest preserve occurs from April to September in thunderstorms. Records show that 30-40 thunderstorm days occur annually, and, on these days, rainfall averages 3-5 centimeters. Snowfall averages 80 centimeters a year; however, accumulations of snow more than a few centimeters deep at one time are rare. Nevertheless, the winters of 1977-78 and 1978-79 were the worst on record, bringing over 200 centimeters of snowfall to the Chicago area.

The Plot M site is particularly vulnerable to water infiltration from precipitation in several ways:

1. It is an elevated open area resting against the side of a hill. Runoff from the higher hills to the west and south of the site is directed toward the open area. Severe storm runoff is directed onto the site by the sloping access road.
2. Protective vegetation over the burial site consists only of a thin grass cover. Traffic over the site, particularly vehicular traffic, has periodically torn up the grass cover. Vandals have torn sod, made tire ruts, and burned the grass, all of which have contributed to accelerated erosion of the sod cover.
3. A deep ravine skirts the south and east side of the site. The steep slopes are susceptible to channeling and erosion during heavy rainfall. Moreover, burrowing animals have taken advantage of the slopes to construct large open holes that slant toward the burial trenches.

EVAPOTRANSPIRATION.--Evapotranspiration is the largest single component of water loss from the drift. It is the major factor that compensates for the effects of infiltration from precipitation and runoff directed toward the site. Evapotranspiration in the forest preserve is relatively high due to the large area of dense vegetation, numerous swamps and wetlands, and to the high average summer temperatures (20.0° to 22.8°C June to August, 1941-70, Midway Airport). In the forest preserve area, the average annual potential evapotranspiration is about 68 centimeters (Bloyd, 1975).

LOCAL RUNOFF.--Surface-water runoff from the burial site occurs only during periods of heavy rainfall. Erosion channels occasionally develop in the soil cover, especially where it has been rutted. The ravine on the east side and the ditch on the northwest side serve to drain storm runoff away from the Plot M site.

GROUND-WATER FLOW.--The abundance of near-surface water-bearing sand layers, the inclined, stratified glacial deposits, and the occurrence of fractures may favor horizontal ground-water flow in the drift. At present, there is no direct evidence that lateral flow is transmitting water through the drift to the Plot M site; however, the total hydraulic head data suggest horizontal flow (see discussion below). Several sand layers and partings in Unit 1 underlie the burial trenches and appear to extend to the ravine east of the site and to the area north

of the site, where the intermittent streams join. If the sand layers extend to the sides of the ravine upgradient from the site, surface water may infiltrate the soil cover and enter the layers.

Ground Water

THE UNSATURATED ZONE.--Neutron log data and moisture analyses of core samples show that the drift near the land surface is nearly, but not completely, saturated. Pore space in the clay-rich sediment is filled largely with water and to a smaller extent with air. This condition of the drift is termed either partially saturated or unsaturated.

In simple terms, the zone between the land surface and the water table is the unsaturated zone. The water table is the boundary between the unsaturated zone and the deeper saturated zone. Often, the ground-water system is more complex due to the occurrence of a capillary fringe above the water table. Thick capillary fringes are common in fine-grained sediments like those at Plot M.

At the midpoint of this study, few data are compiled concerning the hydraulic properties of the unsaturated zone. The thickness and extent of the capillary fringe are unknown. Consequently, only a brief and general description of the characteristics of the unsaturated zone beneath Plot M is given here.

The unsaturated zone approximately corresponds to Unit 1. Laboratory analyses of the silty clay samples collected from Unit 1 show that moisture content ranges from 9 to 19 percent (cubic centimeter per cubic centimeter). The moisture content of fully saturated Unit 1 sediment samples is about 30 percent (tables 5, 6). Thus, the analyses show that Unit 1 is 30-60 percent saturated. These data clearly indicate the poor drainage characteristics of these tight clay-rich sediments. Moreover, these estimates are conservative due to natural moisture loss during sample handling and laboratory testing.

Water table data were compiled primarily from drilling information gathered during the construction of the well monitoring network. The location of the water table was revealed by the level at which water was observed standing in the open borehole when first encountered during drilling. These data show that the Unit 1/Unit 2 boundary marks the average annual position of the water table. Furthermore, these data, together with information on annual variation in water levels in near surface piezometers and on the extent of oxidation of the drift, indicate that the average annual depth from the land surface to the water table ranges from 3 to 6 meters.

THE SATURATED ZONE.--The saturated zone includes Units 2 through 7. In the upper part of the zone, all the piezometers in Units 2 and 3 (piezometers 1, 2, 3, 4, 5, 6, 7, 8, and 11; fig. 11) record seasonal water-level changes; that is, highest levels in April and lowest levels in November and December. Annual water-level changes in the piezometers range from 0.5 to 5 meters. Piezometers 4, 5,

Table 5.--Hydraulic conductivity of glacial drift at Plot M

A. Permeameter determinations

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Hydraulic conductivity (cm/s)	Direction	Average (cm/s)	Total porosity
			Top	Bottom				
1	28	79S3	207.41	206.97	5.07×10^{-7}	Vertical		0.33
1	28	79S4	206.97	206.50	2.01×10^{-7}	Vertical	2.02×10^{-7}	.46
					1.83×10^{-7}	Vertical		.43
					2.23×10^{-7}	Vertical		.42
1	28	79S6	206.04	205.58	4.96×10^{-7}	Vertical		.41
1	28	79S7	205.58	205.12	2.01×10^{-6}	Vertical	1.61×10^{-6}	.36
					1.22×10^{-6}	Vertical		.32
1	27	79S122	205.89	205.43	1.12×10^{-6}	Vertical		.28
1	28	79S10	204.21	203.75	5.64×10^{-7}	Vertical		.33
1	28	79S11	203.75	203.30	6.39×10^{-7}	Vertical	8.84×10^{-6}	.34
					1.13×10^{-6}	Vertical		.32
1	26	79S237	203.45	203.00	7.37×10^{-6}	Vertical		.33
1	28	79S14	202.38	201.93	2.13×10^{-6}	Vertical	2.27×10^{-6}	.34
					2.40×10^{-6}	Vertical		.37
					1.44×10^{-6}	Horizontal		.37
1	30	79S163	201.93	201.47	2.38×10^{-6}	Vertical		.32
					1.12×10^{-6}	Horizontal		.31
1	29	79S63	201.78	201.32	8.72×10^{-7}	Vertical		.37
2	27	79S127	203.61	203.15	5.91×10^{-7}	Vertical	9.66×10^{-7}	.29
					1.34×10^{-6}	Vertical		.32
					5.36×10^{-6}	Horizontal		.34
2	36	80S223	201.93	201.48	1.34×10^{-6}	Vertical	1.23×10^{-6}	.29
					1.12×10^{-6}	Vertical		.29
2	26	79S242	201.17	200.71	1.26×10^{-6}	Vertical		.30
2	28	79S17	200.55	200.10	2.35×10^{-7}	Horizontal		.45
2	27	79S134	200.41	199.95	7.46×10^{-7}	Vertical		.32
2	27	79S138	198.58	198.12	3.33×10^{-6}	Vertical	4.41×10^{-6}	.34
					5.48×10^{-6}	Vertical		.34
2	27	79S139	198.12	197.66	3.20×10^{-6}	Vertical	2.92×10^{-6}	.30
					2.64×10^{-6}	Vertical		.31
2	26	79S250	197.51	197.05	7.99×10^{-7}	Vertical	9.10×10^{-7}	.32
					1.02×10^{-6}	Vertical		.31

Table 5.--Hydraulic conductivity of glacial drift at Plot M--Continued

A. Permeameter determinations--Continued

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Hydraulic conductivity (cm/s)	Direction	Average (cm/s)	Total porosity
			Top	Bottom				
2	29	79S73	197.20	196.75	6.13×10^{-7}	Vertical	7.50×10^{-7}	0.34
					8.87×10^{-7}	Vertical		.32
2	30	79S30	195.99	195.53	2.74×10^{-6}	Horizontal		.33
2	30	79S176	195.99	195.53	2.74×10^{-6}	Horizontal		.33
2	30	79S177	195.53	195.07	1.95×10^{-6}	Vertical	1.89×10^{-6}	.29
					1.82×10^{-6}	Vertical		.30
2	28	79S27	195.98	195.53	1.53×10^{-6}	Vertical		.35
2	28	79S28	195.53	195.07	4.60×10^{-6}	Vertical		.36
2	28	79S29	195.07	194.61	4.79×10^{-6}	Vertical	5.89×10^{-6}	.30
					6.98×10^{-6}	Vertical		.37
2	36	80S227	195.84	195.38	7.36×10^{-6}	Horizontal		.33
2	28	79S30	194.61	194.15	1.78×10^{-6}	Vertical	1.99×10^{-6}	.32
					2.43×10^{-6}	Vertical		.27
					1.73×10^{-6}	Vertical		.36
					1.55×10^{-6}	Horizontal		.32
					1.79×10^{-6}	Horizontal		.31
2	28	79S31	194.15	193.69	1.92×10^{-6}	Vertical	2.14×10^{-6}	.32
					2.35×10^{-6}	Vertical		.31
2	28	79S32	193.69	193.24	1.16×10^{-6}	Vertical	1.45×10^{-6}	--
					1.74×10^{-6}	Vertical		--
2	28	79S33	193.24	192.78	1.04×10^{-6}	Vertical		.32
3	35	80S181	191.24	190.78	1.02×10^{-6}	Vertical		.29
3	36	80S234	190.50	190.05	1.47×10^{-6}	Vertical	1.29×10^{-6}	.30
3	29	79S92	188.52	188.06	2.61×10^{-6}	Vertical	3.05×10^{-6}	.33
					3.49×10^{-6}	Vertical		.32
					2.74×10^{-6}	Horizontal		.32
					4.26×10^{-6}	Horizontal		.31
3	29	79S93	188.06	187.60	2.19×10^{-6}	Vertical		.34
3	29	79S94	187.60	187.15	1.19×10^{-6}	Vertical		.33
					6.39×10^{-7}	Horizontal		.33
					1.11×10^{-6}	Vertical		.29
4	35	80S186	188.95	188.49	1.09×10^{-6}	Vertical		.30
					2.51×10^{-6}	Horizontal		.28

Table 5.--Hydraulic conductivity of glacial drift at Plot M--Continued

A. Permeameter determinations--Continued

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Hydraulic conductivity (cm/s)	Direction	Average (cm/s)	Total porosity
			Top	Bottom				
4	36	80S238	188.67	188.21	5.19×10^{-6}	Vertical	6.34×10^{-6}	0.37
					7.49×10^{-6}	Vertical		--
4	36	80S254	185.47	185.01	2.07×10^{-6}	Vertical		.31
4	36	80S246	185.01	184.56	3.75×10^{-6}	Vertical	3.72×10^{-6}	.29
					3.69×10^{-6}	Vertical		.31
4	36	80S247	184.56	184.10	1.36×10^{-6}	Vertical		.31
4	29	79S99	185.32	184.86	2.34×10^{-6}	Vertical	2.07×10^{-6}	.29
					1.79×10^{-6}	Vertical		.32
					8.78×10^{-7}	Vertical		.31
4	35	80S194	185.49	184.84	7.90×10^{-7}	Vertical		.26
4	36	80S294	183.64	183.19	3.03×10^{-6}	Vertical		.30
4	36	80S251	182.73	182.27	4.75×10^{-6}	Vertical		.33
					5.20×10^{-6}	Horizontal		.32
	35	80S197	183.92	183.47	1.97×10^{-6}	Vertical	2.15×10^{-6}	.30
					2.32×10^{-6}	Vertical		.31
5	35	80S198	183.47	183.01	8.74×10^{-6}	Vertical		.32
5	35	80S205	180.27	179.81	1.10×10^{-6}	Horizontal		.31

¹ Duplicate and triplicate analyses were performed on many (but not all) samples.

Table 5.--Hydraulic conductivity of glacial drift at Plot M--Continued

B. Pressure pulse decay determination

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Hydraulic conductivity (cm/s)
			Top	Bottom	
1	25	79S212	210.16	209.7	2.20×10^{-8}
1	27	79S120	206.81	206.35	1.66×10^{-7}
1	29	79S59	203.60	203.15	1.38×10^{-8}
1	29	79S60	203.15	202.69	3.48×10^{-9}
3	27	79S156	190.35	189.88	1.05×10^{-7}
4	29	79S103	183.49	183.03	4.99×10^{-8}
4	30	79S204	182.88	182.43	2.88×10^{-7}

C. Field bailer tests of piezometers

Unit No.	Number of tests	Hydraulic conductivity		
		Mean (cm/s)	Median (cm/s)	Range (cm/s)
2	6	1.060×10^{-6}	2.050×10^{-7}	1.274×10^{-8} to 3.207×10^{-6}
3	2	1.040×10^{-7}	6.100×10^{-7}	1.933×10^{-8} to 1.887×10^{-7}

Table 6.--Total porosity, bulk density, specific gravity, and surface area data of samples of glacial drift at Plot M

Unit No.	Well No.	Sample No.	Altitude interval (meters)		Total porosity (percent of volume)	Bulk density (gm/cm ³)	Specific gravity (gm/cm ³)	Surface area (m ² /gm)
			Top	Bottom				
1	27	79S111	210.92	210.45	26.9	2.20	2.72	40.6
1	25	79S212	210.16	209.70	31.9	2.17	2.76	--
1	26	¹ 79S227	208.03	207.57	33.1	2.11	2.72	55.4
1	26	79S227	208.03	207.57	32.1	2.17	2.77	--
1	27	¹ 79S120	206.81	206.35	29.9	2.22	2.77	30.0
1	27	79S120	206.81	206.35	30.9	2.23	2.83	--
1	29	79S59	203.60	203.15	27.9	2.26	2.73	--
1	29	79S60	203.15	202.69	25.8	2.28	2.73	--
2	29	¹ 79S66	200.40	199.95	36.4	2.19	2.74	29.2
2	29	79S66	200.40	199.95	26.6	2.30	2.82	--
2	27	¹ 79S133	200.86	200.41	26.7	2.22	2.70	26.3
2	27	79S133	200.86	200.41	27.8	2.27	2.80	--
2	29	79S69	199.03	198.57	25.5	2.28	2.75	14.5
2	27	79S142	197.21	196.75	27.3	2.24	2.71	--
2	30	¹ 79S175	196.47	196.02	26.9	2.26	2.75	2.9
2	30	79S175	196.47	196.02	25.7	2.29	2.74	--
3	29	79S87	190.80	190.35	27.9	2.28	2.75	14.5
3	27	¹ 79S156	190.35	189.88	27.2	2.46	2.72	18.8
3	27	79S156	190.35	189.58	27.0	2.24	2.69	--
3	29	79S96	186.69	186.23	22.2	2.40	2.75	14.4
4	29	¹ 79S103	183.49	183.03	19.8	2.26	2.53	4.6
4	29	79S103	183.49	183.03	26.4	2.27	2.73	--
4	30	79S203	183.34	182.88	24.3	2.31	2.72	14.3
4	30	79S204	182.88	182.43	26.4	2.26	2.72	--
4	30	79S207	181.24	181.05	25.7	2.11	2.72	55.4

¹ Duplicate analysis of one sample performed in separate laboratories.

and 6 contain the largest amounts of water and measure the greatest annual fluctuations. The responses of these piezometers are due chiefly to the variably saturated condition of the two sand layers nearby in Units 1 and 2.

Seasonal water-level changes, drainage and recharge of water during field tests, and annual fluctuations of tritium content in water in the near-surface piezometers indicate that the clay-rich sediments, indeed, transmit water, but at a slow rate. However, deeper down in the drift, approximately 10 meters below the water table, is a zone that seems to transmit water at extremely slow rates. This zone, ranging from 10 to 12 meters thick and observed throughout the area of the Plot M site, extends from the top of Unit 4 to the bottom of Unit 5.

The most significant characteristic of Units 4 and 5 is that they do not yield water to wells. All the piezometers at the Plot M site positioned in the two units (at locations 11, 24, 27, 28, 29, 30, 33, 34, and 37) have remained dry since their installation. The absence of water may be due to the saturated condition of the predominantly silty sediments or to an effect related to the size of the piezometers. To better understand the hydraulic properties of this portion of the saturated zone in view of the present data, it is necessary to examine the above alternative explanations in further detail.

The data show that the degree of saturation of Units 4 and 5 is not significantly less than that in the overlying and underlying water-yielding drift. Neutron moisture logs and core sample analyses show no difference in moisture content between Units 4 and 5 and Units 2, 3, 6, and 7. The hydraulic conductivity of all units, measured by field and laboratory techniques (described below, table 5), is relatively uniform. Furthermore, tritium has migrated into and through the zone to the underlying drift and bedrock. Summarizing the present data, they indicate that Units 4 and 5 are near saturation, transmit water, and have pressure heads that are close to zero, either positive or negative.

The absence of water in the piezometers may be caused by either moisture evaporating as fast as it collects or zero-to-slightly negative pressure head. The large diameter of the piezometers, inaccurate for measurement of low pressure head, may further compound the problem. However, the piezometers are carefully sealed from the land surface and are not plugged, as confirmed by slug tests.

HYDRAULIC CONDUCTIVITY.--The hydraulic conductivity of the saturated drift was determined by application of two laboratory techniques (permeameter and pressure pulse decay) and by field tests. Data from bailer tests of piezometers in Units 2 and 3 were used to calculate horizontal hydraulic conductivity (table 5C). Six piezometers in Unit 2 yielded values ranging from 1.3×10^{-8} to 3.2×10^{-6} cm/s (centimeters per second) and two piezometers in Unit 3 yielded values of 1.9×10^{-8} and 1.9×10^{-7} cm/s, respectively. The average horizontal hydraulic conductivity in Units 2 and 3 is 6.1×10^{-7} cm/s, a composite value for the two units that includes the effects of both sand layers and fractures near the piezometers.

A pressure pulse decay technique was used to determine the vertical hydraulic conductivity of seven core samples from Units 1, 3, and 4 (table 5B). This technique yielded very low values for these units, particularly for Unit 1. The permeameter data were obtained from samples of Units 1-5 (table 5A). The tests yielded hydraulic conductivity values that correspond more closely with the field-determined values. Moreover, the permeameter values are uniform. With only a few exceptions, the vertical and horizontal hydraulic conductivity values fall within the range 1×10^{-6} to 9×10^{-6} cm/s.

Summarizing the hydraulic conductivity data, the pressure pulse method yields values 1 to 2 orders of magnitude lower than field test values. On the other hand, the permeameter values are slightly higher than the field values. The pressure pulse decay technique yields erroneously low values because the samples are squeezed by a small confining pressure during the lab test.

TOTAL HEAD AND GROUND-WATER FLOW.--The total hydraulic head field along cross-section E-E' is shown in figure 12. The section is parallel to the direction of primary ground-water flow (vertically downward) and to the direction of secondary flow (horizontally northward). The equipotential head lines are based on piezometer data gathered in May 1980, and the head gradients and flow directions illustrated in the section are representative of the hydraulic properties of the drift that have prevailed since the beginning of this study.

For the following discussion of flow in the drift, it is convenient to divide the total head field into two parts, an upper part characterized by a significant horizontal gradient and a lower part characterized by a vertical gradient.

In the upper part of the field, five piezometers (3, 4, 5, 6, and 11) record a 6-meter decrease in total head from the south side of the site (piezometer 6) to the north side (piezometer 5). Although ground water moves primarily downward, a relatively large horizontal gradient occurs at the base of Unit 1 and throughout Unit 2. The horizontal gradient is caused by a combination of factors: (1) the gentle, northward dip of the strata, (2) numerous sand lenses in the two units, and (3) fracturing of the near-surface drift.

Units 4 and 5 strongly influence the head distribution in the lower part of the total head field. Equipotential head lines are aligned parallel to the strata and ground-water flow is vertically downward. The near zero pressure head in Units 4 and 5 cause (1) low total head and a very small vertical gradient in both units, and (2) a sharp decrease in total head and a large gradient ("bundling") in overlying Unit 3. Equipotential lines at the base of the drift intersect the sloping-bedrock surface at a low angle.

GROUND WATER IN THE NIAGARA DOLOMITE

The hydrographs of water level for bedrock wells DH1-DH4 (fig. 11) show responses to spring recharge and summer recession as well as long-term trends associated with annual precipitation variations. Since 1976, water levels in the bedrock wells have generally risen as the ground water depleted by the drought of 1976 is replenished. The pattern of water-level fluctuations is similar in all bedrock wells, which indicates that the aquifer responds to stress in a uniform manner over the forest preserve area. No data on the total hydraulic head distribution of the aquifer have been compiled.

TRITIUM MIGRATION

Studies at Plot M


Since 1976, the work effort to determine the extent of tritium migration at the Plot M site has been shared by the Survey and by ANL. This study is primarily concerned with the aerial and vertical extent of subsurface migration in the glacial drift. ANL performs radiometric analyses of both soil moisture extracted from core samples and water collected from wells. A discussion of the analytical techniques used, as well as a presentation of the results of the radiometric analyses of all the soil and water samples collected during 1976-78, is given by Golchert and Sedlet (1978).

The Tritium Plume at Plot M

Tritium concentration levels measured in soil moisture from core samples collected up until June 1980 are illustrated on cross-sections E-E', B-B', and A-A' (figs. 13-15). Concentration levels are given in units of nanocuries per liter of water (nCi/L) and lines of equal concentration indicate exponential changes in tritium concentration levels. For reference purposes, the lithostratigraphic unit boundaries and the positions of the piezometers are shown. In most areas, the lines of equal concentration are based upon data derived from continuously collected core samples. Herein, the contaminated volume, or the volume of the drift where tritium concentration levels exceed 10 nCi/L, is referred to as the tritium plume. For comparative purposes, 3 nCi/L of tritium is the drinking water limit set by the U.S. Environmental Protection Agency (EPA, 1973).

Section E-E'

North-south cross-section E-E' shows the maximum lateral and vertical extent of the tritium plume. The plume extends laterally from the ravine south of the site to the area north of test well 5 and vertically from the middle of Unit 1 to

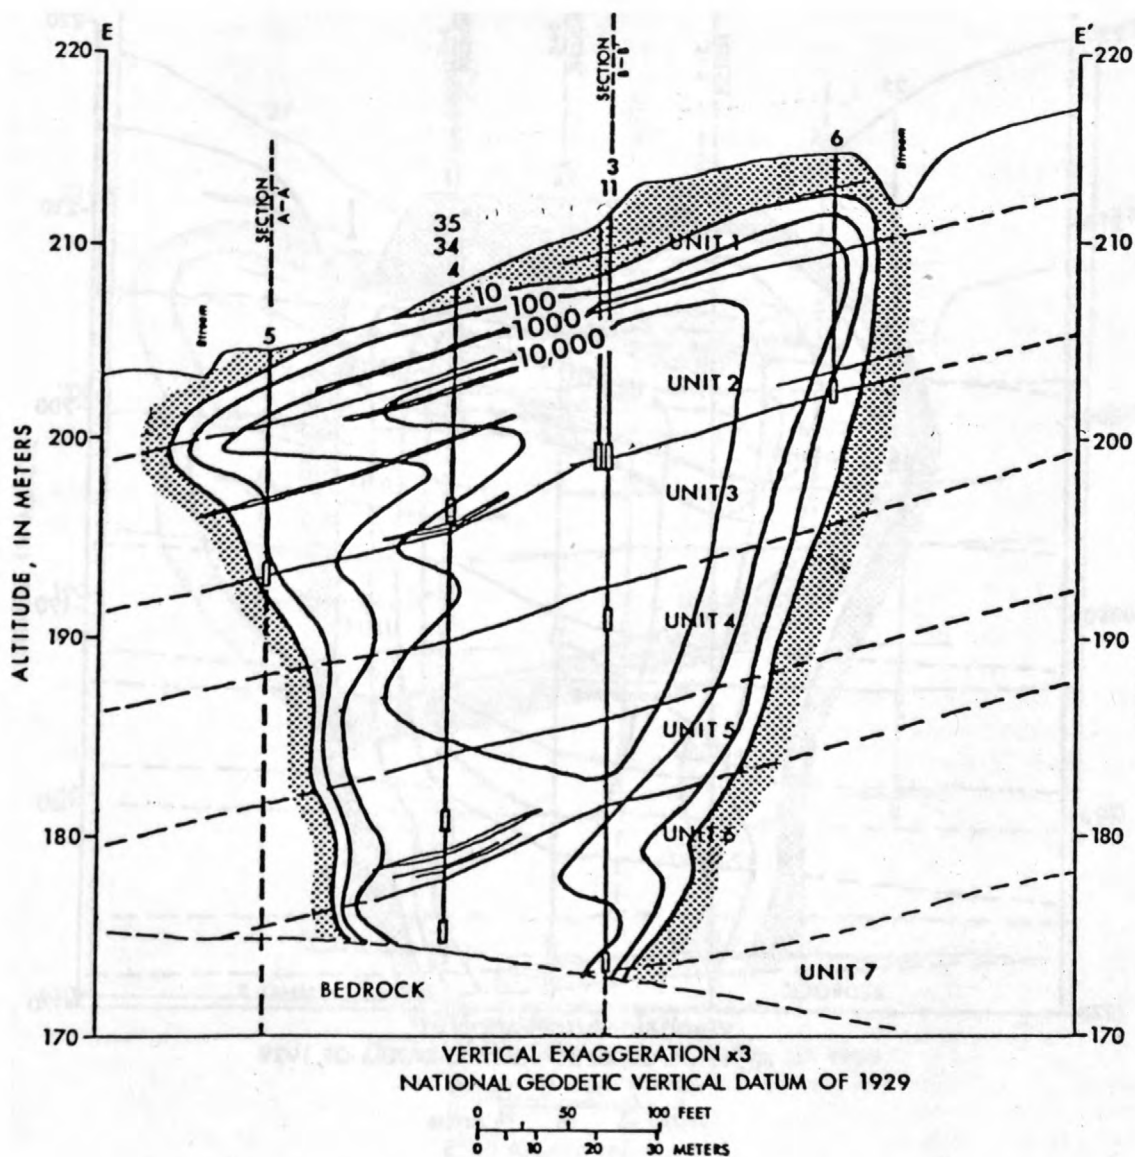

EXPLANATION

—1,000—

LINE OF EQUAL TRITIUM CONCENTRATION,
nanocuries per liter; concentration levels in shaded
area are less than 10 nCi/L

Figure 13.--Cross section E-E' through the Plot M site showing the extent of tritium migration, and levels of concentration in soil moisture collected from core samples of the drift.

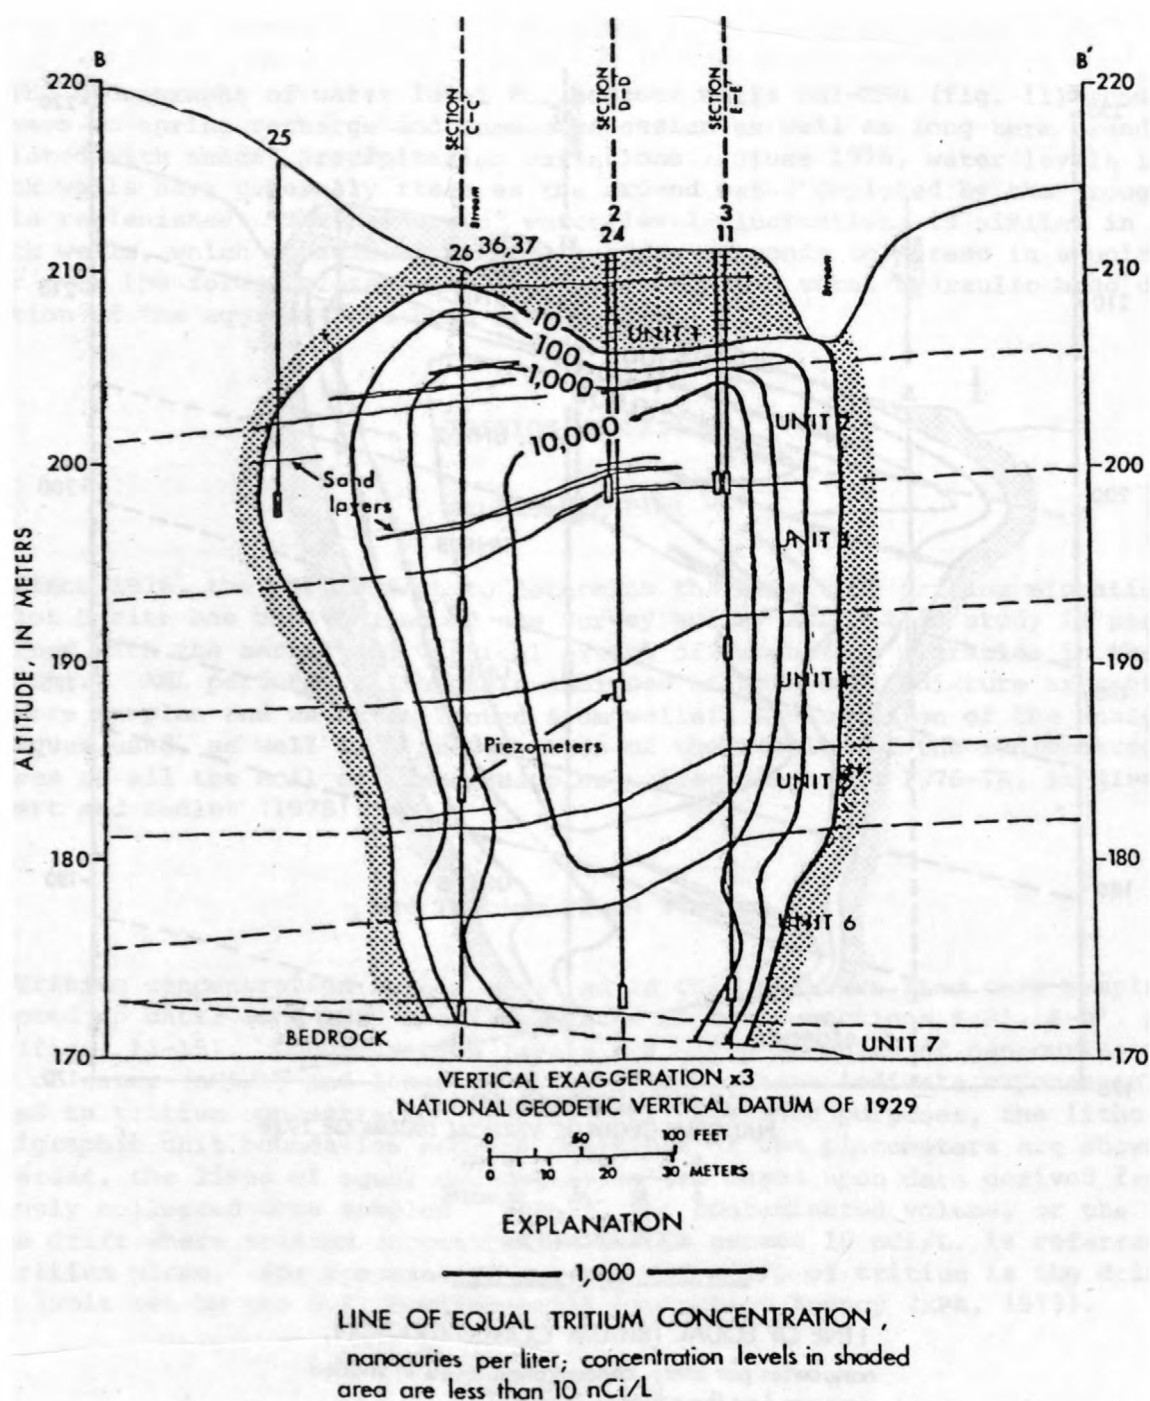


Figure 14.--Cross-section B-B' on the north side of the Plot M site showing the extent of tritium migration and levels of concentration in soil moisture collected from core samples of the drift.

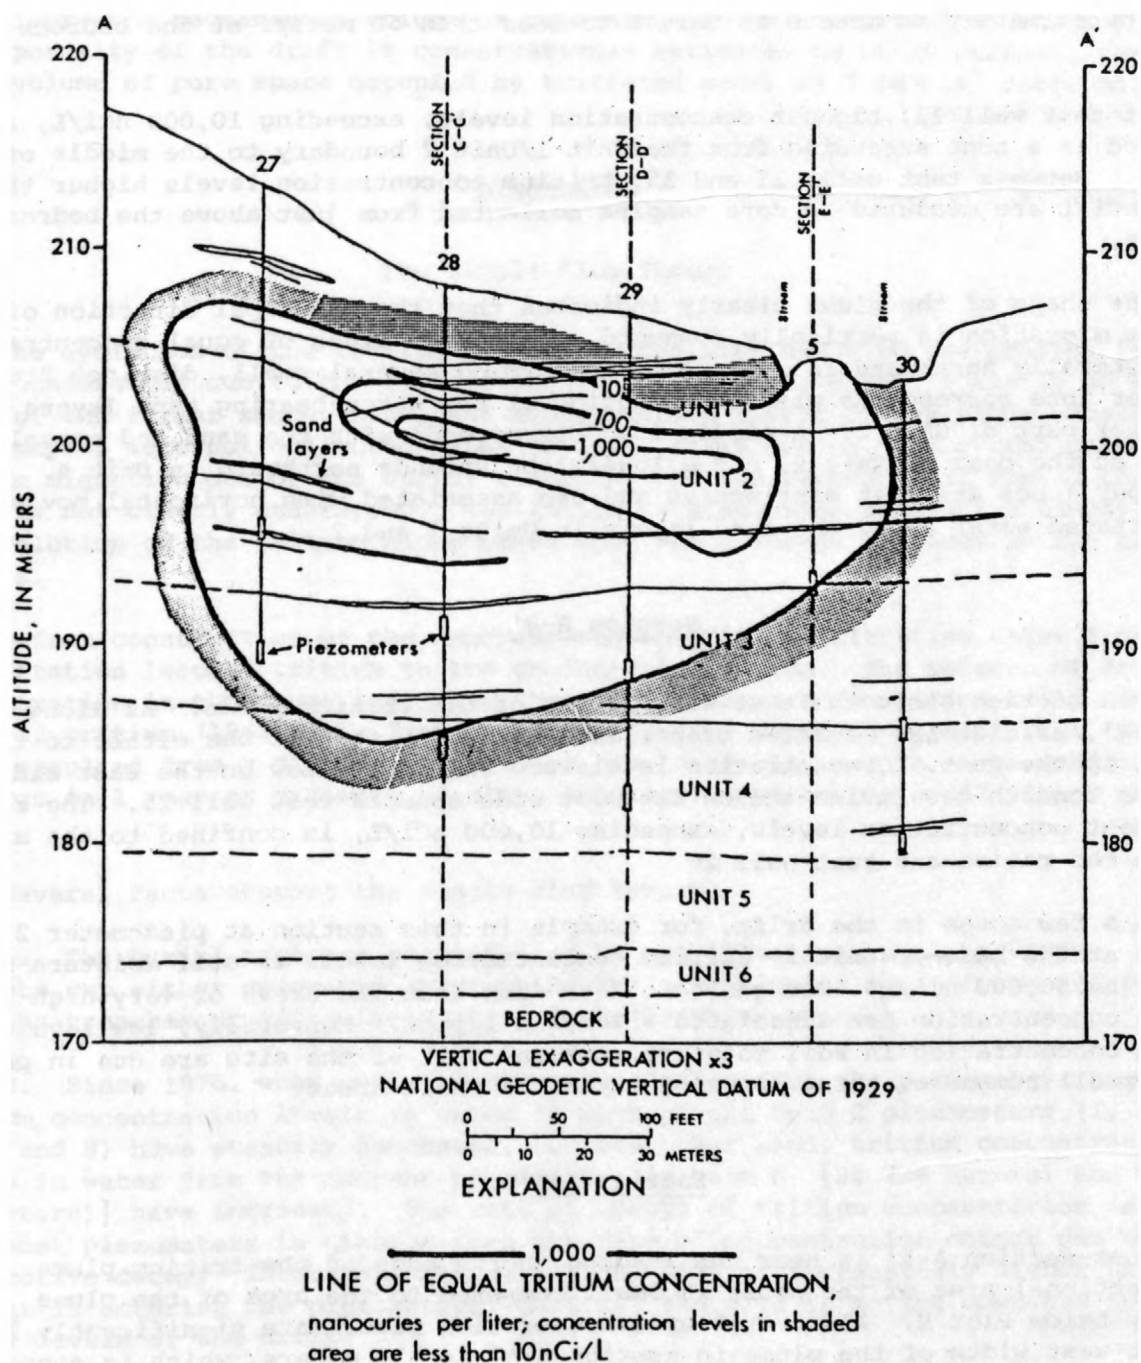


Figure 15.--Cross-section A-A' 50 meters north of the Plot M site showing the extent of tritium migration and levels of concentration in soil moisture collected from core samples of the drift.

bedrock. Also, the plume narrows downward; in this section it decreases in width from approximately 90 meters in Unit 1 to less than 50 meters at the bedrock surface.

At test well 11, highest concentration levels, exceeding 10,000 nCi/L, are measured in a zone extending from the Unit 1/Unit 2 boundary to the middle of Unit 5. Between test wells 11 and 35, tritium concentration levels higher than 1,000 nCi/L are measured in core samples collected from just above the bedrock surface.

The shape of the plume clearly indicates that the principal direction of tritium migration is vertically downward. Also, the lines of equal concentration bend laterally northward in several areas forming several small, distinct "lobes." An upper lobe corresponds with the location of the water-bearing sand layers in the upper part of Unit 2. A middle lobe corresponds with the sand and gravel layers at the base of Unit 2, and a lower lobe extends northward in Unit 4. The two upper lobes are most distinctive and are associated with horizontal movement of tritiated water along the sand layers in Units 1 and 2.

Section B-B'

This section shows the east-west extent of the tritium plume. As along section E-E', tritium has migrated deeper into the drift than it has either to the east or to the west. Concentration levels are relatively low on the east side of the site beneath the ravine and on the west side beneath test well 25. The zone of highest concentration levels, exceeding 10,000 nCi/L, is confined to the area between the ravine and test well 26.

In a few zones in the drift, for example in this section at piezometer 2 located at the base of Unit 2, tritium concentration levels in soil moisture reach as high as 50,000 nCi/L. The geologic data show that the areas of very high tritium concentration are associated with sand layers. Conversely, low levels of tritium concentration in soil moisture east and west of the site are due in part to the small number of thin, dry sand layers in these areas.

Section A-A'

Cross-section A-A' is near the leading, north edge of the tritium plume. The cross-sectional area of the plume is small compared to the area of the plume directly below Plot M. Also, tritium concentration levels are significantly lower. The east-west width of the plume in section A-A' is 110 meters, which is approximately the same as that in section B-B'. However, the plume is considerably thinner (from top to bottom), and highest tritium concentration levels, exceeding 1,000 nCi/L, are located in a small thin zone near the surface. This zone underlies numerous sand layers in Unit 1 near test wells 28 and 29. Tritium concentration levels diminish to the east at test well 30 and to the west at test well 27.

The estimated total volume of the tritium plume is 2.56×10^5 cubic meters, equivalent to a rectangular volume of dimensions 80 m x 80 m x 40 m. If the average total porosity of the drift is conservatively estimated to be 30 percent, then the total volume of pore space occupied by tritiated water is 7.68×10^4 cubic meters.

DISCUSSION

The Single Slug Theory

The evolution of the tritium plume from the mid-1940's to the present is poorly understood due to the lack of pre-1970 subsurface data. There is no knowledge of the former shape, size, and concentration levels of the plume because core samples were not collected prior to 1976, there are no data of the rate of tritium migration out of the burial trenches, and the process that formed the plume is not clearly understood. The following discussion presents a theory of the evolution of the tritium plume based upon the evidence gathered in the last 4 years.

Before construction of the concrete cap in 1956, infiltrating water from precipitation leached tritium to the ground-water system. The pattern of tritium concentration in the plume indicates that it is not an accumulation of 13 annual slugs of tritium (1943-56). The single "bulls-eye" pattern suggests that the plume resulted from a single slug; either one large slug due to above normal recharge in 1 year or a series of slugs that coalesced over a small number of years.

Several facts support the single slug theory:

1. The burial trenches were exposed to precipitation until mid-1956. The concrete cap either succeeded in stopping the migration of most of the tritium from the trenches or effectively stopped the leaching process.
2. Since 1976, when analyses of water samples from the piezometers began, tritium concentration levels in water in most of the Unit 2 piezometers (1, 2, 4, 5, 6, and 8) have steadily decreased. On the other hand, tritium concentration levels in water from the deepest piezometers in Unit 6 [24 (38 meters) and 11 (38 meters)] have increased. The rate of change of tritium concentration in the uppermost piezometers is greater than the rate of concentration change due to radioactive decay. These data indicate that water of increasingly higher tritium content is entering the piezometers, that is, the slug is moving downward to deeper levels of the drift.
3. The seasonal fluctuations of tritium concentration levels in water at the Red Gate Woods well are a rough measure of the relative amount of tritium entering the dolomite from the drift. The highest annual tritium concentration levels have been constant over the last 7 years. If these concentration levels are adjusted

for radioactive decay since 1973, tritium concentration levels in the water have actually increased slightly. The increase in tritium concentration levels in water at the Red Gate Woods well supports the conclusion (in 2 above) that the center of the plume is moving deeper into the drift beneath Plot M and increasingly higher concentration levels of tritium are entering the dolomite.

Tritium Migration Rate

Although this study has determined that the leading edge of the plume, or sharp front (the 10 nCi/L boundary), has moved 40 meters downward through the drift to the underlying bedrock surface, the data neither indicate when the front left the burial site nor indicate when it reached the surface. However, the relatively large surface area of the plume-bedrock contact, the near vertical lines of equal concentration at the contact, and the elevated levels of tritium in the center of the plume just above the contact, together suggest that the front reached the bedrock surface several years ago. The discovery of tritiated water in the Red Gate Woods well in 1973 sets an arrival time as far back as the early 1970's.

These data yield a limiting value of the bulk vertical rate of tritium migration in the drift. A movement of the front 40 meters in the maximum amount of time possible (about 20 years, 1950-70) is equivalent to a rate of 6.3×10^{-6} cm/s. Interestingly, this value is well within the range of values determined by field and laboratory tests.

Factors Favoring Tritium Migration at the Plot M Site

The results of the study show that Plot M is constructed in tight, low permeability glacial sediments that do not permit fast rates of tritium migration along shortened flow paths. Few factors favor migration at the site; the following factors are related in part to several physical characteristics of the site and in part to the history of the site.

1. Tritium moves as water. Laboratory analyses to determine tritium distribution on sediment samples at the site (D. Sherwood, written commun., 1981) show that the mobility of tritium is the same as ordinary water. This agrees with many field studies of similar sediments (Ames and Rai, 1978). Thus, tritiated water occupies and flows unrestricted through all pore spaces in the drift.

2. The fractures in the near-surface drift and the inclined sand layers in Units 1 and 2 aid infiltration and cause lateral northward movement of tritiated water. This movement tends to spread contaminated water throughout a larger volume of drift, enlarging the size of the plume.

3. The underlying dolomite bedrock is a significant, although less important factor, favoring migration at the site. The highly permeable bedrock acts as a drain for the ground water in the drift. A large vertical total head gradient at the base of the drift induces downward water movement.

4. Surface water may be channeled into the drift beneath the burial site (and beneath the vertical concrete walls) by the numerous slanting animal burrows in the ravine walls skirting the site and by horizontal ground-water flow.

Factors Limiting Tritium Migration at the Plot M Site

Many factors combine to limit the rate and extent of tritium migration and the amount and concentration level of tritium in the drift. The most important factors are summarized as follows:

1. The limited volume of tritiated waste and the long elapsed period of burial relative to the radioactive half-life of tritium are major limiting factors. Because of the lack of records, it is impossible to accurately determine the amount of tritium that is buried at Plot M. However, the total volume of buried radioactive waste is small (300 m^3), and the amount of tritiated waste probably represents a much smaller proportion of the total amount. The short period of burial operations and the estimated slow rate of waste accumulation in the burial trenches also limited the amount of tritium that was buried. Approximately two tritium half-lives have elapsed (24.8 years) since the concrete cap was installed. Seventy-five percent of the original amount of tritium has decayed.

2. The drift is thick, dense, and composed chiefly of clay and silt. The hydraulic conductivity of the drift is very low and intergranular flow predominates. Channelized flow in fractures and sand lenses and layers is limited to only a few zones in the upper part of the drift.

3. The hydraulic properties of the drift limit the extent of tritium migration. A vertical total head gradient characterizes most of the drift directing tritium migration downwards. The tightness, density, and low total head gradient in Units 4 and 5 act to slow the rate of vertical migration.

SUMMARY AND CONCLUSIONS

Thirty-three test wells were drilled into the drift at the Plot M site to determine the geologic and hydrologic characteristics of the drift, to install a network of piezometers, to monitor the vertical and horizontal total head gradients within the ground-water system of the drift, and to determine the extent of tritium migration in the drift. Core samples were collected at each test well for determination of geologic, geochemical, and radiological properties. Geophysical logs were run on each well to provide additional qualitative information of the

lithology, density, and moisture content of the drift. Four test wells were drilled into the underlying dolomite bedrock for monitoring ground-water levels, to collect water samples for radiological analysis, and for preliminary pump and packer testing.

The drift at the site is composed of two till sheets; the surficial Wadsworth Till and the underlying Malden Till. The till sheets are divided into seven lithologic units based on characteristics including mineralogy, color, density, grain size, and moisture content. With the aid of geophysical logs, Units 1-7 were correlated between boreholes to determine drift stratigraphy and structure.

Units 1-6 range in thickness from 3 to 6 meters and the distribution of sand, silt, and clay varies systematically with depth. Clay content ranges from 35 to 45 percent in Unit 1 sediments to less than 10 percent in Unit 5 sediments. Unit 6 is composed chiefly of silt and sand, and Unit 7 contains mostly sand and gravel.

Vertical total head gradients characterize the saturated zone in the drift, thus the primary direction of ground-water flow is downward. A horizontal gradient in Units 1 and 2, from the south to the north side of the site, reflects northward ground-water movement along the dipping sand layers in those units. Field bailer tests of piezometers and laboratory tests of core samples show that the hydraulic conductivity of the drift ranges from 1.0×10^{-6} to 1.0×10^{-8} cm/s. Laboratory tests further show no significant difference between values of horizontal and vertical hydraulic conductivity either within one unit or between units.

Radionuclide analyses of moisture extracted from core samples show that tritium has migrated from the burial trenches into the drift. The tritium plume, defined to be the contaminated zone in the drift in which tritium concentration levels exceed 10 nCi/L, has migrated horizontally northward at least 50 meters and 40 meters vertically downward to the bedrock surface. Tritium concentration levels in core samples collected just above bedrock are higher than 1,000 nCi/L.

The diameter of the plume decreases with depth and the elongate shape of the plume supports the hydrologic data that indicate the tritiated water moves primarily downward in the drift. Several small zones or lobes of relatively high tritium concentration protrude northward from the plume. These lobes correspond with horizontal tritium movement along inclined sand layers in Units 1 and 2.

At present, the edge of the plume, or front (10 nCi/L boundary) intersects the underlying bedrock surface. The front moved from Plot M 40 meters downward to bedrock in about 20 years; a rate equivalent to 6.3×10^{-6} cm/s. The center of the plume is 15 meters beneath the burial site and the size, shape, and "bullseye" concentration pattern of the plume indicate that:

1. The plume is a single slug that resulted from infiltration of water either during 1 year or during a small number of years.
2. The burial site is no longer releasing tritium to the drift.

3. The plume is moving deeper into the drift and higher tritium concentration levels are reaching the deepest piezometers and the bedrock surface.

4. The near-vertical pathway of tritium migration extends from the burial site to the bedrock; the data clearly show that tritium does not move horizontally through the drift from Plot M to the Red Gate Woods well.

Fractures and sand layers cause a small amount of near-surface, horizontal tritium migration which enlarges the tritium plume. The small amount of tritium in the burial trenches and in the drift, the age of the tritiated waste, and the large volume of low-permeability sediments beneath Plot M, all play an important role in limiting the amount, direction, and rate of tritium migration.

SELECTED REFERENCES

- Ames, L. L., and Rai, Dhanpat, 1978, Radionuclide interactions with rock and soil media, Volume I: Processes influencing radionuclide mobility and retention; Element chemistry and geochemistry; Conclusions and evaluation: U.S. Environmental Protection Agency, EAP 520/6-78-007, August 1978, 295 p.
- Bloyd, R. M., Jr., 1975, Summary appraisals of the nation's ground-water resources --Upper Mississippi Region: U.S. Geological Survey Professional Paper 813-B, 22 p.
- Golchert, N. W., and Sedlet, Jacob, 1978, Radiological survey of Site A and Plot M: U.S. Department of Energy Report DOE/EV-0005/7, 89 p.
- Grisak, G. E., and Jackson, R. E., 1978, An appraisal of the hydrogeological processes involved in shallow subsurface radioactive waste management in Canadian terrain: Inland Water Directorate, Water Resources Branch, Ottawa, Canada, Scientific Series No. 84, 193 p.
- Horberg, Leland, and Potter, P. F., 1955, Stratigraphic and sedimentologic aspects of the Lemont Drift of northeastern Illinois: Illinois State Geological Survey Report of Investigation 185, 23 p.
- Lineback, J. A., 1979, Quaternary deposits of Illinois: Illinois State Geological Survey Map.
- Matthai, H. F., 1979, Hydrologic and human aspects of the 1976-1977 drought: U.S. Geological Survey Professional Paper 1130, 84 p.
- Olimpio, J. C., 1980, Low-level radioactive-waste burial at the Palos Forest Preserve, Illinois, Part I. Preliminary finite-difference models of steady state ground-water flow: U.S. Geological Survey Open-File Report 80-775, 40 p.

- Olimpio, J. C., 1982, Data for wells at the low-level radioactive-waste burial site in the Palos Forest Preserve, Illinois: U.S. Geological Survey Open-File Report 82-692, 98 p.
- U.S. Environmental Protection Agency, 1973, Water quality criteria, 1972: EPA-R3.-73.033, U.S. Government Printing Office, Washington, D.C., 594 p.
- Willman, H. B., 1971, Summary of the geology of the Chicago area: Illinois State Geological Survey Circular 460, 77 p.
- Willman, H. B., and Frye, J. C., 1970, Pleistocene stratigraphy of Illinois: Illinois State Geological Survey Bulletin 94, 204 p.
- Willman, H. B., Glass, H. D., and Frye, J. C., 1963, Mineralogy of glacial tills and their weathering profiles in Illinois. Part 1 - Glacial tills: Illinois State Geological Survey Circular 347, 55 p.

USGS LIBRARY-RESTON



3 1818 00070674 5