

**EXPLANATION**

ESTIMATED POTENTIAL WELL YIELDS, IN GALLONS PER MINUTE (LITERS PER SECOND)


- 1000 to 1500 (63 to 95)
- 500 to 1000 (32 to 63)
- 200 to 500 (13 to 32)
- 50 to 200 (3.2 to 13)
- 0 to 50 (0 to 3.2)

SELECTED TEST-HOLE AND WELL DATA

TEST HOLE OR WELL—Upper numbers are top and base of aquifer depth intervals in glacial drift. Sand and gravel thicknesses of less than 5 feet (1.5 meters) are not shown. Lower number is depth to bedrock, in feet below land surface. Absence of lower number indicates that the test hole or well did not completely penetrate the glacial drift.

YIELD BOUNDARY

LOCATION OF BURIED VALLEY

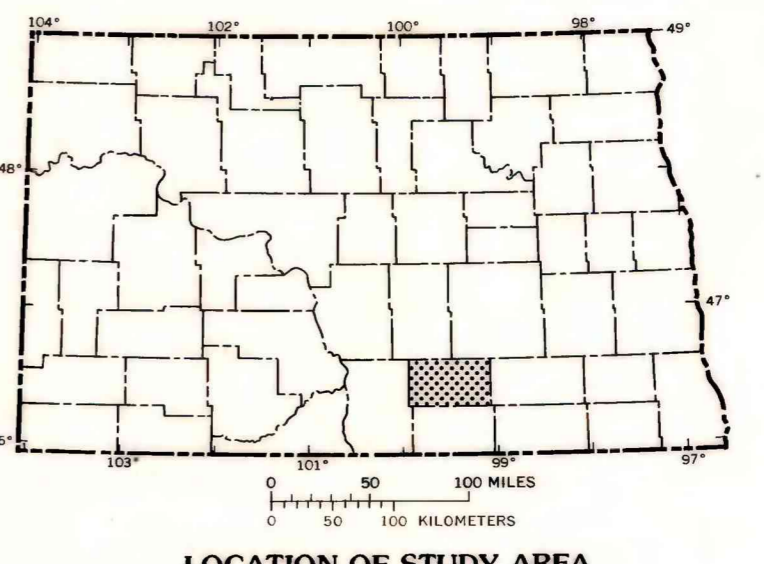

**SELECTED FACTORS FOR CONVERTING INCH-POUND UNITS TO THE INTERNATIONAL SYSTEM (SI) OF METRIC UNITS**

A dual system of measurements—inch-pound units and the International System (SI) of metric units—is given in this report. SI is an organized system of units adopted by the 11th General Conference of Weights and Measures in 1960. Selected factors for converting inch-pound units to SI units are given below.

Multiply inch-pound unit	By	To obtain SI unit
Foot (ft)	0.3048	meter
Gallon per minute (gal/min)	0.06309	liter per second
Mile (mi)	1.609	kilometer
Square mile (mi <sup>2</sup> )	2.590	square kilometer

**INTRODUCTION**

This preliminary map is the first product of the ground-water resources study of Logan County, which has an area of 1,015 mi<sup>2</sup> (2,629 km<sup>2</sup>) in south-central North Dakota (see location map). This study is part of a statewide program to determine the location, extent, chemical quality, and hydrologic characteristics of the ground-water reservoirs (aquifers) in North Dakota. The study was made by the U.S. Geological Survey in cooperation with the North Dakota State Water Commission, North Dakota Geological Survey, and Logan County Water Management District.

Many sources of data have been used in the preparation of the ground-water availability map. A well inventory provided data on depth, construction, and yields of private and public wells. Test drilling and construction of observation wells by the North Dakota State Water Commission as well as production wells constructed by commercial well drillers provided data regarding the thickness, areal extent, and hydrologic characteristics of the aquifers.

Potential well yields shown on the availability map were estimated using the thickness and hydraulic conductivity (permeability) of the aquifers determined at each test hole or well site, and data from aquifer tests. Generally the yield of a well is proportional to the hydraulic conductivity, thickness, and areal extent of the aquifer. If the width of an aquifer is limited, as in the instance of channel deposits in surficial or buried valleys, well yields per unit of drawdown may decrease significantly as pumping continues unless a stream, lake, or other source of recharge is intercepted by the cone of depression created by a pumping well. Such sources of recharge may be depleted if withdrawals exceed inflow to the sources of recharge.

**OCCURRENCE AND POTENTIAL YIELD OF AQUIFERS**

Aquifers occur in both glacial drift and underlying or adjacent bedrock formations. However, this availability map shows only the approximate extent and potential yields of the glacial-drift aquifers. Logan County is almost entirely covered by glacial drift. The glacial drift consists of till and glaciofluvial deposits.

Till is an unsorted, unstratified mixture of clay, silt, sand, gravel, cobbles, and boulders deposited directly by glaciers. Till has a relatively small hydraulic conductivity and is not considered to be a significant aquifer.

Glaciofluvial deposits are stratified deposits of silt, sand, and gravel that were deposited by the combined action of ice and water. The sand and gravel deposits commonly have relatively large hydraulic conductivities and form the principal aquifers in the county. They may be either confined or unconfined. Wells developed in these aquifers generally will yield more than 50 gal/min (3 L/s), and in places as much as 1,500 gal/min (95 L/s). It is not uncommon for two or more aquifers to be interlayered with confining beds of till, clay, or silt.

The estimated yields shown on the availability map are for properly spaced, screened, and developed wells that fully penetrate the aquifer. The map is designed as a guide to the availability of ground water from major glacial-drift aquifers and not to locate specific wells. Few glacial-drift aquifers are so uniform in their water-bearing properties that production wells may be drilled in them without additional test drilling. If the map is used with an understanding of its limitations, it will be useful in the future development of ground-water resources in Logan County.

**SELECTED REFERENCES**

Adolphson, D. G., 1961, Glacial-drift aquifers in the Gackle area, Logan and Stutsman Counties, North Dakota: North Dakota Ground-Water Studies 33, 16 p.

Clayton, Lee, 1962, Glacial geology of Logan and McIntosh Counties, North Dakota: North Dakota Geological Survey Bulletin 37, 84 p.

Colton, R. B., Lemke, R. W., and Lindvall, R. M., 1963, Preliminary glacial map of North Dakota: U.S. Geological Survey Miscellaneous Geologic Investigations Map I-331.

Huxel, C. V., Jr., and Petri, L. R., 1965, Geology and ground-water resources of Stutsman County, North Dakota, Part III—Ground water and its chemical quality: North Dakota State Water Commission County Ground-Water Studies 2 and North Dakota Geological Survey Bulletin 41, 58 p.

Klausung, R. L., 1979, Ground-water basic data for McIntosh County, North Dakota, Part II: North Dakota State Water Commission County Ground-Water Studies 30 and North Dakota Geological Survey Bulletin 73, 458 p.

Paulson, Q. F., 1952, Geology and occurrence of ground water in the Streeter area, Stutsman, Logan, and Kidder Counties, North Dakota: North Dakota Ground-Water Studies 20, 73 p.

Simpson, H. E., 1929, Geology and ground-water resources of North Dakota: U.S. Geological Survey Water-Supply Paper 598, p. 155-156.

PRELIMINARY MAP SHOWING AVAILABILITY OF WATER FROM GLACIAL-DRIFT AQUIFERS IN LOGAN COUNTY, SOUTH-CENTRAL NORTH DAKOTA

BY  
ROBERT L. KLAUSUNG  
1982