# GROUND WATER

# 1980 PUMPAGE, IN ACRE-FEET PER SQUARE MILE Total volume pumped, in thousands of No pumpage EXAMPLE: Pumpage for irrigation in 1980 was between 500 and 999 acre-feet per square mile. The total was 35,000 acre-feet 500-999 Boundary of Snake River Plain Boundary between eastern and western Snake River Plain Each complete block represents an area of 7½ minutes latitude by 7½ minutes longitude. The block grid corresponds to U.S. Geological Survey 1:24,000-scale topographic maps. A 72-minute block is about 54 square miles.

ESTIMATED GROUND WATER PUMPAGE

EXPLANATION

withdrawals for irrigation on the Snake River Plain. Sheet 1 depicts withdrawals from ground water; sheet

INTRODUCTION

resulting from the U.S. Geological Survey's Snake River Plain RASA

(Regional Aquifer-Systems Analysis) study that was initiated in October

1979. The purposes of the RASA study were to: (1) Understand the regional ground-water flow system, (2) determine effects of conjunctive use of ground and surface water, and (3) describe water chemistry (Lindholm, 1981). The purpose of this report is to present the location and volume of estimated 1980 water

This report is one in a series

2 depicts withdrawals from the Snake River and its major tributaries. Kjelstrom (1984) summarized gravity diversions from the Snake River in LOCATION OF STUDY AREA EXPLANATION --- Boundary of Snake River basin --- Boundary of Snake River Plain Eastern Snake River Plain

O 50 MILES O 50 KILOMETERS

The Snake River Plain is an arcuate area of about 15,600 mi<sup>2</sup> in southern Idaho and eastern Oregon. The plain is relatively flat and ranges in width from 30 to 75 mi and in altitude from about 2,100 ft in the west to about 6,000 ft in the east. The entire area is drained by the Snake River, whose course approximates the southern boundary of the plain.

For purposes of the RASA study, the plain was divided into two parts in the vicinity of King Hill, as indicated on the index map. The two parts, herein referred to as the eastern plain and western plain, exhibit significant geologic and hydrologic differences. A detailed description of the geohydrologic framework of the Snake River Plain was presented by Whitehead (1984). In a companion report, Kjelstrom (1984) presented water budgets for the eastern and western plain.

The eastern plain is underlain primarily by Quaternary volcanic rocks (primarily basalt) with interbedded sedimentary rocks along the margins. The high water-yielding basalts constitute the Snake Plain aquifer. The western plain consists largely of Quaternary and Tertiary sedimentary rocks. Sand and gravel zones and some basalts are the most productive aquifers. Contacts between Quaternary rocks and surrounding Tertiary and older rocks define much of the study area boundary.

The economy of the Snake River Plain is based largely on irrigated agriculture. According to a U.S. Geological Survey report, about 96 percent of consumptive water use in 1980 in Idaho was for irrigation (Solley and others, 1983). Concentration of irrigated agriculture on the Snake River Plain suggests that this reported percentage may be higher within the study area. In contrast, self-supplied industries account for about 3 percent of Idaho's consumptive water use, and public water supplies account for about 0.9 percent (Solley and others, 1983).

An estimated 2.3 million 1980 ground-water pumpage:

> was 0.36 million acre-ft. -- Ground-water pumpage is concentrated in the Mud Lake area, the Minidoka Project area, and the Goose Creek drainage basin (see map at right). The Goose Creek area corresponds to the Oakley-Kenyon, Cottonwood,

Pumpage on the western plain


--Irrigators in the Mud Lake and Nampa-Caldwell areas consume less power per acre-foot of pumpage than those in other intensely pumped areas. Low power consumption per unit pumpage occurs because lifts are low and many wells discharge

According to the RASA study, total annual ground-water recharge under current conditions is about 8 million acre-ft in the eastern plain and 2 million acre-ft in the western plain (Kjelstrom, 1984). On the basis of these estimates, 1980 ground-water pumpage was equal to about one-fifth of annual recharge to the ground-water system.


acre-ft of ground water were pumped from about 5,300 irrigation wells on the Snake River Plain in 1980. The following statements summarize --Pumpage on the eastern plain was 1.93 million acre-ft.

> West Oakley Fan, and Artesian City Critical Ground-Water Areas, as designated by the Idaho Department of Water


to gravity irrigation

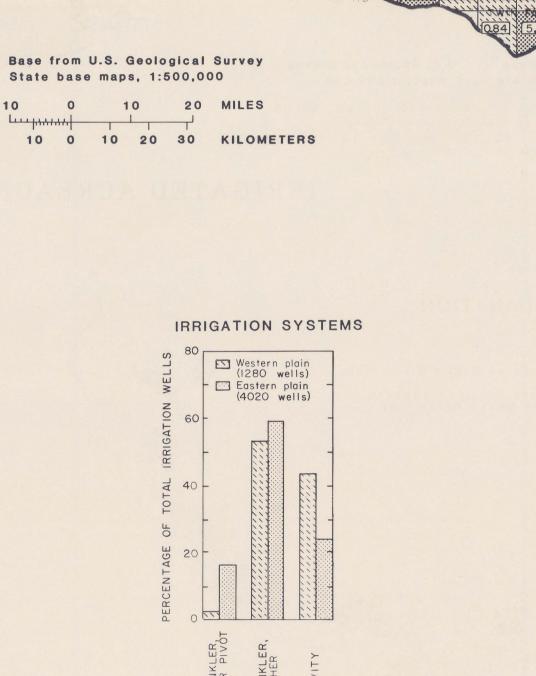


Reported types of irrigation distribution systems supplied by wells on the plain are: 29 percent gravity, 13 percent center pivot sprinkler, and 58 percent other types of sprinkler. Gravity systems are more common on the western plain and center pivot sprinklers are more common on the eastern plain.

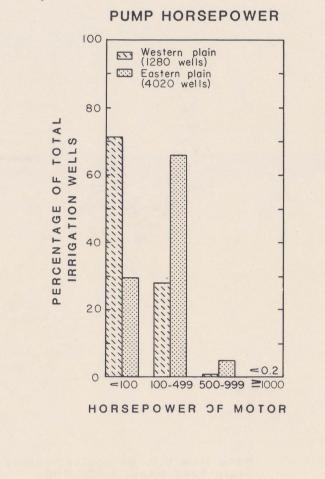


Ground-water pumps by horsepower are: 39 percent less than 100 hp, 57 percent 100-499 hp, and 4 percent 500 hp or greater. Six pumping stations have greater than 1,000 hp. Most pumps with less than 100 hp have low lifts and discharge into gravity irrigation systems.

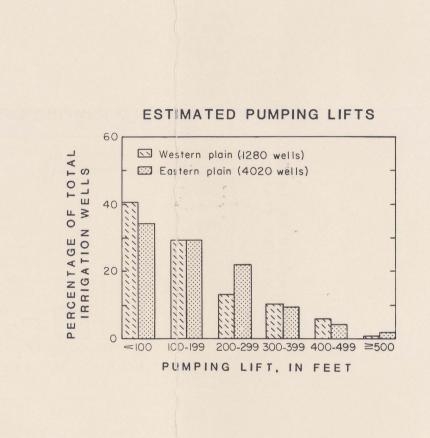

Estimated pumping lift is less than 200 ft in 65 percent of the irrigation wells and less than 300 ft in 85 percent of the wells.

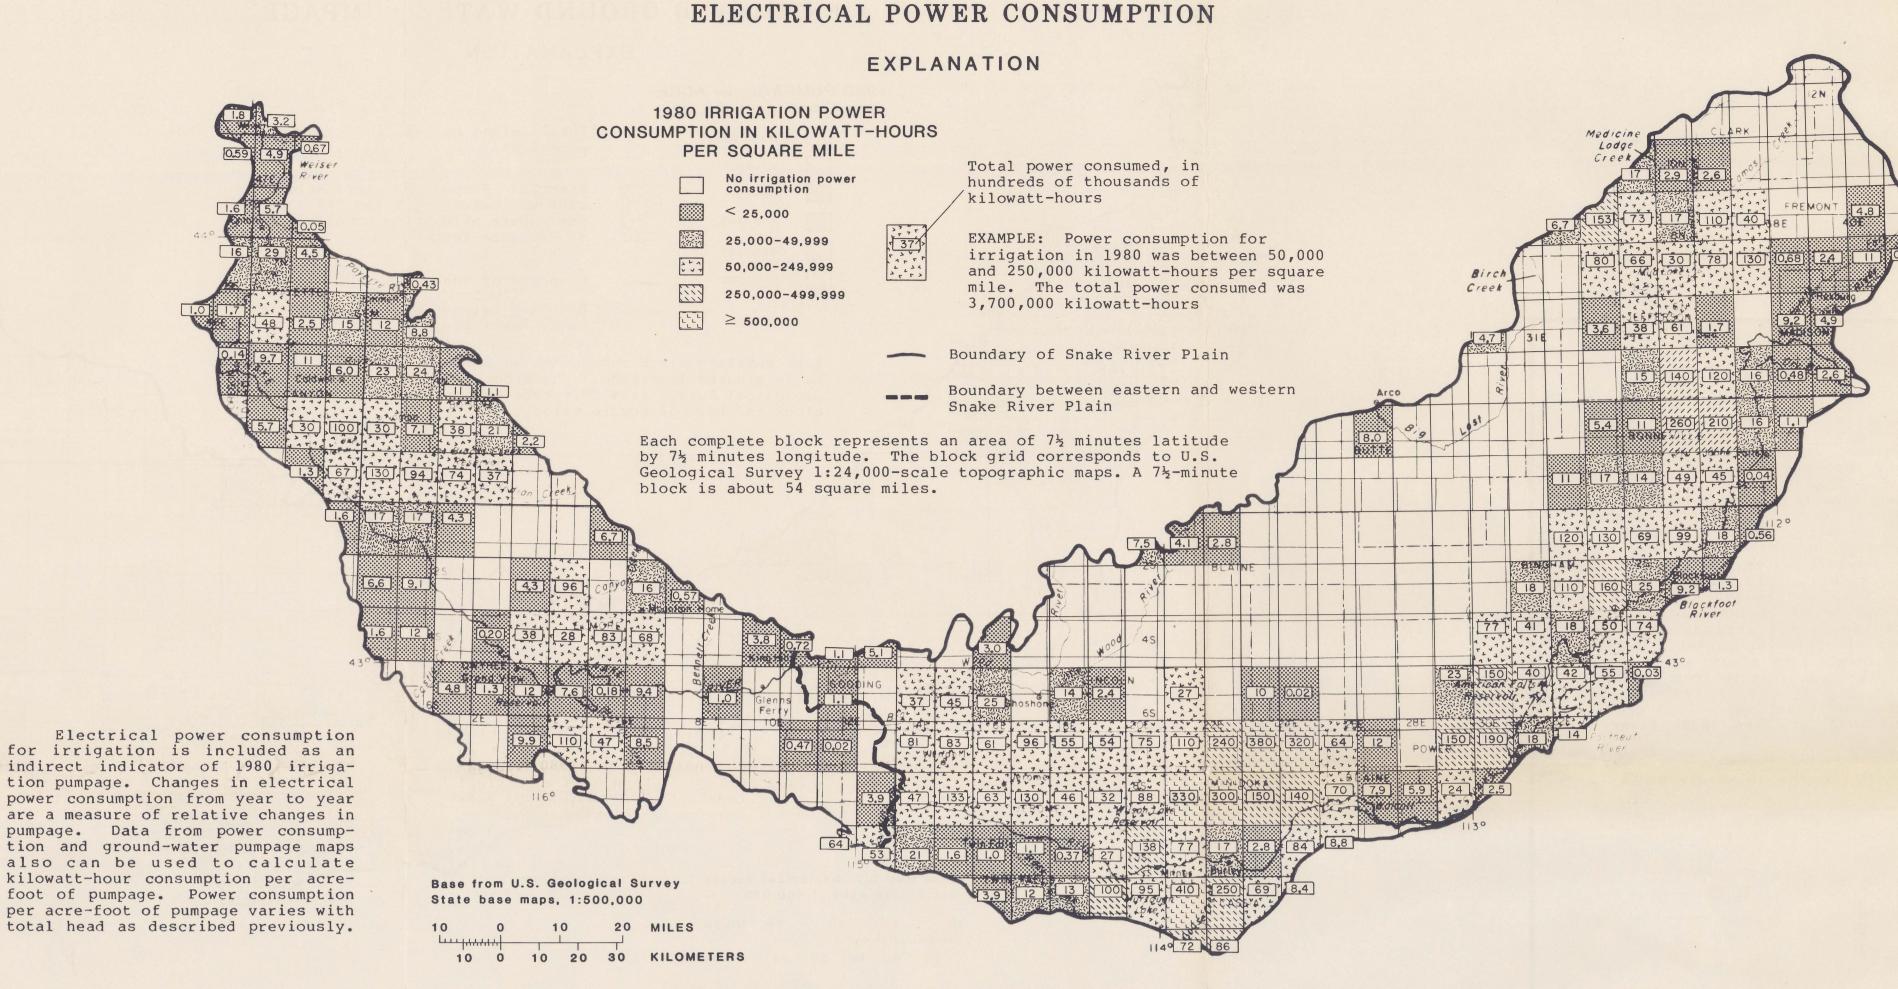



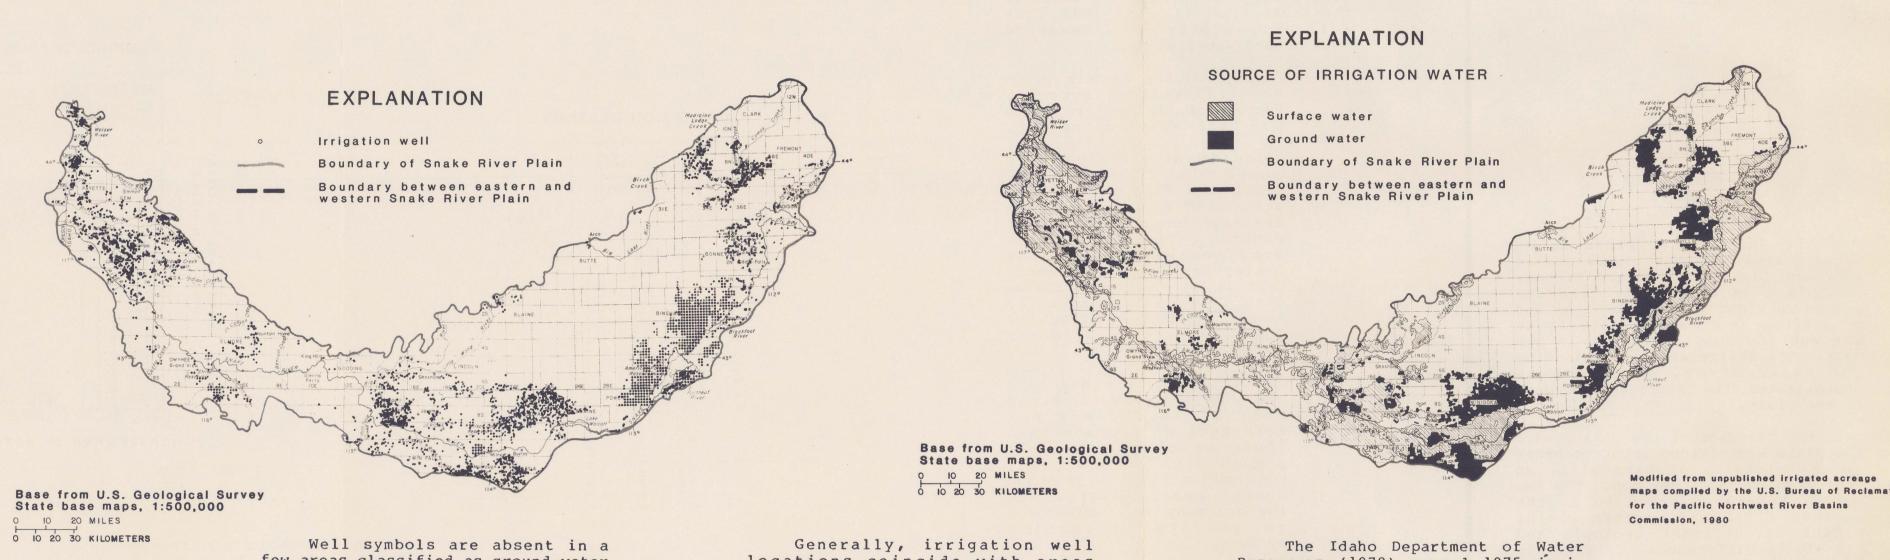

few areas classified as ground-water locations coincide with areas irrigated. Well pumps in these classified by State and Federal areas may have power sources other agencies as ground-water irrigated. than electricity, or electric power Some wells in areas classified as data may be in error. surface-water irrigated are supplemental water sources. On the Uniform distribution of well western plain, many wells drain symbols in some areas, such as waterlogged areas (Nace, West, and Bingham County, does not indicate a Mower, 1957, p. 9). The density similar distribution of wells on the of wells in some surface-water ground. In those areas, utility irrigated areas suggests that the company well locations are accurate importance of ground water as a to the nearest section. Plotting source for irrigation has been each well in the center of the underestimated. appropriate section results in the uniform distribution. For the same reason, density of well symbols does

Resources (1978) mapped 1975 irrigated acreage from small-scale color infrared aerial photography. These maps were updated to 1979 from U-2 photography and satellite imagery by the U.S. Bureau of Reclamation (1980). The western plain is irrigated mostly with surface water from the

Snake, Boise, Payette, Owyhee, Malheur, and Weiser Rivers. On the eastern plain, surface-water irrigation is concentrated along the Snake, Henrys Fork, Teton, and Big Wood Rivers. Most ground-water irrigation is on the eastern plain.

AUG 29 1986

### GROUND-WATER DEVELOPMENT

IRRIGATED AREA AND NUMBER OF IRRIGATION PUMPS SERVED BY IDAHO POWER COMPANY Unpublished data provided by Idaho Power Company, 1981 Idaho Power Company service area Snake River Plain

Steady increases in irrigated acreage and number of irrigation pumps since 1950 reflect a trend that began in the 1860's. Although the Idaho Power Company service area shown above does not correspond directly to the Snake River Plain, the trend illustrated by the data is typical of expanding irrigation on

the plain.

Early irrigation on the Snake River Plain was by gravity diversion of surface water. Surface-water irrigated area reached about 550,000 acres in 1899 and increased to 2.5 million acres by 1945 (G. F. Lindholm and S. A. Goodell, U.S. Geological Survey, written commun., 1982). After 1945, the use of ground water for irrigation increased rapidly. Use of ground water allowed irrigation of lands inadequately supplied by or inaccessible to surface water. Most of these lands are located on the eastern plain, which is underlain by fractured basalt that yields large volumes of good quality this report.

Landsat data indicate that 3.1 million acres were irrigated on the Snake River Plain in 1980. Of these, about 1.0 million acres were irrigated with ground water, 2.0 million acres with surface water, and 0.1 million acres with combined surface and ground water (G. F. Lindholm and S. A. Goodell, U.S. Geological Survey, written commun.,

Several previous studies of ground-water pumpage for irrigation have been made for parts of the Snake River Plain: Mundorff, Crosthwaite, and Kilburn (1964, p. 23) estimated that about 1.5 million acre-ft were pumped on the entire Snake River Plain in 1959; Norvitch, Thomas, and Madison (1969, p. 9) estimated 2.1 million acre-ft were pumped on the eastern plain in 1966; and Young and Harenberg (1971, p. 22) estimated 1 million acre-ft were pumped on the eastern plain in 1969. No previous ground-water pumpage estimates have been made for the western plain, as defined in

Differences in ground-water pumpage estimates point to the need for more accurate data. Accurate estimates of pumpage are needed as input to ground-water flow models and as an aid to managers and planners for surface- and groundwater management strategies.

### PUMPAGE CALCULATIONS

Pumpage from irrigation wells Using equation (2), 1980 pumpage was calculated for each of 5,300 was estimated from electrical power electrically powered irrigation consumption data. Most pumping wells on the plain. Power consumed stations in the study area are at each well in 1980 was supplied by electrically powered. Data collected by Young and Harenberg (1971, p. 11) indicated that nonelectrical power was used for less than 1 percent of the irrigation pumps on (H<sub>r</sub> plus H<sub>D</sub>) was estimated the eastern plain.

Power consumed by a pump to lift and deliver water is related to total head (head from lift and from pressurized distribution systems) and quantity of water pumped. Expressed mathematically:

kWh = (TH)(Q)(K)

APPROACH

where kWh = total power consumed in a year, in kilowatt-hours; TH = total head, in feet, which in turn equals pumping lift (the distance from land surface to pumping water level), H<sub>r</sub>, plus the pressure head associated with the irrigation distribution

system, Hp; Q = total volume of water pumped in a year, in acre-feet; and K = number of kilowatt-hours required to lift 1 acre-ft of water l ft, in kilowatthours per acre-foot-foot.

The annual volume of pumpage for individual pumping stations can be calculated by the following equation: Q = (kWh)/[(K)(TH)] (2)

If Q, kWh, and TH are observed and

recorded, then K can be determined

statistically.

utility companies. The value for K was estimated statistically on the basis of field data, and total head hydrologically. Measurements of volume discharged (acre-ft), power consumed (kWh), and total head (ft) were made at 72 wells and 7 river pumps over short intervals to determine site-

specific values of K. A representative value of K, subsequently used as a constant in pumpage calculations, was estimated by applying the method of linear regression to the data as shown in the graph below.

AN EMPIRICAL FACTOR, K. DETERMINED FROM FIELD DATA (THIS FACTOR WAS USED TO ESTIMATE IRRIGATION PUMPAGE FROM ELECTRICAL POWER CONSUMPTION DATA) kWh = 1.69 (acre-ft)(ft)Mean squared deviation about the regression line = 830.02 100 150 200 250 VOLUME TIMES TOTAL HEAD, IN (ACRE-FEET)(FEET) The estimated value of K is the slope of the regression line. On

the basis of sample data, K equals


1.69; that is, 1.69 kWh were used to

lift 1 acre-ft of water 1 ft.

#### Total head was estimated for each well by summing estimates of pumping lift and pressure head. Pumping lift includes static lift and pumping drawdown. Static lift is the difference between altitude of land surface at point of discharge and altitude of static ground-water level. Land surface altitudes were interpolated from

METHOD OF ESTIMATING PUMPAGE

topographic maps and static water levels were interpolated from the March 1980 water-table map (Lindholm and others, 1983). ESTIMATED WELL DRAWDOWN Western plain, median = 56 (294 wells) Eastern plain, median = 6 (214 wells)

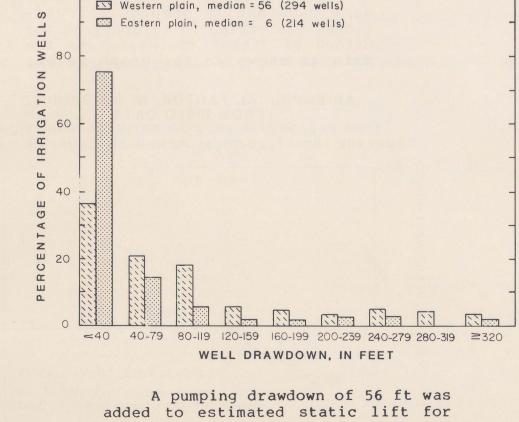

all wells on the western plain and 6 ft for all wells on the eastern plain. Drawdowns are medians from data reported by well drillers for wells yielding more than 300 gal/ min. Medians rather than means were used to dampen the effects of a few extremely high drawdown values.

84-434


Differences in drawdown estimates for the eastern and western plain are due largely to differences in aquifer transmissivity. Most wells on the eastern plain are completed in high water-yielding basaltic rocks, whereas most wells on the western plain are completed in relatively low wateryielding sedimentary rocks.

not accurately indicate density

of wells. Several wells located in

the same section are represented by


one symbol.

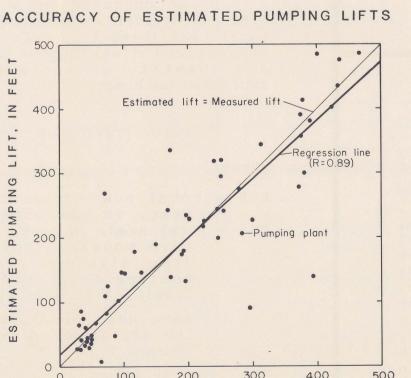

MEASURED PUMPING LIFT, IN FEET To assess the accuracy of estimated lifts, pumping lifts measured at 72 test sites were compared to estimated lifts for the same sites. (Data from 7 of the original 79 tests were eliminated because heads were estimated in the field rather than measured.)

The relation between estimated and measured lifts is depicted in the graph above. A correlation coefficient of 0.89 for the linear regression between estimated and measured values indicates that estimated lifts are reasonably close to measured lifts within the confidence of the data.

Pressure head was estimated for each well on the basis of type of distribution system as reported by utilities. Reported distribution systems agreed with those observed at 90 percent of the test sites.

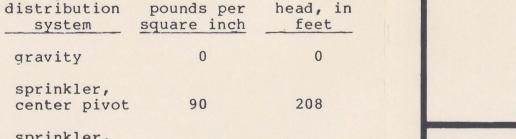

sprinkler, 139 other Heads for center pivot and other sprinkler systems are averages of pressure estimates reported in a survey of companies that sell and install irrigation systems in the

study area. The estimates are shown

Estimated

Irrigation head, in pressure

pressure Estimated

in the following table: Annual kilowatt-hour consumption data supplied by utility companies were used to estimate 1980 pumpage for each pumping station within the study area. Pumpage estimates for individual wells then were summed over areas of 7½ minutes latitude by 7½ minutes longitude.

In areas where total head is low owing to gravity distribution systems and shallow depth to water, pumpage may be overestimated. For example, in the Mud Lake area, the estimation method resulted in a pumpage 35 percent greater than that obtained by other investigators (Johnson and others, 1982, p. 26; U.S. Geological Survey, unpubl. data, 1982) who used several different estimation methods.


Errors in pumpage estimates presented in this report probably result from error in estimated variables. However, pumpage calculations used the best data presently available. Future pumpage estimates would benefit from improved estimates of static lift, drawdown, and

## CONVERSION TABLE

For readers who prefer to use metric units, conversion factors for terms used in this report are listed below. To obtain

4,047 square meter 1,233 acre-foot (acre-ft) cubic meter 0.02832 cubic foot per second cubic meter per  $(ft^3/s)$ second 0.3048 foot (ft) meter 3.785 gallon (gal) liter 0.06309 liter per second gallon per minute (gal/min) 745.7 horsepower (hp) watt kilowatt-hour (kWh) 3,600,000 joule 1.609 mile (mi) kilometer 70.31 pound per square inch gram per square centimeter (psi) 2.590 square mile (mi<sup>2</sup>) square kilometer

NGVD of 1929 (National Geodetic Vertical Datum of 1929): The term "National Geodetic Vertical Datum of 1929" replaces the formerly used term "mean sea level" to describe the datum for altitude measurements. The geodetic datum is derived from a general adjustment of the first-order leveling networks in both the United States and Canada. For convenience in this report, the datum also is referred to as "sea level."

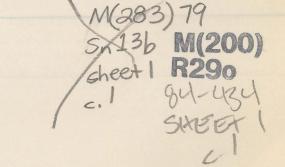

WATER WITHDRAWN FOR IRRIGATION IN 1980 ON THE SNAKE RIVER PLAIN, IDAHO AND EASTERN OREGON

B.B. Bigelow, S.A. Goodell, and G.D. Newton