

USGS
OFR 85-98
COPY 1.

PROCEEDINGS OF THE ADVANCED SEMINAR
ON SEDIMENTATION, AUGUST 15-19, 1983,
DENVER, COLORADO

Glysson, G.D.

U.S. GEOLOGICAL SURVEY
WRD, LIBRARY
505 MARQUETTE NW, RM 720
ALBUQUERQUE, N.M. 87102



U.S. GEOLOGICAL SURVEY
Open-File Report 85-98

PROCEEDINGS OF THE ADVANCED SEMINAR
ON SEDIMENTATION, AUGUST 15-19, 1983,
DENVER, COLORADO

G. Douglas Glysson, Editor

U.S. GEOLOGICAL SURVEY
WRD, LIBRARY
505 MARQUETTE NW, RM 720
ALBUQUERQUE, N.M. 87102



U.S. GEOLOGICAL SURVEY
Open-File Report 85-98

UNITED STATES DEPARTMENT OF THE INTERIOR
DONALD PAUL HODEL, Secretary

GEOLOGICAL SURVEY
Dallas L. Peck, Director

For additional information write to:

Chief Hydrologist
415 National Center
U.S. Geological Survey, WRD
Reston, Virginia 22092

Copies of the report can be
purchased from:

Open-File Services Section
Western Distribution Branch
U.S. Geological Survey
Box 25425, Federal Center
Denver, Colorado 80225

CONTENTS

	Page
Abstract	1
Introduction	1
Summaries of the Presentations	3
I Modeling:	
Modeling water-discharge and sediment-concentration hydrographs at surface mine sites in Pennsylvania, by Lloyd A. Reed	3
Preliminary investigation of the physical basis of soil erosion parameters in the Precipitation-Runoff Modeling System (PRMS), by William P. Carey and Andrew Simon	5
Reducing sediment sampling frequency at streamflow gaging station Rio Grande at Otowi Bridge near San Ildefonso, New Mexico, by David H. Marshall	8
Comparison of digital modeling techniques which simulate sedimentation processes in an agricultural watershed, by Leslie D. Arihood	11
II Instrumentation:	
Measurement of suspended sediment in surface waters: A discussion of new technologies that will operate continuously and unattended, by Marvin C. Goldberg	12
Instrumentation for automatically monitoring sediment concentration and particle size - A progress report, by James H. Ficken and others	14
Monitoring streambed changes and sediment concentrations using the acoustic velocity meter, by Antonius Laenen .	
III Debris Flows:	
Geobotanical evidence of debris flows on Mt. Shasta, California, by C. R. Hupp and W. R. Osterkamp	22
Downstream dilution of lahars from Mount St. Helens: Defining the boundary between debris flow and hyperconcentrated streamflow, by T. C. Pierson and K. M. Scott	29
Stream channel adjustments to 1980 lahars and subsequent stormflow, Mount St. Helens, by Holly A. Martinson and David F. Meyer	31
Erosional development of the North Fork Toutle debris avalanche deposit, by David F. Meyer and Richard J. Janda	34

	Page
IV Sediment Transport:	
Erosion and landform modification at a low-level radioactive waste disposal facility near Sheffield, Illinois, by John R. Gray	33
Estimating long-term sediment discharge--which method to use? by Thomas H. Yorke	40
Sediment budget of the tidal Potomac River and estuary, Water Years 1979-1981, by R. Edward Hickman and James P. Bennett	44
Effects of the proposed Cooper River rediversion on sedimentation in Charleston Harbor, South Carolina, by Glenn G. Patterson	45
V Sediment Chemistry:	
Determination of lake sedimentation rates by lead-210 and Cesium-137, by Albert Yang	46
Inorganic partitioning in sediments, by Arthur J. Horowitz	48
Transport of suspended sediment and associated chemical constituents in the Lower Mississippi River, Louisiana, by Charles R. Demas and Philip B. Curwick	49
Suspended sediment: Transport and chemistry of organic carbon, by E. M. Thurman	50
VI Channel Morphology:	
Sediment impacts from coal mining, northeast Tennessee, by W. R. Osterkamp, W. P. Carey, and C. R. Hupp	52
Unit Hydraulic geometry--An indicator of channel changes, by R. P. Williams	55
Channel adjustment to man-induced stress in West Tennessee, by Andrew Simon and Clarence H. Robbins	56
Contrast in stream channel response to major storms--examples from two mountainous areas in California, by K. Michael Nolan and Donna C. Marron	57
Effects of dam construction on channel geometry and bed material in Bear Creek, Denver, Colorado, by R. F. Hadley and W. W. Emmett	60
Sediment storage and discharge in steep unstable terrane, by Richard J. Janda	61
VII Bedload:	
Variability in measured bedload transport during constant and slowly changing water discharge conditions, by William P. Carey	63
Some characteristics of fluvial processes in rivers, by William W. Emmett, Luna B. Leopold, and Robert M. Myrick	66
Measurement of bedload discharge in nine Illinois streams with the Helley-Smith sampler, by Julia B. Graf	67
List of Attendees	69

ILLUSTRATIONS

		Page
Figure 1.	Graph showing water discharge and suspended-sediment concentration hydrographs computed by PRMS	5
2.	Diagram showing types of botanical evidence of debris flow	23
3.	Map showing location of the study areas on Mt. Shasta, California	24
4.	Diagram showing representative cross section of Ash Creek near Military Pass, California	28
5.	Graph showing dominant fluvial processes, Pine Creek and South Fork Toutle River, 1980-81	32
6.	Graph showing dominant fluvial processes, Pine Creek and South Fork Toutle River, 1981-82	33
7.	Graph showing drainage integration, with time, of the upper North Fork Toutle River basin, above the N-1 debris retention structure	35
8.	Diagram showing Dekaport divisor system	39
9.	Diagram summarizing the use of botanical evidence to date recent flow events along Smoky Creek, northeast Tennessee	54
10.	Diagram showing schematic representation of positive feedback between physical processes in northwestern California	57
11.	Graph showing variability of consecutive bedload samples ..	64
12.	Graph showing theoretical and sampled distributions of relative transport rates	65
13.	Graph showing variability of consecutive bedload samples after smoothing	65

TABLES

Table 1.	Information on rills and gullies used in PRMS subroutine ..	4
2.	Summary of debris flow dates on Upper Whitney Creek, Bolam Creek, Whitney Creek below US97, and Whitney Creek on Juniper Flats	25

	Page
3. Summary of debris flow dates on Mud Creek, California	26
4. Summary of debris flow dates on Ash Creek, California	26
5. Correlation coefficients and standard errors of estimate of relations between the logarithms of water discharge and concentrations of sediment, sand, silt, and clay in suspension for the Schuylkill River at Manayunk, Pennsylvania	41
6. Measured and estimated suspended-sediment discharges of the Schuylkill River at Manayunk, October 1, 1953, to September 30, 1979	42

CONVERSION FACTORS

For use of readers who prefer to use metric units, conversion factors for terms used in this report are listed below:

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
inch (in)	2.540	centimeter (cm)
square inch (in ²)	6.452	square centimeter (cm ²)
foot (ft)	0.3048	meter (m)
foot per second (ft/s)	0.3048	meter per second (m/s)
foot squared (ft ²)	0.09294	square meter (m ²)
cubic foot (ft ³)	0.02832	cubic meter (m ³)
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second (m ³ /s)
mile (mi)	1.609	kilometer (km)
square mile (mi ²)	2.590	square kilometer (km ²)
acre	0.4047	hectare
acre-foot (acre-ft)	1,233.	cubic meter (m ³)
ton (t)	0.9072	megagram (Mg)
ton per square mile (t/mi ²)	0.3503	megagram per square mile (Mg/mi ²)
gallon (gal)	3.785	liter (L)
ounce (oz)	28.35	gram (g)

PROCEEDINGS OF THE ADVANCED SEMINAR ON SEDIMENTATION,
AUGUST 15-19, 1983, DENVER, COLORADO

G. Douglas Glysson, Editor

ABSTRACT

On August 15-19, 1983, the U.S. Geological Survey's Water Resources Division (WRD) sponsored an advanced seminar on sedimentation at the National Training Center in Lakewood, CO. Topics discussed included modeling, mud and debris flows, sediment transport, sediment chemistry, channel morphology, instrumentation, and bedload. This circular presents summaries of the 27 presentations given at the seminar plus one additional summary which was not presented.

INTRODUCTION

The term sedimentation encompasses the processes of erosion, entrainment, transportation, deposition, and the compaction of sediments (Vanoni, 1975). Historically, the WRD has primarily limited its efforts to the study of the transport and deposition processes. Some geomorphologic studies have been conducted with the majority of the work being done in the WRD's national Research Program.

Several major events over the past few years have brought increased public awareness to the sedimentation problem. Notably are the eruption of Mount St. Helens, dioxin in the sediments at Times Beach, MO, and the rapid erosion of the offshore islands off the coast of Louisiana. Not so noticeable has been the introduction of new chemicals through the use of pesticides and fertilizers, and the seepages and direct erosion from waste-disposal sites.

In order to adequately assess our Nation's water resources, the WRD has, over the last several years, expanded its field of study to include all five processes of sedimentation. The Division is investigating the role sediment plays in the transport and deposition of certain chemicals. The sediment particles may sorb these chemicals from the water and (or) release them back into solution depending on the physical and chemical environment. The WRD is also studying the effects that the sedimentation processes have on the ecosystem of our Nation's waterways.

In an effort to improve the effectiveness of the Division's expanding sediment program, the Quality of Water Branch organized an Advanced Seminar on Sediment, which was held August 15-19, 1983, at the Geological Survey's National Training Center in Lakewood, CO. The objectives of this seminar were (1) to gather together the Division's research, District, and Head-quarter's personnel who are actively engaged in geomorphology and (or) sedimentation-related studies to discuss mutual problems, and (2) to provide

a forum for the effective transfer of sediment-related technology. The purpose of this circular is to present summaries of the presentations made at the seminar. It is hoped that, by presenting these summaries, the technology transfer process can be extended to those who were unable to attend the seminar.

REFERENCE

Vanoni, V. A., 1975, Sedimentation Engineering: American Society of Civil Engineers Manual of Engineering Practice No. 54, p. 745.

SUMMARIES OF THE PRESENTATIONS

MODELING

MODELING WATER-DISCHARGE AND SEDIMENT-CONCENTRATION HYDROGRAPHS AT SURFACE MINE SITES IN PENNSYLVANIA

by Lloyd A. Reed

Rainfall, water-discharge, and suspended-sediment data were collected at several surface mine sites in the bituminous coal fields of Pennsylvania. These data were used to refine the Precipitation Runoff Modeling System (PRMS) of Leavesley and others (1983). PRMS is a modular design modeling system developed to evaluate the impacts of various combinations of precipitation and land use on water discharge and sediment yields. PRMS computes hydrographs of water discharge and suspended-sediment concentration for small and large basins affected by single or multiple land uses. The subroutine described here runs on a Tektronix 4051^{1/} and calculates water discharge and suspended-sediment concentration hydrographs for storms up to 24 hours in duration.

The model takes observed precipitation and calculates precipitation excess and the sediment dislodged during the storm. Observed rainfall at 5-minute increments is stored in a 288-unit array by the model user. Precipitation excess is computed for each 5-minute increment by subtracting infiltration, calculated by the Green Ampt/Philip infiltration model, Green and others (1977), from total precipitation. Sediment dislodged from the mined area during each 5-minute increment is computed in two steps. A relation between precipitation intensity and suspended-sediment concentration that varies linearly with soil erodibility is used to calculate a suspended-sediment concentration (a ratio). The suspended-sediment concentration is multiplied by the precipitation excess to determine the tons of sediment dislodged from each acre for each 5-minute increment.

After the precipitation excess and sediment-production values are calculated and stored in arrays, PRMS moves to a routing subroutine and routes the water and sediment from the mined area, producing a water discharge and sediment concentration hydrograph. Precipitation excess and sediment production from the first 5-minute period is recalled and divided into 1-minute intervals. PRMS distributes the precipitation excess and the sediment from the first interval to the mined area. The precipitation excess and sediment distributed on the mined area is accumulated in rills and gullies and equations for open-channel flow and sediment deposition are used to route the water and sediment from the mined area. The size and number of rills and gullies used by PRMS were selected after inspection of several regraded surface mine sites.

^{1/}The use of brand names in this report is for identification purposes only and does not imply endorsement by the U.S. Geological Survey.

The rills and gullies which ranged in size from just noticeable to several inches wide were classified from 1 to 4. Small rills (class 1) joined and formed larger rills, or discharged directly to larger rills and gullies, large rills joined and formed gullies, or discharged directly to gullies or to the diversion channel. Table 1 lists information about the rills and gullies used in this PRMS subroutine.

Table 1.--Information on rills and gullies used in PRMS subroutine

Class rill or gully	Direct drainage area (ft ²)	Total drainage area (ft ²)	Channel area (ft ²)	Number of outlets per acre	Width of each (ft)	Channel discharges to
1	25,000	25,000	7,500	275	0.5	Class 2 rills
2	16,000	41,000	5,000	50	1.0	Class 3 rills
3	2,000	43,000	320	8	1.5	Class 4 rills
4	871	43,560	80	4	2.0	Diversion terrace

After PRMS distributes the precipitation excess and sediment production from the first minute of rainfall over the disturbed area, it is accumulated in the four classes of rills and gullies in proportion to the direct drainage areas listed in the above table. The depth of water in each class of channel is calculated and an equation for open-channel flow is used to compute the velocity of water. The velocity is multiplied by the depth, width, and by the number of outlets to determine the water discharge from each class of rills and gullies. Sediment deposition in each class of channel is calculated on the basis of the particle settling velocity of the sediment and the depth of water in the channel. Sediment deposition in each class of channel is subtracted from the original amount, and the sediment remaining in suspension is routed with the water discharge from the channels. Sediment is routed in proportions equal to the water discharge. If 10 percent of the water in a rill or gully is discharged, then 10 percent of the sediment remaining in suspension is also discharged. After water and sediment discharge have been calculated for each class rill and gully, the water and sediment are routed to the next class or to the diversion terrace, as listed in the above table.

The diversion terrace is divided into four equal segments, each segment receives 25 percent of the water and sediment discharge from the mined area. Water and sediment are routed through the four segments of the diversion terrace, segment 1 discharges to segment 2, segment 2 discharges to 3, segment 3 discharges to segment 4, and segment 4 discharges from the mine site. The water discharge and suspended-sediment concentrations from segment 4 are plotted at 1-minute intervals.

Water and sediment-discharge hydrographs can be computed for a storm of 24 hours or less in duration. The results for one storm are shown on figure 1. Rainfall during the storm was 1.20 in., and the precipitation excess was 0.90

in. The measured sediment discharge was 0.58 tons, and the sediment discharge calculated by the model was 0.75 tons. The measured and calculated water discharges were both about 4,300 ft³.

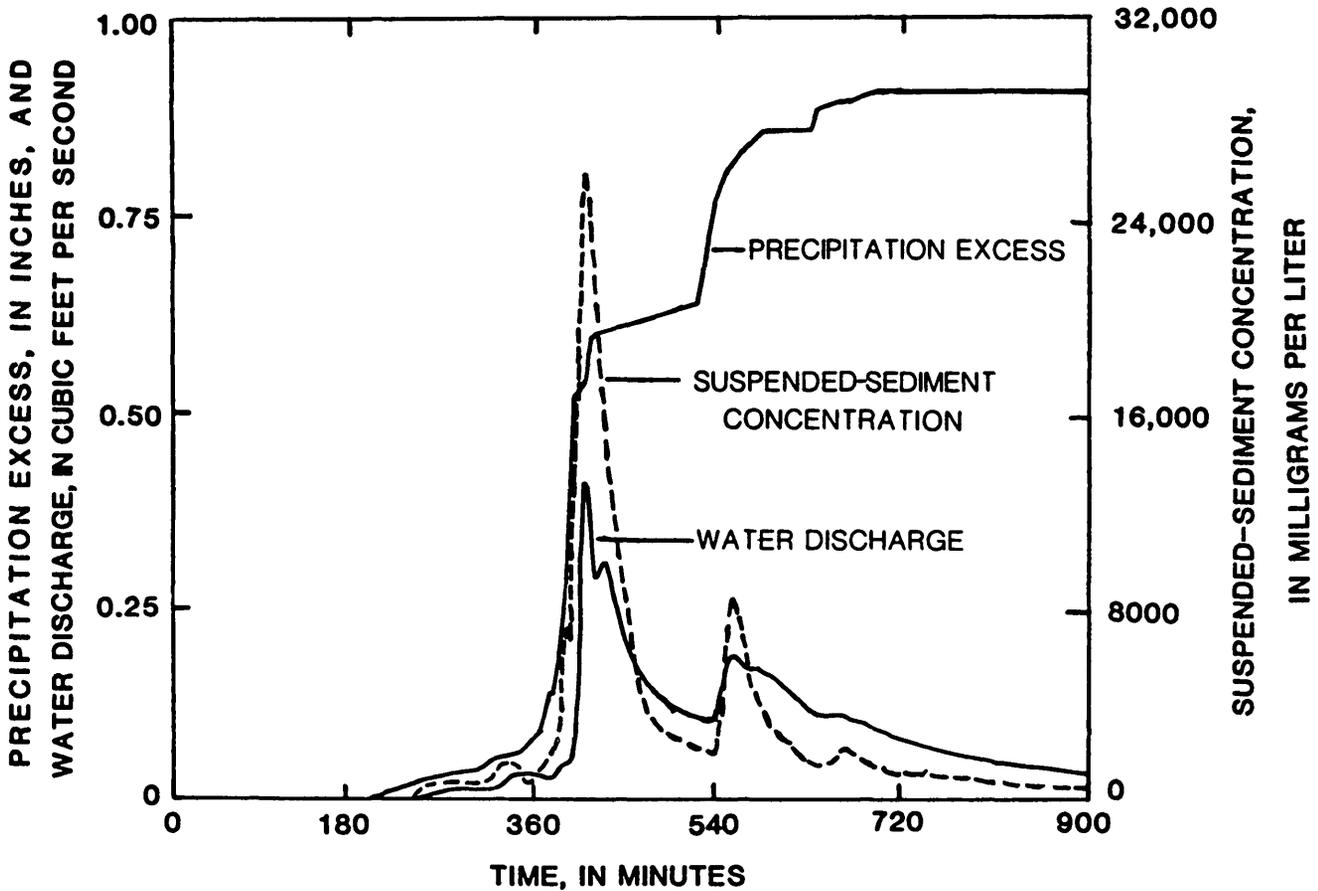


Figure 1.--Water discharge and suspended-sediment concentration hydrographs computed by PRMS.

REFERENCES

- Green, W. H., and Ampt, G. A., 1911, Studies on soil physics; I. Flow of air and water through soils: *Journal of Agricultural Research*, v. 4, p. 1-24.
- Leavesley, G. H., Lichty, R. W., Troutman, B. M., and Saindon, L. G., 1983, *Precipitation-runoff model system: User's manual*, U.S. Geological Survey Water-Resources Investigations (in press).

PRELIMINARY INVESTIGATION OF THE PHYSICAL BASIS
OF SOIL EROSION PARAMETERS IN THE
PRECIPITATION-RUNOFF MODELING SYSTEM (PRMS)

by William P. Carey and Andrew Simon

Simulation of upland soil erosion by PRMS currently requires the user to estimate two rainfall detachment parameters and three hydraulic detachment parameters. One of the rainfall parameters (a coefficient) and all three of the hydraulic parameters are directly related to the erosion properties of the surface material. The remaining rainfall parameter (an exponent) is related to the dampening effect of surface-water depth on raindrop impact.

At present these five parameters must be estimated by calibrating simulated results with observed data collected either on small upland plots or at a downstream gaging station. Neither method provides a physical basis for estimating or transferring parameters. In order to provide a starting point for further research on the physical basis of these parameters, a preliminary assessment of the status of modeling of upland soil erosion modeling is being conducted.

Although progress has been slow in relating measurable soil parameters to rainfall detachment, studies by Meyer and Harmon (1979) and Meyer (1981) have shown that a portable rainfall simulator can be used to evaluate the coefficient in the rainfall detachment equation. Various intensities of rainfall are applied to a soil under the same cover conditions. The relation between erosion rate and intensity is generally log-linear and thus the coefficient in the rainfall detachment equation can be determined. The ratio of the coefficients quantifies the relative erodibility of different soils or the relative erosion from different cover conditions for a given soil.

A value for the exponent in the rainfall detachment equation is difficult to choose because it depends on the ratio of surface-water depth to raindrop diameter. A reformulation of the rainfall detachment equation based on the work of Mutchler and Larson (1971) would provide a dampening term that would not require a user supplied parameter.

The three hydraulic detachment parameters consist of one exponent and two coefficients. Foster and Meyer (1972) state that if the bed shear stress is large compared to critical shear stress then the initial value of the exponent can be set equal 1.5. The two coefficients in the hydraulic detachment equation are functions of the soil's resistance to erosion by flow. Research into the relation between these coefficients and measurable soil properties has not yielded results that can be easily applied in a modeling study. Most studies of cohesive material have focused on the relation between critical tractive force and soil properties. However, Ariathurai and Arulanandan (1978) have successfully correlated cation exchange capacity and sodium adsorption ratio with an erosion rate coefficient.

Recommendations concerning methods to evaluate the hydraulic detachment coefficients in the PRMS cannot be made at this time. Further research is needed on the relations between these model parameters and soil properties and on the general applicability of the methods developed primarily for agricultural applications.

REFERENCES

- Ariathurai, R., and Arulanandan, K., 1978, Erosion rates of cohesive soils: American Civil Engineers Society Journal of the Hydraulics Division, v. 104, Hy 2, p. 279-283.
- Foster, G. R., and Meyer, L. D., 1972, Mathematical simulation of upland erosion by fundamental erosion mechanics, in Present and Prospective Technology for Predicting Sediment Yields and Sources: Proceedings of the Sediment Yield Workshop, USDA, Sedimentation Laboratory, Oxford, MS, November 28-30.
- Meyer, L. D., 1981, How rain intensity affects interrill erosion: Transactions of the American Society of Agricultural Engineers, v. 24, no. 6, p. 1472-1475.
- Meyer, L. D., and Harmon, W. C., 1979, Multiple-intensity rainfall simulator for erosion research on row sideslopes: Transactions of the American Society of Agricultural Engineers, v. 22, no. 1, p. 101-103.
- Mutchler, C. K., and Larson, C. L., 1971, Splash amounts from waterdrop impact on a smooth surface: Water Resources Research, v. 7, no. 1, p. 195-200.

REDUCING SEDIMENT SAMPLING FREQUENCY AT STREAMFLOW GAGING
STATION RIO GRANDE AT OTOWI BRIDGE NEAR
SAN ILDEFONSO, NEW MEXICO

by David H. Marshall

Suspended-sediment samples currently are collected daily at 16 stations that are operated by the New Mexico District of the U.S. Geological Survey. Less-frequent sampling would reduce costs for the existing network and free resources to expand the data-collection network. The purpose of this project is to: (1) develop and test a technique to estimate daily suspended-sediment concentration using records of discharge, climate, and suspended-sediment concentration; (2) determine the best sampling schedule that, when coupled with the estimation technique, would provide accurate estimates of daily suspended-sediment concentration and yearly total suspended-sediment load; and (3) estimate the number of years of daily records necessary to define suspended-sediment concentration versus water discharge relation at a particular station.

Study of the conditions at Rio Grande at Otowi Bridge began with an analysis of trend in the yearly mean suspended-sediment concentration. A double-mass curve was used to determine when a change took place in the relation between suspended-sediment discharge and water discharge. The graph of accumulative annual water discharge versus accumulative annual suspended-sediment load showed a linear relationship with obvious breaks in slope. Annual mean concentrations were grouped for years when the double-mass curve had a constant slope, and the Kruskal-Wallis test (Canover, 1971) was performed to see if the groups were similar. The test showed that the groups differed at the 99-percent significance level, so the data were selected from the most current group having a constant slope, 1973 to present.

The model developed to predict daily suspended-sediment concentration contains both a deterministic and a probabilistic component. The deterministic component estimates the increase in suspended-sediment concentration caused by a rising stage or precipitation. The probabilistic component estimates the decline of suspended-sediment concentration after an increase, given the cause of the increase and the suspended-sediment concentration the day of the increase.

Flow on the Rio Grande follows a yearly cycle. Spring runoff from snowmelt [in the Rocky Mountains] begins in April, peaks in June, and ends in late July or early August. Flow in July through September typically has very rapid increases and declines from intense, short-duration thundershowers. Releases from Abiquiu Reservoir cause rapid increases in stage followed by sustained flow. The plot of daily suspended-sediment concentration versus discharge formed a hysteresis loop in which concentration was higher on the rising stage of spring runoff than on the falling stage (for the same discharge). The discharge-concentration hysteresis loop and the hysteresis loop formed by Froude number and discharge appeared to be very similar. The relationship of the Froude number to suspended-sediment concentration is used in both the deterministic and probabilistic components of the model.

The deterministic component uses rainfall data from five rain-gage stations in the basin, the velocity and hydraulic depth calculated from discharge records from Rio Grande at Otowi Bridge. Rainfall depths were grouped according to the travel time the rainfall runoff needed to reach Otowi Bridge, and the groups then were summed. The summed depth was correlated with the increase in suspended-sediment concentration and a line was fitted to the data using the median of the slopes formed by the origin and the data points. This relationship is used to estimate the increase in suspended-sediment concentration for a given rainfall depth. Increases caused by a rising stage were estimated by correlating the increase in concentration with the velocity squared divided by hydraulic depth and a line was fitted to the data using the median slope. Velocity was determined by using a discharge weighted velocity for a rise on day n of:

$$V_n = \frac{A_{n-1} V_{n-1}^2 + (\Delta A)(\Delta d)g}{A_{n-1} V_{n-1} + (\Delta A)(g\Delta d)^{1/2}}$$

where:

- n = day of the rise
- V = discharge weighted velocity
- A = cross-sectional area
- ΔA = increase in cross-sectional area ($A_n - A_{n-1}$)
- Δd = increase in mean depth ($d_n - d_{n-1}$)
- g = acceleration of gravity

The velocity of the rise is assumed to be celerity velocity of a wave of the depth of the river. This undoubtedly overestimates actual velocity, but is only used to separate the rises for different discharges.

The probabilistic component is estimated using a Markov model (Karlin and Taylor, 1975). The Markov process was estimated by first grouping the [suspended-sediment] concentration data by the time since the latest increase and by the type of increase. Five groups were used: (1) 1 day after a 1-day storm; (2) 1 day after a 2 (or more) day storm; (3) 2 or more days after a storm; (4) 1 day after a rise in stage; and (5) 2 or more days after a rise in stage. The range in [suspended-sediment] concentration was broken into 50 intervals or state spaces. The concentrations were paired for day n and day n+1, and after being grouped, were sorted by state spaces for day n. Only pairs where the concentration on day n+1 was lower than day n were used. The mean of the concentrations for day n+1 for each state space was calculated. All the state space means were joined using an arctangent function to make the model continuous. A lower limit of suspended-sediment concentration was calculated by estimating the lowest boundary of velocity squared divided by hydraulic depth and measured concentration. This acts as an absorbing state; that is, once the concentration falls to this level, it will remain constant (for a given velocity squared/hydraulic depth) until an increase takes place.

The model [developed] is exploratory and was developed to determine if the technique is feasible. Many variables affecting concentration were not used, and actual field conditions were not properly estimated. To assess accuracy,

the model was developed using data from the 1979 and 1980 water years and tested using data from the 1981 water year. The calculated yearly suspended load was 76.5 percent of the measured load, and daily estimated suspended-sediment concentrations were reasonably close to measured concentration for all days when no precipitation occurred. Using observations of suspended-sediment concentrations when precipitation occurred (138 points), the estimated yearly load was 91.8 percent of the measured load and daily concentrations were very close.

Future work on the model will be needed to better estimate rising stage velocity, to develop a better assessment of rainfall relations, and to account for seasonal changes. The data base will be increased 1 year at a time to observe convergence of the estimated parameters. Other sampling schemes will be studied to optimize accuracy with the fewest possible samples, and recommendations for reduced sampling will be developed.

REFERENCES

- Canover, W. J., 1971, Practical nonparametric statistics: New York, John Wiley and Sons, p. 229-237.
- Karlin, Samuel, and Taylor, Howard M., 1975, A first course in stochastic process: New York, Academic Press, p. 45-116.

COMPARISON OF DIGITAL MODELING TECHNIQUES WHICH SIMULATE
SEDIMENTATION PROCESSES IN AN AGRICULTURAL WATERSHED

by Leslie D. Arihood

The Precipitation-Runoff Modeling System (PRMS) and Areal Nonpoint Watershed Environmental Response Simulation (ANSWERS) models are evaluated for their accuracy, applicability, and practicality in simulating water and sediment runoff from a midwestern agricultural watershed. The models' applicability and performance are analyzed in light of the watershed's characteristics, storm patterns, and runoff characteristics.

Model design should be able to incorporate the specific characteristics of Hooker Creek watershed. Sediment production is mostly from the flood plain and areas close to the flood plain. The drainage network has developed in a manner such that runoff is rapid. The steady-state hydraulic conductivity of soil is reached within 5 minutes after water is pooled on the soil surface. Soils near the stream and soils in the uplands have different capacities to infiltrate, hold and drain water.

Sediment transport is influenced greatly by source material and rainfall intensity. About 90 percent of suspended sediment is less than 0.062 mm, this reflecting the fine-textured soils of the watershed. Rainfall intensity strongly influences suspended-sediment concentration and discharge. In fact, sediment discharge from storms having a similar maximum intensity can be adequately described by a straight-line arithmetic plot of mean daily storm discharge and sediment discharge.

Differences in each model's structure and concepts of hydrologic processes are important in determining the model's usefulness and applicability. The PRMS is capable of simulating several storm and nonstorm periods whereas ANSWERS can simulate only one storm period per run. ANSWERS' grid system is well suited to the Hooker Creek drainage network. Overland flow planes can outlet directly to adjacent overland flow planes or to the beginning of a stream and continue to maintain the actual watershed slope. The PRMS has a subsurface reservoir contributing to streamflow whereas ANSWERS can simulate subsurface flow only by tile drains. ANSWERS can simulate infiltration from surface pools until they dry, but PRMS simulates infiltration only during rainfall.

ANSWERS' data collection is simplified by providing some sources for data in the documentation and by referencing sources that are easily obtained. Data for ANSWERS that must be collected from the watershed, such as discharge and rainfall, are commonly collected by Districts and do not require significant increases in data-collection expertise.

INSTRUMENTATION

MEASUREMENT OF SUSPENDED SEDIMENT IN SURFACE WATERS: A DISCUSSION OF NEW TECHNOLOGIES THAT WILL OPERATE CONTINUOUSLY AND UNATTENDED

by Marvin C. Goldberg

Timely and accurate data on particle size distributions and mass concentrations of suspended sediment in natural water bodies are used by the U.S. Geological Survey and other agencies concerned with water quality and stream hydrology. Obtaining this data adequately and efficiently would be made easier if a device were available which could analyze the sediments automatically and unattended in situ. The analyzer, ideally, would be able to extract the sample from the cross section and measure the particle size/mass distributions. It should have a range of 1 to 1000 micrometers in hydrodynamic size and from 50 to 500,000 parts per million in concentration. It should make the measurements accurately and reliably, without operator attention for a period of at least 2 weeks.

There are several technologies currently used for particle size measurements. These include: sieving, sedimentation, gravimetry, elutriation, turbidimetry, light obscuration, electrozone measurements (Coulter-type sensors), doppler-shifted light scattering, acoustic echoing, holography, microscopy, X-ray fluorescence, photon correlation spectroscopy, elastic light scattering, and attenuation of transmitted energy from a beam, where the beam can be visible light, X-ray, beta-ray, gamma-ray, or ultrasonic.

Only sieving, visible light beam attenuation, single-particle obscuration of a light beam, electrozone devices, and back-angle light scattering can measure sizes over the range desired. Of these, the single-particle obscuration and electrozone methods require many sensors operating in parallel and, in both cases, each sensor contains a small orifice through which the particles must flow. Provision for automatically unclogging these orifices is a necessity, introducing a degree of complexity which is undesirable in a field-sited particle sensor. Automatic sieving instruments are mechanically quite complicated and, for long-term reliability, electronic complexity is preferable to mechanical.

The techniques remaining are light-beam attenuation and light scattering. Of these two methods, light scattering has the advantages of being relatively insensitive to large concentration changes and being easy to combine with depolarization measurements, for extending the low end of the size range.

The U.S. Geological Survey uses hydrodynamic sizes as a size parameter. Few methods can accurately measure both size and mass in a single measurement and thus mass is often approximated by multiplying an average density (2.65) times the determined volume of the particle. Light-beam attenuation and light scattering techniques can be combined with sedimentation procedures to provide a hydrodynamic size measurement. A particle-sizing instrument developed in our laboratory, incorporating right angle scattering, depolarization ratios and back-angle scattering, has demonstrated better resolution in the small size range with smaller samples than gravimetric sedimentation and equal

capabilities with larger particles. The instrument is mechanically quite simple, produces a signal that is readily digitized, and is adaptable to being incorporated into a field-sited particle analyzer.

INSTRUMENTATION FOR AUTOMATICALLY MONITORING SEDIMENT
CONCENTRATION AND PARTICLE SIZE - A PROGRESS REPORT

by James H. Ficken

The Instrument Development Laboratory has procured several new instruments for evaluation of their capability to measure suspended sediment and one instrument for particle size analyses. Two Markland Ultrasonic Suspended-Solids Meters have been procured to evaluate the meter's capability to measure suspended-sediment concentrations in the range of 5,000 to 70,000 mg/L. Daily sediment loads at two selected sites will be estimated by using the output of the Markland meters. These estimates will be compared to estimates made from routine daily sediment-sample analyses.

A Dynatrol instrument (a vibrating u-tube) was procured to evaluate its capability to measure the density of a water-sediment mixture at a field site. The density can be related to sediment concentration provided corrections are made for variations in density because of dissolved solids and temperature.

A Markland sludge gun, which is an infrared transmissometer, was procured to evaluate its capability to detect and measure the absorption or scattering of infrared light by water-sediment mixtures. This instrument was evaluated for its ability to measure concentrations of sediment in water-sediment mixtures.

A Micromeritics SediGraph 5000D was procured for the particle-size analysis of sediment. Analytical determinations from this instrument will be compared with determinations from the standard pipet method pertinent to measurement accuracy and analytical costs.

The Instrument Development Laboratory at HIF is working with Districts and the Interagency Sedimentation Project to evaluate the instrumentation mentioned above. Reports will be given by the following individuals:

- (1) Bill Matthes of the Iowa District will report on the work they are doing with the Micromeritics SediGraph.
- (2) Dave Marshall of the New Mexico District will report on their progress to date on operating the Markland Ultrasonic Suspended-Solids Meter.
- (3) Dallas Childers of the Vancouver, Washington, Subdistrict will report on their application of the Markland Ultrasonic Suspended-Solids Meter.
- (4) Gerry Goddard of the Wisconsin District will discuss characteristics of the site at which the Dynatrol is planned to be installed, and
- (5) John Skinner of the Federal Intra-Agency Sedimentation Project will discuss the Dynatrol.

(Note: Selected Summaries of these presentations are included in this report.)

PROGRESS REPORT ON TESTING OF THE SEDIGRAPH PARTICLE SIZE ANALYZER

by Bill Matthes

A Sedigraph model 5000D manufactured by Micromeritics Instrument Corporation was purchased by the Hydrologic Instrument Facility and assigned to the Iowa District for testing the potential of the unit as an alternate to the pipet method.

The Sedigraph measures the sedimentation rate of particles dispersed in a liquid, which range in size from 100 to 1 microns. The instrument determines, by means of a finely columnated beam of x-rays, the concentration of particles remaining at decreasing sedimentation depths as a function of time. Analysis time is further reduced by continuously moving the sedimentation cell so that the effective sedimentation depth is inversely related to the elapsed time. A built-in solid-state computer solves Stoke's law and synchronizes the cell movement with the equivalent spherical diameter on the x-axis of the recorder, corresponding to the elapsed time and instantaneous depth. The logarithm of the difference in transmitted x-ray intensity is electronically generated, scaled, and plotted linearly as a "Cumulative Mass Percent" on the y-axis.

The experiments utilized for the testing procedure were designed to supply information on the degree of operator training, time of analysis, effects of varying concentration on analysis, reproducibility of results, effects of changing cells, and comparison of results with the pipet method.

The materials utilized during the instrument evaluation consisted of seven fluvial sediment samples from various sites around the country. (DeLaney and Shroder, 1979).

Operator training--The training of qualified operators for the Sedigraph is less demanding and not as critical as for the traditional pipet method. About 40 hours of on-the-job training would be sufficient to bring prospective operators to a level of acceptable competence.

Time comparison--Sample preparation time for either the pipet or Sedigraph methods is the same. The time of analysis per sample is 20 minutes for the Sedigraph and approximately 40 minutes for the pipet in the range of 62 to 2 microns. One operator and one unit could analyze approximately 3500 prepared samples per year.

Effect of varying concentration--The concentration of the sample does not have to be ascertained previous to the analysis. Rather, the sample is diluted until the concentration is such that it meets the operational limits. The effects of varying sample concentration tested by starting with a very turbid solution and diluting with 10 ml diluted dispersing agent after each run. Negligible differences were noted between runs.

Reproducibility--A minimum of two analyses were obtained on each sample and nearly identical results were obtained on most samples with as many as eight repetitions.

Effect of interchanging cells--During normal operation, cell windows will have to be replaced for various reasons. Results indicated no significant differences using two different cells.

Comparison of results--In general the best agreement between methods was obtained for samples having 50 to 60 percent of the material finer than 1 micron. For samples having a more uniform distribution of particle sizes the results are acceptable, the largest differences were noted in samples containing 65 to 70 percent material larger than 10 micron. These differences are significant and work is still being done to resolve this discrepancy.

As a choice for an alternate method, the Sedigraph's utilization will depend largely on its reliability, availability, reproducibility, and comparability with other methods. With the exception noted, the Sedigraph appears initially to fulfill these criteria adequately.

REFERENCES

- DeLaney, B. M., and Schroder, L. J., 1979, Preparation of Reference Material for Particle-Size Analysis of Silts and Clays: U.S. Geological Survey Open File Report 79-1590.
- Weaver, A. V., Grobler, D. C., 1983, An Evaluation of the Sedigraph as a Standard Method of Sediment Particle Size Analysis: Water South Africa, v. 7.
- Shahvar, Zoreh, 1978, Particle Size Analysis: Effect of method, sediment concentration, and dispersing agent on measured size distribution: Masters Thesis, Iowa State University.
- Schiebe, F. R., Welch, N. H., Cooper, L. R., 1981, Measuring of fine silt and clay size distributions: American Society of Agricultural Engineers Paper 81-2042, summer meeting, June 1981.
- Micromeritics, 1982, "Instruction Manual" Sedigraph 5000D Particle Size Analyzer (with X-ray shutter), MIC p/N: 500/42804/00, June 29, 1982.

INSTRUMENTATION FOR AUTOMATICALLY MONITORING SEDIMENT CONCENTRATION AND PARTICLE SIZE - A PROGRESS REPORT

by Gerald Goddard

Description of Willow Creek Storm Sewer Basin - Madison, Wisconsin - Dynatrol Test Site

The Willow Creek storm sewer basin is located in the west-central part of the city of Madison, Wisconsin. The gaging station was operated in cooperation with the city of Madison and the Dane County Regional Planning Commission to determine the nutrient, sediment, and water loadings to Lake Mendota. Continuous discharge and water-quality data have been collected since October 1973.

Willow Creek drains an area of 3.15 mi² of which about 30 percent is impervious area. The basin is primarily residential with some small areas of commercial development and is considered fully developed. The drainage network consists of variously sized, enclosed storm sewers along with natural and concrete-lined open channels.

The gaging station is located about 200 ft downstream of the storm-sewer outlet along a dredged-open channel. The control at the station consists of a 6-ft wide Parshall flume installed in a broad-crested concrete weir. Over 9 years of record, the maximum observed instantaneous discharge was 754 ft³/s and minimum observed instantaneous discharge was 0.01 ft³/s. The average discharge was 2.38 ft³/s. Willow Creek is very flashy in regard to discharge, as is typical of urban streams and storm sewers. The stage can change up to 4 ft within 15 to 20 minutes which corresponds to a change in discharge of about 750 ft³/s.

Suspended-sediment samples have been collected since October 1974 using a U.S. PS-69 automatic point sampler. Suspended-sediment concentrations have ranged from less than 10 mg/L to a maximum of 5,450 mg/L. The maximum daily load was 319 tons. Annual suspected-sediment yields ranged from 80 to 293 tons/mi². Rapid changes in sediment concentrations of 2,000 to 3,000 mg/L can occur within 15 to 20 minutes. This will provide a good test of the response time of the Dynatrol in monitoring changing sediment concentrations. Dynatrol will also be evaluated with regard to its response to particle size. Particle size of the suspended sediment at the gaging station is mostly in the silt-clay size range. The amount of silt size particles in the samples ranged from 15 to 78 percent; the clay size particles ranged from 21 to 72 percent; and the sand size particles ranged from 1 to 74 percent.

The Dynatrol will be tested to see how closely it monitors sediment concentrations throughout a storm event. To check the accuracy of the Dynatrol, samples collected at the outlet of the unit will be analyzed for sediment concentration, dissolved solids, and specific conductance. Sieve analyses will also be made. Temperature and specific conductance will be recorded using a minimonitor.

The variation in discharge and sediment concentration at this site should provide a wide variety of situations to evaluate the Dynatrol. Storms varying in rainfall amount and intensity are relatively frequent under normal conditions. This site is also located within one-half mile of the Wisconsin District office so close surveillance and frequent inspections are possible.

DETERMINING SEDIMENT CONCENTRATION WITH A FLUID-DENSITY CELL

by J. V. Skinner

The combination of a commercial density cell and a special electronic circuit shows considerable promise as a sediment-concentration meter. The cell consists of a U-shaped tube that is attached to an electromagnetic vibrator and a water-sampling pump. As sediment particles move through the tube, they are forced to vibrate and thereby increase the mass of the oscillating system. As the sediment concentration increases, the vibrational period also increases.

The electronic circuit performs three functions: it sustains the vibration of the tube, accurately measures the vibrational period, and digitally displays the measurement after a preset time interval.

The relation between concentration and vibrational period has been established in a series of laboratory tests. Results indicate that for accurate measurements, the period reading must be corrected for water temperature and dissolved solids.

MONITORING STREAMBED CHANGES AND SEDIMENT CONCENTRATIONS USING THE ACOUSTIC VELOCITY METER

by Antonius Laenen*

Acoustic velocity metering (AVM) systems have been operational tools for the measurement of streamflow since 1965 (Laenen and Smith, 1982). These systems measure the traveltime of a sonic pulse transmitted diagonally across a stream in both directions to determine stream velocity along an acoustic path. This paper points out some acoustic applications that may be useful in the measurement of sediment and its transport and describes our experiences with the AVM system.

The measurement of stream depth by acoustic means is certainly not new. Fathometers are used routinely by U.S. Geological Survey field personnel to define stream bottom profiles. This device uses a single transducer to transmit an acoustic pulse to a reflecting surface (stream bottom) and then time the backscattered signal to obtain a measurement of depth. A subbottom profiler is another widely used device. Profilers are useful in locating well-defined surfaces beneath less-consolidated bottom material. This device uses a trailing hydrophone to listen for reflected signals originating from a source some lateral distance away.

An AVM system uses only the direct signal between transducers to define the velocity component of the moving water between. In addition, signals are also reflected from the streambed, and these (if monitored indirectly by oscilloscope) can be used to measure streambed changes in the vicinity midway between transducers. These phenomena have been documented by Laenen (1983) and verified on the Cowlitz River in Washington by oscilloscope photography. This study showed that depths measured by scaling signal times off oscilloscope photos were within 0.3 ft of sounded depths and that this point measure was a good index for the cross section. AVM systems presently used do not recognize reflected signals, and other signal-recognition techniques need to be explored before an AVM could monitor reflected signals automatically. Signal-correlation analysis, yet to be tried in stream-based acoustic systems, is the most likely method now available to make measurement by acoustic reflection a viable tool.

The measurement of sediment concentration by ultrasonic means is also not a new idea. Physical equations defining the relation of signal attenuation to particle size and concentration were derived in the early 1940's. A Water Resources Division Bulletin article by G. H. Flammer (1962) concludes with remark "the (ultrasonic) method for determining sediment size and concentration seems adaptable to continuously recording and automatic field installations."

The acoustic attenuation of signals propagated in the stream determines how well an AVM system will operate. Signal strength is affected by the particulate matter present in the acoustic media, and signal attenuation experienced in normal AVM operation may be a reasonable indicator of the relative magnitude of the sediment concentration along the acoustic path.

*This paper was not presented at the Seminar.

Equations by Urick (1967) indicate that significant signal attenuation should occur for the frequencies and the path lengths used in AVM systems, with enough attenuation to provide information regarding sediment concentration. Oscilloscope photographs of signals from AVM systems now in use indicate this is indeed so.

To date, there has been no formal study to document the effect of sediment concentration on signal attenuation in existing AVM systems. Equipment has been designed and built to record changes in signal strength, and a program should be initiated to verify if a relation between this signal strength and sediment concentration is a reasonable approach.

The speed at which the acoustic signal travels in a stream is affected by the density of the water-sediment mixture. If temperature and specific conductance are known and density gradients do not bend the acoustic signal significantly, then relative density changes will be indicated by the changing traveltime of the acoustic pulse. The accuracy and practicality of this scheme has yet to be tested; however, noticeable changes in speed of sound and associated sediment concentrations have been documented. Problems incurred in this approach to the measurement of sediment concentration, include the derivation of a modulus of elasticity value for the water-sediment mixture. Definition of modulus values could entail a difficult and involved laboratory analysis.

REFERENCES

- Flammer, G. H., 1962, Ultrasonic measurement of suspended sediment: U.S. Geological Survey Bulletin 1141-A, 48 p.
- Laenen, A., 1983, Measuring water surface and streambed elevation changes with the acoustic measuring system: American Geophysical Union, Water Resources Research, v. 19, no. 5, p. 1317-1322.
- Laenen, A., and Smith, W., 1982, Acoustic systems for the measurement of streamflow: U.S. Geological Survey Water-Supply Paper 2213, 26 p.
- Urick, R. J., 1967, "Principles of Underwater Sound," 2d edition: McGraw-Hill, p. 384.

MUD AND DEBRIS FLOWS

GEOBOTANICAL EVIDENCE OF DEBRIS FLOWS ON MOUNT SHASTA, CALIFORNIA

by C. R. Hupp and W. R. Osterkamp

Geobotanical data, including increment cores and cross sections from trees growing on and near debris-flow deposits, were collected in the vicinity of Mount Shasta during July of 1982 and 1983. Evidence of debris flows is common in the valley sections along most streams draining Mount Shasta, especially those which head at an alpine glacier. This evidence usually appears as depositional terraces at levels above the present stream channel. In some cases, past debris flows have degraded the valley section and were deposited further downstream. Debris flows either destroy or damage the vegetation in or near their paths but nearly all surfaces created by debris flows now sustain reestablished woody vegetation. Recent surfaces along six streams have been dated dendrochronologically to provide magnitude and frequency information of debris-flow activity in the vicinity of Mount Shasta. Floods and debris flows can have various effects on woody vegetation, including partly felling trees, scarring stems, and creating bare areas where seedlings can become established. The effects are recorded in the wood, and the age of the geomorphic event is measured in years by the annual growth increments.

Trees that survive a debris flow provide highly accurate dates. Effects of a debris flow are manifested in several ways, usually as deformation of the stem or wood anatomy. These deformations are of four basic types (fig. 2): (1) eccentric annual growth, (2) suppression and release sequences, (3) adventitious sprouting along the parent trunk, and (4) corrosion of the stems by debris transported in the debris flow. The analysis of cross-dated cores and cross sections of stems bearing one or more of these deformations ultimately yields a date for a particular event. All of these lines of evidence were employed for debris-flow dating at Mount Shasta. In areas where a debris flow removed vegetation, a minimum age was obtained by dating the reestablished trees. Often the age structure of the tree stands on terraces indicated the trees began growing shortly after the deposition.

Whitney-Bolam, Ash, and Mud Creeks were the most intensively studied drainages (fig. 3). Study sites were selected to facilitate determination of downvalley extent of any particular debris flow. Field routine consisted of: (1) determination of depositional terraces, through ground traverses, topographic maps, and aerial photography; (2) removal of increment cores, cross sections, and wedges from trees growing on or near the debris-flow terraces using increment borers and hand saws; and (3) analysis of wood samples for age and ring pattern.

Trees selected for dendrochronological analysis were either growing on a terrace with their root flare indicating germination after surface deposition or bore obvious deformation indicative of debris-flow damage, or both. Detailed field notes were taken which described the character and location of debris-flow terraces, the location and type of botanical evidence for each tree sampled, and field date of the debris flow (when possible). About 425 trees were analyzed. Results of tree-ring analyses are summarized in tables 2, 3, and 4.

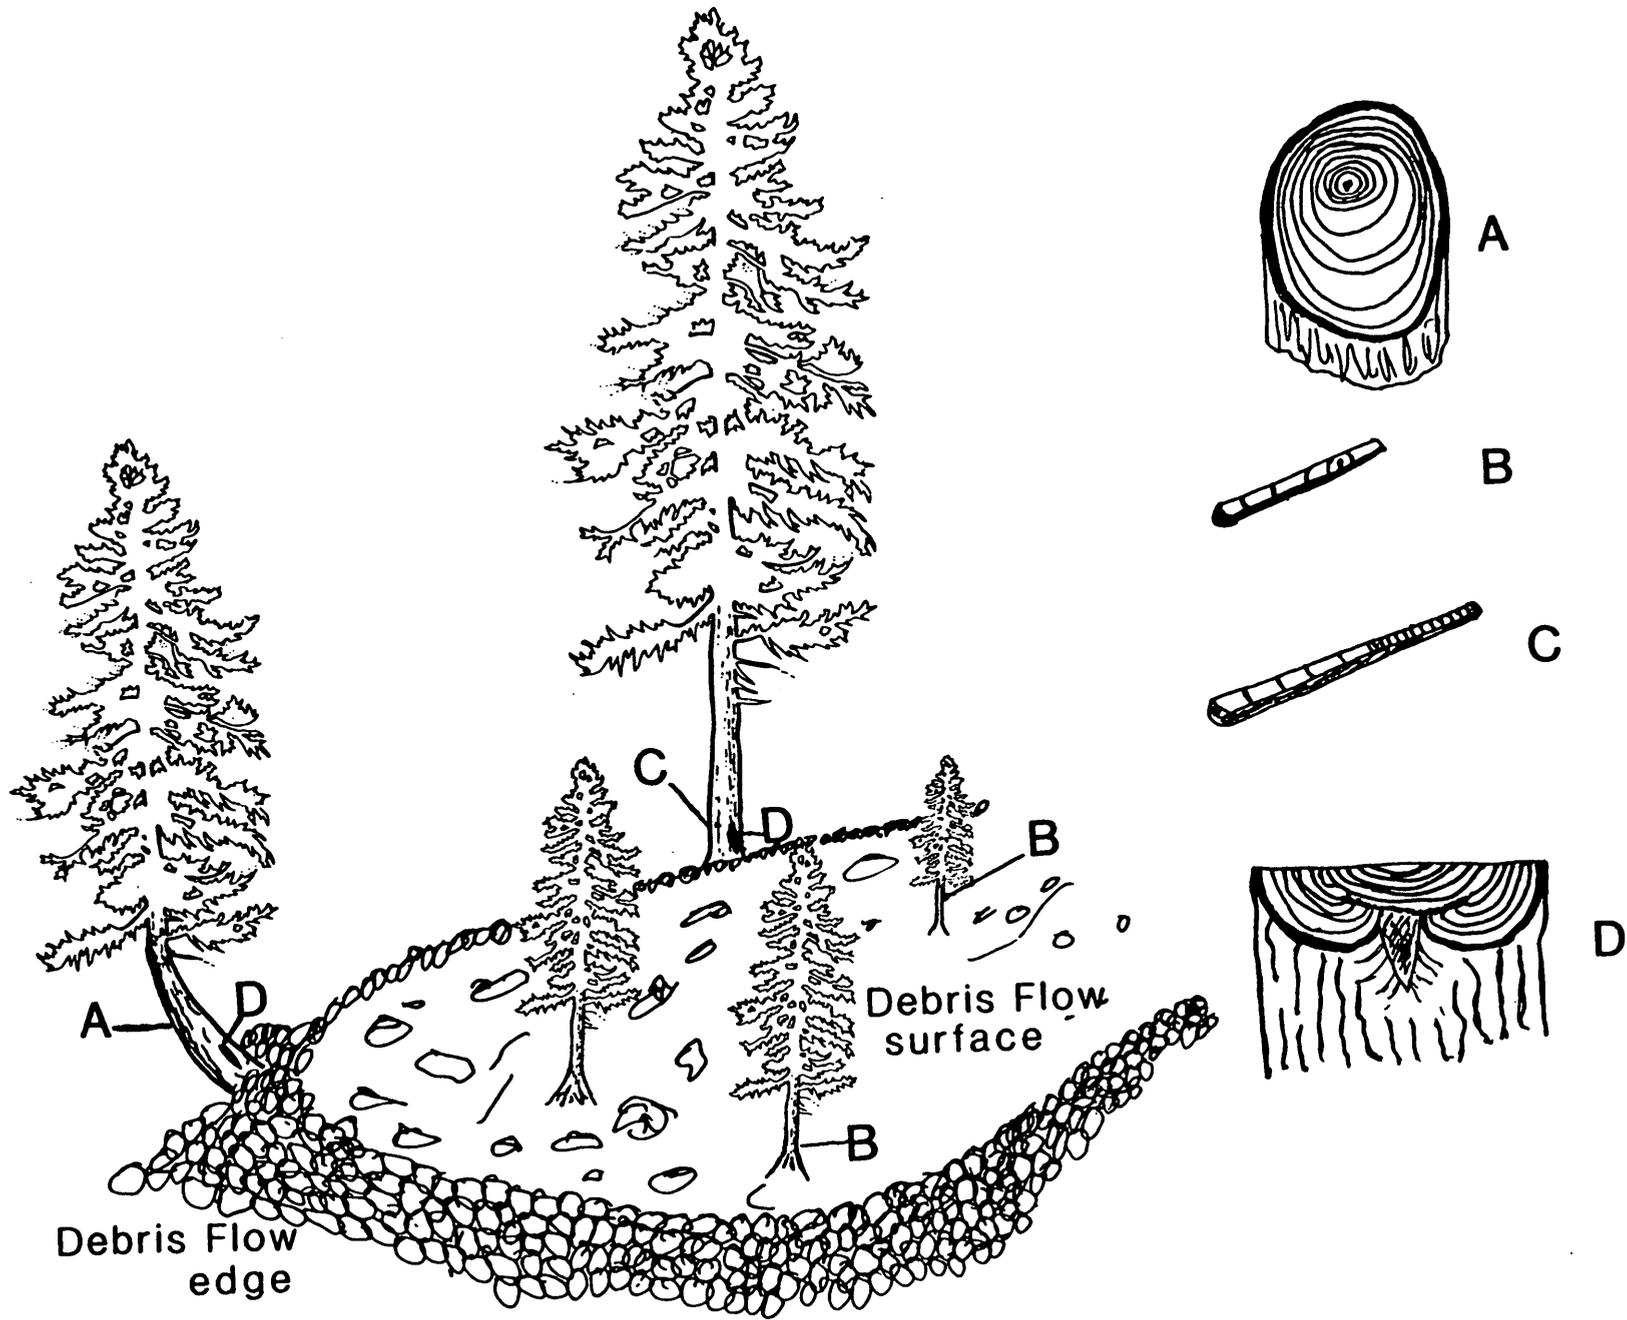


Figure 2.--Types of botanical evidence of debris flow.

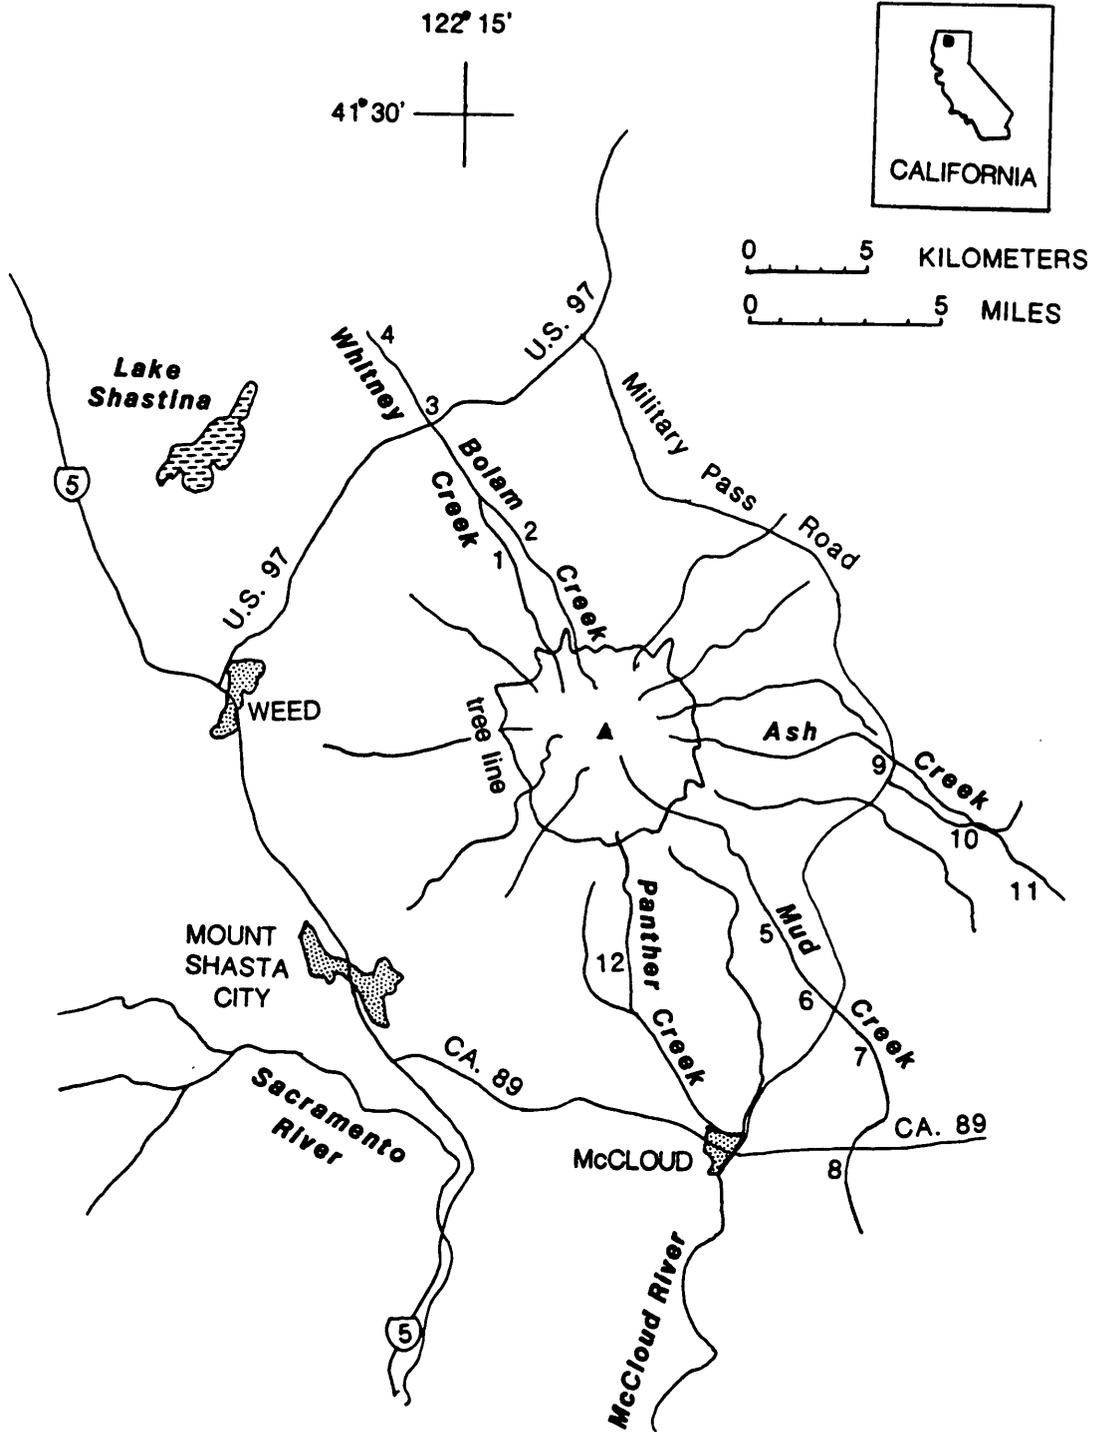


Figure 3.--Study areas on Mount Shasta, California.

Table 2.--Summary of debris flow dates on [Upper] Whitney Creek and Bolam Creek

Event	Sites			
	Upper Whitney Creek	Bolam Creek	Whitney Creek Below US 97	Whitney Creek on Juniper Flats
A		1974		
B			1962(f)	
C		*1952		1952
D	1935	1935	*1935(h)	*1935(h)
E		1924(f)		
F	1840			*1840
G			1790	
H	1670	*1670		

- A - Tree age, ring anomalies
- B - Tree age
- C - Tree age, corrasion scar
- D - Tree age, ring anomalies, corrasion scars
- E - Corrasion scars
- F - Tree age, ring anomalies, corrasion scars
- G - Tree age
- H - Tree age
- (f) - Probably a flood, not debris flow
- (h) - Historically documented
- * - Site of major deposition for event, when occurring at more than one site

Table 3.--Summary of debris flow dates on Mud Creek, California

Event	Damsite	Pipeline	RD 13	CA 89
A	1977	*1977		
B		*1974	1974	1974
C			1967(f)	1967(f)
D	1964	*1964		
E		1962		
F			1950	
G	1924	1924(h)	*1924(h)	*1924(h)
H		1910		
I	1881		1881(h)	*1881(h)
J	1800	*1800		

- A - Tree age, ring anomalies, corrasion scar
- B - Tree age, ring anomalies
- C - Adventitious sprouts from a flood (no debris flow), tree age
- D - Tree age
- E - Tree age, corrasion scars
- F - Tree age
- G - Tree age, corrasion scars
- H - Tree age, corrasion scars
- I - Tree age, ring anomalies
- J - Tree age
- (f) - Probably a flood, not debris flow
- (h) - Historically documented
- * - Site of major deposition for event, when occurring at more than one site

Table 4.--Summary of debris flow dates on Ash Creek, California

Sites			
Event	Upper Ash Creek	Military Pass Ford	Old Mill Site
A	*1977(h)	1977	
B	*1962	1962	1962
C	1939	1939	
D		1900	*1900
E	1800	1800	*1800
F		1725	*1725

- A - Tree age, corrasion scars
- B - Tree age, ring anomalies, corrasion scars
- C - Tree age, ring anomalies, corrasion scars
- D - Tree age, ring anomalies
- E - Tree age
- F - Tree age
- (h) - Historically documented
- * - Site of major deposition for event, when occurring at more than one site

Most dendrochronologically datable debris-flow terraces occur relatively low in the valley section. Usually two or three terraces were found below the major stream incisement at all sampling sites. An example of this is shown in Figure 4, a representative cross section of Ash Creek. As a rule, recent small debris flows were identified at high elevations on the mountain and (or) low in the valley section; large debris flows were usually identified at low elevations and (or) high in the valley section (fig 4). Evidence of old small debris flows is rare, probably owing to the likelihood of being washed out by subsequent larger debris flows. Much evidence suggests cyclic scour and fill sequences along given reaches. Recent debris flows which can be traced downvalley indicate a fining of the clasts downslope, from very coarse lahars to hyperconcentrated floods.

Tree-ring dating was useful for dating surfaces as old as 500 years. However, considerable geomorphic and stratigraphic data indicate many debris flows that are much older. These data have not been thoroughly analyzed yet but the literature has shown that a widespread pyroclastic deposit is about 9200 years old. This deposit is distinctive and was used as a marker bed for relative ages of older deposits and as an indicator of areas with no recent debris-flow activity. Exposures of debris-flow stratigraphy, especially in cut banks, indicate periodic large events both prior and since the pyroclastic deposit. The unsorted to reverse grading which may be typical of debris-flow deposits can be seen in these exposures.

Recent and ancient debris flows on Mount Shasta represent a major surficial geomorphic agent. These flows, along streams and down valley, may be the most significant geomorphic process and have contributed to the formation of large alluvial fans. Dendrochronologic and stratigraphic analyses may allow for estimation of the magnitude and frequency of debris flows on Mount Shasta.

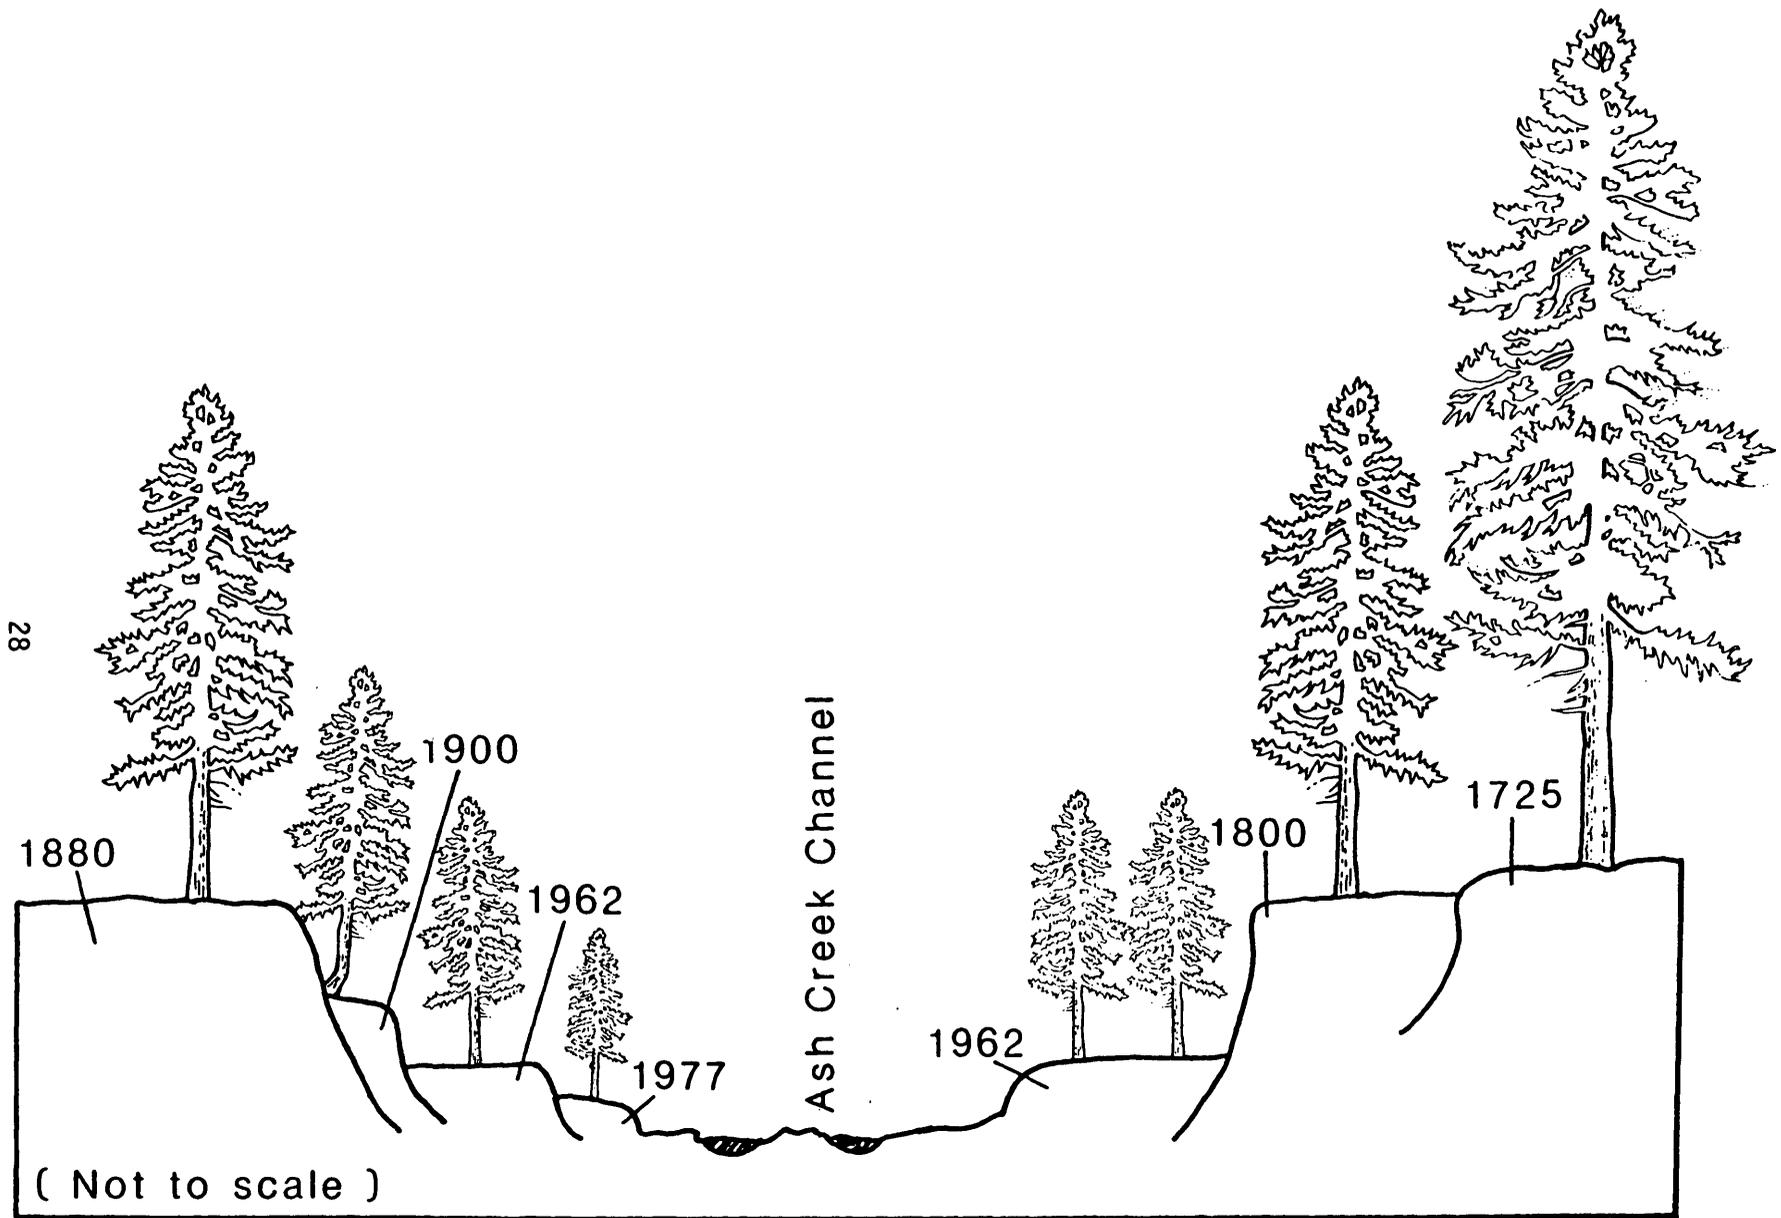


Figure 4.--Representative cross section of Asn Creek near Military Pass, California.

DOWNSTREAM DILUTION OF LAHARS FROM MOUNT ST. HELENS:
DEFINING THE BOUNDARY BETWEEN DEBRIS FLOW AND HYPERCONCENTRATED STREAMFLOW

by T. C. Pierson and K. M. Scott

Mudflows and debris flows (collectively termed lahars in volcanic terrain) behave as non-Newtonian fluids. Hyperconcentrated streamflow, on the other hand, is thought to behave as a Newtonian fluid. Although the transition from one type of fluid to the other has significant implications for the mechanics of flow and sediment transport, the sediment concentration boundary separating them has only been arbitrarily defined. Several lahars occurring at Mount St. Helens since the catastrophic eruption on May 18, 1980, have transformed from debris flow to hyperconcentrated streamflow. These flows provided the opportunity to describe the change in flow properties as the boundary was crossed, and to correlate changes in character of the deposits with this transition.

An explosive eruption on March 19, 1982, caused nearly instantaneous melting of a large volume of snow in the Mount St. Helens crater. Subsequently, a flood of roughly 3200 acre feet of water and hot volcanic ejecta cascaded down the north flank of the volcano, eroding and incorporating enough additional rock debris into the flow to transform it into a debris flow within 1.2 miles of the crater breach. This lahar, with an initial peak discharge estimated to be in excess of 490,000 ft³/s, entered the North Fork Toutle River and flowed 17 miles downstream (moving in two surges) as a coherent debris flow slurry. Flow velocities, computed from superelevation in bends, ranged between 13 and 30 ft/s. Sediment concentrations of peak flow deposits were experimentally determined from reconstituted samples and showed a progressive downstream decrease from about 90 to 79 percent by weight. The deposits, which remained liquefied for more than a day, were typical of debris flow deposits: poor sorting ($\sigma = 2.0$ to 5.0 phi units), lack of stratification within depositional units, matrix-supported clasts rather than openwork structure, and relatively low silt and clay contents (7 to 15 percent by weight).

Between 17 and 25 miles downstream from the crater, the character of the deposits changed progressively to a lahar-runout facies, consisting of poorly stratified, moderately well sorted ($\sigma = 1.1 - 1.6$ phi units) beds of non-cohesive, openwork sand (predominantly coarse) with occasional lenses of pumice gravel. These beds commonly exhibited both normal and reverse grading. At four gaging and observation stations located 30, 36, 45, and 50 miles downstream, observers noted that the flow was no longer a coherent slurry, but rather sand suspended in muddy water--hyperconcentrated streamflow. Grab samples, observed deposition of coarse sand (deposits drained immediately), and formation of 8 ft high standing waves confirmed a change in fluid properties. Progressive downstream changes at peak flow were observed (with respect to stations mentioned above) in suspended sediment concentration (-, 71, 67, and 61 percent by weight), discharge (34000, -, 23,000, and 16,000 ft³/s), and temperature (16.5, -, 12.5, and 10.8°C). Mean velocity did not change significantly; it remained between 13 and 20 ft/s. The sedimentology and stratigraphy of deposits from the May 18, 1980, South Fork Toutle River lahar and deposits from several prehistoric lahars in the Toutle River valley show trends very similar to those of the March 19, 1982, deposits.

Dilution of the debris flow by deposition of coarser particles and incorporation of additional water from the river resulted in the transition from a one-phase slurry (trapped pore water transported within a framework of particles) to a two-phase hyperconcentrated fluid (coarser particles freely suspended in a mixture of water and fines). For the March 19, 1982, lahar, this sediment concentration threshold was crossed at between 76 and 79 wt. percent solids. Samples from the recessional limb of the May 18, 1980, North Fork Toutle River Lahar indicate that the threshold for that lahar (mudflow) was bracketed between 72 and 84 wt. percent solids. This boundary is, however, dependent on particle-size distribution of the slurry. Past experimental work has indicated that silt- or clay-rich mixtures make the transition at considerably lower sediment concentrations.

STREAM CHANNEL ADJUSTMENTS TO 1980 LAHARS AND SUBSEQUENT STORMFLOW, MOUNT ST. HELENS

by Holly A. Martinson and David F. Meyer

The South Fork Toutle River, flowing west from Mount St. Helens, and Pine Creek, flowing southeast, are two river systems altered by lahars generated during the May 18, 1980, eruption. During water years 1980-82, the volume of sediment eroded or deposited by fluvial processes has been comparable to or greater than volumes eroded or deposited at channel cross sections by the May 18, 1980, lahars. Reaches of comparable slope have adjusted similarly, although the magnitude of storage changes has not been proportional to discharge, nor have trends or patterns of adjustments persisted through time. These large-scale changes reflect the response of disturbed channels to the statistically large streamflows that have occurred since the eruption.

The largest changes in sediment storage occurred during water year 1981 at all measured sections. This is in part due to ubiquitous lateral instability and pervasive widening by channels by 30 feet or more during water year 1981 (fig. 5). The additional downcutting of channel incisions in the steep, uppermost reaches caused a net loss of sediment from storage. For example, in upper Pine Creek, cross-sectional area at surveyed sites increased by 790 to 2600 ft². In moderate-slope reaches, area changes of as much as 750 ft² reflected net storage losses or gains. Channel aggradation dominated at these sites, but erosion of higher terraces and the valley walls contributed to a net loss of sediment in storage measured at about half the sites. In low-slope reaches of the South Fork Toutle the channel incised, but increases in cross-sectional area of as much as 5,400 ft² were mainly caused by increases in channel width.

During water year 1982, changes in storage averaged one-fifth the magnitude of changes during water year 1981, and the pattern of response commonly was reversed (fig. 6). Eighty percent of measured cross sections in the high slope reaches of upper Pine Creek filled, with a net gain in storage. Channels incised at 90 percent of the measured sections in moderate slope reaches (lower Pine Creek and middle South Fork Toutle River), lowering the bed by as much as 5 feet, and causing a net loss of storage. Widening was negligible at Pine Creek, except near the mouth, but continued as a dominant process in the middle reaches of the South Fork Toutle. The channel aggraded and widened in the low-slope reaches of the lower South Fork Toutle.

Therefore, high flows caused by storms of water year 1981 had a "first flush" effect. Subsequent discharge of comparable magnitude during water year 1982 did not have proportional effects on the channels. At some sites, the largest changes in storage occurred during high flows caused by the first significant storm of water year 1981.

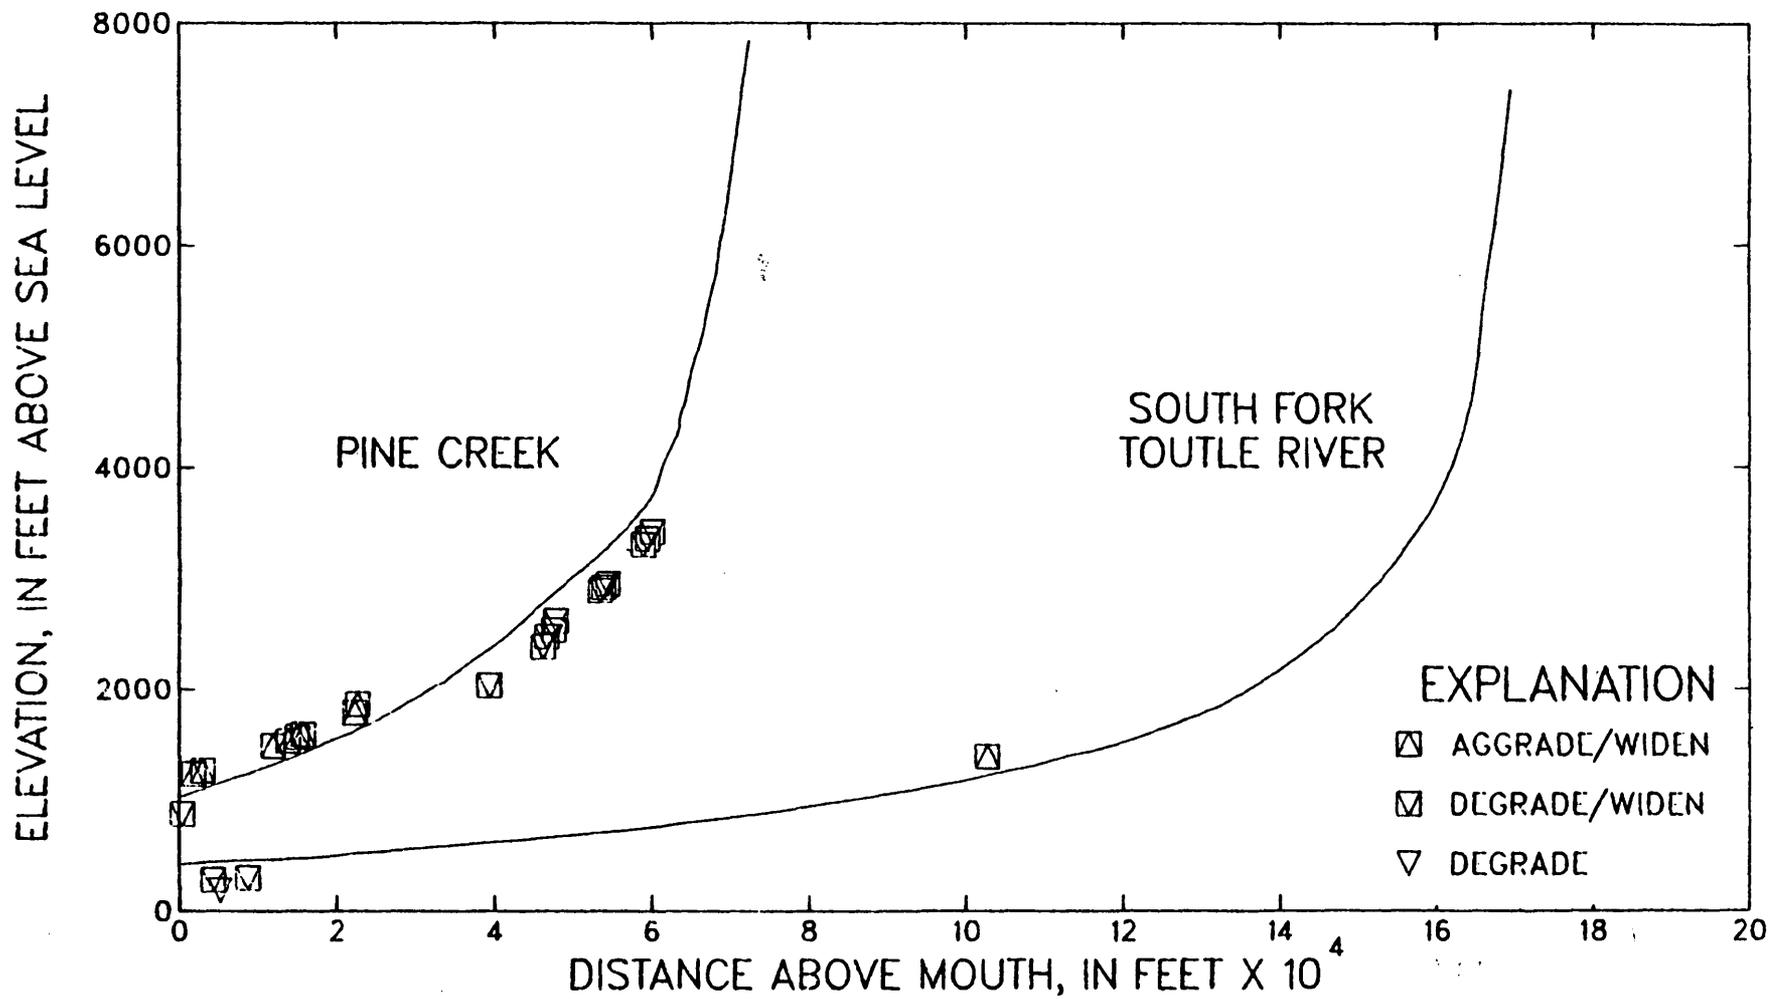


Figure 5.--Dominant fluvial processes, Pine Creek and South Fork Toutle River, 1980-81.

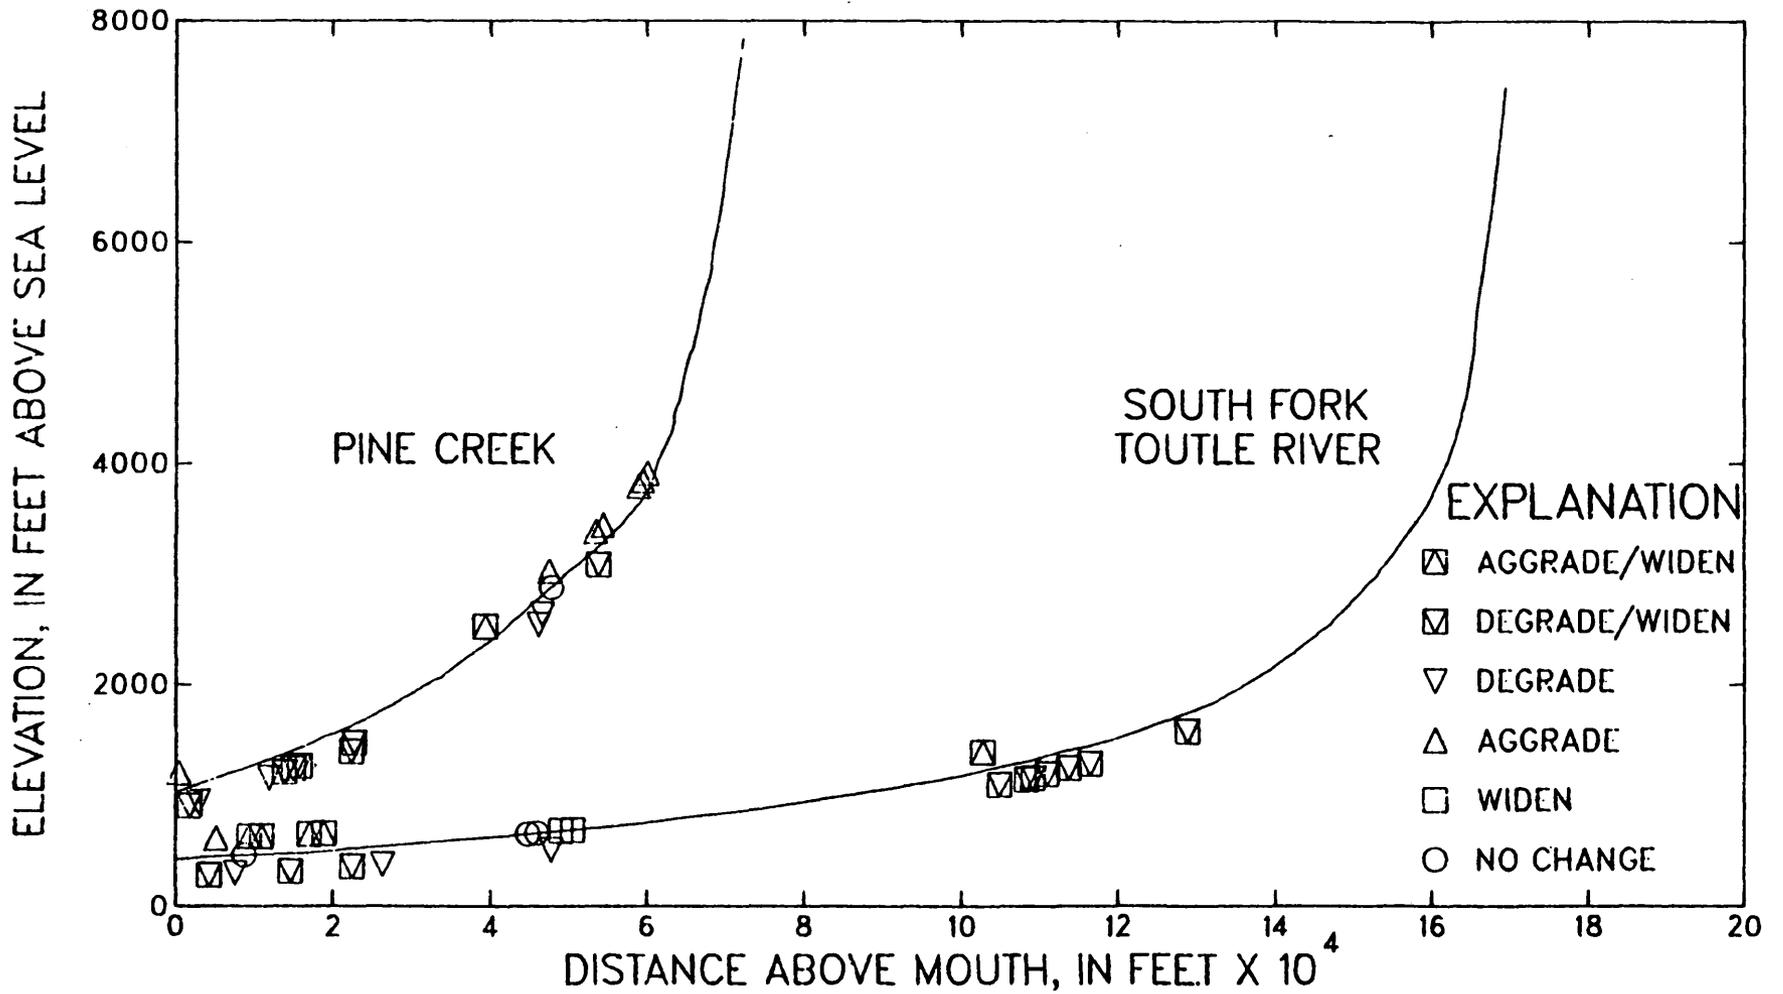


Figure 6.--Dominant fluvial processes, Pine Creek and South Fork Toutle River, 1981-82.

EROSIONAL DEVELOPMENT OF THE NORTH FORK TOUTLE DEBRIS AVALANCHE DEPOSIT

by David F. Meyer and Richard J. Janda

In 3 years following the May 18, 1980, eruption of Mount St. Helens, the chaotic, hummocky topography of the massive debris avalanche deposit in the North Fork Toutle River has been significantly altered by mass wasting and fluvial processes. This deposit initially covered about 23 mi² with an average of 150 feet of poorly sorted, low cohesion, primarily sand-size debris. Three major and nine minor tributaries were impounded by the avalanche deposit, and numerous closed depressions existed on its surface. For erosion to proceed, a through-flowing drainage had to develop.

Erosional development of each area on the avalanche deposit involves a four-step sequence of events: (1) drainage integration by fill and spill of closed depressions (fig. 7), (2) channel incision and extension, (3) channel widening, and (4) alternating scour and fill. However, even reaches experiencing aggradation show a net decrease in sediment storage because bank erosion more than compensates for aggradation on the bed. These processes deliver annually 2-3 x 10⁷ tons of suspended sediment and a large but as yet unquantified amount of bed load to the North Fork Toutle River. This extreme load creates major sediment-management problems along the lower Toutle and Cowlitz Rivers.

Drainage integration was initiated by lahars generated by compaction, dewatering, and possibly liquefaction of the avalanche deposit during the morning and afternoon of May 18, 1980. Further integration proceeded quickly because areas on and upstream from the avalanche deposit receive 60 to 130 inches of precipitation annually. Surface runoff and ground-water seepage filled depressions, causing breaching and cutting of incipient channels. Breach flows surged downstream, sometimes as debris flows, until contained in larger depressions. The first significant discharge from the avalanche deposit to the North Fork Toutle River occurred on August 27, 1980, when a 284 acre-foot lake near Elk Rock (10 miles northwest of the crater, and 5 miles upstream of the distal end of the avalanche) breached, generating a peak flow of about 16,000 ft³/s. Some breaches were caused by eroding away earthen impoundments rather than the fill-spill process. The largest breach of this type occurred on February 20, 1982, when the North Fork Toutle River breached the impoundment of Jackson Creek Lake, releasing about 2000 acre feet of water. In addition to natural breaches, 37.9 mi² of drainage integration was brought about by constructing controlled outlets to South Fork Castle, Coldwater, and Spirit Lakes. Spillways were constructed at the first two lakes during summer of 1981, and a pumping scheme was installed at Spirit Lake in autumn 1982.

Streams resulting from initial drainage integration quickly eroded deep narrow channels because of the generally steep (0.008-0.055) initial slope and the readily erodible character of the avalanche deposit. New channels commonly incised 16 feet or more in response to breaching flows and storm runoff early in water year 1981.

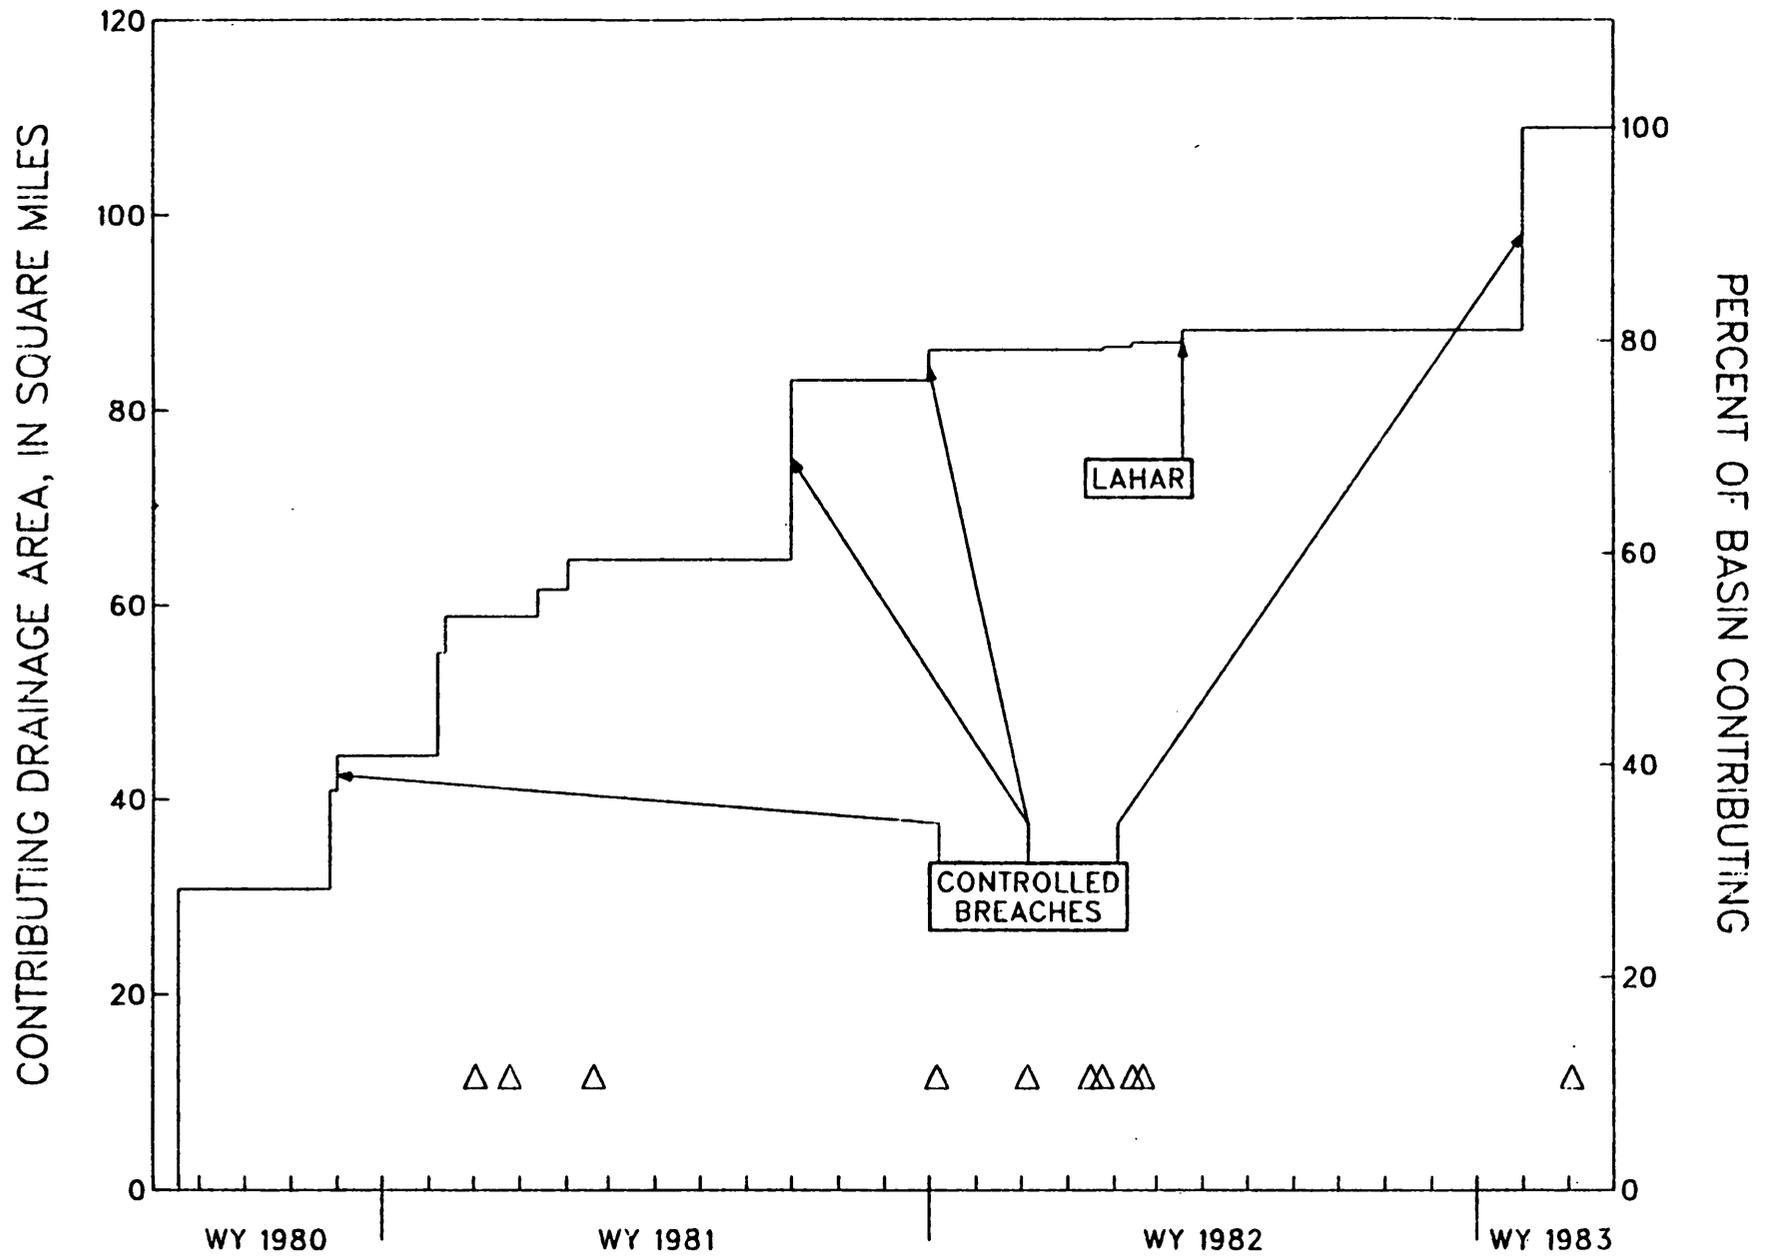


Figure 7.--Drainage integration, with time, of the upper North Fork Toutle River basin, above the N-1 debris retention structure.

During the last three quarters of water year 1981, marked incision occurred only upstream of Elk Rock. Nearly all sediment eroded from incising reaches was carried through the Elk Rock reach to and beyond the distal end of the avalanche deposit. Channel widths in both incising and poised reaches commonly increased by about 100 percent. Bank erosion caused relatively dry debris slides and avalanches as well as occasional slumps, but banks generally remained steep and straight. Storm runoff volumes, peak discharges, and sediment delivery were all low compared on a per unit of precipitation basis with events in water year 1982.

Channel response on the North Fork avalanche deposit was quite different in water year 1982 for at least three reasons. First, annual precipitation and storm intensities were greater than in water year 1981. Second, at least 20 mi² of drainage area was gained through episodic natural integration and construction of controlled exits for Coldwater and South Castle Lakes. Finally, an effluent ground-water table developed over much of the avalanche and greatly increased the banks susceptibility to slumping and flowing. In some tributaries, slumping of saturated debris generated debris flows that were observed to flow for as much as 1.2 miles. Higher peak discharges and increased sediment delivery caused massive channel widening (up to 180 feet in a single 2-day storm). Locally, width increased to the point that flow depths were insufficient to transport imposed sediment loads. Within the Elk Rock reach, net changes in thalweg elevation were minimal, although complex cut and fill sequences as much as 30 feet thick were evident following several storm periods. Even during periods of aggradation, channel widening in this reach eroded a greater volume of material than that deposited on the bed. Upstream and downstream of Elk Rock, large alluvial fans formed and considerable amounts of alluvium were placed in temporary storage.

Erosional development of the avalanche deposit has also been influenced by volcanically generated debris flows, the largest of which occurred March 19, 1982, during the initial explosive phase of a dome-building eruption. This flow integrated drainage from the crater and the Pumice Plain north of the mountain with the North Fork Toutle River and was responsible for the largest peak discharge from the upper North Fork Toutle River since May 18, 1980. Although this flow caused considerable erosion and deposition on the avalanche, it merely accentuated fluvial landforms developed during the preceding winter storms.

Despite these drastic changes in surface morphology, to date only about 5 percent of the original avalanche deposit has been eroded away. Thus, this unit is likely to cause persistent sediment management problems.

SEDIMENT TRANSPORT

EROSION AND LANDFORM MODIFICATION AT A LOW-LEVEL RADIOACTIVE WASTE DISPOSAL FACILITY NEAR SHEFFIELD, ILLINOIS

by John R. Gray

Erosion and other landform-modification processes are being studied at a 20-acre low-level radioactive waste disposal site near Sheffield, IL. The primary objective of the study, along with concurrent studies on the saturated and unsaturated ground-water resources at the site, is to develop a data base on site hydrology and surface stability to develop criteria for future waste site selection. The determination of rainfall-runoff and runoff-sediment transport relations, and the comparison of these relations to those obtained from a nearby undisturbed basin are specific study objectives.

Runoff and sediment discharges are monitored in three watersheds comprising two-thirds of the site area, and in a 2.7-acre watershed in undisturbed terrain 0.3 miles south of the site. The effects of slope and land use on infiltration, runoff, and sediment yield are being evaluated at four plots ranging in size from 110 to 118 ft², two on site and two on the undisturbed watershed. Three tipping-bucket and one weighing rain gage record the amount and intensity of precipitation. A micrometeorological station collects data for computing evapotranspiration. Land-surface altitudes are measured periodically at fixed locations onsite to quantify settling and compaction of fill materials. Photographs are taken periodically from reference points to provide for visual comparison of vegetative and surficial changes over time. Surveys of ground-cover density are also made as one variable affecting the relation between rainfall and runoff.

Preliminary results indicate that 34.6 inches of precipitation from July 1, 1982, through June 30, 1983, produced 9.1 inches of runoff from the site, compared to 2.0 inches of runoff from the undisturbed watershed. Evapotranspiration was computed to be 24.0 inches at the site for this period. The balance of 1.5 inches of water infiltrated the subsurface. Peak sediment concentrations of 54,000 milligrams per liter (mg/L) were measured in 1982 compared to 30,000 mg/L in 1981. The reduced concentrations followed the implementation of erosion control measures and the establishment of a 75-percent vegetative cover on the site. Site sediment yields are still significantly greater than yields from the undisturbed watershed. A 0.7-inch rain on July 21, 1982, for example, caused 0.4 ton of sediment-per-acre to be transported from a 3.26-acre area of the site, whereas no runoff resulted from the same storm at the undisturbed watershed. Analyses of samples for particle-size distributions show that silt- and clay-size particles comprise over 95 percent of the sediment load in the site. Slope appears to be a significant factor in the relation of rainfall to runoff and sediment transport in the undisturbed watershed. However, storm sediment yields obtained from plots of different slope on the site suggest the rainfall to runoff and sediment transport relations are less dependent on slope than on other factors, such as soil composition and compaction, or antecedent soil moisture conditions. Significant differences in runoff between plots and larger gaged watersheds have been observed; a 1.3-inch rain on June 29, 1983, induced 0.16 inch of

runoff from the combined gaged site area compared to 0.01 inch of runoff from a site plot with a 14-percent slope. Measurements of sediment deposited in an 84-ft³ stilling basin downstream from a gage indicate that less than 3 percent of total storm sediment discharge is retained in the stilling basin.

More than 110 collapse holes formed on the site from December 1978 through December 1982. Although most collapse holes were less than 10 feet in diameter, two exceeded 20 feet in width, and one was estimated to be 16 feet deep. Over 70 percent of the holes formed along the edges of waste disposal trenches.

A modified bubble gage measures stage at one station. The device uses a gas purge system to transmit the hydrostatic pressure over an orifice anchored in the hub of a crest-stage gage to a differential-port pressure transducer. The transducer attenuates a regulated voltage from a battery as a function of pressure differential between its sensing port and atmospheric pressure at its reference port. The voltage is recorded and converted to engineering units of stage by a data logger.

A dekaport divisor system was developed to obtain reliable data on runoff and sediment yields from plots (fig. 8). The system pumps runoff from a 5.3-gallon primary collecting vessel through a 10-port cone splitter housing, a subunit of a U.S. Geological Survey cone splitter. The cone splitter housing divides pumpage into 10 equal parts. Discharge from one port is retained in a 55-gallon auxillary collecting vessel for volumetric measurements and sample collection.

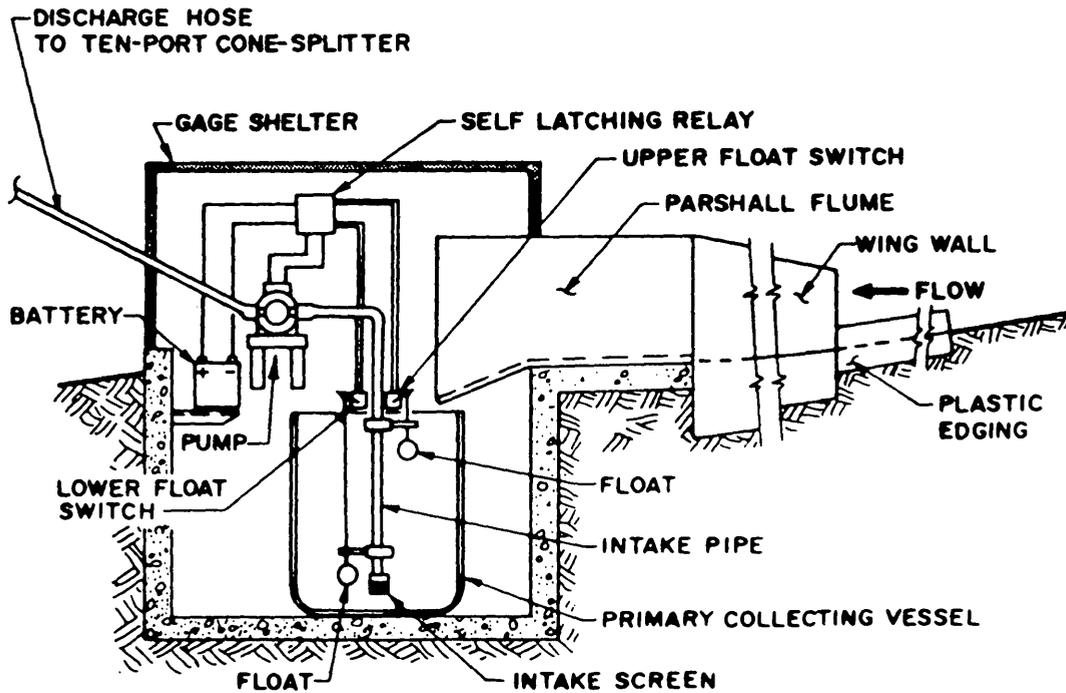
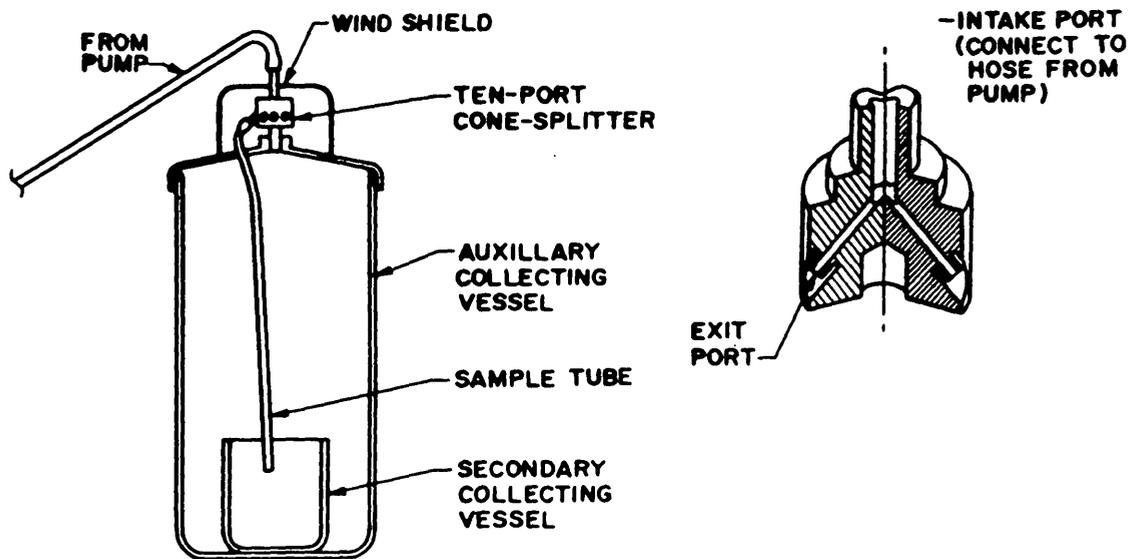


Figure 8.--Dekaport divisor system.

ESTIMATING LONG-TERM SEDIMENT DISCHARGE--WHICH METHOD TO USE?

by Thomas H. Yorke

The accuracy of various methods for estimating long-term suspended-sediment discharge was evaluated by comparing the discharge measured at a long-term daily sediment station with the discharge estimated by 16 different methods. The flow-duration, suspended-sediment transport curve procedure (Miller, 1951; Colby, 1956) was used as the basis for all the methods; the differences between the methods were the types of curves, the dependent variable, and how the curves were plotted. The types of curves included a single annual curve, two seasonal curves (dormant and growing seasons), and three size fraction curves (sand, silt, and clay). Relations between sediment concentration, sediment discharge, and water discharge were developed for each type of curve. The curves were computed as straight lines by a least-squares regression and hand drawn through average sediment-concentration or sediment-discharge values within specified water discharge intervals.

Daily suspended-sediment discharge records for the Schuylkill River at Manayunk, PA, were used as the base information for the analyses. The river drains 1,810 mi² and traverses three physiographic provinces. Land uses range from anthracite mining in forested mountains in the headwaters to extensive agriculture and industrial cities in the middle and lower basin. More than 9.9 million tons of suspended sediment was discharged by the river from 1954 to 1979; annual sediment discharges ranged from 107,000 tons in 1966 to 996,000 tons in 1972. The sediment was 6 percent sand, 54 percent silt, and 40 percent clay.

Major floods have a significant affect on the long-term sediment discharge characteristics of the river; the highest annual sediment discharges from 1954 to 1979 occurred in 1955 and 1972 when floods generated by Hurricanes Connie and Diane in 1955 and Hurricane Agnes in 1972 transported most of the annual sediment discharge. During the 26-year period, 25 percent of suspended-sediment discharge was transported in 11 days or 0.12 percent of the time; 50 percent was transported in 56 days or 0.59 percent of the time.

Only the 86 samples collected for particle-size determinations from 1954 to 1979 were used in the analyses. The water discharge at that time of sampling ranged from 1,800 to 73,600 ft³/s. The correlation coefficient and standard error of estimate of the relations between water discharge and concentrations of sediment, sand, silt, and clay are indicated in table 5. Generally, the relations between sediment and water discharge and clay and water discharge are better (lower standard error) than the relations between sand and water discharge and silt and water discharge. Also, the growing season relations are as good or better than either the dormant season or annual relations.

The average annual suspended-sediment discharge estimated by the 16 different methods ranged from 395,000 to 499,000 tons/yr (table 6) compared to the measured average discharge of 382,000 tons/yr. The mean discharge estimated by the 16 methods was 432,000 tons/yr and the standard deviation was 29,000 tons/yr. The mean for the eight regression methods was 452,000 tons/yr and the mean for the eight group-average methods was 412,000 tons/yr; the standard deviations were 26,000 and 14,000 tons/yr, respectively.

Table 5.--Correlation coefficients and standard errors of estimate of relations between the logarithms of water discharge and concentrations of sediment, sand, silt, and clay in suspension for the Schuylkill River at Manayunk, PA.

		Correlation coefficient	Standard error of estimate of log units
Growing season	sediment	.85	.22
	sand	.87	.31
	silt	.85	.26
	clay	.73	.26
Dormant season	sediment	.75	.26
	sand	.84	.31
	silt	.66	.32
	clay	.75	.26
Annual	sediment	.79	.25
	sand	.85	.31
	silt	.74	.30
	clay	.74	.26

Table 6.--Measured and estimated suspended-sediment discharges of the Schuylkill River at Manayunk, October 1, 1953, to September 30, 1979

	Sediment discharge in tons/day	Difference in percent
Measured average annual sediment discharge	382,000	
Estimated average annual sediment discharges:		
REGRESSIONS - Concentration data		
Annual curve	480,000	25.7
Seasonal curves	444,000	16.2
Annual particle-size curves	424,000	11.0
Seasonal particle-size curves	424,000	11.0
REGRESSIONS - Sediment-discharge data		
Annual curve	445,000	16.5
Seasonal curves	442,000	15.7
Annual particle-size curves	462,000	20.9
Seasonal particle-size curves	499,000	30.6
GROUP AVERAGE CURVES - Concentration data		
Annual curve	407,000	6.5
Seasonal curves	395,000	3.4
Annual particle-size curves	418,000	9.4
Seasonal particle-size curves	401,000	5.0
GROUP AVERAGE CURVES - Sediment-discharge data		
Annual curve	432,000	13.1
Seasonal curves	409,000	7.1
Annual particle-size curves	432,000	13.1
Seasonal particle-size curves	404,000	5.8

The positive bias of the estimates probably is caused by the use of only samples collected for particle-size determinations. These samples normally were collected only when the concentrations of sediment were high. Expanding the data set to include water and sediment discharges for each October 15 and April 15 for the 26-year period improved the accuracy of the estimated discharges appreciably. Long-term discharges estimated with relations between sediment discharge and water discharge were 345,000 and 391,000 tons/yr for the regression and group average techniques, respectively. These estimates were within -9.7 percent and +2.5 percent of the long-term measured discharge.

The analyses indicate that the following generalizations apply to estimating long-term sediment discharge for the Schuylkill River at Manayunk: (1) a single relation between suspended-sediment concentration or discharge and water discharge provides as good an estimate of long-term sediment discharge as individual relations for sand, silt, or clay; (2) two seasonal relations between sediment concentration or discharge and water discharge provide a better estimate than a single annual curve; (3) curves hand drawn through average values of sediment concentration or discharge provide better estimates than straight lines computed by least-squares regression; and (4) relations between sediment concentration and water discharge provide a better estimate than relations between sediment discharge and water discharge.

REFERENCES

- Colby, B. R., 1956, Relationship of sediment discharge to streamflow: U.S. Geological Survey Open-File Report, 170 p.
- Miller, C. R., 1951, Analysis of flow-duration, sediment-rating curve methods of computing sediment yield: U.S. Department of the Interior, Bureau of Reclamation, 55 p.

SEDIMENT BUDGET OF THE TIDAL POTOMAC RIVER AND ESTUARY, WATER YEARS 1979-1981

by R. Edward Hickman and James P. Bennett

Determination of the sediment budget of the tidal Potomac River and Estuary involved two different types of studies: (1) the calculation of the loads entering from upland sources and shore erosion, and (2) the calculation of the amounts of sediment transported through the tidal Potomac River and Estuary and passing between the tidal Potomac and the Chesapeake Bay. Loads from the upper Potomac River Basin, entering the tidal Potomac at Chain Bridge, were calculated using standard U.S. Geological Survey methods. Although loads from shore erosion are included, their determination is not discussed.

The loads from the local nonpoint sources are introduced by streamflow leaving the local tributary watersheds (that is those downstream of Chain Bridge) and by overflows of the combined sewer system of the District of Columbia. The loads in the overflows of the combined sewer system were estimated from daily volumes of overflow and mean concentrations developed by other studies. The loads from local tributary watersheds were estimated by calculating yields from five monitored watersheds and applying these yields to the remaining area. Yields were calculated for four of the monitored watersheds (three urban and one rural) by developing relationships between sediment concentration and streamflow. The yields calculated for the urban watersheds are 50 percent or less of values calculated using samples collected 1959-1962. This decrease is due in part to the imposition of effective sediment controls at construction sites and to the construction of two multi-purpose impoundments. The yield calculated for the one rural watershed is in the range of the values for the urban watersheds and two to three times greater than yields reported for other rural watersheds in this area. This discrepancy is probably because most of the samples from this watershed were collected during a very dry period.

The amounts of sediment being transported through the tidal Potomac and between the tidal Potomac River and the Chesapeake Bay were calculated using a hybrid one-layer/two-layer box model which was continuously calibrated using observations of sediment and salt concentrations made throughout the tidal Potomac River and Estuary and in the adjacent Chesapeake Bay. Transport between model elements was determined by solving the conservation of mass equation using an implicit finite difference technique.

Results indicate that during the 1979-1981 water years, 7.9 million tons of sediment entered the tidal Potomac River and Estuary from upland sources, and that all of this was retained in the tidal Potomac. The Potomac River at Chain Bridge supplied 56 percent of the incoming sediment, local nonpoint sources, 38 percent, and shoreline erosion, 6 percent. The tidal Potomac River and Estuary also served as a sediment sink for the Chesapeake Bay during this period. The Chesapeake Bay contributed 13,200 tons more to the tidal Potomac than passed in the other direction.

EFFECTS OF THE PROPOSED COOPER RIVER REDIVERSION ON SEDIMENTATION IN CHARLESTON HARBOR, SOUTH CAROLINA

by Glenn G. Patterson

The rates of sedimentation and of resultant maintenance dredging in Charleston Harbor increased dramatically in the 1940's, following two major modifications to the harbor. One modification was deepening of the project depth of the navigation channels from 30 to 35 feet below mean low water. The other modification was the Santee-Cooper diversion project, which added an average of 15,000 ft³/s of Santee River water to the Cooper River, increasing by many times the freshwater inflow to the harbor. The diversion brought additional sediment into the harbor and made the harbor a more efficient sediment trap by inducing a landward flow of salty water along the harbor floor. In 1966, plans were made to divert most of the Santee River water back to its former channel, in order to reduce the rate of sedimentation in the harbor.

The purpose of this investigation was to use existing information to determine the probable effectiveness of the proposed rediversion in reducing rates of sedimentation and maintenance dredging in the harbor.

The approach was to estimate a sediment budget for the harbor and then estimate the effect of rediversion on the sediment budget.

Major sources of sediment included erosion from the bed and banks of the upper Cooper River and sediment that originated in the Santee River basin and passed Pinopolis Dam with the diverted water. A number of minor sources, not directly affected by the diversion, contributed additional sediment.

Between 1942 and 1953 most of the sediment that was dredged from the navigation channels returned to the harbor, resulting in a rapid rate of sedimentation on the harbor floor. Improvements in dredging and spoil disposal methods reduced the rate of runback of dredged sediment after 1953 to an estimated 22 percent, but the rate of maintenance dredging has remained high (about 7 million cubic yards per year)--higher than can be accounted for by known sediment inputs. Inflow from the ocean by bottom currents may provide some of the additional for sediment.

Rediversion should reduce sediment loads in the Cooper River and diminish the sediment-trapping landward bottom current. The rate of maintenance dredging that will be needed following rediversion cannot be precisely estimated because of the uncertainties in the sediment budget, but the rate of maintenance dredging following rediversion will probably be 40 to 75 percent less than the average during the period 1966-82. The reduction in the rate of maintenance dredging may be delayed by a decade or more by the need to remove previously accumulated sediment and may be partially offset by the effects of future channel deepening.

SEDIMENT CHEMISTRY

DETERMINATION OF LAKE SEDIMENTATION RATES BY LEAD-210 and CESIUM-137

by I. C. Yang

Natural and artificial radionuclides of ^{210}Pb and ^{137}Cs have been used widely for the determination of sedimentation rate in lakes, estuaries, and coastal regions. Since ^{210}Pb has a half-life of 22.26 years, it is possible to date the sediment age up to 150 years. The ^{210}Pb method used for determining sedimentation rates is based on the occurrence of excess ^{210}Pb , a member of the ^{238}U decay series. There is a continuous escape of ^{222}Rn from the lithosphere and hydrosphere to the atmosphere where it decays with a 3.8-day half-life and transforms into ^{210}Pb through four short-lived daughters. The ^{210}Pb is rapidly removed from the atmosphere by wet precipitation or dry fallout and provides a measurable flux to the earth's surface at a rate of approximately 3.2 to 6.5 disintegration per minute per square inch per year ($^{210}\text{Pb}/\text{in}^2/\text{year}$) depending on the location. From the water column, it is scavenged to the bottom sediments. There are three assumptions involved: (1) the influx of ^{210}Pb to the sediment-water interface remains constant; (2) the sedimentation rate remains constant; and (3) no independent migration of ^{210}Pb occurs once deposited. These assumptions have been verified by many authors (Koid and others, 1972; Eakins and others, 1978; Thompson and others, 1975).

^{137}Cs , with a 30-year half-life, was produced in the atmosphere as the result of nuclear-weapon tests from 1952 to 1954, and more extensively in 1963. The residence time of this nuclide in the air and water column is less than 1 year. Therefore, an appearance of ^{137}Cs activity in the sediment column would indicate the onset of nuclear testing devices of 1952 and the maximum activity would correspond to the year of 1963 and subsequently decrease to the present time.

There are three methods used to measure ^{210}Pb activity: (1) gamma method which is direct counting of sediment for the 46 KeV gamma activity from ^{210}Pb by a Ge(Li) detector; (2) beta method which is separation of Pb from other radionuclides by ion-exchange columns, precipitation as PbCrO_3 , aging to ingrow the ^{210}Bi daughter from ^{210}Pb decay, and counting ^{210}Bi beta particles on low-beta gas proportional counter; and (3) alpha method which is chemical separation of ^{210}Pb on a silver disk, and counting ^{210}Pb alpha particles by alpha spectrometer. The last two methods are capable of high sensitivity with gram-size samples, although many processing steps are involved, and a longer ingrowth time of daughter radioactivity is required. The first method is simple and fast, but less accurate and requires large samples.

Lake sediment cores from the Scofield Reservoir in Utah and the Lahontan Reservoir in Nevada have been dated by the ^{210}Pb and ^{137}Cs methods. The results of the Scofield Reservoir indicate that top the 4 inches of sediment yields excess ^{210}Pb activity of 30 pCi/oz dry weight, decreasing to 7/pCi/oz at a depth of 30 inches. The sedimentation rate was approximately 0.19 in/yr which was comparable to the value of 0.22 in/yr obtained independently by

the ^{137}Cs method. The Scofield Reservoir has a bottom sediment thickness of 11.8 inches which corresponds to a lake history of approximately 60 years. On the Lahontan Reservoir, excess ^{210}Pb activity profiles showed an inverse curve in the surface layer due to inverse sedimentation, probably caused by filter-feeding organisms. The excess ^{210}Pb activity in the top 3.3 inches was 23 pCi/oz, and increasing to 31 pCi/oz between 3.3 and 6.7 in depth. Thereafter the activity gradually decreased to 15 pCi/oz at a depth of 18.5 inches. The sedimentation rate was about 0.4 in/yr compared to ^{137}Cs values of 0.5 in/yr.

REFERENCES

- Eakins, J. D., and Morrison, R. T., 1978, International Journal of Applied Radiation Isotopes, 29, p. 531.
- Koide, M., Soutar, A., and Goldberg, E. D., 1972, Earth and Planetary Science Letters, 14, p. 442.
- Thompson, J., Turekin, K. K., and McCaffrey, R. J., 1975, in Estuarine Research, Cronin, L. E. (ed.), Academic, New York, v. 1, p. 28.

INORGANIC PARTITIONING IN SEDIMENTS

by Arthur J. Horowitz

Historically, the Water Resources Division (WRD), as the name implies, has concentrated much of its water-quality efforts on the analysis of dissolved constituents. As a result, water quality tends to be evaluated on the basis of the kinds and concentration of the various inorganic constituents found in solution. However, in most aquatic systems, sediment (both suspended and bottom) contains many times the concentration of certain inorganic constituents than are dissolved in the water column. The strong association of numerous elements and compounds (arsenic, mercury, cadmium, lead, zinc, and others) with sedimentary material means that much of the distribution, transport, and availability of inorganic constituents in a given hydrologic system cannot be detected or evaluated solely through the sampling and analysis of water. Additionally, sediment can be viewed as a chemical reservoir which may, under certain physico-chemical conditions, release these chemicals into the water column, or otherwise enter the food chain. Finally several inorganic constituents can degrade or react with other constituents to form soluble and possibly even more toxic forms (for example, the conversion of mercury to methyl mercury). Therefore, a comprehensive picture of water quality, which adequately describes the distribution, transport, and availability of inorganic constituents, requires chemical data on sediments.

At the present time, the WRD lacks the capabilities, and the requisite field and laboratory procedures, to determine both the total (true) concentration of inorganic constituents, and their partitioning, in sediment. The term total means the actual concentration of a constituent in the sense of a series of analyses which yield results equal to 100 percent and should not be confused with the term totally recoverable. Partitioning involves both a physical and a chemical separation. The physical aspect refers to the analysis of various size fractions (for example, sand, silt, clay) or specific gravity fractions, in order to ascertain constituent distribution within a particular sample and to facilitate intersample comparisons or to more readily ascertain spatial trends. The chemical aspect refers to the determination of the association of inorganics with various other materials within a sample (such as humic acids, carbonates, ferromanganese oxides) and to the type of association which exists (adsorption, complexation, substitution, and others). Through the use of these types of data, it may be possible to begin to identify sources and sinks, or the fate and possible effects of potentially toxic, or environmentally necessary inorganic constituents. Similarly, such data will help in transport modeling, for estimating cycling rates, and for determining the availability of inorganics to ecological systems.

In order to provide the procedures and techniques for dealing with inorganic-sediment associations, a methods-development project for inorganic partitioning in sediment has been established. Initial project objectives include: (1) adapting or developing methods for the determination of total concentrations in sediment for routine use in the WRD Central Laboratory System; (2) developing a size-fractionation method which does not alter chemistry, and the selection of an appropriate size range or ranges for routine analysis; (3) adapting or developing methods for inorganic-sediment chemical partitioning; and 4) providing guidelines on the use and interpretation of data generated by these methods.

TRANSPORT OF SUSPENDED SEDIMENT AND ASSOCIATED CHEMICAL CONSTITUENTS IN THE LOWER MISSISSIPPI RIVER, LOUISIANA

by Charles R. Demas and Philip B. Curwick

Suspended sediment transported by the lower Mississippi River is viewed both as a burden and an asset by the State of Louisiana. Sediment deposition and bed movement pose a constant navigational threat. This results in millions of maintenance dollars spent each year on dredging. Conversely, diversion of sediment-laden Mississippi River water, and sediment control measures in the Mississippi River Basin have accelerated the rate of erosion of the State's coastal wetlands and shoreline. Coastal erosion has enormous economic repercussions to the State by affecting offshore oil revenues and influencing productivity of its vast nearshore fisheries. Use of sediment-laden Mississippi River water to maintain and reclaim coastal wetland area is a potential management tool available to the State to help reduce the rate of coastal erosion.

For this reason, the Louisiana District of the U.S. Geological Survey entered in a cooperative agreement with the State of Louisiana to perform a 4-year study to characterize suspended-sediment movement and attached chemical load of the lower Mississippi River from Tarbert Landing to Venice, LA (296 river miles). The specific objectives of the study are: (1) to identify areas where suspended sediment and associated chemical load are deposited or resuspended with respect to variations in streamflow and suspended-sediment loads at the upstream boundary; (2) to determine selected chemical constituent loads in relation to suspended-sediment concentrations, particle size, and water discharge and relate this to bed sediment; and (3) to develop and test a one-dimensional numerical sediment transport model and use it to predict sediment and chemical loads for the study reach.

Suspended sediment, bottom material, and attached chemical constituents will be sampled during several different rises in river stage during the course of the study. Suspended sediment will also be collected on a monthly basis. Instantaneous discharge measurements will be made concurrently with each sampling trip at selected sites. All suspended-sediment samples will be depth integrated at five or more equal discharge increments in a cross section. Suspended-sediment and water-quality samples will be collected using a P-63 point sampler and a bag sampler. Bottom material will be collected with a teflon-coated Shipek grab sampler. Data collection and site selection will be optimized with the aid of a numerical unsteady flow model and a one-dimensional numerical sediment transport model. Fathometer tracings and continuous stage data will be collected at several sites to help calibrate the models. Suspended sediment and bottom material will be characterized according to particle size and associated chemical constituents.

SUSPENDED SEDIMENT: TRANSPORT AND CHEMISTRY OF ORGANIC CARBON

by E. M. Thurman

Suspended sediment transports 50 percent of the total organic carbon to the ocean, an important part of the global carbon cycle. Suspended or particulate organic carbon (SOC and POC) varies in concentration from micrograms per liter to milligrams per liter, depending on the type of river (Meybeck, 1981). The concentration of suspended organic carbon follows the river continuum concept (Vannote and others, 1980). That is, concentrations are least in first and second order streams and increase downstream with greatest concentrations in highest order streams.

Suspended organic carbon consists of living biomass, detritus, and organic coatings on silt and clay. The importance of each of these sources varies with river and season. Small streams and rivers contain organic carbon from allochthonous origin that is outside the riverine system. Large rivers have an autochthonous input from algae and aquatic organisms. The amount of autochthonous input is largest in summer and fall and is least in winter.

The percentage of organic carbon of suspended sediment varies from 0.5 percent to 40 percent. The least amount is found in rivers with greatest discharge, and the most is found in slow-moving rivers that drain wetlands and swamps. Thus, the concentration of SOC for all world rivers varies inversely with the concentration of suspended sediment (Meybeck, 1981). Because higher erosional rates dilute SOC and reduce primary production, SOC is less. However, within a river system, SOC varies directly with suspended sediment in a log-log fashion (Nordin and Meade, 1981). That is, increased discharge increases the concentration of suspended sediment, which increases SOC. This increased SOC usually peaks ahead of dissolved organic carbon and discharge.

SOC has a longer residence time in rivers than DOC has. Because sediment may exist for tens of years in streams to tens of thousands of years in flood plains of major rivers, SOC undergoes biological and chemical degradation over a much longer period than dissolved organic carbon. The C/N ratio in suspended sediment is 10:1, which means that suspended sediment is considerably enriched in nitrogen compared to surrounding soils with a 25:1 nitrogen ratio (Malcolm and Durum, 1976). Because suspended sediment concentrates nitrogen by ion exchange and also consists of coatings of living biomass, it is enriched in organic nitrogen compounds. This makes it a good substrate for bacteria, which colonize its surfaces.

Bacteria attach themselves by pili (thread-like organs), and act as "microbial factories" degrading organic matter aerobically in the suspended state. Here carbon dioxide and water are major products, and suspended organic carbon is converted to inorganic carbon. However, once sediment is deposited, oxygen may be depleted in interstitial waters. The bacterial community changes to anaerobic organisms, which convert POC to organic acids, methane, and carbon dioxide. This is characteristic of interstitial waters of sediment where DOC increase to 50 to 500 mg C/L (Thurman, 1983).

Suspended organic carbon on sediment behaves as an adsorbent for organic pollutants. It is well established that the percent organic carbon is a good prediction of equilibrium constants of organics (Schwarzenbach and Westall, 1981). Thus, sediment concentrates the least soluble of organic compounds, such as contaminants, and acts as a sink to store these contaminants in the flood plain of the river.

REFERENCES

- Malcolm, R. L., and Durum, W. H., 1976, Organic carbon and nitrogen concentrations and annual organic carbon load of six selected rivers of the United States: U.S. Geological Survey Water-Supply Paper 1817-F, 21 p.
- Meybeck, M., 1981, River transport of organic carbon to the ocean, p. 219-269, Report of a workshop "Flux of organic carbon by rivers to the oceans" NTIS Report # CONF-8009140, VC-11.
- Nordin, C. F., and Meade, R. H., 1981, The flux of organic carbon to the oceans. Some hydrological considerations, p. 173-218. Report of a workshop "Flux of organic carbon by rivers to the oceans" NTIS Report # CONG-8009140, VC-11.
- Schwarzenbach, R. P. and Westall, J., 1981, Transport of nonpolar organic compounds from surface water to groundwater: Laboratory sorption studies, Environmental Science and Technology, v. 15, p. 1360-1367.
- Thurman, E. M., 1983, Organic Carbon in Water, Chapter 2, in Organic Geochemistry of Natural Waters, Martinus Nijhoff-Dr. Junk, The Hague, (In Review).
- Vannote and others, 1980, The river continuum concept: Canadian Journal of Fisheries and Aquatic Sciences, v. 37, p. 130-137.

CHANNEL MORPHOLOGY

SEDIMENT IMPACTS FROM COAL MINING, NORTHEAST TENNESSEE

by W. R. Osterkamp, W. P. Carey, and C. R. Hupp

Extensive data, including water and sediment discharges, channel morphologies, bed- and bank-material characteristics, and botanical evidence of flow events, have been collected since 1981 from the Smoky Creek, Crabapple Creek, and Louse Creek basins, northeast Tennessee. Most basins of the area have been heavily impacted by coal-mining activities.


Crabapple Creek and Louse Creek drain adjacent basins of 1.1 and 4.4 mi², respectively. By 1981 about 7 percent of the Louse Creek basin had been disturbed by surface mining, much of the mining having occurred prior to 1971. The Crabapple Creek basin has remained relatively undisturbed since lumbering prior to World War II. Preliminary data from the Crabapple Creek basin indicate annual suspended-sediment yields of less than 86 t/mi², whereas casual observations suggest substantially higher yields from the Louse Creek basin. Marked differences between the two basins are also apparent in channel characteristics, particularly morphology. Crabapple Creek has a relatively stable, well-armored channel 26 feet in width that is closely lined by a mature population of trees and shrubs. Analyses of coal content in bank material for the period 1981 to 1983 averaged less than 1 percent, suggesting little fluvial transport and deposition of coal. In contrast, Louse Creek has a 69-foot wide anabranching channel with numerous gravel and cobble bars that are being stabilized by sycamores and alders. Most of these trees are less than 25 years old, and suggest stabilizing channel conditions following deposition of coarse material and channel widening during mining. Coal content of bank-material samples from along Louse Creek averages 2.3 percent. Along channels below active coal mining, coal content often ranges from 5 to 10 percent.

Smoky Creek drains a basin of about 31 mi². Upper Smoky Creek and major tributaries have high-gradient, subalpine channels that are generally either well armored or formed on bedrock. The stream valley is progressively more alluvial in the downstream direction, having bottom-land widths up to 820 feet near the confluence of Smoky Creek with the New River. Extensive strip mining began in the basin about 1940 and has continued with varying intensity to the present. Since 1978 the annual suspended-sediment yield measured at Smoky Creek at Hembree, in the central part of the basin, has averaged about 2,280 t/mi². Over 90 percent of the suspended sediment is in the silt-clay size range. Yield data from Smoky Creek above Hembree, about 2.5 miles upstream from the Hembree gage and with a drainage area of 8.1 mi², are not available, but suspended-sediment concentrations during peak discharges appear to be greater than at Hembree.

Channel-morphology data are being collected from nine monumented sections in the Smoky Creek basin and are supplemented with stratigraphic and botanical observations in the central part of the basin. Preliminary results indicate a general sequence of: (1) channel widening and aggradation by movement of coarse bed material in the upper reaches of the drainage net below active

mining; (2) eventual movement of the bed material into the upper and central parts of the Smoky Creek channel, the coarsest sizes being the least mobile; (3) incisement of recent deposits, channel narrowing, and reestablishment of woody vegetation along upland reaches following cessation of mining; and (4) continuing bank erosion, possible channel widening, aggradation, and reworking of mobile bed material as it is transported downstream during high-flow events. Upland areas above Bills Branch near Hembree (drainage area of 0.66 mi²), for example, were mined principally in 1975. Parts of Bills Branch channel, which was mostly cut into bedrock, apparently had substantial aggradation. Recent cross-section measurements indicate that much of the previously deposited debris has been incised and transported downstream, and degradation of remaining coarse alluvium is continuing. At Smoky Creek above Hembree, similar measurements show recent aggradation, presumably by deposition of material derived from tributary basins such as that of Bills Branch. Section data, stratigraphic evidence, and botanical observations at Smoky Creek at Hembree and along lower reaches show that in recent years substantial bank erosion has occurred. At a site 0.6 mile downstream from the Smoky Creek at Hembree gage, botanical evidence shows that flow events deposited 30 and 3 inches of debris, respectively, in 1977 and 1983 (fig. 9). During the last 25 years there has been at least 72 feet of lateral channel migration and accompanying bank erosion at the same site.

SMOKY CREEK
POINT BAR SYCAMORE
IN 1983

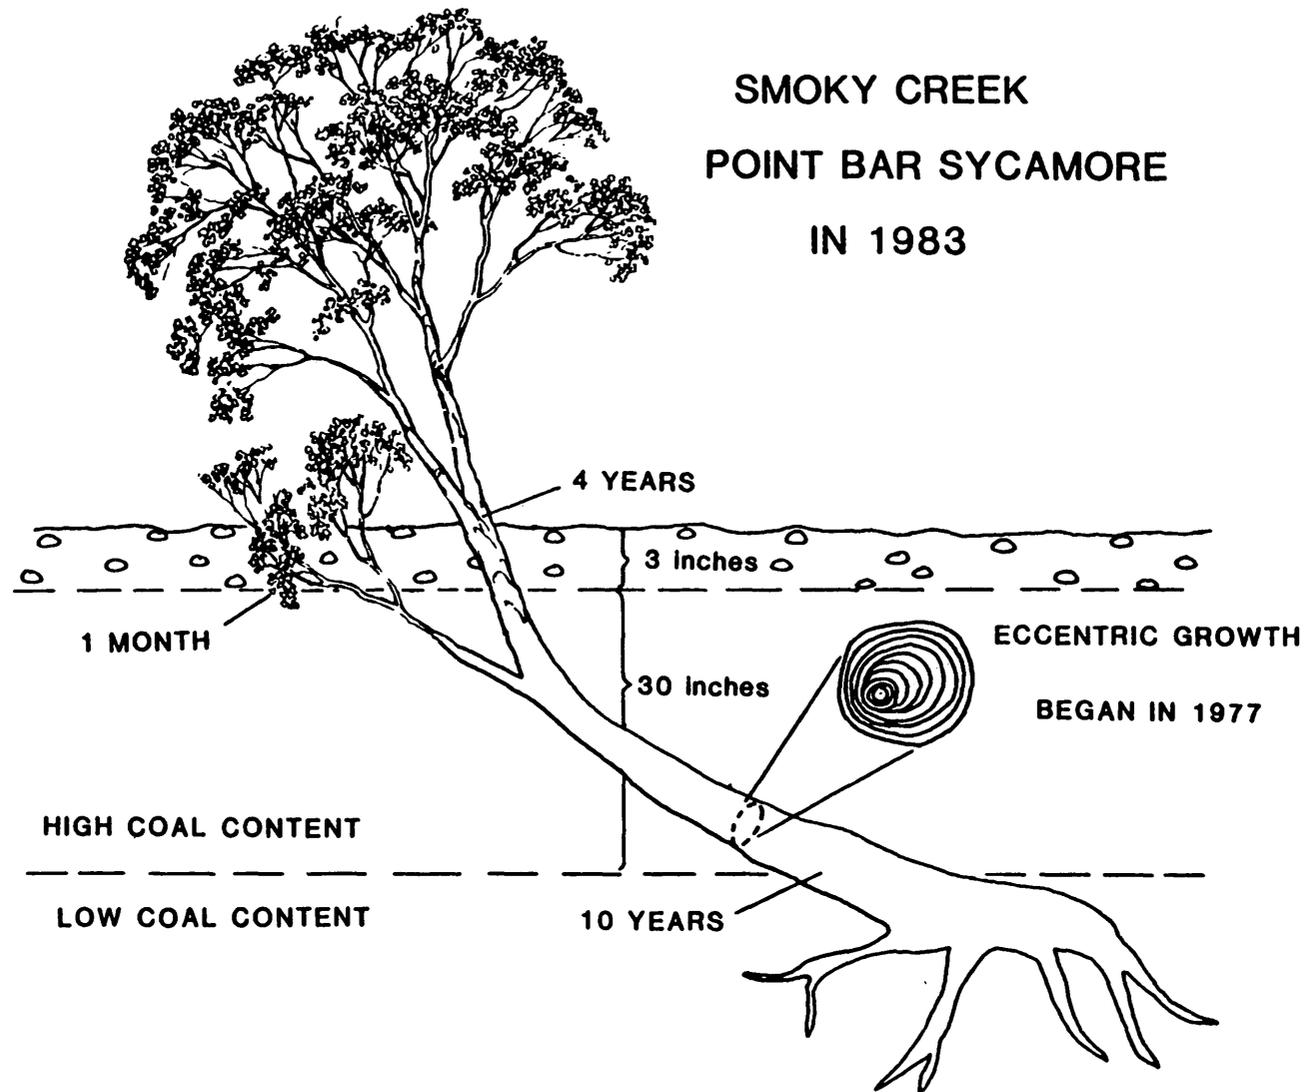

54

Figure 9.--Diagram summarizing the use of botanical evidence to date recent flow events along Smoky Creek, northeast Tennessee.

UNIT HYDRAULIC GEOMETRY--AN INDICATOR OF CHANNEL CHANGES

by R. P. Williams

Water-discharge and sediment-transport data collected at selected sites and surveyed river reaches in the Western United States were used to evaluate hydraulic variables of the energy equation to evaluate channel changes at stream sections. The coefficients and exponents of hydraulic-geometry relations were based on unit discharge rather than on total discharge. Unit hydraulic geometry has greater application to defining channel changes than conventional analysis. The unit hydraulic-geometry relations were used to infer sectional competence of coarse-sediment discharge and expected channel changes and to define quasi-equilibrium of near-bankful streams.

Results of this study suggest that long-term projections of coarse-sediment transport initially involved an evaluation of past hydraulic changes in the stream reach. Although the primary analysis used-streamflow measurements, slope-area techniques can be used to analyze ungaged reaches. The methods described are applicable to a broad range of stream conditions and provide techniques for evaluating natural changes and man's influence on stream reaches.

CHANNEL ADJUSTMENT TO MAN-INDUCED STRESS IN WEST TENNESSEE

by Andrew Simon and Clarence H. Robbins

Alluvial stream channels are dynamic geomorphic systems that are continuously adjusting to altered energy inputs. In west Tennessee, channel modifications have caused drastic channel adjustments in plan and profile. More specifically, these modifications in conjunction with land-use practices have led to accelerated downcutting and headward degradation, downstream aggradation, accelerated scour, and bank instabilities. Channel straightening creates a steepened profile and thus a heightened energy condition within the channel. Channel responses to this induced stress are, therefore, similar in type but greater in magnitude than those changes caused by dredging or clearing.

Large-scale channel instabilities and adjustments are occurring in the Obion River and the South Fork Forked Deer River whereas the nonchannelized Hatchie River flowing through similar deposits continues to exhibit characteristics of stability.

Channel slope, defined as the primary dependent variable (Mackin, 1948) proved to be a sensitive and descriptive parameter essential in determining channel adjustment. Although channel slope is generally considered to be one of the most difficult hydraulic variables to define, the rejuvenated fluvial systems of west Tennessee manifest readily measurable variations.

Adjustments in profile to man-induced slope increases are described by inverse exponential functions of the basic form $S=ae^{-bt}$; where "S" is some function of channel-slope, "t" is the number of years since the completion of channel work, and "a" and "b" are coefficients unique by reach. These equations define response times for particular reaches or for entire rivers.

The length of time required to attain some "quasi-equilibrium" condition is a function of the magnitude and extent of the imposed disturbance. The adjusted profiles are similar to the predisturbed profile gradients where no alteration to channel length took place. Where channels were straightened by constructing cutoffs, slope adjustments trended towards a profile with lower gradients.

REFERENCES

- Mackin, J. H., 1948, Concept of the graded river: Geological Society of America Bulletin, v. 59, p. 463-511.

CONTRAST IN STREAM CHANNEL RESPONSE TO MAJOR STORMS:
EXAMPLES FROM TWO MOUNTAINOUS AREAS IN CALIFORNIA

by K. Michael Nolan and Donna C. Marron

Studies in two mountainous areas of California have illustrated basic differences in the effects of major flood events on the morphology of stream channels. Widespread catastrophic storm effects in northwestern California contrast with localized storm-related effects in the Santa Cruz Mountains of west-central California.

Major storms in northwestern California trigger widespread debris sliding along inherently unstable colluvial streambanks. Streamside failure is particularly widespread in this area because of positive feedback effects between physical processes (fig. 10). These effects are responsible for triggering additional landsliding downstream of initial failure sites. The massive amount of colluvium deposited in these gravel-bed channels as a result of this landslide activity overwhelms the sediment transport capacities of channels and results in massive channel aggradation and major increases in channel width throughout entire drainage basins. The effects of these large volumes of colluvium on channel geometry are exacerbated by persistent mass

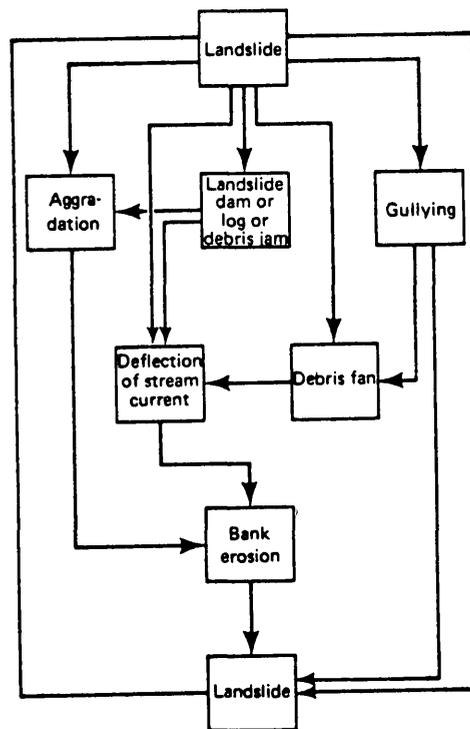


Figure 10.--Schematic representation of positive feedback between physical processes in northwestern California (after Colman, 1973).

order channels on an annual basis. Widespread channel changes resulting from recent storms in northwestern California have lasted for decades and may last for decades longer.

In contrast, major channel changes associated with storms in the Santa Cruz Mountains occur only locally. Most storm-related channel changes are no more severe than those associated with moderate events. Catastrophic channel changes are limited to localized areas that experience exceptionally abundant mass movement activity in the form of debris flows and debris avalanches that are triggered by high pore water pressures caused by locally intense precipitation. The moderate volumes of colluvium introduced elsewhere are transported with little affect on channel geometry because much of the colluvium is characterized by relatively small grain sizes (sand), channel gradients are generally steep, and because channels usually do not contain large quantities of alluvium prior to major storms. The relatively coherent bedrock found in the area limits streambank erosion. Streamside failure due to undercutting is therefore relatively limited and the positive feedback found between hillslope and stream channel processes in northwestern California does not occur to any great extent in the Santa Cruz Mountains. Major channel changes associated with storm events are therefore limited to localized areas that receive maximum precipitation intensities.

The contrast in channel response observed in the two study areas is the result of interactions between naturally occurring physical processes operating in the respective areas. Although cultural activity may cause the impacts of any given storm event to be disproportionately large, these activities do not alter basic process interactions. A more delicate balance exists between processes in northwestern California than in the Santa Cruz Mountains. This suggests that it would be easier for cultural activities to cause storms to have disproportionately large impacts on stream channels in northwestern California than in the Santa Cruz Mountains.

The contrast in channel response occurs despite a similarity in the magnitude and frequency of sediment transport in both areas. The effectiveness of flood events in shaping channel morphology in these mountainous areas is therefore independent of the magnitude and frequency of sediment transport and is best judged on the basis of impact duration. Channel morphology present in most stream reaches at any given time in northwestern California reflects the effects of individual storms and the length of time available for moderate post-flood flows to modify flood effects. In contrast, channel morphology in the Santa Cruz Mountains reflects the effects of both moderate and extreme flow events. Where overwhelming volumes of sediment have been introduced to channels during previous storms, channels tend to flow through alluvial channels that are relatively wide and flat. Elsewhere, channels tend to be V-shaped and relatively steep, and presumably reflect effects of moderate events at least as much as effects of extreme events. Since the localized effects generated by any one storm can persist longer than the recurrence interval of the storm itself, channel morphology throughout the area probably reflects the effects of multiple storms.

The key to understanding why persistent storm-related effects in northwestern California are more widespread than those in the Santa Cruz Mountains lies in identifying the physical processes operating on hillslopes and stream channels in each area, as well as assessing how these processes interact. Study of this interaction not only provides information describing the effects of major floods on the morphology of stream channels, but also provides information on the role of various hydrologic events in shaping general basin morphology.

REFERENCES

- Colman, S. M., 1973, The history of mass movement processes in the Redwood Creek basin, Humboldt County, California: paper presented in lieu of M.S. Thesis, University Park, Pennsylvania State University, Department of Geosciences, 180 p.

EFFECTS OF DAM CONSTRUCTION ON CHANNEL GEOMETRY AND BED MATERIAL IN BEAR CREEK, DENVER, COLORADO

by R. F. Hadley and W. W. Emmett

The objective of the study is to determine the downstream effects on channel geometry and characteristics of bed material caused by construction of a flood-control dam and reservoir on Bear Creek near Denver, CO. This is a "back-yard" project that requires 2 or 3 days a year in the field for surveys, data collection, and analysis.

Bear Creek originates on Mount Evans along the Continental Divide, west of Denver, and flows eastward out of the mountains onto the plains where it joins the South Platte River in the Denver metropolitan area. The drainage area of Bear Creek is approximately 260 mi², most of which lies in the mountains. There are two streamflow gaging stations on Bear Creek with more than 50 years of record. One is at Morrison where the stream leaves the mountains, and a second is at Sheridan near the mouth. The mean annual flow at Morrison is 53 ft³/s, and is 38.8 ft³/s near the mouth. Before the flood-control dam was constructed, there was generally a snowmelt peak in the spring and occasional flood peaks from summer thunderstorms.

The channel was relatively unregulated prior to 1979 except for diversion of flows for irrigation of about 12,000 acres. In July 1979, a flood-control dam constructed by the U.S. Corps of Engineers near Morrison was completed and impoundment of Bear Creek Lake began. Since the closure of the dam, the flow in Bear Creek has been regulated and peak discharges have been reduced.

In March 1977, five cross sections were surveyed and monumented on Bear Creek in Bear Creek Park between South Lamar Avenue and South Sheridan Boulevard in a reach about 700 feet long. The study reach is about three-fourths mile upstream from the gaging station near the mouth of Bear Creek. The five cross sections have been surveyed three times--twice before the dam was closed in 1977 and 1978, and once after dam closure in 1982. Bankfull width of the five cross sections ranged from 37 to 62 feet and averaged 46.2 feet in 1977 before dam closure. The mean bankfull depth ranged from 1.2 to 2.4 feet and averaged 1.6 feet. In the 1982 the bankfull width ranged from 43 to 76 feet and averaged 54.8 feet. The mean bankfull depth ranged from 1.8 to 3.0 feet and averaged 2.5 feet. In the study reach, the gradient has decreased from 0.421 to 0.316 percent. Although the channel has become wider and deeper since the dam closure, the most obvious change is the large increase in depth. Changes in width probably have been restricted by the dense vegetation growth along the banks that confine the flow.

Cross sections 1 and 2 are located in a pool, cross sections 3 and 4 are located on a riffle, and cross section 5 is at the upstream end of a second pool. In 1977 the median diameter of bed material in the pools was 0.48 mm, and the median diameter of bed material on the riffle was 4.6 mm.

SEDIMENT STORAGE AND DISCHARGE IN STEEP UNSTABLE TERRANE

by Richard J. Janda

Storage of readily erodible sediment in, and adjacent to, stream channels profoundly influences fluvial sediment discharge, particularly in steep unstable terrane. Most recent hydrologic and geomorphic investigations by the U.S. Geological Survey have emphasized transport processes. Storage of sediment, however, is often an equally important aspect of long-term movement of sediment drainage basins. Sediment discharge in headwater reaches of humid steepland streams is commonly supply limited, whereas downstream reaches are more likely to be transport limited. The impact of some land-use changes on sediment discharge and the geomorphic significance of storms of a given magnitude can be properly documented only if changes in storage are considered along with changes in transport. The initial locations, volume, and physical characteristics of stored sediment, together with changes in these parameters while in storage, are all matters of interest (Dietrick and others, 1982). The sedimentation impact of two comparable floods on a river may differ greatly if the recurrence interval of the floods is less than the time required to recharge streamside sediment storage areas.

The volume of temporarily stored modern alluvium along a river is commonly more than 10 times larger than its average annual total sediment discharge (Swanson and others, 1982b). Alluvium may be stored in bedforms, behind organic debris or landslide dams, and on bars and flood plains. Sediment discharge and channel characteristics might also be influenced by storage changes associated with streamside outcrops of glacial drift, lahars, colluvium, loess, residual soil, and unconsolidated bedrock as well as modern alluvium. The type and stability of storage are a function of stream order and terrane characteristics with vegetation playing a particularly prominent role. Storage in channels, flood plains, and alluvial fans may delay and attenuate peak downstream delivery of sediment introduced from hill-slope disturbances. Conversely, increased peak-water discharge may cause the transport of stored sediment without increased hill-slope erosion. Increased water and sediment discharge often lead to increased channel width, thereby setting up self-reinforcing positive feedback that further accelerates erosion. In fact, changes in channel width generally exert a more profound influence on storage than do changes in bed elevation in mountainous terrain.

Examples of these processes are provided by the Oregon Cascades (Swanson and Fredricksen, 1982; Swanson and others, 1982), the Coast Ranges of California and Oregon (Janda and others, 1975; Dietrick and Dunne, 1978), and the Mount St. Helens impact area of southwestern Washington (Janda and Meyer, in press).

Water Resources Division is often asked to assess the immediate and long-term sedimentation impacts of intense storms, changes in land use, and more exotic forms of disturbance. These assessments often must be performed in a short time and with limited funds. Nonetheless, before undertaking such projects, one should, as a minimum, assess qualitatively whether the system of interest is supply limited or transport limited. Preferably, one should develop in as quantitative terms as practicable a flow chart of the storage or landscape elements of interest and the transport processes that move sediment between elements. This procedure will help identify which storage

elements and transport processes most need further documentation. If the system is supply limited, historical observation, time sequential aerial photographs, and stratigraphic techniques may provide more useful information than short-term transport studies.

If we are to develop predictive capabilities, we shall have to make increased use of analytical models. However, existing sediment routing models will have to be improved by making them two-dimensional and by incorporating stochastic as well as deterministic elements within them. Calibration and verification of such models will require carefully selected long-term data sets.

REFERENCES

- Dietrich, W. E., and Dunne, T., 1978, Sediment budget for a small catchment in mountainous terrain: *Zeit. Geomorph, N. F., Suppl. Bd. 29*, p. 191-206.
- Dietrich, W. E., Dunne, T., Humphrey, N. F., and Reid, L. M., 1982, Construction of sediment budgets for drainage basins: U.S. Forest General Technical Report PNW-141, p. 5-23.
- Janda, R. J., Nolan, K. M., Harden, D. R., and Colman, S. M., 1975, Watershed conditions in the drainage basin of Redwood Creek, Humboldt County, California, as of 1973: U.S. Geological Survey Open-File Report.
- Swanson, R. J., and Fredricksen, R. L., 1982, Sediment routing and budgets: Implications for judging impacts of forestry practices: U.S. Forest Service General Technical Report PNW-141, p. 129-137.
- Swanson, F. J., Fredricksen, R. L., and McCorison, F. M., 1982a, Material transfer in a western Oregon forested watershed in the natural behavior and response to stress of western coniferous forests: R. L. Edmunds (ed.), Douden, Hutchinson, and Ross, Inc., Stroudsburg, Pa, p. 283-266.
- Swanson, F. J., Janda, R. J., and Dunne, T., 1982B, Summary: sediment budget and routing studies: U.S. Forest Service General Technical Report PNW-141, p. 157-165.

BEDLOAD

VARIABILITY IN MEASURED BEDLOAD TRANSPORT DURING CONSTANT AND SLOWLY CHANGING WATER-DISCHARGE CONDITIONS

by William P. Carey

Cyclic variations in bedload transport under constant water-discharge conditions are an inherent part of the bedload transport process. Although these cyclic variations have been measured extensively in the laboratory, similar information is not available from field measurements. The existing field data sets on cyclic variations generally consist of a small number of samples that yield little information about the nature of transport cycles. Collecting comprehensive field data on these variations is complicated by the restriction of constant or slowly changing water discharge.

The sand bed channels of western Tennessee are particularly suited to this type of sampling because they tend to hold their peak discharge for periods of up to several days and then recede slowly. During periods of sustained peak discharge, it is assumed that bedload transport has equilibrated with the flow conditions and that measured variability is indicative of the inherent variability in the transport process.

During a 4-day period of slowly changing water-discharge conditions, four sets of bedload samples were obtained at the same sampling point using the standard 65 pound Helley-Smith bedload sampler. The sample sets consist of 43, 50, 80, and 120 samples. Samples for the 50, 80, and 120 sample sets were collected consecutively with an approximate 3-minute interval between samples. Water discharge was essentially constant during each sample set and varied less than 15 percent for the 4-day period.

Individual measured transport rates exhibit large variations from one sample to the next as shown in figure 11. These individual rates can be converted to dimensionless rates by dividing each individual in a set by the mean rate for the set. When these dimensionless rates are plotted as cumulative frequency distributions, they show good agreement with the theoretical probability distribution derived for the case of ripples on dunes (fig. 12). As the number of samples increase, the similarity between the sampled and theoretical distributions also increases. Probability distributions for the 80 and 120 sample sets closely approximate the theoretical distribution. This agreement between sampled and theoretical distributions has been verified by many laboratory investigations, and by the few field data sets that have a sufficient number of samples.

A plot of measured transport rates versus time for the 120 sample set shows that peak transport rates seem to occur at approximately equal intervals (fig. 11). This cyclical trend is well documented in laboratory studies and has been shown to correspond to the passage of dune bedforms. By applying a smoothing technique to the same data set, these short-term cycles become very distinct and a much longer term oscillation appears (fig. 13). This longer term oscillation has also been reported in laboratory studies and may

be caused by groups of large and small dunes moving passed the sampling point. Information on the frequency and length of bedforms was not obtained during the sampling period.

The data collected in this study are believed to constitute one of the most comprehensive sets of field observations on cyclic variability in existence today. These observations confirm the existence of at least two superimposed cycles occurring under conditions of constant or slowly changing water discharge.

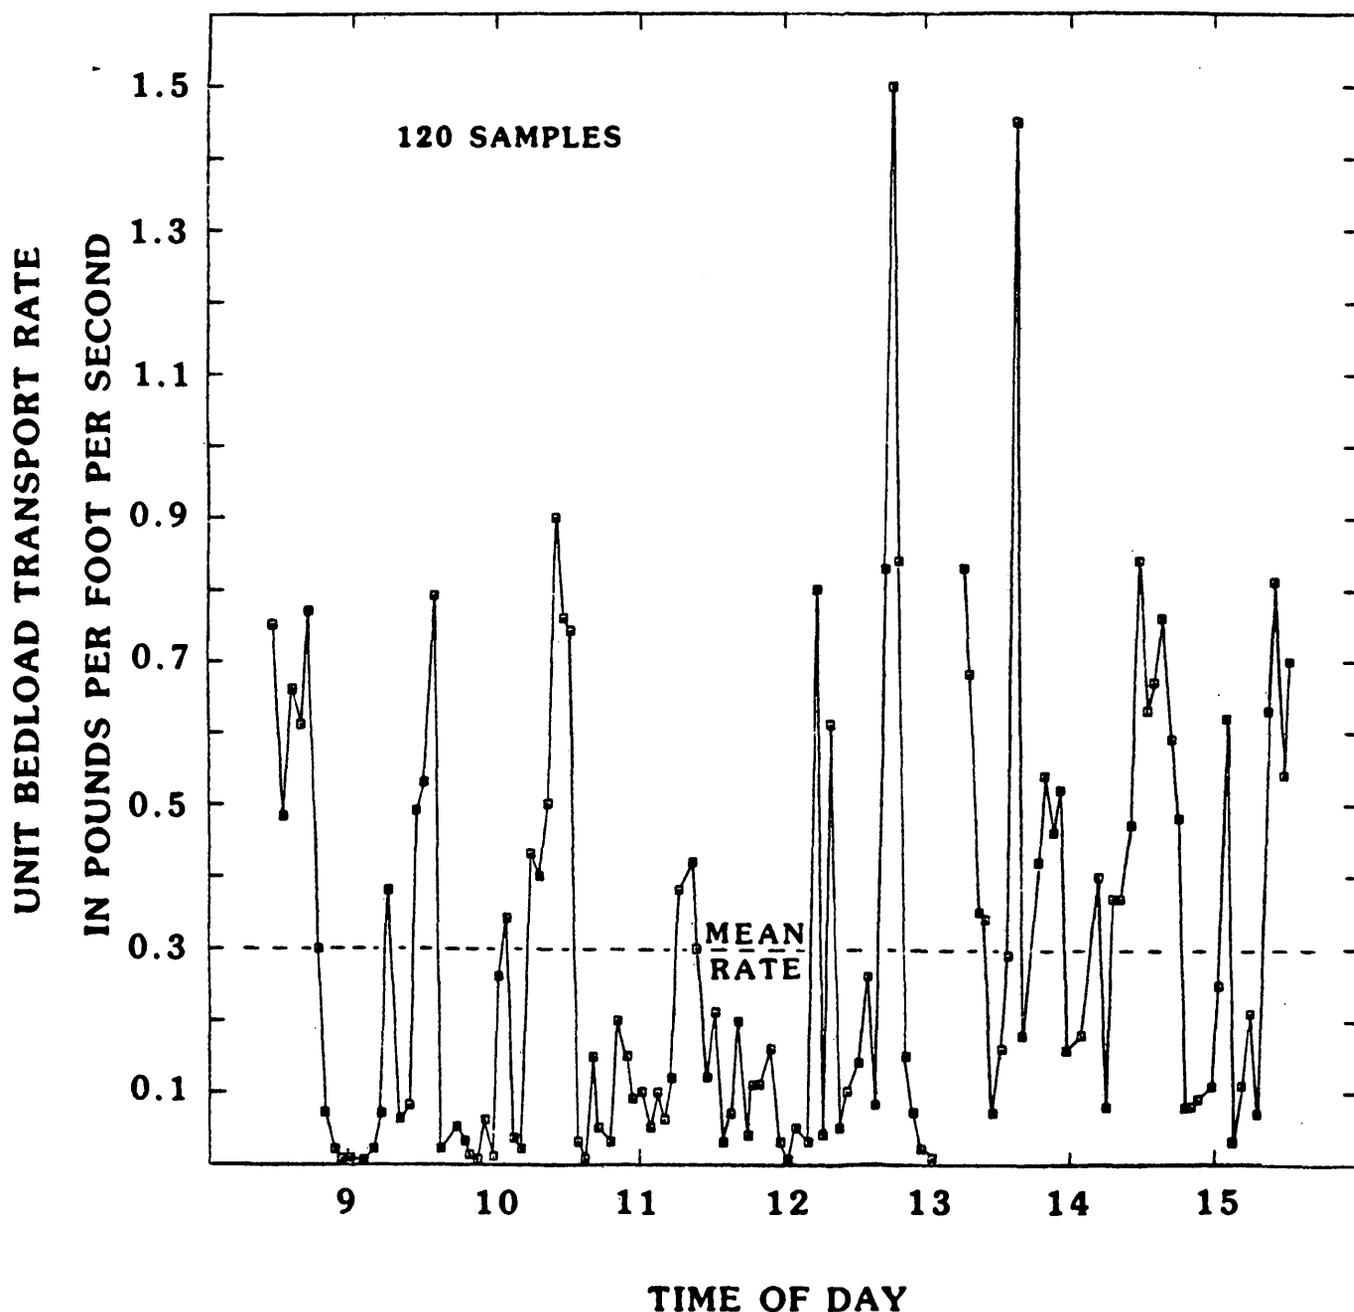


Figure 11.--Variability of consecutive bedload samples.

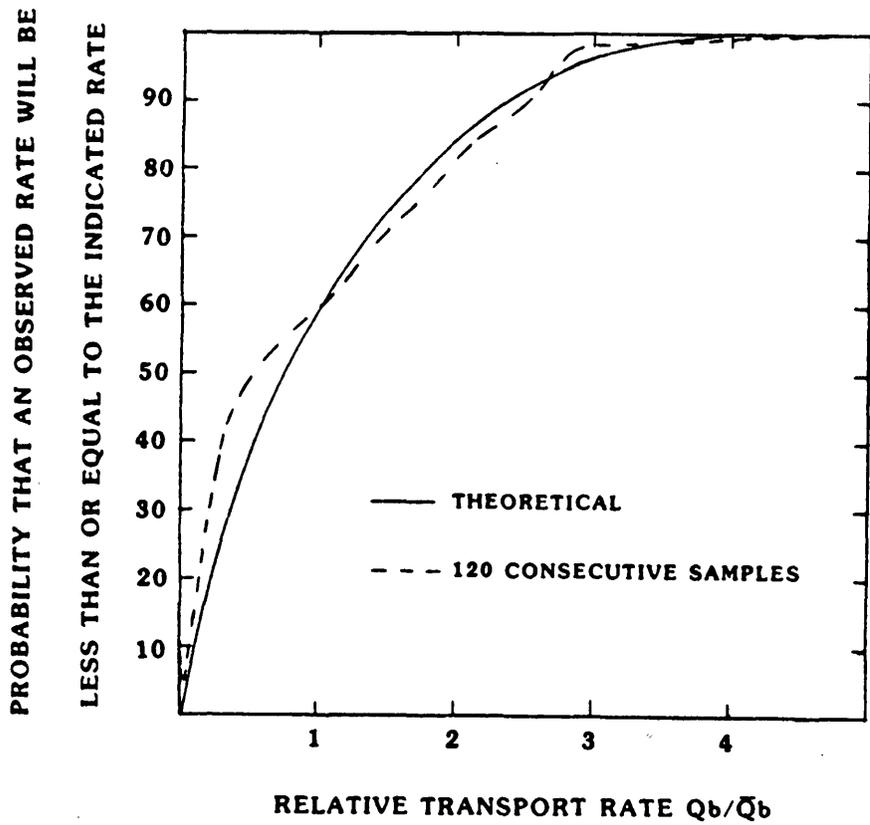


Figure 12.--Theoretical and sampled distributions of relative transport rates.

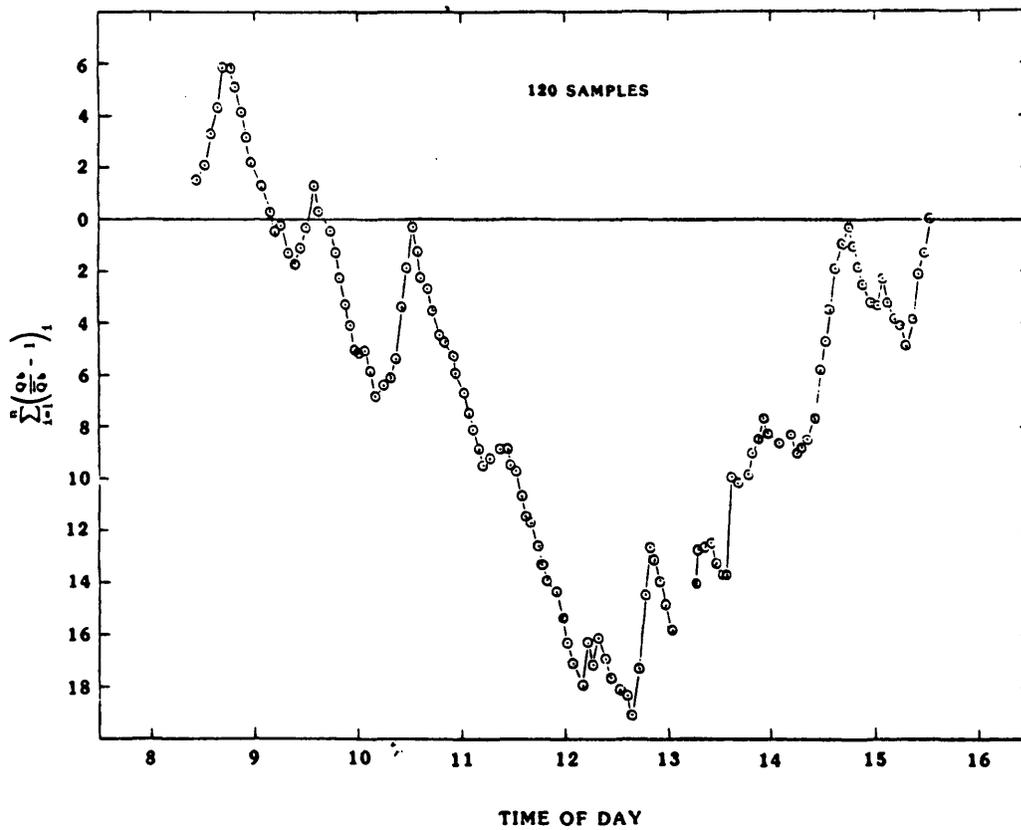


Figure 13.--Variability of consecutive bedload samples after smoothing.

SOME CHARACTERISTICS OF FLUVIAL PROCESSES IN RIVERS

by William W. Emmett, Luna B. Leopold, and Robert M. Myrick

Fluvial processes in rivers have been studied extensively in the United States during the past 20 years. This paper related some older studies of scour and fill to some new studies for which detailed data on water-surface slopes and bedload-transport rates help to substantiate earlier interpretations. Although discussion is based on data from three small rivers, the principles involved have transfer value to other rivers.

Reversal in maximum values of water-surface slope from riffles during low flow to pools during high flow causes a similar reversal in maximum values of stream power; this reversal is reflected in measured values of bedload-transport rate. Both pool and riffle reaches are likely to contribute sediment to bedload, resulting in generalized scour during high flow. However, spatially variable bedload-transport rates require those reaches with the least available stream power during times of high transport rate to temporarily fill as continuity in the sediment budget is maintained. Similarly, those reaches with the least available stream power during times of receding river stage become sinks for storage of the moving sediment. This process helps explain the sorting mechanism of sediment and the maintenance of pool-riffle sequences in rivers. The volume of scoured material within its annual travel distance is, on average, equal to annual bedload, but this is only an approximation because all bed particles do not move at the same speed or travel the same distance. Scour is associated with dilation of the grain bed through the scour depth, but individual particles move intermittently and at a speed much less than that of the water. The volume of material scoured and moved may be large, but because of its low mean speed downstream, the entire volume does not move out of a long reach but, in affect, is shifted downstream only a limited distance.

MEASUREMENT OF BEDLOAD DISCHARGE IN NINE ILLINOIS STREAMS WITH THE HELLEY-SMITH SAMPLER

by Julia B. Graf

Samples collected with the Helley-Smith bedload sampler provide useful information about transport of sand-size sediment in Illinois streams. Bedload samples were collected from 1978 through 1981 at nine sites ranging in drainage area from 432 to 4,393 mi². Sampling sites and years of sampling are: Vermilion River near Leonore (1980 and 1981), Spoon River near Seville (1981), La Moine River near Ripley (1981), Kishwaukee River near Perryville (1981), Green River near Geneseo (1978-1981), Rock River near Joslin (1978-1981), Edwards River near New Boston (1980), Henderson Creek near Oquawka (1978-1981), and Kaskaskia River near Venedy Station (1981). The purpose of the sampling program was to provide information needed to estimate volume of sand-sized material entering the Mississippi River and two of its major tributaries, and Rock River and the Illinois River.

All streams sampled drain flat to gently rolling terrain. Surficial materials in all drainage basins are composed largely of unconsolidated sediments deposited by processes related to Pleistocene glaciation--loess, drift, till, and dune sands. Bedrock is exposed in places along some of the streams, particularly the Rock and Vermilion Rivers. Bed materials in all streams except the Vermilion River range from fine to coarse sand. The Vermilion River has a bed composed primarily of granule to cobble gravel. Median diameters of bed materials at sampling sites are: Vermilion River, 3.65 mm; Spoon River, 0.56 mm; La Moine River, 0.57 mm; Kishwaukee River, 0.76 mm; Green River, 0.28 mm; Rock River, 0.67 mm; Edwards River, 0.53 mm; Henderson Creek, 0.38 mm; and Kaskaskia River, 0.29 mm.

The Helley-Smith samples provide the basis for bedload-discharge rating curves for the Rock and Kaskaskia Rivers and Henderson Creek. The 10 samples from the Rock River, collected at flows ranging up to almost the peak discharge of record, yield a well-defined bedload transport curve. Data from Henderson Creek cover a much narrower range of flow conditions and show wide scatter. Sampling methods which changed over the 4-year sampling period may have affected results. Although a transport curve was developed from the data, additional sampling is needed to obtain a reliable curve. Only three measurements define the Kaskaskia River rating curve, but these cover a range of flow conditions and fall on a straight line. Measured bedload discharges near Venedy Station are all much less than bedload discharges computed from hydraulic and channel characteristics, suggesting that a reservoir 30.6 miles upstream of the site may be a significant factor in reducing bedload.

The possibility of extending bedload-discharge rating curves or of developing curves for stations with few measurements was investigated by comparing measured bedload discharge with bedload discharge computed from hydraulic and channel characteristics for a range of flow conditions. Three theoretical or empirical methods were used for the computations. One bedload sample was collected in each of the Spoon, Kishwaukee, and Edwards Rivers. Comparison of computed bedload discharges with the one measured value made possible the selection of an appropriate method for computing bedload discharge for each of these streams. No one computational method best

represents bedload discharge in these streams. No bedload discharge rating curve was developed for the La Moine River, because the two measured bedload discharges are not sufficient for development of a rating curve and do not agree well with the computed bedload discharges. Bedload discharges measured in the Vermilion River, which has a sand, gravel, and bedrock bed, were much lower than any computed bedload discharges. Large bed material grains or high flow velocities may have interfered with the operation of the bedload sampler. A paucity of movable bed material also may be a cause of low measured bedload discharge at that site.

The dominant size of bedload in all streams sampled is in the range from 0.25 to 0.50 mm. Suspended sediment in all sampled streams is composed predominantly of silt- and clay-sized particles (less than 0.062 mm), with only a few percent of the sample being larger than the sampler bag mesh. Therefore, for most of these streams, the bedload sample probably contains very little sediment that was actually traveling in suspension. However, high percentages of sediment less than 0.25 mm in some bedload samples may be caused by significant suspended load of a size close to the sampler bag mesh size. Very high percentages of sediment less than 0.25 mm collected in Green River samples (30 to 54 percent) suggest that the very fine bed materials in that stream may be clogging the sampler. Because of this inferred clogging, samples were not used to develop a bedload discharge rating curve for the Green River.

Suspended-sediment discharge was measured at the same time as bedload for nine of the samples. The fraction of total sediment discharge that traveled within 3 inches of the bed ranged from about 0.1 percent to 10 percent. The bedload fraction was low for the Kaskaskia and Vermilion Rivers (0.4 and 0.1 percent, respectively) and was highest for the Kishwaukee and Rock Rivers and Henderson Creek (7 percent, 5 percent, 2 to 10 percent, respectively).

LIST OF ATTENDEES

Northeastern Region

Leslie D. Arihood, Indianapolis, IN
Gerald L. Goddard, Madison, WI
Julia B. Graf, Urbana, IL
John R. Gray, Urbana, IL
Lloyd A. Reed, Harrisburg, PA
Thomas H. Yorke, Harrisburg, PA

Southeastern Region

Willian P. Carey, Nashville, TN
Philip B. Curwick, Baton Rouge, LA
John George (Regional Office), Atlanta, GA
James H. Ficken (HIF), Bay St. Louis, MS
Glenn G. Patterson, Columbia, SC
Andrew Simon, Nashville, TN

Central Region

John Costa, Lakewood, CO
James E. Kircher, Lakewood, CO
David H. Harshall, Albuquerque, NM
Wilbur J. Matthes, Jr., Iowa City, IA
Albert Yang, (Central Laboratory) Arvada, CO

Western Region

Dallas Childers, Jr., Vancouver, WA
Richard J. Janda, Vancouver, WA
Holly A. Martinson, Vancouver, WA
David F. Meyer, Vancouver, WA
K. Michael Nolan, Menlo Park, CA
Thomas C. Pierson, Vancouver, WA
Rhea P. Williams, Boise, ID

Research

William W. Emmett, Lakewood, CO
Marvin C. Goldberg, Lakewood, CO
R. Edward Hickman, Reston, VA
Arthur J. Horowitz, Atlanta, GA
Cliff R. Hupp, Reston, VA
Waite R. Osterkamp, Reston, VA
John V. Skinner, Minneapolis, MN
E. Michael Thurman, Lakewood, CO

Headquarters

G. Douglas Glysson, Quality of Water Branch