

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

GROUND-WATER FLOW IN
THE CENTRAL VALLEY, CALIFORNIA

By Alex K. Williamson, David E. Prudic, and Lindsay A. Swain

Open-File Report 85-345

REGIONAL AQUIFER-SYSTEM ANALYSIS

6001-17

Sacramento, California
1985

UNITED STATES DEPARTMENT OF THE INTERIOR

DONALD PAUL HODEL, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

For additional information
write to:

District Chief
U.S. Geological Survey
Federal Building, Room W-2234
2800 Cottage Way
Sacramento, CA 95825

Copies of this report
can be purchased from:

Open-File Services Station
Western Distribution Branch
U.S. Geological Survey
Box 25425, Federal Center
Denver, CO 80225
(Telephone: [303] 236-7476)

Foreword

The Regional Aquifer-System Analysis Program

The Regional Aquifer-System Analysis (RASA) program was started in 1978 after a congressional mandate to develop quantitative appraisals of the major ground-water systems of the United States. The RASA program represents a systematic effort to study a number of the Nations's most important aquifer systems which, in aggregate, underlie much of the country and which represent important components of the Nations's total water supply. In general, the boundaries of these studies are identified by the hydrologic extent of each system, and accordingly transcend the political subdivisions to which investigations have often arbitrarily been limited in the past. The broad objective for each study is to assemble geologic, hydrologic, and geochemical information, to analyze and develop an understanding of the system, and to develop predictive capabilities that will contribute to the effective management of the system. The use of computer simulation is an important element of the RASA studies, both to develop an understanding of the natural, undisturbed hydrologic system, and of any changes brought about by human activities, as well as to provide a means of predicting the regional effects of future pumping or other stresses.

The final interpretive results of the RASA program are presented in a series of U.S. Geological Survey Professional Papers that describe the geology, hydrology, and geochemistry of each regional aquifer system. Each study within the RASA Program is assigned a single Professional Paper number, and where the volume of interpretive material warrants, separate topical chapters that consider the principal elements of the investigation may be published. The series of RASA interpretive reports begins with Professional Paper 1400 and thereafter will continue in numerical sequence as the interpretive products of subsequent studies become available.

Dallas Peck

Director

CONTENTS

	Page
Foreword-----	III
Abstract-----	1
Introduction-----	3
Purpose and scope-----	5
Previous investigations-----	5
Well-numbering system-----	7
Description of the Central Valley-----	10
Hydrology-----	11
Geology-----	20
Land subsidence-----	21
Acknowledgments-----	27
Model development-----	27
Simulation of ground-water flow-----	28
General concepts and features of the model-----	31
Dividing the aquifer system into finite-	
difference blocks-----	31
Boundaries-----	33
Simulation of land subsidence-----	36
Estimates of recharge and discharge-----	39
Streamflow-----	42
Precipitation-----	45
Irrigation-----	46
Estimates of aquifer properities-----	49
Thickness-----	49
Hydraulic conductivity-----	50
Horizontal-----	50
Vertical-----	51
Aquifer storage-----	53
Water-level analysis-----	56
Sequence of calibration-----	57
Predevelopment ground-water flow-----	60
Water levels and flows-----	61
Horizontal-----	61
Vertical-----	61
Recharge and discharge-----	74
Extent of freshwater-----	78
Postdevelopment ground-water flow-----	79
History of water development-----	79
Irrigation-----	82
Domestic and industrial-----	97
Effects of development-----	97
Changes in recharge and discharge-----	99
Changes in water levels-----	108
Predevelopment to 1961-----	108
1961-77-----	121
Changes in ground-water flow-----	140
Land subsidence-----	153
Simulated subsidence, 1961-77-----	160
Factors that affect the relation of subsidence	
to pumpage-----	168

	Page
Postdevelopment ground-water flow--Continued	
Effects of development--Continued	
Change in aquifer storage-----	174
Water-table zone -----	175
Elastic storage-----	175
Water released from inelastic compaction-----	176
Model limitations-----	179
Calibration-----	179
Variable density-----	183
Recharge and discharge estimates-----	183
Modeling Subsidence-----	185
Summary and conclusions-----	186
Selected references-----	189
Appendix A. Recharge and discharge values used in simulations (description of computer-tape format)-----	196
Appendix B. Aquifer properties used in simulations-----	197

ILLUSTRATIONS

	Page
Figure 1. Map showing location of the Central Valley-----	4
2. Map and diagram showing the well-numbering system and well locations-----	8
3. Map showing geographic features in the Central Valley-----	12
4. Map showing mean annual precipitation in Central Valley drainage basin-----	14
5. Graphs showing monthly mean precipitation and natural streamflow in the Sacramento and San Joaquin Valleys----	17
6. Graphs showing variations in precipitation from the late 1800's to 1980 at four locations-----	18
7. Graphs showing cumulative departure of precipitation from the mean at four locations-----	18
8. Map showing thickness of aquifer system studied, based on generalized thickness of continental deposits-----	22
9. Map showing areas affected by land subsidence-----	24
10. Diagram showing node array for finite-difference formulation-----	30
11. Sketch showing conceptualization of the aquifer system----	32
12. Map showing model grid and boundaries-----	34
13. Diagram showing (A) relation of storage term to the hydraulic head in a compacting interval of the aquifer system, and (B) hydrograph and compaction record for a well in the Tulare Basin-----	37
14. Maps showing (A) land-surface altitude, and (B) predevelop- ment water-table altitude and hydrologic-section locations-----	64
15. Maps showing simulated and estimated head difference between the water table and the lower pumped zone under predevelopment conditions-----	68
16. Diagrammatic sections (A-C) showing simulated predevelopment equipotential lines-----	70

	Page
Figure 17. Map showing areas of predevelopment flowing wells and the Corcoran Clay Member of the Tulare Formation-----	72
18. Map showing simulated predevelopment net recharge/discharge--	76
19. Map showing the depth to the base of freshwater-----	80
20. Graph showing increase of irrigated acreage in California since 1870, and in the Central Valley since 1959-----	86
21. Graph showing irrigation water use from 1961 to 1977-----	87
22. Maps showing ground-water pumpage for 1961, 1962, 1975, and 1977-----	88
23. Diagram showing the approximate depth to the weighted center of the pumped zone-----	96
23a. Diagram showing change in water level and direction of flow from 1900 to 1961, due to ground-water pumpage-----	98
24. Diagram showing changes in water-budget terms due to development in the Central Valley-----	101
25. Map showing area and subarea boundaries-----	102
26. Graph showing components of a recharge and discharge water budget, 1961-77-----	105
27. Map showing calibration adjustments to postdevelopment water-table net recharge/discharge estimates-----	106
28. Hydrographs (A-J) of selected wells showing long-term water-level changes-----	109
29. Maps showing spring 1961 (A) water-table altitude, (B) hydraulic head in the lower pumped zone and (C) head difference between water table and the lower pumped zone-----	114
30. Maps showing change from 1860 to spring 1961 in (A) the water-table altitude and (B) the lower pumped zone hydraulic head-----	119
31. Maps showing observed and simulated (A) water-table altitude, spring 1976, and (B) change in water-table altitude, spring 1961 to spring 1976-----	124
32. Maps showing observed and simulated (A) hydraulic head in the lower pumped zone, spring 1976 and (B) change in hydraulic head in the lower pumped zone, from spring 1961 to spring 1976-----	130
33. Hydrographs (A-N) showing observed and simulated water levels, 1961-77-----	135
34. Graphs (A-H) showing variation in horizontal and vertical average pore velocities and flows during predevelopment and 1961 conditions-----	143
35. Graph showing ratio of postdevelopment to predevelopment vertical leakance in 51 model blocks-----	151
36. Maps showing (A) major subsiding areas, locations of wells, water levels, and compaction data and (B) land subsidence, 1926-70-----	154
37. Graph showing volumes of land subsidence in the major subsiding areas of the San Joaquin Valley, and pumpage in the Los Banos-Kettleman City area, 1925 through 1977---	159
38. Maps showing (A) estimated land subsidence, 1961-75 and (B) simulated land subsidence, 1961-75-----	164

	Page
Figure 39. Hydrographs (A-F) and measured compaction of selected wells in the major subsiding areas of the San Joaquin Valley from 1940 through 1980-----	169
40. Graph showing departure of simulated and observed water levels, 1961-76-----	181
41. Graph showing cumulative distribution of the deviation of simulated from observed water levels for the end of the calibration period spring 1961 to spring 1976, for the water table and the lower pumped zone-----	182
42. Graph showing the ratio of calibrated to estimated net recharge/discharge to/from the water-table zone-----	184

TABLES

	Page
Table 1. Major stream budget loss summary-----	43
2. Regression results--excess precipitation as a function of annual precipitation-----	45
3. Hydraulic conductivity and specific-yield values used for specific formations-----	53
4. Development of surface-water storage reservoirs-----	83
5. Development of major water-conveyance facilities-----	84
6. Summary of the components of ground-water recharge and discharge, 1961-77 average-----	104
7. Specific yield, thickness, and permeability summary-----	141
8. Comparison of estimated and simulated volumes of land subsidence in the San Joaquin and Sacramento Valleys from 1961 to 1977-----	160
9. Comparison of estimated and simulated volumes of subsidence to pumpage for the major subsiding areas from 1961 to 1977-----	161
10. Proportion of pumpage from water table and compaction storage-----	177
11. Summary of water-level differences, observed and simulated, 1961-77-----	180

CONVERSION FACTORS

For readers who may prefer to use International System of Units rather than inch-pound units, the conversion factors for the terms used in this report are listed below:

<u>Multiply</u>	<u>By</u>	<u>To obtain</u>
inch (in)	25.40	millimeter
foot (ft)	0.3048	meter
mile (mi)	1.609	kilometer
acre	4,047	square meter
square mile (mi ²)	2.590	square kilometer
foot per day (ft/d)	0.3048	meter per day
foot per year (ft/yr)	0.3048	meter per year
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second
acre-foot per year (acre-ft/yr)	1,233	cubic meter per year
gallon per minute (gal/min)	6.309	cubic meter per second
acre-foot (acre-ft)	1.233	cubic meter
square foot per second (ft ² /s)	0.09290	square meter per second

GROUND-WATER FLOW IN THE CENTRAL VALLEY, CALIFORNIA

by Alex K. Williamson, David E. Prudic, and Lindsay A. Swain

ABSTRACT

The agricultural productivity of the Central Valley is dependent on the availability of water from irrigation. About 7.3 million acres of cropland in the Central Valley receives about 22 million acre-feet of irrigation water annually. One half of this irrigation water is supplied by ground water, which amounts to about 20 percent of the Nation's ground-water pumpage. Ground water is important as a stable supply of irrigation water because of the high variability of surface-water supplies in the Central Valley. This large ground-water development during the past 100 years has had major impacts on the aquifer system such as decline in water levels, land subsidence, depletion of the aquifer storage, and increase in recharge. The flow conditions before and during development were simulated on a regional scale using a three-dimensional finite-difference flow model.

The Central Valley is a large (20,000 square miles) structural trough filled with poorly permeable marine sediments that are overlain by coarser continental sediments. In general, previous investigators have conceptualized the northern one-third of the valley--the Sacramento Valley--as a water-table aquifer and the southern two-thirds--the San Joaquin Valley--as a two-aquifer system separated by a regional confining clay layer. A somewhat different concept of the aquifer system was suggested during this study by analyses of water-level measurements, texture of sediments interpreted from electric logs, and flow-model simulations. Vertical hydraulic head differences are found throughout much of the Central Valley. Early in development, flowing wells and marshes were found throughout most of the central part of the valley. More than 50 percent of the thickness of the continental sediments is composed of fine-grained lenticular deposits that are discontinuous, but distributed throughout the stratigraphic section in the entire Central Valley .

The concept presented in this report considers the entire thickness of the continental deposits as one aquifer system which has varying vertical leakance that depends on several factors, including amount of fine-grained sediments. The average horizontal hydraulic conductivity is about 6 feet per day, and the average thickness of the continental deposits is about 2,400 feet.

Irrigation use, which averaged 22 million acre-feet of water per year during 1961-77 increased the evapotranspiration about 9 million acre-feet per year over its predevelopment value. This is a large figure compared to the average annual surface-water inflow to the Central Valley of 31.7 million acre-feet per year. Precipitation on the valley floor is mostly lost to natural evapotranspiration. The overall postdevelopment recharge and discharge of the aquifer system was more than 40 times greater than the predevelopment estimated values. The increases of pumpage associated with development mostly in the San Joaquin Valley has caused water-level declines that exceed 400 feet in places and resulted in the largest known volume of land subsidence due to fluid withdrawal in the world. Water in aquifer storage has declined about 60 million acre-feet since predevelopment to 1980--40 million acre-feet were derived from the water-table zone, 17 million acre-feet from compaction of sediments, and 3 million acre-feet from elastic storage. During 1961-77, ground water withdrawn from aquifer storage averaged about 800,000 acre-feet per year.

The flow model was calibrated principally in accordance with the hydrologic data observed during 1961-75 because little predevelopment data were available for analysis. An explicit algorithm to simulate land subsidence was developed and calibrated. The simulated land subsidence was within 6 percent of the estimated volume, however, the time lag associated with this type of subsidence was not adequately simulated. Simulated water-level changes averaged 2.6 and 12 feet higher than the observed water-level changes for the water table and lower pumped zones, and the standard deviation of the simulated changes minus observed change was 22 and 27 feet, respectively. The flow model was tested for the period of 1976-77 drought with good results. The simulations indicated that vertical leakance greatly increased from the predevelopment values as a result of water flowing through some of the more than 100,000 irrigation well casings which are open to different aquifer layers.

The simulation results are shown on maps for comparison with the observed hydrologic data. A description of the computer-tape file, which contains estimates of recharge/discharge, and the aquifer properties used in the simulation are included in Appendix A and B, respectively.

INTRODUCTION

The Central Valley of California (fig. 1) has fertile soil and a long growing season, conditions that are conducive to farming. Almost 40 percent of the total United States production of vegetables, fruits, and nuts come from this valley (U.S. Department of Commerce, 1978). The valley floor, where agricultural production is most intense, has an average water deficiency (precipitation minus evapotranspiration) under natural conditions of as much as 40 in/yr (Thomas and Phoenix, 1976). Thus, agricultural development in the valley is dependent on water from sources other than direct precipitation.

The water needed for agricultural production is obtained from two sources. The first source is from streams and rivers that enter the valley from the surrounding mountain ranges where there is a surplus of water. The surface water is diverted by canals to areas of farming. The second source is ground water, which is used primarily where surface-water supplies are not available or are not sufficient or dependable enough to support the agricultural activities.

The amount of water required to support agriculture averages about 22 million acre-ft/yr. Ground-water withdrawals in the Central Valley account for about one half of the total water used. This amount is equal to 74 percent of the total annual ground-water pumpage in California (Kahrl, 1978), and over 20 percent of the total annual ground-water pumpage for the entire United States (Murray and Reeves, 1977).

This large demand for ground water has placed a considerable stress on the aquifer system within the valley. Ground-water pumpage has exceeded recharge in several parts of the valley, and has caused water levels to decline more than 400 ft. In some areas, the water levels have declined below sea level (Thomas and Phoenix, 1976, and Bertoldi, 1979). The effect of excessive pumpage in the valley has been the greatest volume of land subsidence due to fluid withdrawal recorded anywhere in the world (J. F. Poland, U.S. Geological Survey, oral commun., 1982). More than 5,200 mi² of land surface has subsided more than 1 ft and at one location, subsidence exceeds 29 ft (Ireland and others, 1984).



FIGURE 1.--Location of the Central Valley
(modified from Thomas and Phoenix, 1976)

Purpose and Scope

The Central Valley aquifer system was studied as part of the National Regional Aquifer Systems Analysis (RASA) Program of the U.S. Geological Survey. The valley was chosen because of (1) its long history of intensive ground-water development; (2) its dependence on ground water to maintain agricultural productivity; (3) restrictions of previous studies that were limited to localized geographic areas or to defining only a part of the system; and (4) the large size (20,000 mi²) and complexity of the system. The scope of the overall project was to collect, interpret, and verify hydrologic information from numerous sources with the goal of quantifying the hydrologic conditions of the entire system and develop methods to evaluate aquifer responses to changes in ground-water-management practices (Bertoldi, 1979, p. 9). The purpose of this report, which is a part of the overall project, is to: (1) evaluate the aquifer system on a regional basis, mainly through the use of a mathematical (computer) model; (2) simulate the conditions that existed before development of the ground-water resources (prior to 1870); (3) simulate the present conditions, and (4) discuss the changes in the ground-water system caused by development of the valley's water resources. Simulation of the aquifer system using a mathematical model was chosen as a method for analysis because it integrates large amounts of diverse types of data, testing both the conceptualization of the system and the aquifer characteristics.

Only those aspects that directly apply to the analysis of aquifer properties and to ground-water flow within the system between Red Bluff in the north and Bakersfield at the south end of the valley (fig. 1) are included in this report. Detailed descriptions of the water quality and geology of the Central Valley are discussed in separate reports, as well as information that pertains to the drilling of test holes. This report presents information for recharge, evapotranspiration, and pumpage. The methods of computation of these hydrologic variables are discussed in detailed reports by Diamond and Williamson (1983) and Williamson (1982).

Previous Investigations

No comprehensive report on the modeling of ground-water flow of the entire Central Valley of California has been published. The Central Valley has been studied or modeled in different areas by several investigators since about the late 1880's. The earliest reliable systematic study was by W. Hammond Hall (1886), the California State Engineer from 1878 to 1889. Hall's work together with Mendenhall and others' (1916) study of ground-water resources of the San Joaquin Valley and Bryan's (1923) study of the Sacramento Valley helped formulate the concepts of the aquifer system in the valley during a period when there was little stress on the system.

Between 1923 and the end of World War II (1945) virtually no quantitative investigative reports for the Central Valley were published, however, ground-water data were being accumulated. It was during the period 1923-45 that hundreds of exploratory gas and oil wells were drilled and logged in the valley and these logs provided basic information on the lithologic character of the aquifer system, including the lower boundary of alluvium, distribution of coarse and fine-grained materials, and distribution of minerals.

Post-World War II agricultural growth and attendant ground-water use in the valley increased so rapidly that by 1950, California pumped nearly 50 percent of all the ground water pumped in the the United States. With this increased pumping, virtually tens of thousands of wells were drilled in the Central Valley making available a greatly expanded set of data upon which to renew scientific investigation of the ground-water resources. The new data allowed Croft (1968, 1972) to map an important confining bed that extends over nearly 5,000 mi² of the San Joaquin Valley, and four other lesser confining beds. From the data gathered from 1945 to 1960, Davis and others (1959) and Olmsted and Davis (1961) were able to define geologic features and estimate the storage capacity of the upper 200 ft of the aquifer system in the San Joaquin and Sacramento Valleys. Eighty-six papers on subsidence research were written by the U.S. Geological Survey during the years 1950 and 1983. These papers describe the mechanics of subsidence caused by compaction of both shallow deposits (hydrocompaction) and deep deposits (owing to withdrawal of ground water, oil and gas fluids) in the San Joaquin Valley. These reports resulted from various investigations which contain valuable data that were used to form the initial model values of specific-storage coefficients, specific yields, and vertical and horizontal hydraulic conductivity.


The California Department of Water Resources administers two programs--one that provides ground-water-level data dating back to 1921 and another program of comprehensive land-use data that is resurveyed in most areas every 5 to 10 years. These basic data provided valuable data on head distribution, evapotranspiration, recharge, distribution of pumpage, and irrigation return-flow.

Since about 1970, several investigators have developed ground-water-flow models for parts of the valley. Bloyd (1978) designed an uncalibrated, unverified flow model for natural flow conditions in the Sacramento Valley. The California Department of Water Resources (1977b) in cooperation with the Kern County Water Agency developed a calibrated flow model for the Kern County area of the Tulare Basin in part of the southern San Joaquin Valley. Londquist (1981) and Page (1977) developed models of parts of the aquifer system in areas of San Joaquin and Stanislaus Counties; the California Department of Water Resources (1974a) designed a mathematical model to simulate man's impact on the water resources of Sacramento County. A contractor for the Department of Water Resources (1982) has developed a calibrated three-dimensional flow model of the San Joaquin Valley for use in coordination with an economic optimization model. Mitten (1983) and C. J. Londquist (U.S. Geological Survey, written commun., 1983) are using ground-water-flow models to study the aquifer system in the Fresno and Madera areas, respectively. Corapcioglu and Brutsaert (1977) developed a model to simulate land subsidence caused by pumping in a few sites in the San Joaquin Valley. These models provided some information for estimation of initial boundary conditions and comparative values for hydraulic conductivity and storage coefficients where applicable to the regional model discussed in this paper.

Although the foregoing studies provided the bulk of the background information it would be negligent to omit the mention of other sources of information. Nearly 600 reports (Bertoldi, 1979) and numerous data obtained from 300 local agencies, farmers, and industrial managers were used in formulating and corroborating the characteristics of the regional aquifer system of the Central Valley.

Well-Numbering System

The well-numbering system commonly used in California is shown and explained in figure 2.

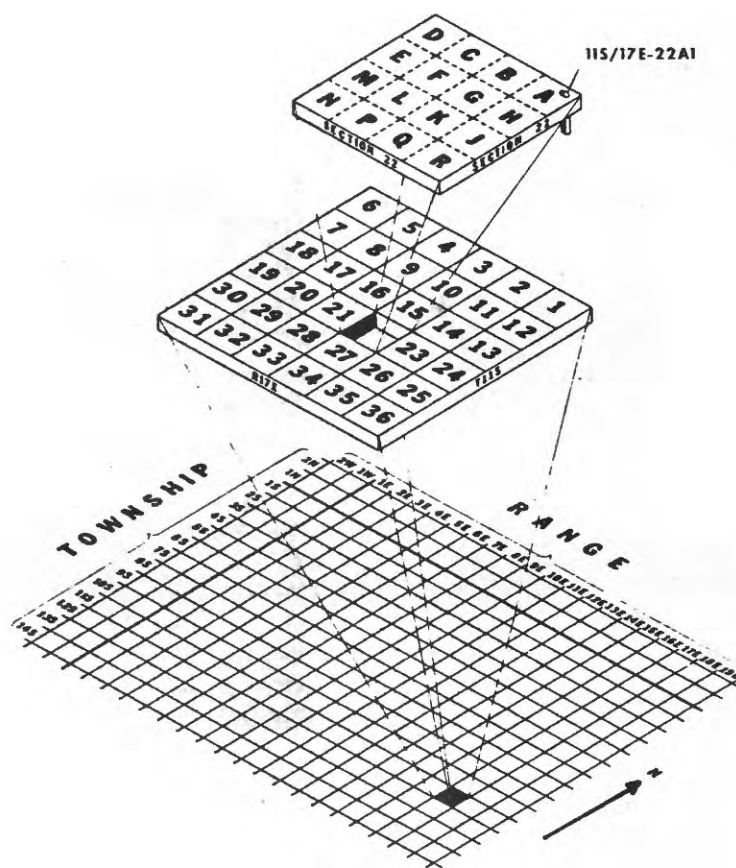

WELL-NUMBERING SYSTEM

Description of the Central Valley

Surrounded by mountains and filled with alluvium and other sediments, the Central Valley extends more than 400 mi from near Red Bluff in the north to near Bakersfield in the south (fig. 1). The valley ranges in width from about 20 to 70 mi and covers an area of approximately 20,000 mi². Geologically, it is one of the most notable structural troughs in the world.

The Central Valley is subdivided into two distinct valleys, each drained by a major river after which that part of the valley is named. As a result, the northern one-third of the valley is called the Sacramento Valley and the southern two-thirds is called the San Joaquin Valley. The southern part of the San Joaquin Valley, sometimes called the Tulare Basin, is a basin of interior drainage, where water often collects in nearly dry-lake areas known as Kern, Buena Vista, and Tulare Lake beds (informal usage) (fig. 3). The two valleys are separated by an area commonly called the Delta where the Sacramento and San Joaquin Rivers meet and discharge through a natural outlet at Suisun Bay and into San Francisco Bay. The valley can be subdivided for study into four areas: Sacramento, Delta, San Joaquin, and Tulare (fig. 1).

Topographically, the Central Valley is relatively flat and of low altitude. The only feature of prominent relief within the valley is the Sutter Buttes, which rise about 2,000 ft above the valley floor near the center of the Sacramento Valley. Altitudes in the valley are mostly less than 500 ft above sea level. Maximum altitudes of about 1,800 ft occur at the apexes of some alluvial fans along the south and northwest perimeters and on the Sutter Buttes to the north. Two areas within the valley--the Sutter Buttes and the Kettleman Hills--(fig. 3), are not part of the aquifer system.

Hydrology

The climate in the valley is of Mediterranean type (dry summers). Average annual precipitation ranges from 13 to 26 in. in the Sacramento Valley and 5 to 16 in. in the San Joaquin Valley (fig. 4). About 85 percent of the annual precipitation occurs in the six months from November to April (fig. 5A and B). Summers are hot, winters are moderate and allow a long growing season.

Streamflow, a very important factor in the water supply of the valley, is entirely dependent on the precipitation in the Sierra Nevada and in parts of the Klamath Mountains in the north (fig. 1). No perennial streams of any significant size enter the valley from the west side except for those in the northwest end of the valley. The mean annual streamflow entering the Central Valley around its perimeter is 31.7 million acre-ft. Mean annual precipitation in the mountains increases with altitude to as much as 90 in. (Rantz, 1969). Much of the precipitation in the mountains occurs in the form of snow, especially in the higher southern Sierra Nevada. The resulting snowpack delays runoff so that about 78 percent of the total unimpaired runoff to the valley occurs in the six months between January and June (fig. 5).

Precipitation and runoff in the valley vary greatly from year to year as well as within the year (fig. 6). The standard deviation of annual flows ranges from 40 to 80 percent of the mean among the major streams. Years when the precipitation is near the mean are somewhat rare. A relatively stable measure of variability in the valley would be the sum of the 15 largest streams' annual flow, because often one end of the valley will be wetter or drier than the other. However, for this flow, only 2 (1962 and 1975) of the 17 years (1961-77) and only 16 percent of 44 years of record were within 10 percent of the mean annual flow. The periods of wetter and drier than normal precipitation since the late 1800's are shown in figures 7A-D.

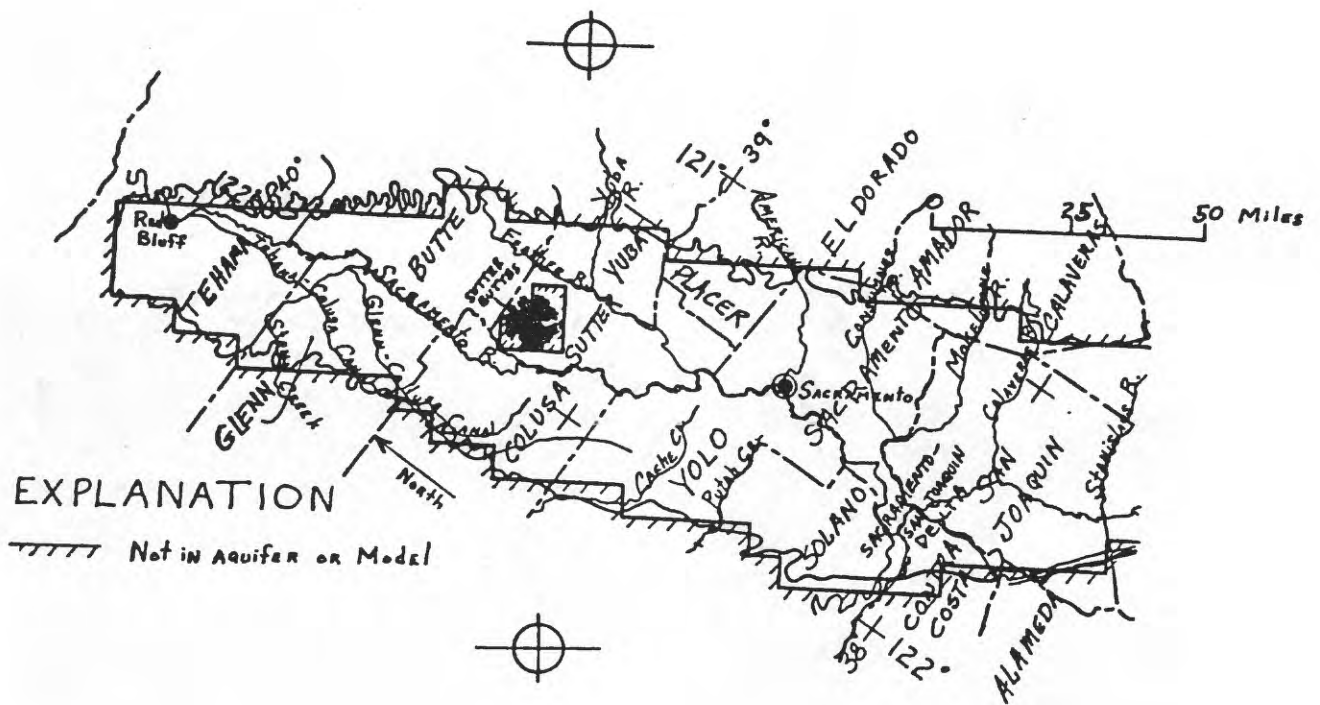


Figure 3. -- Geographic features in the Central Valley.

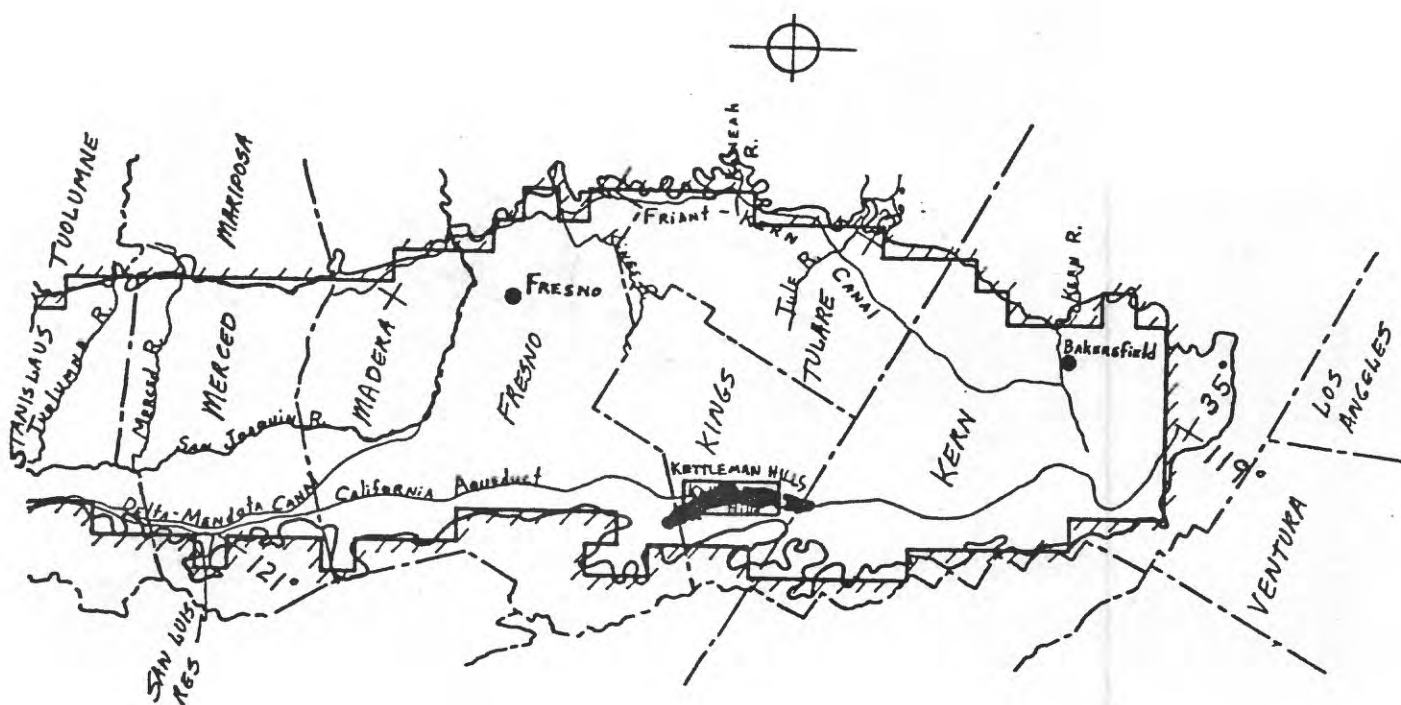


Fig. 3 - (right side)





FIGURE 4. -- MEAN ANNUAL precipitation in the CENTRAL VALLEY DRAINAGE BASIN
(from RANTZ, 1969)

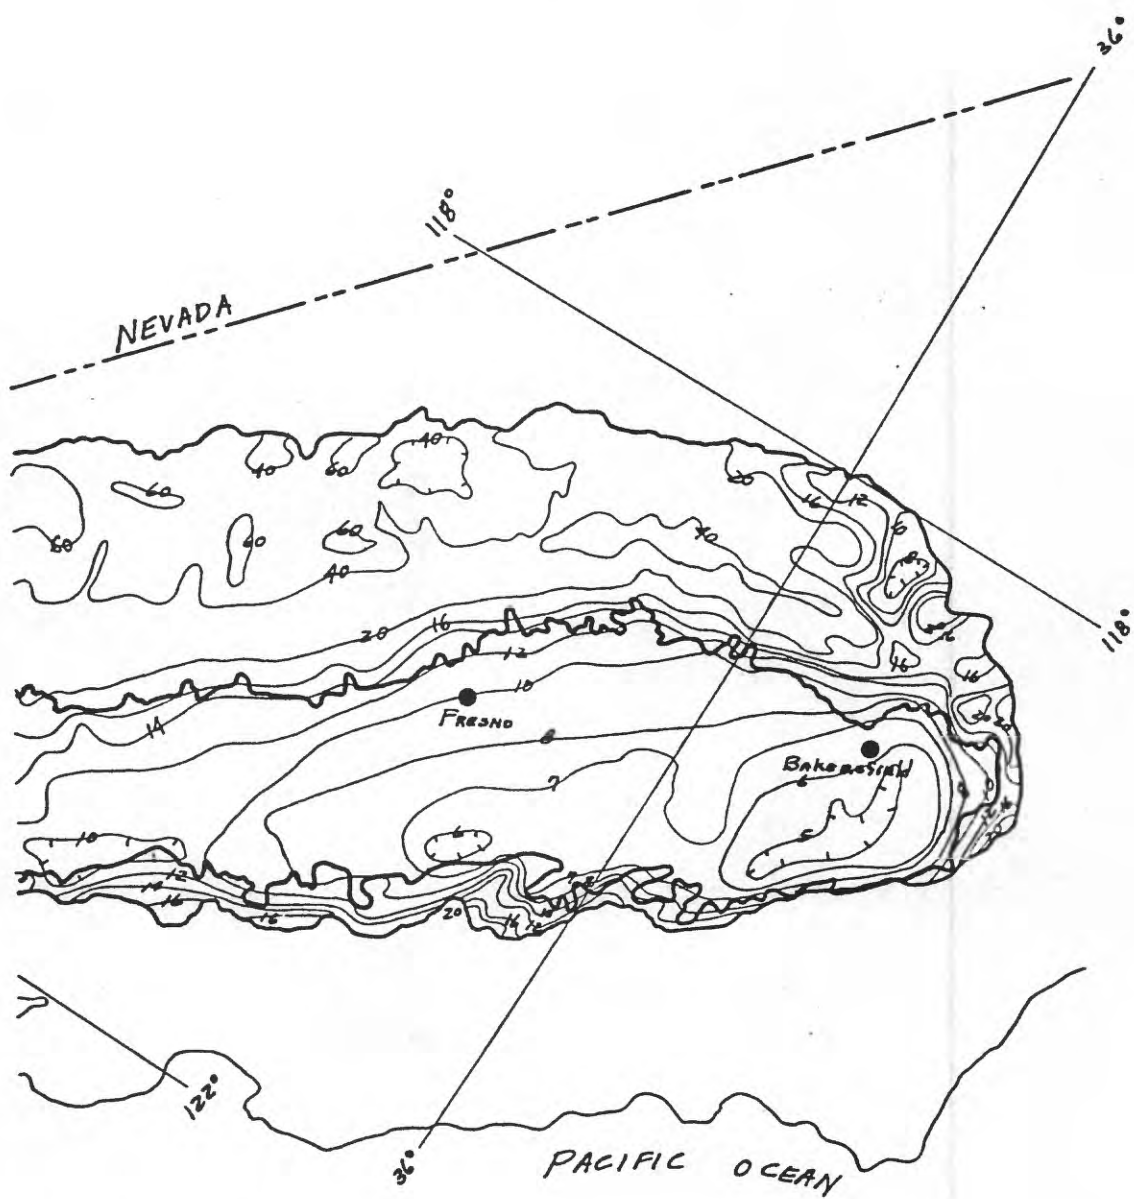


Fig 4 - (right side)

RATIO OF MEAN MONTHLY TO MEAN ANNUAL, IN PERCENT



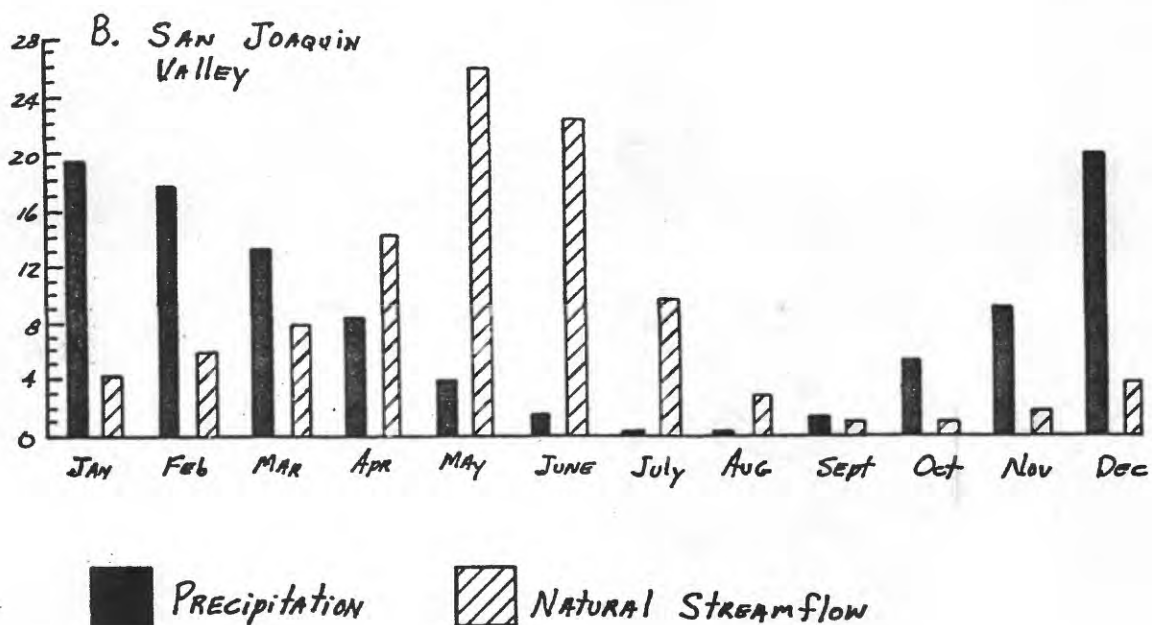



FIGURE 5. -- MEAN monthly precipitation and NATURAL STREAMFLOW in the SACRAMENTO and SAN JOAQUIN Valleys, AS A PERCENTAGE of the MEAN ANNUAL precipitation and STREAMFLOW, respectively.

PRECIPITATION, IN PERCENTAGE OF MEAN ANNUAL


6A.

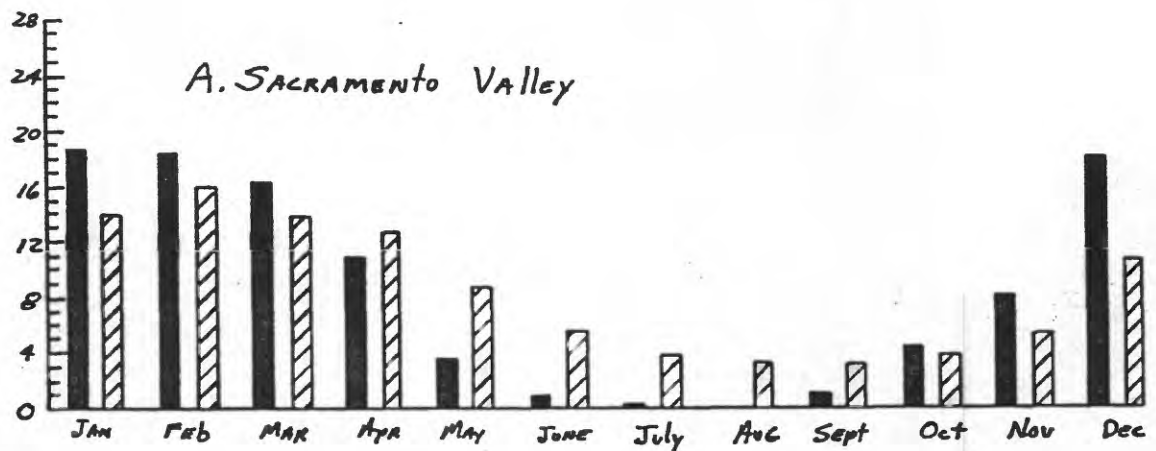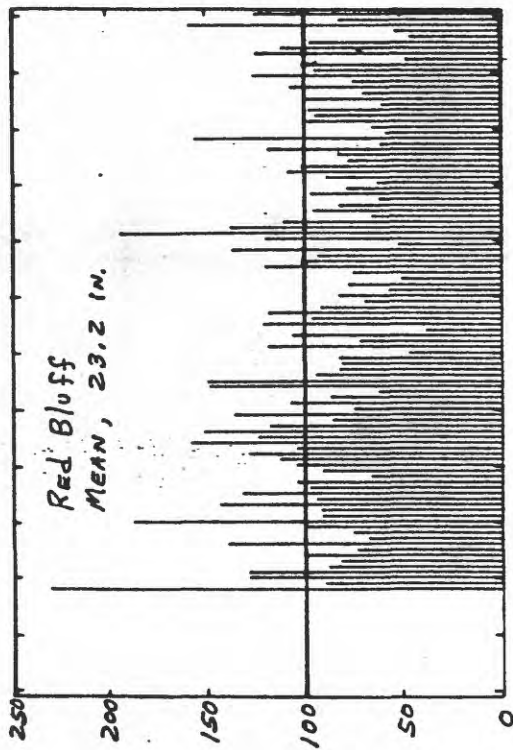


6B.

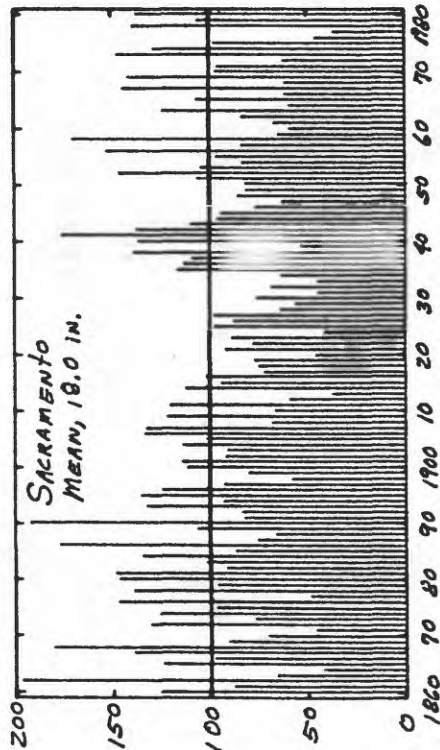

7A.

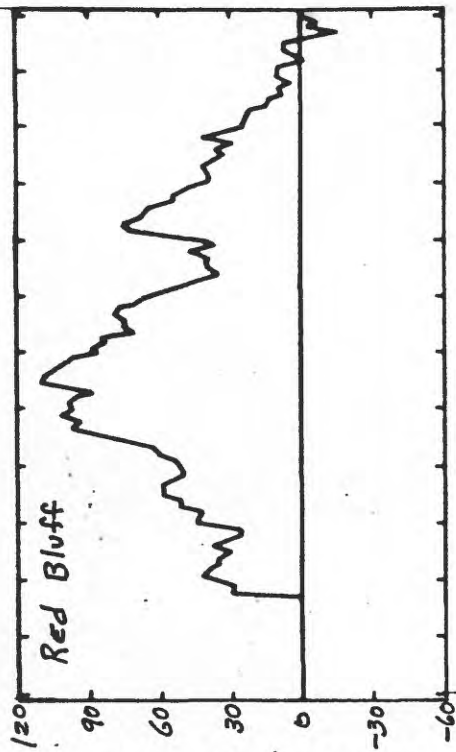


7B.

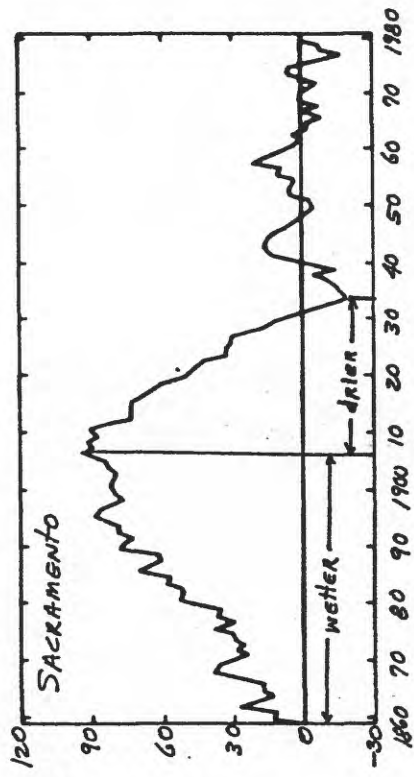


CUMULATIVE DEPARTURE, IN INCHES

Fig 6 & 7 - (Left side)


6C.

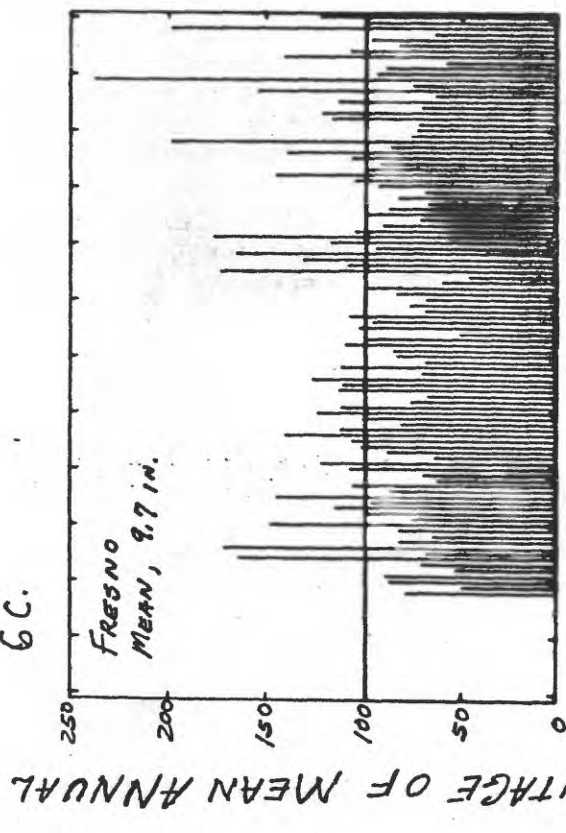

6D.

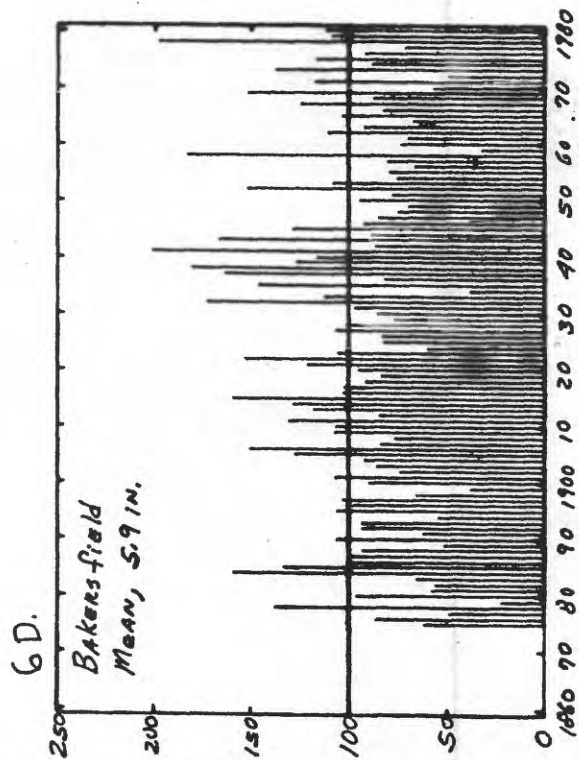

7C.

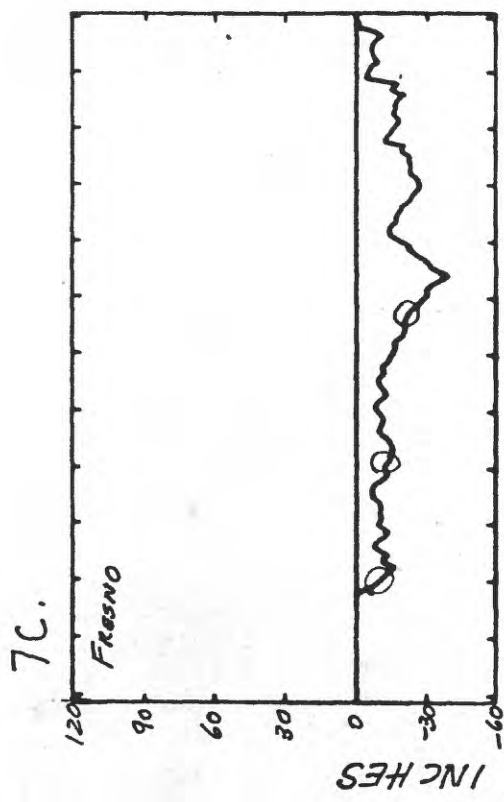

7D.

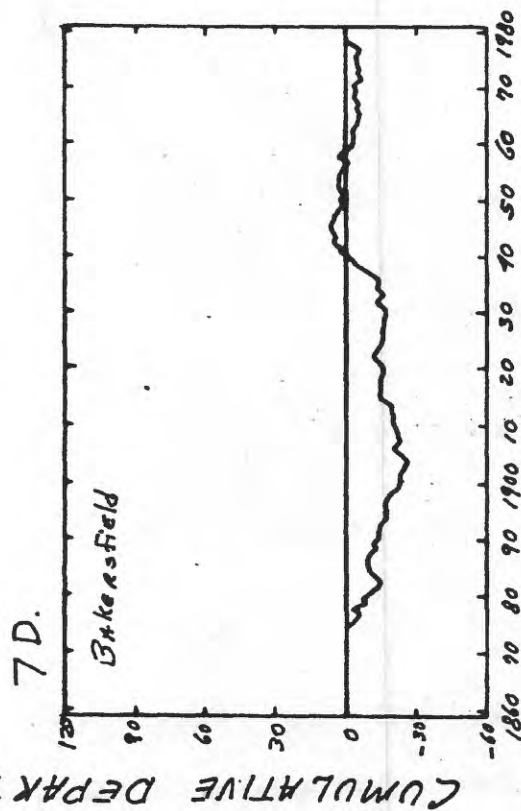


FIGURE 6 AND 7. -- ANNUAL PRECIPITATION AND CUMULATIVE DEPARTURE OF PRECIPITATION
FROM THE MEAN ANNUAL, 1860 - 1980, AT FOUR LOCATIONS.

Geology

The geology of the Central Valley is described in an accompanying report (R. W. Page, 1985), therefore this section contains information pertinent only to the understanding of the ground-water-flow system.

In general, the Central Valley is a long, northwest-trending, asymmetric structural trough that is filled with sediments. Along the eastern part of the valley the sediments are underlain by pre-Tertiary crystalline and metamorphic rocks of the Sierra Nevada block (Davis and others, 1959, p. 40, and Olmsted and Davis, 1961, p. 39). The sediments are thought to be underlain by a pre-Tertiary mafic and ultramafic complex beneath the west side and part of the east side of the valley (Cady, 1975, p. 17-19; and Suppe, 1978, p. 7). Generally, only minor quantities of water occur in the joints and cracks of these pre-Tertiary rocks.

Rocks of the Coast Ranges on the west side of the valley consist mainly of pre-Tertiary and Tertiary semiconsolidated to consolidated clastic sediments of marine origin that have been folded and faulted. These deposits extend eastward underneath the Central Valley where, near the east edge, they become thinner (Davis and others, 1959, p. 40, and Olmsted and Davis, 1961, p. 42). The marine sedimentary rocks contain saline water except in a few areas where freshwater has apparently flushed some of the saline water out (R. W. Page, U.S. Geological Survey, written commun., 1983; Davis and others, 1959, p. 44, and Olmsted and Davis, 1961, p. 134).

Continental deposits of post-Eocene to Holocene age overlie the marine sedimentary rocks (fig. 8). The continental deposits include some volcanic material but contain mostly fluvial deposits with lesser amounts of interbedded lacustrine deposits. The continental deposits consist predominately of lenses of gravel, sand, silt, and clay. The numerous lenses of fine-grained deposits (clay, sandy clay, sandy silt, and silt) are distributed throughout the valley and constitute over half of the total thickness penetrated by wells as determined from electric logs (R. W. Page, U.S. Geological Survey, written commun., 1983). Most of these lenses are not widespread, although several major ones have been mapped in the valley--principally beneath the axis of the San Joaquin Valley. The most notable deposit is the Corcoran Clay Member (Pleistocene) of the Tulare Formation (Pliocene and Pleistocene), which is part of the E-clay of Croft (1972) in the San Joaquin Valley. This diatomaceous clay bed covers an area of approximately 5,000 mi² (R. W. Page, U.S. Geological Survey, written commun., 1983) and ranges in thickness from near zero to at least 160 ft beneath the present bed of Tulare Lake (R. W. Page, 1983 and Davis and others, 1959). The northern extent of the Corcoran Clay Member is not known because of the absence of data north of Stockton, particularly in the Delta area. A diatomaceous clay similar in composition to that of the Corcoran Clay Member was found in a test hole (12N/1E-34Q) drilled in the Sacramento Valley (Page and Bertoldi, 1983). Location of this hole is shown in figure 2. Laboratory tests of the clay indicate it is highly susceptible to compaction, like the Corcoran Clay Member; however, the clay was not found in six other test holes in the area (fig. 2); the full extent of this clay is not known.

Land Subsidence

The many fine-grained (clayey) lenses in deposits of the Central Valley are conducive to subsidence, both naturally and by man-induced activities. The five processes that are known to cause land subsidence in the Central Valley in order of their magnitude are:

- (1) Compaction of the aquifer system caused by lowering of the hydraulic head in the aquifer system;
- (2) Oxidation and compaction of peat soils caused by draining the lands near the confluence of the San Joaquin and Sacramento Rivers;
- (3) Compaction of moisture-deficient deposits above the water table (referred to as hydrocompaction) caused by applying water at land surface to previously dry sediments;
- (4) Compaction of deposits below the aquifer system caused by fluid withdrawal from oil and gas fields; and
- (5) Deep-seated tectonic settling.

Of these five processes that cause land subsidence in the Central Valley, only the first two listed have altered the ground-water system or changed the physical properties of the aquifer materials. The other three processes have had little impact on the ground-water-flow system as a whole. All five processes are briefly discussed in the following paragraphs.

Compaction of the aquifer system caused by the lowering of the hydraulic head has caused the greatest amount of subsidence over the largest area in the Central Valley (fig. 9). Most of the land subsidence has occurred in the San Joaquin Valley south of the Merced River where approximately 5,200 mi² had subsided at least 1 ft by 1970 and a maximum subsidence of 29.6 ft was measured at one location in 1977 (Ireland and others, 1984, p. 2). In the Sacramento Valley, the maximum amount of subsidence by 1973 was about 2 ft in at least two small areas in the southwestern part of that valley (Lofgren and Ireland, 1973, p. 6). However, Lofgren and Ireland (1973, p. 6) noted that other areas may have also subsided, but precise leveling data were not available for several parts of that valley. Leveling data near Zamora in the Sacramento Valley (J. C. Blodgett, U.S. Geological Survey, written commun., 1979) indicates that subsidence in that area has increased between 1973 and 1979.

Compaction of the aquifer system occurs mainly in the fine-grained sediments. When the hydraulic head in the aquifer system declines to a level below the preconsolidation stress, the fine-grained sediments compact and release water. The water released from compaction is a one-time source. Thus, the storage capacity of the aquifer system is reduced, even though the storage capacity of the coarse-grained parts of the system may remain constant. During periods of water-level decline, compaction reduces the amount of drawdown by providing a source of water from the fine-grained sediments to pumping wells. On the second cycle of drawdown, after recovery of water levels due to cessation of pumping or due to recharge, the water release from the compacted fine-grained sediments does not occur and the water levels decline rapidly.

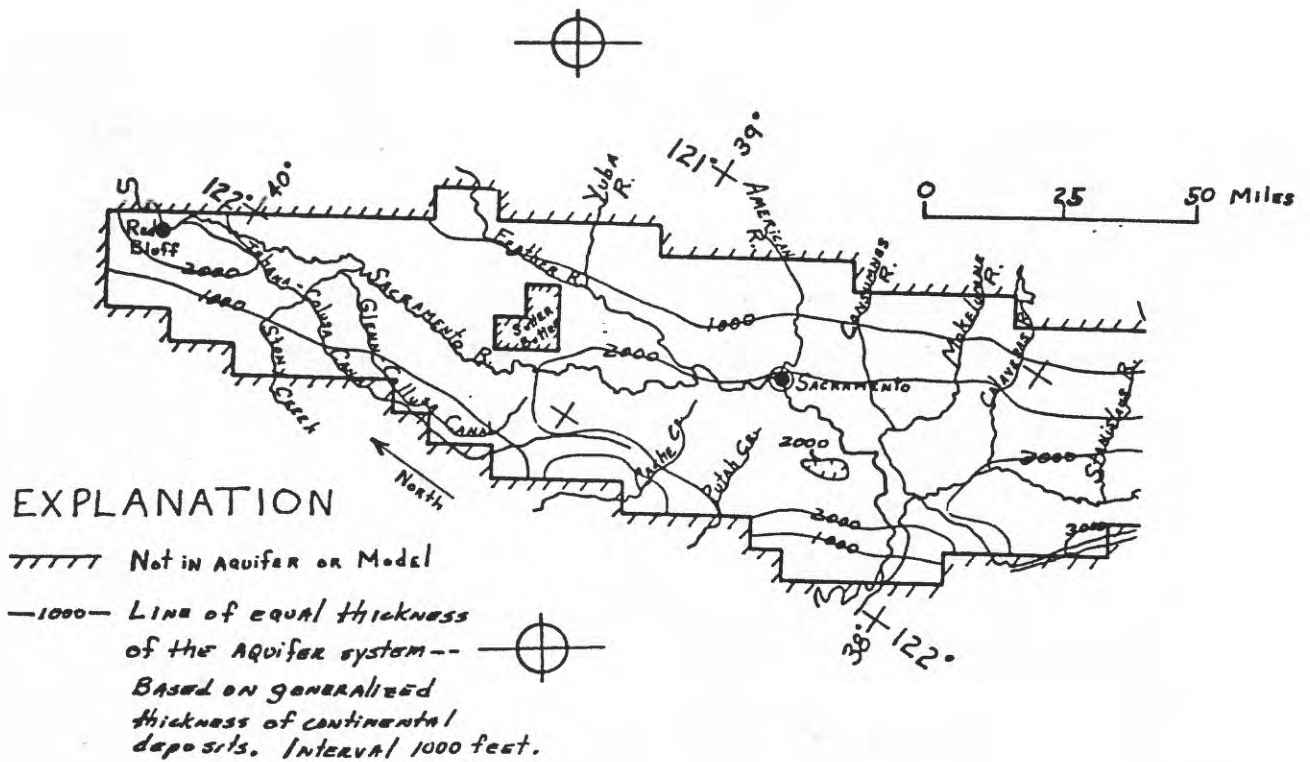


FIGURE 8. -- Thickness of aquifer system studied, based on the generalized thickness of continental deposits.

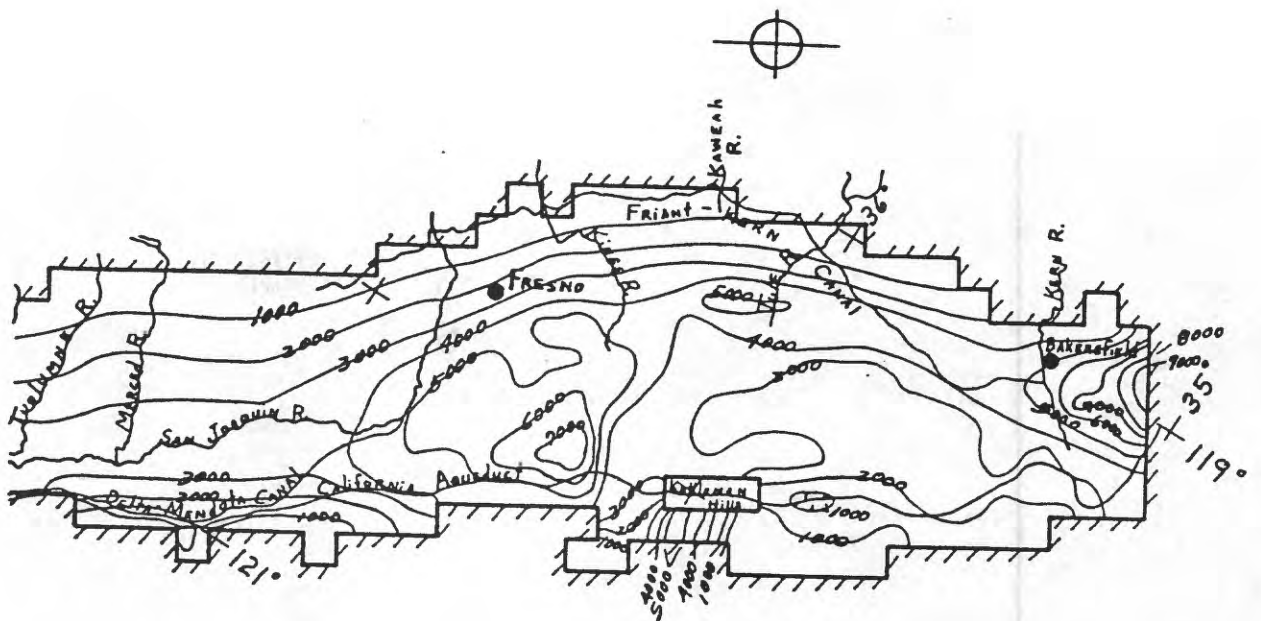


Fig. 8 -(right side)



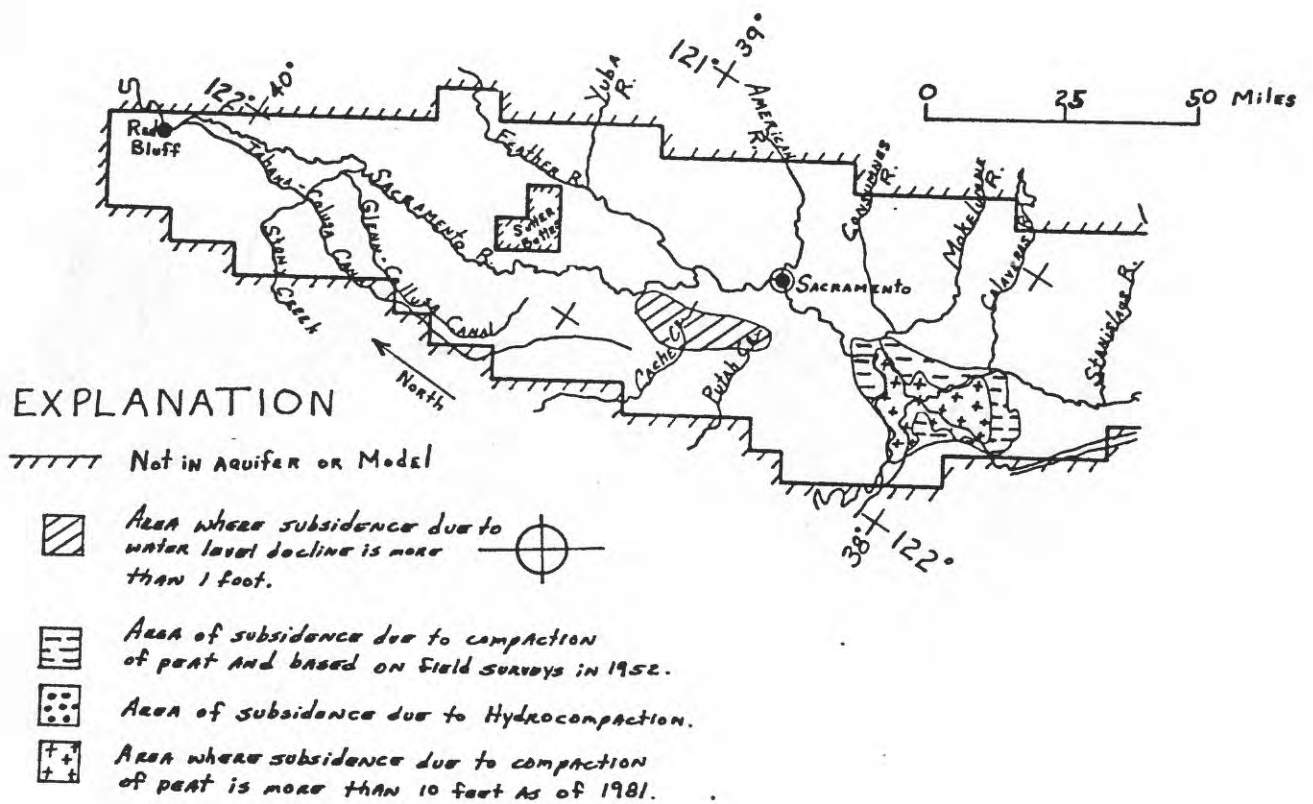


Figure 9. -- Areas affected by land subsidence.

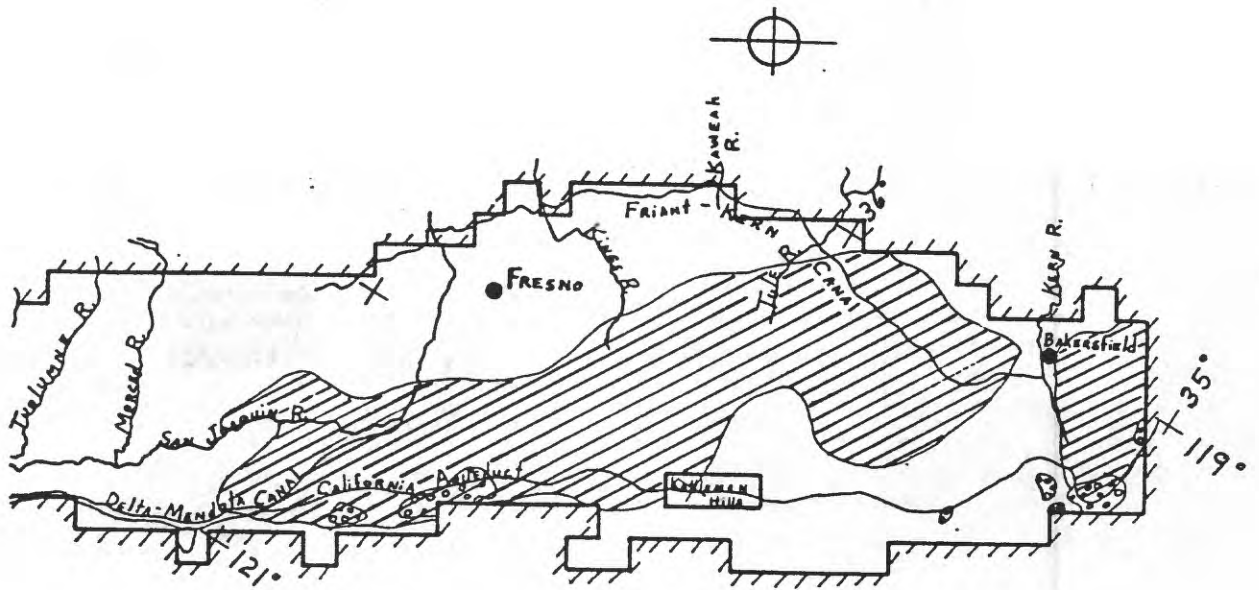


Fig. 9 - (right side)

Land subsidence caused primarily by the oxidation and compaction of peat soils after marshlands were drained to grow crops has affected an area of about 410 mi² near the confluence of the Sacramento and San Joaquin River systems (Poland and Evenson, 1966 and fig. 9). Based on a map by Newmarch (1981), an area of about 170 mi² has subsided at least 10 ft from the time reclamation began to 1980. Drainage for cultivation of this low-lying area began in 1850 and by at least 1922, the entire area was under cultivation (Weir, 1950). Today, the area is a complex system of manmade islands and channels. Prior to development, much of the marshland was at or above sea level but since development, much of the area is below sea level and is continuing to subside about 3 in/yr (Newmarch, 1981). In some places as much as 40 ft of loose organic peat overlies the sediments. Weir (1950) estimated that subsidence in the lower Jones Tract was 4.5 ft for 1902 (when the tract was first drained) to 1917. Poland and Evenson (1966) reported that subsidence on one island was more than 9 ft from 1922 to 1955 and Newmarch (1981, p. 135) reported a maximum of 21 ft on one island as of 1980.

Perhaps the most critical problem in the area near the confluence of the Sacramento and San Joaquin Rivers is that the peat lands continue to subside. To allow farming, the water table in the islands has to be lowered by pumping water out of drainage and discharge up into the rivers thus increasing the hydraulic gradient from the river toward the island.

Compaction of deposits above the water table after water was applied at the surface (called hydrocompaction) has been documented in a few areas on the west and south end of the San Joaquin Valley (Bull, 1964; Lofgren, 1969; Poland and others, 1975, p. H8). The total area that was affected by hydrocompaction in the San Joaquin Valley is about 210 mi² (fig. 9). Subsidence of 5 to 10 ft is common in these areas and locally, subsidence of 15 ft has been observed (Poland and Evenson, 1966, p. 244).

Compaction of deposits beneath the aquifer system caused by fluid withdrawal from oil and gas fields may cause local land subsidence. Lofgren (1975, p. D33) noted that subsidence around oil fields south and west of Bakersfield was generally less than 1 ft during the period of leveling from 1935 to 1965. However, the maximum amount of subsidence may have occurred earlier because the peak production from these fields was before 1935. Lofgren and Ireland (1973) noted that some subsidence caused by fluid withdrawal from oil and gas fields in the Sacramento Valley may have also occurred, although actual data are sparse. Similarly Newmarch (1981, p. 140) indicated that as much as a foot of subsidence could be attributed to the removal of fluids from a few gas fields near the Delta and noted that the subsidence was probably limited to areas close to the fields.

Little information is available for the rates of tectonic downwarping in the Central Valley. Lofgren (1975) indicated that structural downwarping has been uniform since the Pleistocene in the southwestern part of the San Joaquin Valley based on calculations of average depositional rates from carbon-14 dates and that the rate of downwarping is sufficiently slow that it has not affected the historical span of leveling. Newmarch (1981, p. 138) estimated a rate of tectonic downwarping of 0.006 in/yr for the southern end of the Sacramento Valley assuming that downwarping began 6 million years ago, that the approximately 3,000 ft of alluvial materials were deposited at sea level, and that the base of these deposits moved downward owing to tectonic downwarping. Evidence of tectonic movement was noted by Poland and others (1975, p. H8) in the southern Coast Ranges near the southwestern end of the Central Valley and in the Tehachapi Mountains to the south where apparent movements of as much as 0.8 ft have been measured at bench marks. During the period of development in the Central Valley (about 130 years) the overall effect of this process on the total observed land subsidence has been minimal when compared to the other processes.

Acknowledgments

This study was aided by generous assistance from several sources. The staff of the California Department of Water Resources provided a computer-tape file of more than 450,000 water-level measurements. Joe Kutska, U.S. Bureau of Reclamation, provided similar data for more than 100,000 measurements. John Renning, U.S. Bureau of Reclamation, provided data on the historic Delta outflow and soil-moisture budgets. Phil Lorens and Arvey Swanson, California Department of Water Resources, provided data for drillers' logs in the Sacramento and part of the San Joaquin Valley, respectively.

MODEL DEVELOPMENT

A three-dimensional ground-water-flow model, developed for this study, was used to analyze the aquifer system in the valley. This section describes: (1) the concepts and development of the flow model; (2) the initial estimates of recharge, discharge, and hydraulic properties of the aquifer system used in the model; and (3) the procedure used to calibrate the flow model by modifying the initial estimates of recharge, discharge, and aquifer properties.

Simulation of Ground-Water Flow

Ground-water flow in the Central Valley was simulated with a finite-difference model. A finite-difference model is a set of ground-water-flow equations with representative aquifer properties which can describe ground-water flow in the aquifer system. The set of ground-water-flow equations then can be solved simultaneously with aid of a computer. A computer program written by Trescott (1975) and modified by Trescott and Larson (1976) and Torak (1982) was chosen for this study because: (1) it simulates ground-water flow in three dimensions; (2) it has been successively used to simulate ground-water flow in many aquifer systems; and (3) it has been successfully modified to incorporate the effects of inelastic compaction of fine-grained sediments in an aquifer system near Houston, Texas (Meyer and Carr, 1979). The three-dimensional ground-water-flow equation the program solves simultaneously can be written as follows (Trescott, 1975, equation 3):

$$Ss \frac{dh}{dt} + w(x,y,z,t) = \frac{d}{dx} (k_{xx} \frac{dh}{dx}) + \frac{d}{dy} (k_{yy} \frac{dh}{dy}) + \frac{d}{dz} (k_{zz} \frac{dh}{dz}) \quad (1)$$

where

- h = hydraulic head, in feet;
- Ss = specific storage, in feet⁻¹;
- w = volumetric flux of recharge/discharge per unit volume, in seconds⁻¹;
- t = time, in seconds;
- k_{xx}, k_{yy} = hydraulic conductivity in the principal horizontal directions, in feet per second;
- k_{zz} = hydraulic conductivity in the vertical direction, in feet per second, and
- x, y, z = cartesian coordinates.

In order to solve the three-dimensional ground-water-flow equation, Trescott's program replaces the continuous derivatives in the flow equation with finite-difference approximations at a point or node. An example of a group of nodes used in the finite-difference approximation is shown in figure 10. Surrounding each node is a block with dimensions x, y, and z in which the hydraulic properties are assumed to be uniform. The result is N number of unknown head values at N nodes which result in N number of equations where N is the number of blocks that represent the aquifer system.

In Trescott's program, the time derivative $\frac{dh}{dt}$ is approximated by the Backward-Difference technique (Remson and others, 1971, p. 78). The approximation for each node may be given as:

$$\frac{dh}{dt} = \frac{(h_i - h_o)}{\Delta t} \quad (2)$$

where

h_o = the hydraulic head in a node at the beginning of a time step, in feet,

h_i = the hydraulic head in a node at the end of a time step (unknown), in feet; and

Δt = the time-step interval, in seconds.

The program solves the unknown head for each time step using the Strongly Implicit Procedure (Trescott, 1975, p. 11). This is done by iterating through the Finite-Difference equations for each node until the head change between the previous iteration and the current iteration is less than a specified amount for all nodes. Once this criteria is met, the program advances to a new time-step interval and the process of computing head values at each node is repeated. Both the ground-water-flow equation and the numerical technique are discussed in detail in Trescott (1975) and Trescott and Larson (1976). In the following paragraphs, the basic concepts and structure of the model are described.

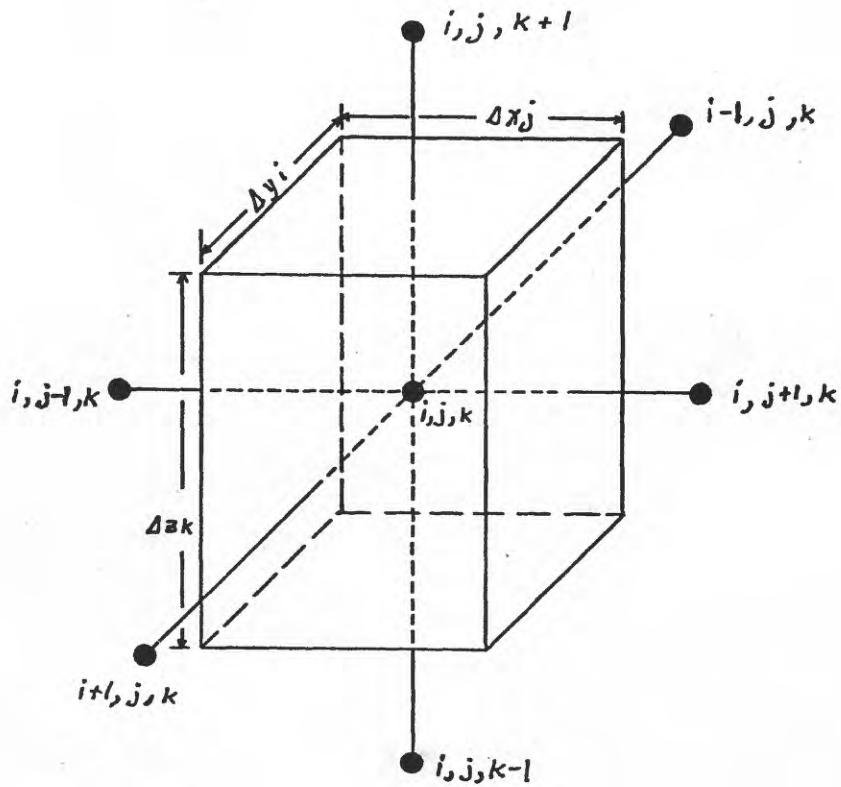


Figure 10. -- Node array for finite-difference formulation, showing Model block associated with node i, j, k , (from Bennett and others, 1982)

General Concepts and Features of the Model

In general, ground water moves from the margins of the valley towards the center, and since development, to major pumping centers. A simplified section (fig. 11A) shows the general patterns of recharge, discharge, and ground-water flow at present (1983) in the Central Valley aquifer system. The computer model can simulate many elements of the real aquifer system as shown in figure 11B; including recharge from precipitation, streams, and irrigation return flow, and discharge as evapotranspiration, to streams as baseflow, and to wells as pumpage. The aquifer system is heterogeneous and consists of many discontinuous beds of clay, silt, sand, and gravel. The model simulates the heterogeneity in the aquifer system by: (1) varying the aquifer properties from block to block, and (2) averaging values to represent the aggregate of the heterogeneity within each block.


Dividing the aquifer system into finite-difference blocks.--The aquifer system was divided into blocks by superimposing a grid over a map of the study area and oriented such that a minimum number of the blocks were outside the study area. A uniform planimetric grid spacing of 6 mi by 6 mi was used in the study (fig. 12). The vertical dimensions of the blocks vary and are incorporated into several terms that quantify the aquifer properties. For example: The horizontal transmissivity term for each node equals the product of the thickness of the block and the average horizontal hydraulic conductivity of the sediments. Similarly, the leakance (TK) term, which affects vertical flow between layers, equals the equivalent vertical hydraulic conductivity divided by the thickness between nodes (one-half of each adjacent block thickness).

The valley was also subdivided by grouping model blocks into areas and subareas for analysis. In the San Joaquin Valley subarea boundaries approximate the ground-water-management boundaries outlined by the California Department of Water Resources (1980).


Four model layers were used to simulate the three-dimensional flow in the Central Valley aquifer system. The lowest model layer (layer 1 in fig. 11B) consists of the continental deposits below the depth penetrated by any production wells in the area. Most of the pumpage comes from layers 3 and 4. The division between the water table (layer 4) and the lower pumped zone (layer 3) was determined on the basis of the following criteria:

- (1) In areas where there was a large amount of well-construction data, the division between the shallow and the deep zones (model layers 3 and 4) was based on the vertical zonation of perforation intervals. A depth near which the majority of wells had no perforation was chosen as the boundary between the two zones.
- (2) In most of the area where the E-clay, which includes the Corcoran Clay Member of the Tulare Formation (Croft, 1972, p. 18), has been mapped--the division made by the criteria coincided with the depth above the E-clay. In the Westside area, the division based on criteria 1 was above the Corcoran Clay Member. The E-clay underlies more than half of the San Joaquin Valley (Croft, 1972, pl. 4)
- (3) In the remaining areas, the division was interpolated and extrapolated from adjacent areas.

4. Aquifer System

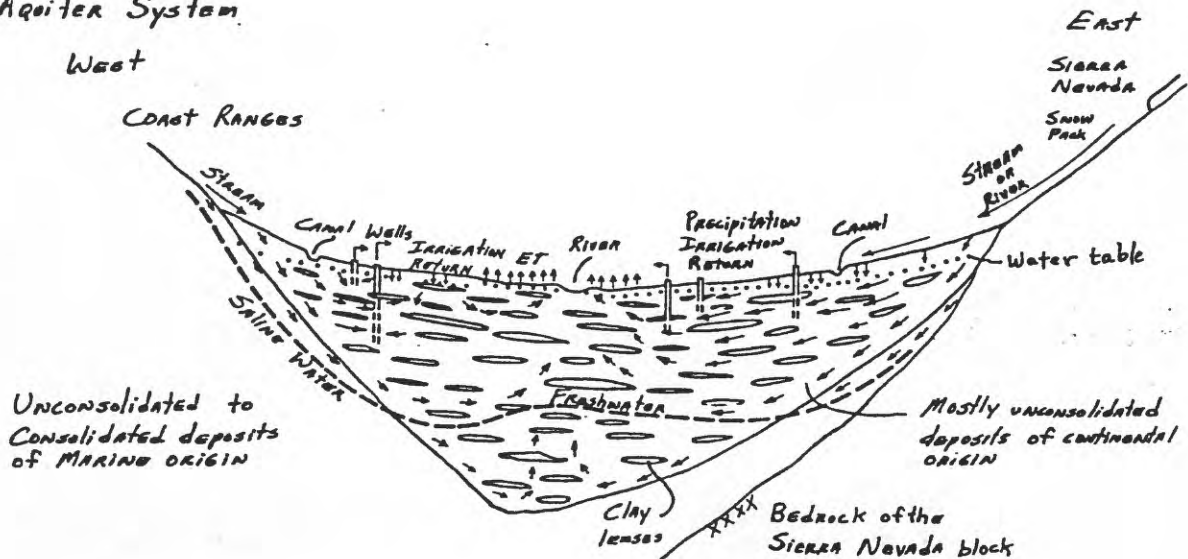

B. Model of the Aquifer system

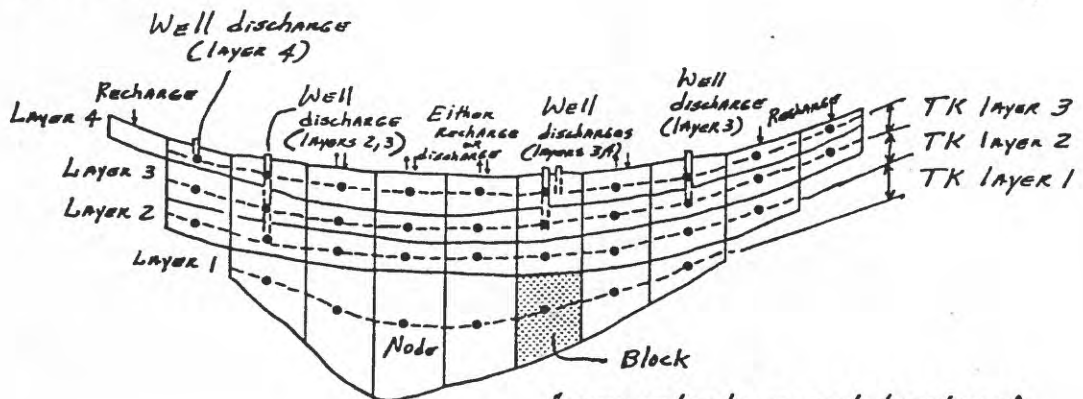

Arrows indicate general direction of water movement. Longer arrows imply larger flows.

Vertical Leakage (TK) values between layers are calculated by dividing the harmonic mean of the vertical hydraulic conductivity of the aquifer materials by the thickness between nodes. TK layers 2 and 3 may be increased by wells that are screened in both layers 2 and 3 and loss frequently in layers 3 and 4.

Discharge from all wells in the block simulated at the node.

Note: Sketches are not drawn to scale.

FIGURE 11. -- Conceptualization of the aquifer system.

Layer 2 extends to the depth of the deepest wells in the area. In model blocks where the wells are not as deep as they are in the adjacent general area, layer 3 extends to the deepest wells in the block. This layer definition reduces the effect of well leakage between nonadjacent layers (model layers 2 and 4) and allows for a simple adjustment of the TK term between adjacent layers to account for well leakage during transient analyses (Bennett and others, 1982 p. 338).

Transmissivities were assumed constant in all model layers including the uppermost layer which incorporated the water table. Commonly, the transmissivity of the uppermost layer is allowed to vary depending on the saturated thickness in the layer, which can change during a simulation period owing to pumping rate or recharge. However, unless the changes in the water table are large compared to the thickness of the uppermost model layer, the change in the transmissivity is small and assigning a constant value makes little difference. In simulating the Central Valley aquifer from 1961 to 1977, the water table in a few model nodes in the uppermost layer changed about 60 ft but the initial saturated thickness was more than 500 ft. The maximum error in assuming a constant transmissivity was 12 percent, which is within the limits of this large-scale study.

Boundaries.--The modeled aquifer system is surrounded by impermeable (no flow) boundaries except at Suisun Bay (fig. 12). Generally, the boundaries along the west side of the valley and beneath the aquifer system represent less permeable marine deposits; along the east side, the boundary is represented by less permeable igneous or metamorphic rocks. At the south end of the Central Valley, the boundary of the modeled aquifer system is the White Wolf fault, which acts as a barrier to flow (Wood and Dale, 1964). At the north end, the boundary is the Red Bluff Arch, which is a series of low-lying hills consisting of northeast-trending anticlines and synclines. The series of hills act as a barrier to ground-water flow (California Department of Water Resources, 1978, p. 39). In addition, both the Sutter Buttes and the Kettleman Hills within the valley restrict ground-water flow and were assumed impermeable (R. W. Page, U.S. Geological Survey, written commun. 1983).

Along the three model blocks that coincide with the discharge point (Suisun Bay) of the San Joaquin and Sacramento Rivers (fig. 12), constant hydraulic heads were specified in all model runs in the uppermost model layer (layer 4 in fig. 11B) . During steady-state (predevelopment) simulations, the hydraulic head in the entire model layer 4 was held constant to aid in estimating recharge and discharge.

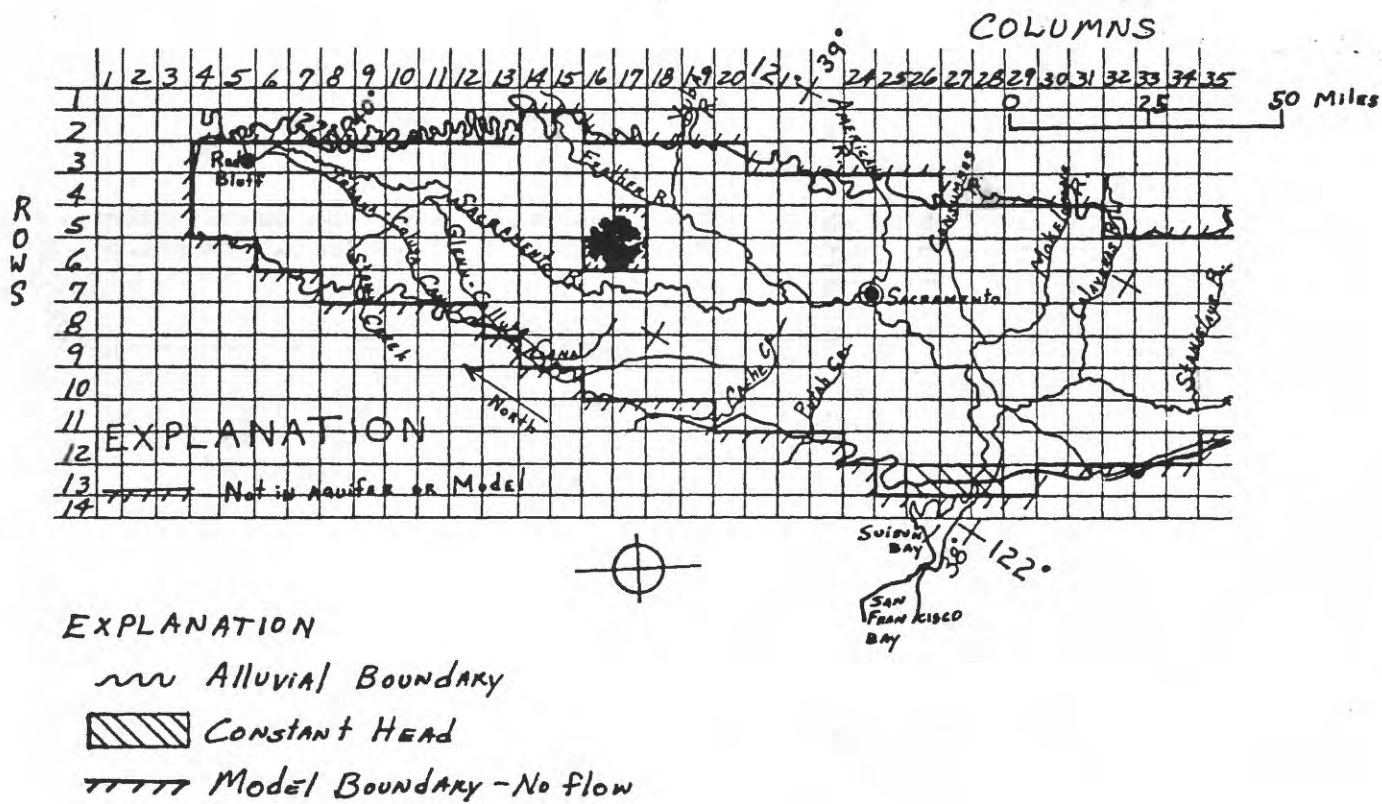


FIGURE 12.-- Model grid and boundaries.

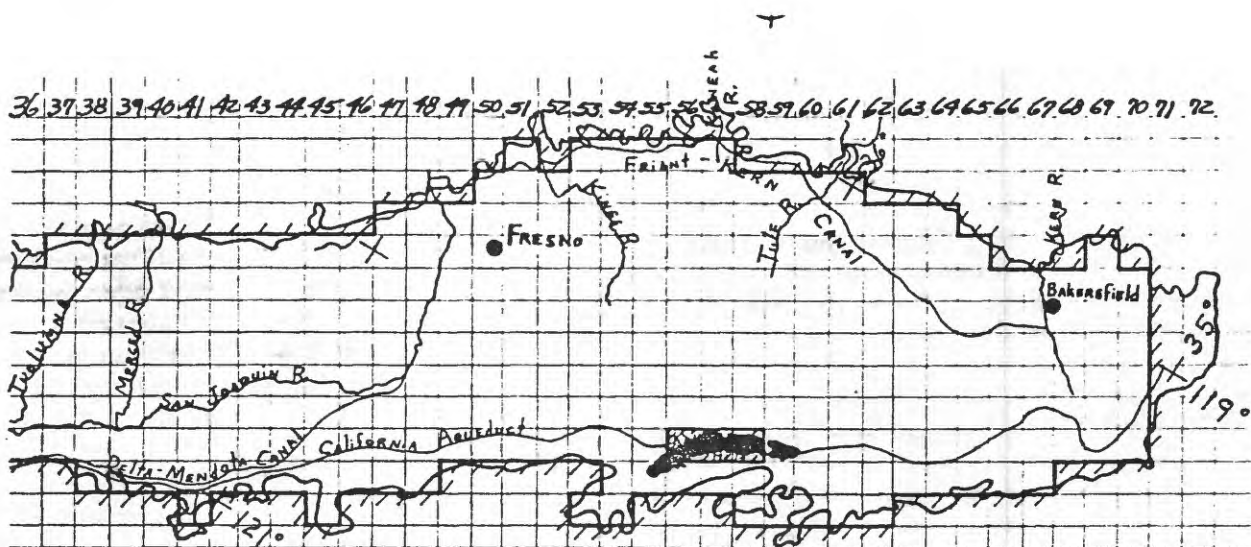


Fig. 12 - (right side)

Simulation of Land Subsidence

The computer program of Trescott (1975) was modified to account for the release of water from the inelastic (irreversible) compaction of clay beds in the aquifer system. In general, the ratio of subsidence to head decline in an aquifer system, which is related to the irreversible compaction of the clayey beds, is small until after the head declines below the preconsolidation head (a critical head) then the ratio of subsidence to head decline increases to a constant (Holzer, 1981). Water released from storage during the interval of head decline when the aquifer head is still above the preconsolidation stress comes mostly from expansion of the water and elastic compression of the aquifer materials (referred to in this report as elastic storage). Water released from storage in the interval of head declines when the aquifer head is below the preconsolidation stress comes mostly from the compaction of the clayey beds (referred to in this report as inelastic storage). Riley (1969) compared the compaction measured in an extensometer to head declines in an area in southeastern San Joaquin Valley, and noted that the relation between compaction and head declines changed during large annual head fluctuations. Compaction was small and recoverable (elastic) during the initial part of the seasonal head decline. However, when heads declined below a certain altitude, which also declined each year, compaction per unit head decline increased and compaction became mostly irreversible (inelastic). Riley (1969) interpreted the head where the change in the rate of compaction to unit head decline occurred to be the new man-induced preconsolidation stress.

When pumping of ground water ceases as in the example of seasonal pumping for irrigation in the Central Valley, head recovers and in general, the compaction of the clayey beds ceases. The amount of water that can be stored in the aquifer system during the recovery period by elastic storage is much less than the amount released by inelastic compaction and by elastic storage. If the head declines again, because of pumping of ground water, compaction of the clayey beds will not reoccur until the head in these beds again decreases below the preconsolidation stress, providing that the residual compaction from the previous drawdown phase has been completed (Poland and Davis, 1969, p. 263). The amount of water released from storage during the same interval of head decline that occurred during the first drawdown period (assuming the head recovered to the initial level) is much less for the second drawdown period. This concept is shown in figure 13A. Poland (1961, p. B54) estimated that as little as 10 percent of the water released during the first drawdown period in which the clayey beds were compacted would be released by elastic compression of the clayey beds in a subsequent recovery of head to the initial level and a head decline over the same interval, again assuming the residual compaction from the previous drawdown period was largely complete.

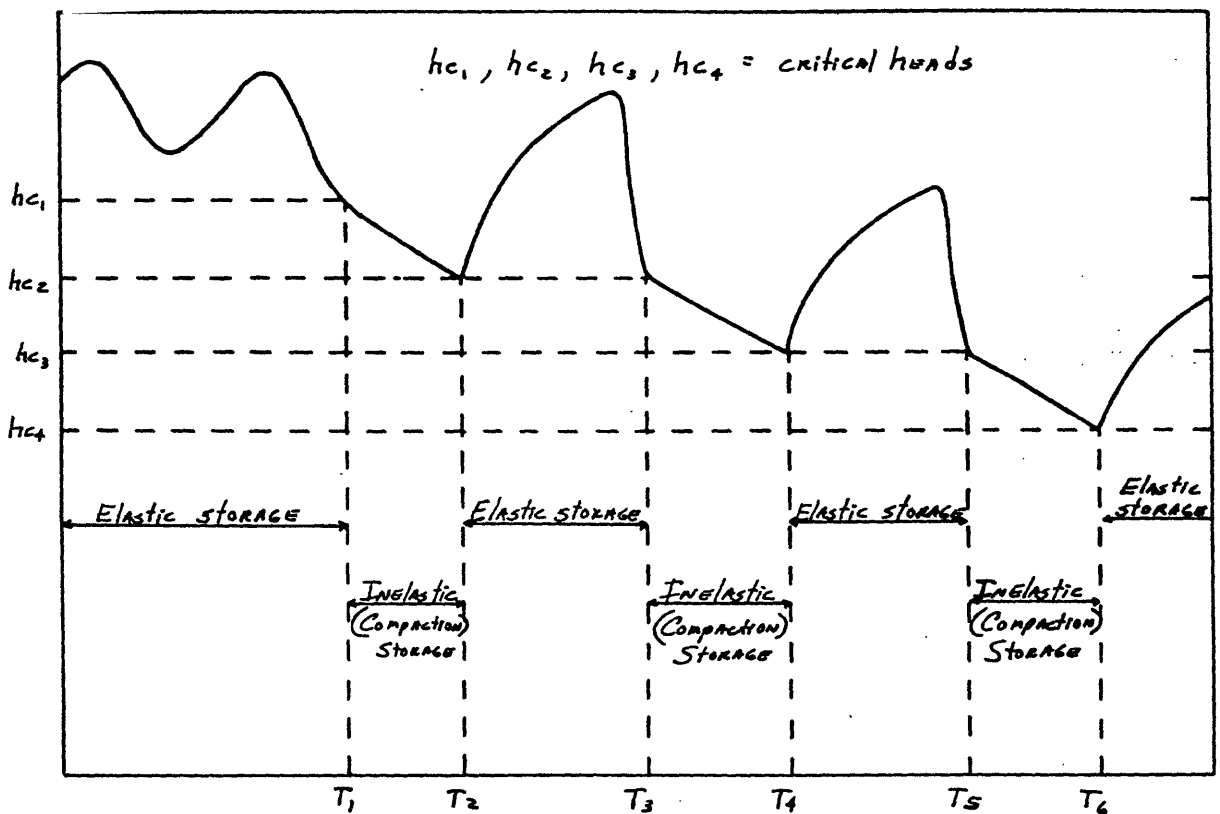


FIGURE 13A. -- Relation of storage coefficient to the hydraulic head in a compacting interval of the aquifer system.

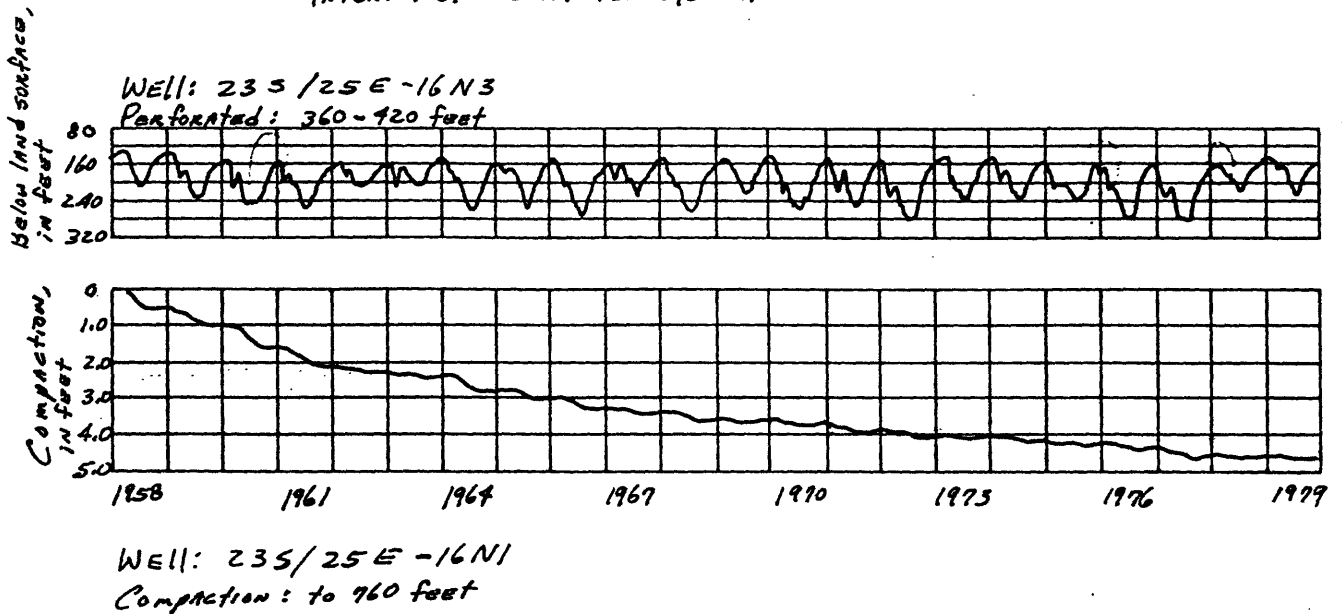


FIGURE 13B. -- Hydrograph and compaction record for a well in the Tulare Basin.
(location shown on figure 2)

In a real compacting system the mechanics of subsidence are not as simple as shown in figure 13A. For example, at the Pixley well-field site (23S/25E-16N), about 3 mi south of Pixley, compaction was approximately 3 ft for the period 1959-71 yet the long-term head decline was negligible (fig. 13B). Helm (1975) related this to the continued compaction in the middle of the thicker clayey beds because of the time needed for pressure head changes to reach the middle of these beds. The cyclic nature of the compaction curve is produced by the seasonal periods of drawdown where each time, the middle zones of the clayey beds were equilibrated to a new lower head before the head in the more permeable zones of the aquifer recovered. Helm (1978, p. 195) estimated that the time for nonrecoverable compaction to be complete, assuming that the head was lowered instantaneously a specified amount and remained constant, was 5 years for the Pixley site. At six other sites in the San Joaquin Valley, it ranged from 40 to 1,350 years.

The modification used in the Central Valley flow model differs from the method used by Meyer and Carr (1979) in a study near Houston, Texas. In the Central Valley flow model values of lowest critical heads (hydraulic head at which inelastic compaction of the clay beds begins) and inelastic storage are read into the computer program for each block in model layers 2 and 3. These layers were the intervals where compaction of the clayey beds was most prevalent in the aquifer system. Meyer and Carr (1979) in their analysis assumed that the initial critical heads were 80 ft below the initial hydraulic heads (predevelopment or steady-state heads) and a single multiplier was used to change the storage value from elastic (recoverable) to inelastic (nonrecoverable). However, in this study the calibration period (1961-1977) began when subsidence in the aquifer system had been ongoing for many years. Therefore, the approach used in this study allowed for an inelastic storage to be simulated in the first time step when the starting head was below the critical head. The approach also allowed for varying inelastic-storage values from block to block because of differences in the percent of fine-grained (clayey) beds.

The modification in the computer program allows for the compacting clayey beds within a model layer, in an individual block, at the start of a time step to respond with either an elastic- or inelastic-storage value depending on whether the hydraulic head is below the lowest previous critical head. If the initial hydraulic head (starting water level) is above the initial critical head then the elastic-storage value is used until the hydraulic head falls below the critical head (see fig. 13A). When this happens, the elastic storage value changes to an inelastic-storage value, associated with inelastic compaction, at the beginning of the next time step. The inelastic-storage value is used until the hydraulic head begins to recover, then the inelastic-storage value returns to the elastic-storage value, again at the beginning of the next time step and the hydraulic head at which recovery started is recorded as a new critical head. When the hydraulic head falls below the new critical head, the elastic-storage value is changed to an inelastic-storage value and the cycle repeats itself. Subsidence is computed only if the head declines below the critical head. It is calculated by multiplying the drop in head below the critical head times the inelastic-storage coefficient. This value is calculated at the end of a time step and is accumulated through the simulation.

The modification has a few drawbacks. First, the change in head in an aquifer system actually propagates slowly through the included clayey beds in the vertical direction because of the low vertical hydraulic conductivity and large inelastic specific storage of the clayey beds. This causes a gradual rather than an abrupt release of water from inelastic storage. In the simulations, however, all of the water is released from inelastic storage within the time step in which the head change occurs. Therefore, the time lag between stress change and compaction is not adequately simulated. This error is mostly cancelled when looking at periods of several years or more. Second, the inelastic-storage term is assumed constant even though laboratory consolidometer tests of small clay samples indicate that the amount of water released from inelastic storage is a function of the applied stress. In addition, the vertical hydraulic conductivity of the compacting clayey beds, in theory, decreases as the beds are compacted. However, based on soil consolidation theory, Helm (1977) was able to simulate the total compaction with reasonable results at seven sites in the San Joaquin Valley for periods of decades using constant values for aquifer properties.

In the computer program, the change from an elastic-storage value to an inelastic-storage value or vice versa was done at the beginning of each time step even though the change actually occurred in the previous time step. This means that unless small time steps are used in the simulation, the change from one storage value to another could lag greatly, thus causing errors in the simulation. A better technique would be to have the storage values change while iterating through the finite-difference equations within the time step. However, attempts to do this caused instability in the program and the difference in computed head values between iterations did not converge to an acceptable value.

Estimates of Recharge and Discharge

Methods used to estimate the initial values of recharge, discharge, and hydraulic properties of the aquifer system used in the simulations were selected based on two criteria: (1) A method should be as independent as possible of the other methods being used in order to avoid situations where an error or wrong assumption would carry through the analysis, and (2) each method would be able to be applied throughout the valley so that if there was a bias error, at least the relative differences between one area and another would be apparent. These criteria eliminate some methods of estimation. However, the benefits of maintaining independence and consistency in a regional aquifer analysis were judged more important than being able to use all available methods.

Recharge and discharge can be considered at various scales of detail. The scale chosen is important because the hydraulic effect on some unit of the aquifer equals the difference between recharge and discharge in that unit. When a larger unit of the aquifer is considered, more canceling effects occur and consequently, the variation of net recharge/discharge per unit area is smaller. Consideration of this principle requires that care be taken when comparing values of recharge/discharge. Because this is a regional analysis, the geographic units chosen (model blocks) were designed with a 6-mi-grid

spacing. Equal values of recharge and discharge which occur within the same model block are ignored because their net effect on flow to or from adjacent nodes or deeper layers is zero. The total recharge minus the total discharge into or out of a particular model block of the aquifer system will be called net recharge/discharge.

Surface-water bodies, such as rivers and lakes, can be recharging the aquifer system or receiving discharge from the aquifer system depending on head difference between the surface-body and the aquifer at a particular location and time. Precipitation can recharge the aquifer directly through the soil. Irrigated agricultural land usually recharges the aquifer system by irrigation return flow but can receive discharge from the aquifer under particular conditions. Wells usually discharge water, but can be used for recharge, although this is uncommon in the Central Valley.

The only component of net recharge/discharge that can be measured directly is pumpage. Because net recharge/discharge is a sum of components, there are many ways to categorize the components by type and/or in time or space. The result is that there appear to be many ways to calculate the components (Wilson and others, 1980). However, most of these methods can be divided into one type or a combination of the following four types.

- (1) Proportional.--The proportional method assumes that a constant proportion of the inflow term becomes ground-water recharge. The inflows are measured or estimated and the proportions are compared with or taken from values calculated from the results of other methods, such as the water-budget type. In evaluating recharge from agricultural return flow, this proportion is equal to one minus the irrigation efficiency minus the proportion of irrigation water which becomes surface runoff.
- (2) Rate time.--The rate-time method is also called the Infiltration-Duration Method. It uses the equation:

$$Q_r = i A t \quad (3)$$

where

Q_r = recharge volume in the specified time period, acre-ft;
 i = infiltration rate, feet per year;
 A = wetted area for infiltration, acre; and
 t = time duration of infiltration during the time period, year.
The infiltration rate (i), if measured, is done for a short time, small area, and measured water budget (such as a stream-seepage measurement or a percolation test). This rate has to be extrapolated in time and space, which is difficult owing to its high variability and poor relation to other conditions.

- (3) Ground-water flow.--The ground-water-flow method assumes that the flow across a plane, as calculated by Darcy's law, is equal to the net recharge upgradient of that plane. This calculation is made by analytical techniques or simulation-model calibrations. This also assumes that the flow system is in equilibrium (steady-state condition) and that the aquifer properties are estimated correctly. This would be a poor method to use for input to a flow model because it violates the principle of independence.

- (4) Water budget.--The Water-budget method is based on the Continuity equation:

$$\Sigma \text{ Inflows} - \Sigma \text{ Outflows} + \Delta \text{ Storage} = 0 \quad (4)$$

The terms in the above basic equation have been divided by many investigators in various ways. Net recharge/discharge is a component of one of the terms. It is assumed that all the significant components of each of these terms, except net recharge/discharge, can be measured or estimated. The equation is then used to solve for the dependent variable and net recharge/ discharge that is sometimes referred to as a residual quantity. In this type of equation, where the dependent variable, net recharge/ discharge, is equal to the difference of the independent terms, the random error in the dependent variable will be large if the difference between the independent terms is small relative to the size of the terms themselves.

There are also various methods that actually are ways to extrapolate the results of the methods described above to other locations or other time periods. These include other types of regression models that relate net recharge/discharge to flow, storage, or conveyance properties of water sources.

The water-budget method was the principal method used in this study because budgets could be designed to minimize the random error by adhering to the following criteria:

- (1) Categorizing components so that recharge was relatively large when compared with the other terms in the equation.
- (2) Choosing budget-unit boundaries where:
 - a. reasonably accurate data for flows across boundaries were available;
 - b. the number of significant flow components was minimal;
 - c. boundaries are compatible with other flow components such that water is not missed or counted twice; and
 - d. the geographic units for which average flow components are calculated are similar in size to the nodal spacing for the ground-water model.

Recharge and discharge values were estimated for the 17-year period 1961-77 by several types of water budgets. This period was chosen because recent data were available, and because it includes a variety of dry and wet conditions as well as changes in water development. These stresses on the ground-water system aid in understanding the flow system because they require a more rigorous test of the simulation and the concepts upon which it is based. The estimates of the various components of recharge and discharge are given in Appendix A.

The model does not automatically adjust certain components of recharge and discharge as might be desired for head-dependant functions such as river leakage or evapotranspiration. By regression analysis, the authors found that the dominant factors affecting recharge and discharge rates in the aquifer system are the amount of surface-water flow, land use, and canal systems; these factors are more important than the dependence on the head change in the aquifer. Therefore, the authors did not use the head dependent function for net recharge/discharge in the model.

Streamflow

Streamflow losses (ground-water recharge) and streamflow gains (ground-water discharge) were estimated by Mullen and Nady (1985) using the water-budget method. This was done for all major streams, for each reach bounded by gages, according to the following equation:

$$\text{Loss} = Q_{\text{ups}} + Q_{\text{in}} - ET - D_{\text{iv}} - Q_{\text{dns}} \quad (5)$$

where

- Q_{ups} = flow at the upstream gage, acre-feet per year;
- Q_{in} = inflow from tributaries or drains, acre-feet per year;
- ET = evapotranspiration from the channel and riparian vegetation;
- D_{iv} = diversions for irrigation; and
- Q_{dns} = flow at the downstream gage.

Generally, all of these terms except ET are measured quantities except where part of the record has been estimated. Evapotranspiration cannot be measured from riparian vegetation with any degree of accuracy. Evapotranspiration from the streams and riparian vegetation was not estimated because of the uncertainty about the width of the channel and the riparian vegetation and evapotranspiration rate. Therefore, the stream-loss values estimated for the simulation model include evapotranspiration from the stream surface and the riparian vegetation. This error was considered in the calibration process that will be described later. The stream-loss values also include some unmeasured accretions (gains) from surface drains and unmeasured diversions for irrigation. In the Sacramento River, unmeasured gains from small creeks are of significant size. This causes an underestimate of stream losses and a corresponding overestimate of ungaged runoff infiltration. The Tule River has unmeasured diversions that are also significant. This causes an overestimate of stream losses and a corresponding underestimate of irrigation return flow.

The results of the stream-water budgets for 60 reaches of 20 major streams are summarized by Mullen and Nady (1985) and summarized in table 1. The total length of the major stream channels (accounting for 29.3 of the 31.7 million acre-ft/yr mean inflow) in the valley is about 1300 mi. Average annual rates of exchange in the different reaches ranged from a gain of 13,400 to a loss of 22,400 acre-feet per year per mile of channel. The mean of all gaining reaches was 3,100 and the mean of all losing reaches was 3,400 acre-ft/yr. These values were prorated and summed for each model block based on the proportion of the length of the reach in the model block.

The minor streams that are gaged account for 7 percent (2.1 million acre-ft/yr) of the valley's inflow. Other minor streams that are not gaged account for less than 1 percent of the total in flow (Nady and Larragueta, 1983). Ungaged flow was estimated by a multiple-regression analysis based on 60 gaged small streams. Most of the flow of the ungaged minor streams is applied on fields as artificial recharge.

TABLE 1.--Summary of major stream losses and gains

(Totals may not agree due to rounding)

Stream name	Reach	Upstream gage	Reach length (mi)	1961-77 mean				Unit loss (1000 (acre-ft/yr)/mi)
				Inflow	Diversion	Losses (negative shows gains)	Standard deviation of loss	
Kern River	1	Below Isabella Dam	19.9	646.0	0.0	12.7	14	0.6
	2	Near Democrat Springs	23.8	636.3	0.0	-24.0	28	-1.0
	3	Near Bakersfield	20.7	678.1	427	67.3	89	3.3
			64.4		427	56.1		0.9
Tule River	1	Below Success Dam	11.9	141.8	69.1	18.2	8.7	1.5
	2	Below Porterville	2.7	54.5	0.0	20.1	21	7.5
	3	At Oettle Bridge	23.0	34.4	0.0	18.4	27	0.8
	4	Porter Slough at Porterville	5.9	15.1	2.0	6.4	9.3	1.1
	5	Porter Slough near Porterville	3.7	6.9	0.0	2.1	5.4	0.6
			47.2		71.1	65.3		1.4
Kaweah River	1	Below Terminus Dam	2.8	421.3	71.7	-11.8	6.4	-4.2
	2	Below McKays Point	4.5	215.2	82.5	-2.0	5.5	-0.5
	3	Below Peoples Ditch	9.5	158.1	117	20.2	4.9	2.1
	4	St. Johns below McKays Point	27.1	202.3	90.1	46.7	29	1.7
			43.9		362	53.0		1.2
Kings River	1	Below Pine Flat Dam	21.9	1,707	956	-53.8	34	-2.5
	2	At Reedly Narrows	13.0	805.4	184	16.5	27	1.3
	3	Below Peoples Weir	16.9	605.4	263	65.9	15	3.9
	4	Below Lemoore Weir	5.4	276.5	90.2	10.1	4.5	1.9
	5	North Fork below Island Weir	5.3	176.2	17.0	4.9	7.1	0.9
	6	Fresno Slough below Crescent Weir	9.5	154.2	6.7	11.2	14	1.2
	7	Fresno Slough at Stinson Weir	18.1	136.3	3.2	4.6	12	0.3
	8	South Fork below Army Weir	37.6	86.7	59.0	4.5	11	0.1
			127.7		1,578	63.9		0.5
San Joaquin River	1	Below Friant Dam	64.9	2,697	2,250	165	30	2.5
	2	Near Mendota	20.7	283.4	164	6.9	16	0.3
	3	Chowchilla Bypass at Head	81.0	458.1	0.0	147	92	1.8
	4	Near Dos Palos	46.8	379.6	0.0	-42.2	35	-0.9
	5	Near Stevinson	7.3	510.1	0.0	157	530	21
	6	At Fremont Ford	7.0	1,124	1.6	157	260	22
	7	Near Newman	9.9	1,006	7.1	-44.8	38	-4.5
	8	At Crows Landing Bridge	9.5	1,590	63.1	-62.1	11	-6.5
	9	At Patterson Bridge	20.7	1,610	107	-44.2	130	-2.1
	10	At Maze Road Bridge	5.1	2,570	10.7	-47.1	92	-9.2
			272.9		2,600	392		1.4
Fresno River	1	Near Daulton	14.8	107.9	54.4	3.4	14	0.2
	2	At Madera	8.2	51.8	0.0	9.7	8.9	1.2
			23.0		54.4	13.1		0.6
Chowchilla River	1	Below Buchanan Dam	13.0	164.0	0.0	4.9	17	0.4
Merced River	1	Below Merced Falls	7.3	867.0	534	-0.5	18	-0.1
	2	Below Snelling	18.7	320.0	31.7	-60.2	20	-3.2
	3	Near Cressey	23.6	362.1	17.6	-43.9	10	-1.9
			49.6		584	-104.6		-2.1
Tuolumne River	1	Below Lagrange Dam	20.7	1,488	898	-90.7	42	-4.4
	2	At Hickman Bridge	16.3	756.7	1.3	-33.9	32	-2.1
	3	At Modesto	13.0	790.7	6.5	-44.1	47	-3.4
			50.0		906	-168.7		-3.4

TABLE 1.--Summary of major stream losses and gains--Continued

(Totals may not agree due to rounding)

Stream name	Reach	Upstream gage	Reach length (mi)	1961-77 mean				Unit loss (1000 (acre-ft/yr)/mi)
				Inflow	Diversion	Losses (negative deviation shows gains) of loss	Standard deviation of loss	
Stanislaus River	1	At Goodwin Dam	11.0	1,054	519	-40.7	33	-3.7
	2	At Orange Blossom Bridge	13.6	575.7	1.5	-3.2	37	-0.2
	3	At Riverbank	16.7	585.9	3.6	-67.2	38	-4.0
	4	At Ripon	6.7	658.2	3.6	-2.6	38	-0.4
			48.0		528	-113.6		-2.4
Calaveras River	1	Below New Hogan Dam	6.8	139.2	0.0	-1.5	1.5	-0.2
	2	At Jenny Lind	11.1	249.0	2.7	13.7	18	1.2
	3	At Bellota	16.8	30.1	2.8	17.7	7.1	1.1
			34.7		5.5	29.9		0.9
Mokelumne River	1	Below Comanche Dam	24.3	499.8	118.1	48.0	17	2.0
Comsumnes River	1	At Michigan Bar	25.5	346.4	9.8	2.5	17	0.1
American River	1	At Fair Oaks	16.0	2614	34.6	382	140	24
Yuba River	1	Below Englebright Dam	17.8	1848	188	-49.0	71	-2.8
Feather River	1	At Oroville	15.6	4,310	582	-10.9	57	-0.7
	2	Near Gridley	21.7	3,550	42.0	-178	120	-8.2
	3	At Yuba City	5.0	5,391	0.7	-3.9	130	-0.8
	4	Below Shanghai Bend	13.8	5,738	56.6	-186	220	-13
			56.1		681	-378		-6.7
Sacramento River ¹	1	Near Red Bluff	43.2	--	--	44.0	58	1.0
	2	Near Vina Bridge	17.0	--	--	-5.3	44	-3.1
	3	At Hamilton City	18.7	--	--	22.0	56	1.2
	4	At Ord Ferry	15.0	--	--	-1.6	64	-1.1
	5	Butte City	26.4	--	--	1.5	54	.06
	6	At Colusa	26.5	--	--	-30.3	66	-1.1
	7	Below Wilkins Slough	28.9	--	--	-106	54	-3.7
	8	At Knights Landing	14.4	--	--	41.4	53	2.9
	9	At Verona	19.0	--	--	-16.6	74	-8.7
		209.1			-51		-0.2	
Stony Creek	1	Below Black Butte Dam	18.5	421.5	72.7	49.1	18	2.7
Cache Creek	1	At Rumsey	21.3	507.6	0.0	-0.2	19	0.0
	2	Near Capay	20.3	530.1	134	23.2	18	1.1
		41.6		134	23.0		0.6	
Putah Creek	1	Near Winters	10.9	346.2	181	13.9	5.6	1.3
	2	Below Wintara	4.3	111.3	0.1	1.3	5.6	0.3
	3	Above Davis	5.6	110.0	0.0	3.2	4.6	3.5
		20.8		181	18.3		1.7	
TOTAL -----			995.0	--	336		0.3	

¹Sacramento River flows are for the April to October (7 month) period; they are not annual figures. Inflow and diversions not listed.

Precipitation

Ground-water recharge by precipitation occurs when precipitation is greater than the potential evapotranspiration and when the soil moisture storage capacity is full. In general, precipitation exceeds potential evapotranspiration in the winter while the reverse is true in the summer, thus most of the ground-water recharge from precipitation occurs during the winter and spring months. The method of estimating ground-water recharge from precipitation is described below.

Estimates of monthly soil-moisture budgets for the fifty-year period from 1922 through 1971 were computed for native vegetation by the California Department of Water Resources, and the U.S. Bureau of Reclamation, (John Renning, U.S. Bureau of Reclamation, written commun., 1979). They assumed 2-, 3-, and 4-foot rooting depths for the Sacramento Valley, Delta, and San Joaquin Valley areas, respectively, and a moisture-holding capacity of 1.5 inches per foot of root depth to determine soil-moisture storage capacity. The monthly precipitation which exceeds monthly potential evapotranspiration is added to soil-moisture storage until the capacity is filled. Excess precipitation for any month is accumulated with the excess precipitation from previous months of that year and becomes a recharge value for the ground-water system. The soil moisture storage is carried over into the summer when it is depleted as the potential evapotranspiration exceeds precipitation. Linear regressions for the three areas were computed, relating excess precipitation to annual precipitation. The results are shown in table 2. Total precipitation on the valley floor averages about 12.4 million acre-ft/yr. Excess precipitation which averages 1.5 million acre-ft/yr, includes ground-water recharge and surface runoff. The surface runoff is not added in any other water-budget term, so it is counted here, even though it may actually become recharge down-gradient in the valley. Total annual precipitation for each model block was estimated based on mean annual precipitation (fig. 4) and measured ratios of annual to mean annual precipitation for each year during the period 1961-77.

TABLE 2.--Regression results--Excess precipitation (PPT_{ex}) as a function of annual precipitation (PPT)

equation: $PPT_{ex} = m PPT + b$				(4)
Area	Slope(m)	Intercept(b)	R-squared	
Sacramento	0.64	-9.1	0.85	
Delta	0.63	-7.3	0.79	
San Joaquin	0.64	-6.2	0.64	

Irrigation

Recharge and discharge resulting from irrigation is very important in understanding the aquifer system in the Central Valley because 57 percent of the total area of 20,000 mi² is irrigated. During 1961-77, water use for irrigation averaged about 22 million acre-ft/yr.

To determine net recharge/discharge from irrigated areas and unlined canals, a water budget was designed to examine the artificial components (such as canal losses and irrigation return flow) of the hydrologic cycle, which have greater values than the natural components because of extensive agricultural development. A major component in many areal water budgets is evapotranspiration. The estimation of evapotranspiration is difficult and subject to large errors. However, evaluation of the artificial components of the cycle allows the use of evapotranspiration values from irrigated agriculture where the environment is much more uniform. The relatively uniform agricultural evapotranspiration contributes less variation and uncertainty to the water-budget analysis.

The spatial boundaries chosen for a water budget of irrigated lands are: land surface at the top and the depth of crop roots at the bottom, and horizontally, the model block boundaries or the boundaries of geographic units of similar size whose data could be translated to model blocks by an areal proportion.

The water budget is defined as follows:

$$\frac{\text{INFLOW}}{(\text{SW} + \text{GW})} - \frac{\text{OUTFLOW}}{(\text{ETAW} + \text{GWR}_4)} \pm \Delta\text{SMS} = 0, \quad (6)$$

where

- SW = surface inflow, measured at the diversion point to an area, minus surface outflow, if any, from that area;
- GW = pumped ground water;
- ETAW = evapotranspiration of applied water;
- GWR₄ = recharge to the top layer (4); and
- ΔSMS = change in soil moisture storage in time (using 1-year intervals assumed ΔSMS to be zero in that interval).

This calculation includes recharge from irrigated areas with recharge from unlined distribution canals; this has several advantages in addition to having one less term to consider. A regional scale does not require detailed separation of hydrologic features. Flow measurements of smaller, unlined distribution canals (such as ditchtender records), usually are approximate and may contain significant errors. This equation also makes GWR₄ as large as possible when compared to the other terms which tends to minimize effects of errors in the smaller terms.

Removing ΔSMS from equation 4 and solving for GWR₄:

$$\text{GWR}_4 = \text{SW} + \text{GW} - \text{ETAW} \quad (7)$$

Separating GW into layers of origin, layer 4 (top) and layer 3 (deeper),

$$GWR_4 = SW + GW_4 + GW_3 - ETAW \quad (8)$$

For a water-table aquifer, assuming the time lag for recharge is less than the periods of interest for modeling, the net recharge between the upper land surface and the water table is the desired result. This assumption was tested by checking response time lags in water-table well hydrographs and appears to be valid for simulation periods of 6 months to one year for much of the valley. The net recharge/discharge to the water table (net R/D₄) is then:

$$\text{net R/D}_4 = GWR_4 - GW_4 \quad (9)$$

Substituting equation 8 into equation 9 gives;

$$\text{net R/D}_4 = ((SW + GW_4 + GW_3) - ETAW) - GW_4 \quad (10)$$

GW₄ cancels out, yielding;

$$\text{net R/D}_4 = SW - ETAW + GW_3 \quad (11)$$

The net recharge/discharge (net R/D₃) for the lower pumped zone (model layer 3) is

$$\text{net R/D}_3 = - GW_3 \quad (12)$$

Equations 11 and 12 indicate that pumpage from the lower zone (layer 3) can be represented in the water budgets as a transfer of water to the water table (layer 4). Adding these two equations together shows that where the layer definition can be ignored, the composite net flow (net F) is

$$\text{net F} = \text{net R/D}_3 + \text{net R/D}_4 = SW - ETAW \quad (13)$$

Equation 13 has the advantage of having only one component that needs to be estimated because net surface inflow (SW) is measured.

Ideally, all components should be calculated for identical areas. However, the most accurate land-use and surface-water data are not collected or summarized for areas that have coincidental boundaries. Therefore, it was necessary to apportion the data values among model blocks, based on the area in that model block.

Surface-water-delivery data for the San Joaquin Valley and southern Delta area were collected as irrigation district totals and prorated to the model blocks in each district. The evenness of distribution within a district varies from one district to another but it was compared in the Turlock Irrigation District against more detailed records of deliveries. In that district, which is large and has a large supply of surface water, the assumption of uniform distribution was adequate for the water years tested, 1962 and 1970.

In the Sacramento Valley, surface-water-delivery data are often misleading. Because of the abundance of water, much of the water delivered drains off one field to another field or to another irrigation district downslope. There is very little detailed data for drain flows. Therefore, it is possible to have water values counted more than once as being delivered for crops. The most detailed surface-water-use data available are estimated from land use and unit applied-water values (Bloyd, 1978, p. 120). Another source of error in this data is in determining from aerial photographs whether the fields are irrigated by surface water or ground water. Many fields are equipped for both, so it is difficult to determine which is used primarily. To make adjustments for these errors, water budgets for subareas 12 to 15 (see fig. 25, p. 102) were developed.

From these subareas, the ratios of net surface water used to total delivered average 77, 47, 57, and 83 percent, respectively. These ratios were used to adjust downward the total surface-water delivery presented by Bloyd (1978, p. 130-132). Though reported by Bloyd as totals for townships (36 mi²), these data were available on a quarter-township basis (Phil Lorens, California Department of Water Resources, unpub., 1978). These values were available only for 1961 and 1970, therefore, they were adjusted for other years based on a regression of known surface-water diversions for the other major streams (Mullen and Nady, 1985). This regression accounted for variation from wet years to dry years and long-term trends. Evapotranspiration (ET) of applied water values were made from land-use data, which is summarized for 7.5-minute quadrangles of latitude and longitude, and unit ET values. Each quadrangle includes an area about 1.64 times the area of a model block. Details of estimating evapotranspiration of applied water is presented by Williamson (1982). Average unit ET of applied-water values were used, causing an overestimate in wet years and an underestimate in dry years. The variation in ET between dry and wet years is small, however.

Pumpage data were collected for quarter township areas (0.25 times the area of the model block). Pumpage data were estimated from power consumption records and pumping plant efficiency tests (Diamond and Williamson, 1983). Data for missing years were estimated by regression analysis. Estimates were not available for most of the Delta area. Pumpage in the Delta area was estimated for the simulations by the water-budget method assuming an irrigation efficiency of 55 percent, and estimated values of crop needs (ET of applied water) and surface water diverted for irrigation.

There is some error in all the prorations. The effect of these errors is equivalent to a transfer of a volume of water from a model block to an adjacent model block. For this reason, constant additive adjustments to net recharge estimates were calibrated for each model block to account for balancing the errors in the volumes between adjacent model blocks.

The proportion of pumpage from the deeper zone in the aquifer was estimated by several methods. These methods assume that the proportion of flow from different depth zones into a well is proportional to the length of perforations in that zone. Construction data for more than 3,300 irrigation and public supply wells were used to calculate the proportion of perforated intervals in each zone for each model block. To extend this analysis, discharge water temperature measurements for 35,000 pumping plant efficiency tests for about 13,000 wells were analyzed. Temperature data from 3,000 wells having construction information established a relation between temperature and perforated interval. This relation was used to approximate perforated intervals for each of the 13,000 wells. These approximate predicted perforated intervals were used to estimate the proportion of perforated intervals in each zone. These proportions were averaged with those previously determined using appropriate weighting factors. Where no data existed, the proportion was interpolated from adjacent areas. The effect of errors in estimating these proportions will be discussed in the section, "Changes in Ground-Water Recharge."

Estimates of Aquifer Properties

The methods used to estimate aquifer-system properties such as thickness, hydraulic conductivity, and storage are described in the following sections. The same principle of using consistent methods for the entire valley, as previously described, was applied. Some measures (like the mean) of the estimates made are given in this section, others will be given in the predevelopment and postdevelopment sections. These estimates were adjusted during calibration of the model. The complete data set of final values after calibration is given in Appendix B.

Thickness

Post-Eocene deposits of continental origin constitute the primary ground-water reservoir in the Central Valley. The thickness of these deposits (fig. 9) was estimated by R. W. Page (U.S. Geological Survey, written commun., 1981 and Page, 1974) from interpretation of electric logs and from published reports. The thickness of these deposits average about 2,400 ft and increase from north to south and have a maximum thickness of more than 9,000 ft near Bakersfield. However, the contact between continental and the underlying marine deposits is not always certain because the two types of deposits in some places interfinger, particularly near the southern end of the valley. For example, de Laveaga (1952, p. 102) suggested that the continental deposits may be as much as 15,000 ft thick where 9,000 ft is shown in figure 8. Thus, the thickness of continental deposits in the Central Valley, particularly the southern part, used in the analyses of the system may be less than what is actually present. Excluding the deeper continental deposits (which interfinger with marine deposits) probably does not greatly affect the analyses of ground-water flow in the Central Valley because the amount of flow in the deeper parts of the continental deposits is considered to be small.

Hydraulic Conductivity

The hydraulic conductivity (K) of a saturated, porous medium is the volume of water it will transmit in a unit time, through a cross section of unit area, under a hydraulic gradient of a unit change in head through a unit length of flow (Lohman, 1972, p. 6). In this report it will be expressed in units of feet per day.

Horizontal.--Two sources of data were considered to estimate horizontal hydraulic conductivity (Kh) values--specific-capacity data from power company pump-efficiency tests and drillers' logs. Because pump-efficiency tests are not available for the entire valley, that method was used only as a spot check on the results of the other methods.

Driller's logs contain descriptions of the formations drilled through in each depth interval. Each formation description was assigned to one of five categories of formations with similar properties described by Davis and others (1959, p. 202-206). The depth interval and category was coded for each well log for computer tabulation. More than 10,000 well logs in the Sacramento Valley and more than 7,400 logs in the San Joaquin Valley were coded for the analysis. Hydraulic conductivities were assigned to formation categories that were characterized by grain size using values determined by Johnson and others (1968); Morris and Johnson (1967), and California Department of Water Resources (1966, p. 137). Although there is considerable variation in Kh values within a category, the method should still give a good indication of relative differences in Kh because of the large sample size. Table 3 shows the categories and their corresponding Kh values and specific yields (which will be discussed in the next section).

An equivalent Kh value was computed for each segment of each well which corresponded to the appropriate model layer, by the following equation:

$$Kh_{eq} = \frac{\sum (b Kh)}{\sum b} \quad (14)$$

where

- Kh_{eq} = equivalent Kh,
- b = thickness of the interval reported on the drillers' log, and
- Kh = horizontal hydraulic conductivity of the interval.

These equivalent Kh values for individual wells were averaged for each layer in each model block. Values for model blocks with no data were interpolated and extrapolated from nearby model blocks. The resulting Kh values for all of the model blocks have a mean of 25 ft/d and a standard deviation of 13 ft/d. The resulting Kh values were compared with values reported by other investigators. The comparison showed that estimates of Kh obtained in the above manner were not consistently larger nor smaller than other estimates. It also showed that in 57 percent of the 244 model blocks that could be compared, the present estimates are within a ratio of 0.6 to 1.67 to the other estimates.

Estimated values were also compared with values estimated from specific-capacity data collected by utility companies in pump-efficiency tests. In two-thirds of the 251 model blocks that could be compared, the values from drillers' logs were larger than those estimated from specific capacity. Only 46 percent of the model blocks were within the ratios mentioned above.

Vertical.--The aquifer system is composed of many interbedded lenses of coarse- and fine-grained deposits in which the vertical hydraulic conductivity varies according to the type of deposit. Because it is impossible to model every lens in the aquifer system, an equivalent vertical hydraulic conductivity of the lenses in each model layer in each block was calculated by applying the principle of conductances in series as:

$$Kz_{eq} = \frac{\sum b}{\frac{b_1}{Kz_1} + \frac{b_2}{Kz_2} + \dots + \frac{b_n}{Kz_n}} \quad (15)$$

where

- Kz_{eq} = equivalent vertical hydraulic conductivity;
- $\sum b$ = total thickness between the centers of two adjacent model layers;
- b_1, b, b_n = thickness of individual lenses; and
- Kz_1, Kz_2, Kz_n = vertical hydraulic conductivity of corresponding lenses in the aquifer system. The lenses were categorized into coarse- and fine-grained deposits.

This simplified equation 15 is as follows:

$$Kz_{eq} = \frac{\sum b}{\frac{\sum b_c}{Kz_c} + \frac{\sum b_f}{Kz_f}} \quad (16)$$

where

- $\sum b_c, \sum b_f$ = sum of the thicknesses of coarse and fine beds, respectively, and
- Kz_c, Kz_f = vertical hydraulic conductivities of coarse and fine sediments, respectively.

In general, the vertical hydraulic conductivity of the fine-grained lenses is much less (by at least two orders of magnitude) than that of the coarse-grained lenses, which causes the term $\sum b_c / Kz_c$ to be negligible. Thus, equation 16 can be simplified to:

$$Kz_{eq} \cong \frac{\sum b \cdot Kz_f}{\sum b_f} \quad (17)$$

The ground-water-flow model used in this investigation incorporated the vertical hydraulic conductivity into the term known as leakance. Leakance (TK) is defined by Lohman (1972, p. 30) as the ratio of Kz to the thickness of the confining beds. In an aquifer system composed of many interbedded lenses of coarse- and fine-grained deposits, an equivalent TK can be computed as:

$$TK_{eq} = \frac{Kz_{eq}}{\sum b} \quad (18)$$

where

TK_{eq} = equivalent leakance.

Substituting the right side of equation 17 for Kz_{eq} in equation 18 yields:

$$TK_{eq} \cong \frac{Kz_f}{\sum b_f} \quad (19)$$

Thus, the flow between model layers is controlled by the vertical hydraulic conductivity of the fine-grained deposits divided by the thickness of the fine-grained deposits.

TK values were calculated for each well using equation 19 based on thicknesses of coarse and fine-grained beds developed by Page (1983) from about 690 electric logs, selected at a density of one per quarter township (9 mi²). The initial value of Kz used for fine-grained beds was 1×10^{-4} ft/d. These equivalent TK values for individual wells were averaged for each model block between each layer.

In some areas, many wells are perforated for long intervals across two adjacent model layers. Bennett, and others (1982) discuss this problem, noting that where wells penetrate two adjacent layers, by using the Thiem equation, TK_{eq} values for the wells can be calculated. All of the well TK_{eq} values can be summed with the aquifer TK_{eq} because the flows are parallel. Because of the large variation in values and the model's high sensitivity to TK, these values were substantially adjusted in the calibration process. This will be further discussed in the section, "Changes in Ground-Water Flow."

Aquifer Storage

The term storage coefficient is used to describe water that is released from or taken into storage. Theis (1938, p. 894) defined it as the volume of water (in cubic feet) released from storage in each column of the aquifer having a base 1 ft² and a height equal to the thickness of the aquifer when the water table or the piezometric surface is lowered 1 ft. The storage coefficient is equal to the specific storage times the thickness of the aquifer where the specific storage of a saturated aquifer is the volume of water that a unit volume of aquifer releases from storage under a unit decline in hydraulic head. Jacob (1940) noted that water released from an elastic artesian aquifer was derived from three sources: (1) expansion of the water, (2) compression of the aquifer, and (3) compression of the adjacent and included clay beds. Poland (1961) assumed the third source of water was caused by the inelastic compaction of the adjacent and included clayey beds. Water is also released from the shallow part of the aquifer by gravity drainage when the water table is lowered (known as specific yield). However, the volume of water released from gravity drainage, or the aquifer's specific yield, is usually much greater than water released from the other sources. Thus, for the upper part of the aquifer system in the Central Valley, specific yield was used as the storage coefficient. The specific yield was estimated by the same method of weighted averages as described in the section "Horizontal Hydraulic Conductivity" except specific yield replaced horizontal hydraulic conductivity. The values used for each formation are given in table 3. The mean specific yield is 0.09 and has a standard deviation of 0.03.

TABLE 3.--Hydraulic conductivity and specific yield values
used for aquifer materials for initial estimates

[Hydraulic conductivities were reduced by a factor
of 4 during model calibration]

Aquifer material	Hydraulic conductivity (ft/d)	Specific yield (percent)
Bedrock	0.0	0.0
Clay	.00053	3
Sandy clay	1.1	5
Fine sand	11	10
Sand and gravel	110	25

Jacob (1940) concluded that in an elastic artesian aquifer, the volume of water released from compression of the adjacent and included clayey beds was the chief source of water released from storage in the aquifer. In the analyses of the Central Valley aquifer system, the system below the uppermost part was considered confined in the sense that the vertical permeabilities of the sediments are much lower than the horizontal permeabilities which restricts the vertical movement of water. Jacob (1940) defined the elastic-storage coefficient for an uncemented granular material assuming that water stored in the clayey beds was released instantly to avoid mathematical complications, (although Jacob recognized there would be a time delay between the lowering of the head in the aquifer and the release of water from the clays because of their low permeability) as:

$$S = \gamma \theta m \left(\frac{1}{E_w} + \frac{1}{\theta E_s} + \frac{c}{E_c} \right) \quad (20)$$

where

- S = storage coefficient, dimensionless;
- γ = specific weight of water, 0.434 pounds per square inch per feet;
- θ = porosity of the sediments, dimensionless;
- m = thickness of the aquifer, in feet;
- E_w = bulk modulus of elasticity of the water, 3×10^5 pounds per square inch;
- E_s = bulk modulus of elasticity of the aquifer matrix, pounds per square inch;
- E_c = modulus of compression of clay beds, pounds per square inch, and
- c = a dimensionless quantity that depends largely on the thickness, configuration, and distribution of the clay beds.

Replacing the storage coefficient with an specific storage (S_s), and rearranging terms, the equation can be:

$$S_s = \frac{S}{m} = \frac{\gamma \theta}{E_w} + \frac{\gamma}{E_s} + \frac{\gamma \theta c}{E_c} \quad (21)$$

the elastic specific storage of the aquifer system is equal to:

$$S_{s_c} = \frac{\gamma \theta}{E_w} + \frac{\gamma}{E_{as}} \quad (22)$$

where

- E_{as} = weighted average bulk modulus of elasticity of the aquifer system, pounds per square inch.

Estimates of the elastic storage term were calculated by adding the product of the thickness of coarse-grained deposits times its specific storage to the product of the thickness of the fine-grained deposits times its specific storage. Values of the elastic specific storage of the coarse- and the fine-grained deposits were obtained from Poland (1961), Riley and McClelland (1972), and Helm (1978).

Poland (1961, p. B53) assumed that release of water from storage during short-term pumping tests was primarily caused by the expansion of water and the elastic compression of the coarse-grained part of the aquifer. He approximated the contribution of water derived from each of the two mechanisms for the aquifer system in the southwestern part of the San Joaquin Valley. In the calculations, he used an aquifer thickness of 700 ft and a storage coefficient of 0.001, which is the average of aquifer tests of wells for the area that was studied by McClelland (1962). Clayey interbeds were not included in his calculations and they accounted for another 300 ft of the aquifer system. The estimated elastic specific storage value of the coarse-grained deposits in the aquifer system was 1.4×10^{-6} per foot with about 40 percent contributed by the expansion of water and 60 percent contributed by the elastic compression of the aquifer matrix. Similarly, Riley and McClelland (1972, p. 77d) estimated the elastic specific storage of the more permeable layers (coarse-grained deposits) in the aquifer system near Fresno to be between 0.7 to 1×10^{-6} per foot. These results were based on several detailed aquifer tests.

In contrast, Helm (1978, p. 193) calculated an elastic specific storage value of the fine-grained (clayey) deposits at seven sites in the San Joaquin Valley. The values ranged from 2.0×10^{-6} to 7.5×10^{-6} per foot with an average value of 4.5×10^{-6} per foot. Thus, based on somewhat limited information, the range of elastic specific storage for the Central Valley aquifer system was estimated to be between 1×10^{-6} for parts of the aquifer system that are all coarse-grained deposits to 4.5×10^{-6} per foot for parts of the system that are all fine-grained deposits. This results in an average elastic specific storage value of about 3×10^{-6} per foot where the deposits are one-half coarse grained and one-half fine grained.

Poland (1961) estimated the volume of stored water released by inelastic compaction of clayey beds in the highly compressible aquifer system, was 50 times greater than water released by the elastic expansion of water and elastic compression of the aquifer system. In this area the ratio of subsidence to head decline ranged from 0.04 to 0.1. He concluded that land subsidence in areas of heavy ground-water pumpage was almost totally caused by "... the compaction of the clay, silty clay, and clayey silt beds, both by plastic deformation and mechanical rearrangements of grains, and to that extent is inelastic and permanent." However, water is not always released from the compaction of the clayey beds, but is dependent on the change in head in the aquifer system. The theory and mechanics of how the clayey beds in an aquifer system compact and how it relates to land subsidence is presented in detail by Lofgren (1968) and Poland and Davis (1969).

Estimates of inelastic (compaction) storage were calculated by (1) estimating the thickness of fine-grained beds in the aquifer system and (2) multiplying that value times the mean inelastic specific storage of 3×10^{-4} per foot. The mean inelastic specific storage value was calculated by Helm (1978, p. 193) who estimated an inelastic specific storage value at each of seven sites in the San Joaquin Valley, where the values ranged from 1.4×10^{-4} to 6.7×10^{-4} per foot. Another estimate of the inelastic specific storage was calculated from Poland (1961) to be about 2×10^{-4} per foot assuming a 300-ft-thick clayey section in the aquifer system and an inelastic storage coefficient calculated by Poland of 5×10^{-2} . This value is reasonably close to the mean value estimated by Helm (1978).

Water-Level Analysis

Two major data bases of water-level measurements were accessed and analyzed to provide estimates of model-block-averaged water levels during the calibration period and also during predevelopment.

A statistical analysis of the data was chosen over the more traditional method of drawing contour maps for each time period of interest. Contour maps of water levels were available from the California Department of Water Resources, but were only used for verification of the estimates because of the following limitations:

- (1) Water levels of the entire valley were not mapped, and only one depth zone was mapped in any area.
- (2) Temporal trends made by using values taken of successive contour maps can be erroneous owing to the variation of subjective input in compiling each map.
- (3) It was unclear which wells were used for the water-level mapping and what well construction information was available.
- (4) Confinement exists in areas where no extensive clay layers have been mapped, because numerous discontinuous clay layers collectively act as confining units. The absence or presence of clay layers was not considered in compiling the water-level maps.
- (5) Only a part of the data was used, because of the time required to incorporate a large volume of available data.

The data base from the California Department of Water Resources was copied, edited, and analyzed; more than 460,000 ground-water-level measurements were available from more than 18,000 wells for the years between 1920 and 1979. Depth and (or) construction information was available for about 8,000 of the wells, which allowed assigning the wells to the depth zones in the model. About 32 percent were in the top (water table) zone, 6 percent were in the next two lower layers, 10 percent possibly spanned the top two layers, and 52 percent were of unknown depth. Most of the wells were measured biannually, though about 6 percent were measured at least monthly. Of the biannually measured wells, the autumn measurements were almost always taken in October. Most of the spring measurements were taken during March in the Sacramento Valley and Delta, during February in the upper San Joaquin Valley, and during January in the Tulare area. This causes a slight problem because the usual months of high and low water levels are in February and August, respectively. The effect of the water level in spring is slight because the monthly change is small, but the effect in the autumn is substantial because the recovery of water levels is very rapid at the end of the pumping season. This condition occurs because water levels in the aquifer systems respond fastest immediately following a change in stress, with the rate of change decreasing with time. Therefore, a measurement taken early will be more accurate than one taken late, after the next change in stress occurs. Often by the time of the autumn measurement, more than half of the postseason recovery has taken place. More measurements are taken in the spring (57 percent) than the autumn (43 percent). The Bureau of Reclamation has a ground-water-level data base that was used as a supplement. Many, but not all, of the 112,000 measurements in the Bureau of Reclamation file are duplicates of ones found in the California Department of Water Resources file.

In order to use the large file of data, several steps were taken. First, depth and well-construction information was added for about 2,000 wells that had drillers' logs available. Then, the data were plotted by making computer-generated hydrographs for the period 1960-80 with all of the wells in a township plotted on the same page using different symbols. This allowed easy location of large errors, and comparison of adjacent well hydrographs. Because well construction information and depth zones were assigned to some of the wells, other wells could be seen to have similar responses and were coded to depth zones accordingly. They were only assigned if there was substantial evidence to indicate the similarity.

The next step was to convert all of the records to seasonal values, whether the actual data were monthly or biannual. Means were calculated for each group of water-level measurements within the same year, season, and model block. These means were plotted on the same page with all of the depth zones of one model block. The hydrographs were compared to the California State Department of Water Resources contour map for specific times as a check for the spacial variation of water levels among blocks.

The data were also averaged by area and subarea to determine long-term trends. If a block contains rolling areas, the average of depth to water was more consistent to show trends than the average altitude of water levels within the block, because some wells may be measured in one year and may not be measured in other years. The results are described in the sections, "Effects of Development", and "Change in Aquifer Storage."

Sequence of Calibration of the Model

Calibration of a ground-water-flow model is achieved by adjusting the values of one or more aquifer properties or recharge/discharge such that the computer-simulated hydraulic heads match (within the limits of the investigation) the observed heads in the aquifer system. The normal sequence of calibration of most model studies is to first adjust values of aquifer properties (usually terms that incorporate vertical and horizontal hydraulic conductivity) assuming steady-state conditions (no head change with time), and then adjust values of aquifer properties (usually the storage term) assuming transient conditions (changes in head with time). However, in the Central Valley, the system as a whole has been in a state of continual change since agricultural development began in the late 1800's. Few data are available for the natural recharge rates to and discharge rates from the ground-water system as well as the distribution of hydraulic heads before agricultural development began. Thus, the computer model that numerically represents the Central Valley aquifer system was calibrated under transient conditions.

Transient simulations were run for the period of spring 1961 to autumn 1977 because: (1) there were both natural variations in the recharge and discharge to the system as well as changes in man's operation of the water system, and (2) there were adequate data for the distribution of head in the aquifer system, and for estimates of recharge from precipitation, streams, applied irrigation water and discharge from evapotranspiration and pumpage. These data were compiled for water years (October 1 to September 30) and allocated to six-month (spring-autumn and autumn-spring) periods. All river recharge and discharge and precipitation recharge was assumed to occur in the autumn to spring period. The municipal pumpage was divided equally between the two six-month periods. All of the agricultural pumpage was assumed to occur in the spring to autumn period. Analysis of well hydrographs indicate the irrigation return flow reaches the water table having about a 6-month time lag, therefore, recharge from irrigation was assumed to occur in the autumn to spring period. Because of a data-manipulation difficulty, it was allocated to the winter season before the irrigation season instead of after.

Calibration of the model of the Central Valley aquifer system was done in three phases. In each phase, pumpage in the lower pumped zone (model layer 3) was held constant (the values were assumed correct), while one set of values (transmissivity, leakance, storage, and recharge) were adjusted at a time. Repeated adjustments were made to each of the sets of values. A discussion of each phase is presented in the following paragraphs.

In the first phase of model calibration, the simulation period from 1961 to 1976 was divided into two separate periods; spring 1961 to spring 1970 and spring 1970 to spring 1976. The rates of recharge and discharge were summed from the six-month period and averaged for the particular period. These periods were selected because: (1) in the west side of the San Joaquin Valley, hydraulic heads in the earlier period (1961-70) declined as much as 60 ft because of heavy pumpage and the land subsided as much as 8 ft, and (2) in the same area, hydraulic heads in the latter period (1970-76) recovered as much as 120 ft following the deliveries of surface water from the California aqueduct. The modification of the computer program that automatically changed the storage term from elastic to inelastic depending on the head in the aquifer system was not used in the first phase of calibration. Instead, the storage term for blocks that correspond to areas actively subsiding were assigned an inelastic-storage value. The inelastic-storage value was estimated by dividing the amount of observed land subsidence in the model block by the observed head decline during the particular calibration period. An elastic-storage value was assigned to all other blocks that were outside the areas of active subsidence. The storage term was held constant throughout the first phase of calibration.

First, the sequence of model calibration in the first phase was to uniformly adjust all vertical hydraulic conductivities (incorporated in the TK values), and then, based on a relation between observed vertical head differences to those computed, to individually adjust the values of TK for each block. The relation is expressed in the following equation:

$$TK_{\text{new}} = TK_{\text{old}} \text{ FAC } \frac{\Delta HV_{\text{mod}}}{\Delta HV_{\text{obs}}} \quad (23)$$

where:

ΔHV_{mod} = the computed difference between model layers 4 and 3 at the end of the pumping period;

ΔHV_{obs} = the observed vertical head difference between the water-table zone (model layer 4) and the lower pumped zone (model layer 3);

TK_{new} = the adjusted leakance value;

TK_{old} = the previous leakance value, and

FAC = 0.9 when the ratio of ΔHV_{mod} to ΔHV_{obs} is less than one, and 1.1 when the ratio is greater than one.

Second, horizontal hydraulic conductivities were adjusted uniformly throughout all layers to achieve the best fit of horizontal hydraulic gradients. At this point, it became obvious that the net recharge/discharge from streams was in error because simulated heads were either too high or too low at points which correlated with the stream values. Because no reasonable change in any other parameter could solve this problem, all net recharge/discharge calculated from stream budgets were divided by 5. The best results in fitting horizontal head gradients were obtained when the initial estimates of horizontal hydraulic conductivity were reduced by a factor of four.

Then the amounts and distribution of recharge and discharge in the uppermost model layer (layer 4) were adjusted in blocks whose heads could not be matched by changing the other model values. Simple linear regression analysis showed that for a 1 ft change in head at the end of a simulation period, a 0.25 ft/yr (of the period) change in net recharge/discharge in the top layer was required. The recharge and discharge adjustments were made for the two calibration periods and the differences in the adjustments between the two calibration periods were averaged at each block. The result was a reduction in the overall amount of recharge to the uppermost layer by 20 percent and in places, a substantially different distribution of recharge and discharge. The result of the first phase of model calibration was a model that simulated the overall changes in head in the aquifer system from 1961 to 1970 and from 1970 to 1976.

In the second phase of model calibration, the two calibration periods remained the same, but the computer program was modified to account for water released from compaction of the clay beds. The inelastic (compaction) storage term was then calibrated for the period from 1961 to 1970; first by uniformly adjusting the inelastic storage term throughout layers 2 and 3, and finally by adjusting individual values assigned to the blocks. Individual adjustments occurred mostly in the Westside area. In addition to adjusting values of inelastic storage, minor adjustments were done for both horizontal and vertical hydraulic conductivity values, particularly where individual adjustments of inelastic storage were done to improve model results.

The third and final phase of model calibration was done while simulating six-month periods from the spring of 1961 to the spring of 1976. The simulations included the modified version of the computer program that accounted for subsidence. These simulations were used to calibrate the elastic storage term and to slightly readjust all other values in the model. In general, the adjusted elastic-specific-storage values were a factor of 2 times greater than the average initial estimate discussed in the "Storage" section of this report, except in the Westside area where the adjusted values approximated the initial specific storage estimates. The results obtained from this calibration phase and the sensitivity of aquifer properties are discussed in following sections.

PREDEVELOPMENT GROUND-WATER FLOW

Water development for irrigation began in 1850 in the Central Valley. These irrigation developments affected the ground-water system which previously had been in hydrologic equilibrium, (called steady state because there is no change in aquifer storage with time). Consequently, most of the hydrologic data were collected after changes had already taken place in the system. However, there are some recorded water-level measurements made by the state engineer's office that are a good indication of what ground-water conditions were like in those areas. Most of the water-level measurements used in the analysis of predevelopment ground-water flow were obtained for the periods of 1905-07 in the San Joaquin Valley (Mendenhall and others, 1916, p. 15), and 1912-13 in the Sacramento Valley (Bryan, 1923, p. 18). Some earlier (late 1800's) information was obtained from Hall (1886). Some adjustments to the data from the early 1900's were required because of effects of development already occurring. Also, strong inferences about ground-water conditions can be made from other evidence such as areas of marsh and swamps. Simulation of the predevelopment flow system using the available information has somewhat compensated for missing or questionable data used during the investigation.

Water Levels and Flows

The aquifer system in the Central Valley is a single and heterogeneous system, in which flows and heads vary in all three dimensions. This type of system is difficult to understand and describe. In order to simplify the discussion, the horizontal and vertical variations in flow and head will be discussed separately, while attempting to show the relations. This is compatible with the description of the simulation because the model also considers horizontal- and vertical-flow components separately.

Horizontal.--Ground water moves from areas of recharge to areas of discharge, in the direction of decreasing hydraulic head. In the Central Valley, ground-water flow in the predevelopment system began as recharge in the low hills along the perimeter of the valley and in the upper reaches of streams and moved toward the topographically low areas in the center of the valley.

Under natural conditions, the water table roughly paralleled the land surface and the direction of ground-water flow was approximately coincidental with the slope of the land (fig. 14). Recharge occurred in the high altitude areas and discharge occurred in low altitude areas where the water table was close to land surface.

The Central Valley has only one outlet for discharge of surface water and ground water from the Delta west to San Francisco Bay. Because this outlet is only about one-third of the way from the north end of the valley, the head gradient has to be steeper in the Sacramento Valley. Notice that the trough of lowest head in the San Joaquin Valley is to the west of the center (fig. 14B). This also coincides with the topography.

Much of the ground-water discharge from the southern part of the valley was to Tulare Lake and the area surrounding it (note the depression on figure 14B). Because of the characteristics of the surface-water drainage system and the variability of surface runoff, the volume and therefore the level of the lake varied tremendously. From records obtained between 1853 and 1908 (Mendenhall, 1908 and Grunsky, 1898a), the water level of the lake varied more than 40 ft from an altitude of 220 ft during the wet years 1862-68 to 180 ft (altitude at bottom of lake) in 1906 when the lake was dry. This natural fluctuation would have significantly affected ground-water levels and flows. Also, it was reported that deep and very shallow ground water was fresh, while a zone of intermediate depth was alkaline. This is an additional indication that although the system was probably in equilibrium during a long-term period, there were short-term variations from that state, however.

Vertical.--Under natural conditions, recharge and discharge occur at the water table. If the lower part of an aquifer is to contribute to the horizontal flow between recharge areas and discharge areas, there must be vertical flow downward in the recharge areas and upward in the discharge areas (figs. 15 and 16). Downward head gradients are often not discovered because this occurs in recharge areas where deep wells are not commonly drilled. Upward head gradients along the trough of the valley, indicated by large areas of flowing wells that occurred prior to development, were documented as early as the 1880's (Hall, 1889). Figure 17 shows the area of flowing wells documented by Hall and the areas outlined as artesian in the San Joaquin Valley in the early 1900's (Mendenhall and others, 1916).

Most investigators have conceptualized the ground-water system in the Sacramento Valley as a single water-table aquifer (Bloyd, 1978, p. 102) and in the San Joaquin Valley as two aquifers, a water-table aquifer and a confined aquifer below the Corcoran Clay Member of the Tulare Formation. The Corcoran Clay Member is a very notable marker bed in the valley and has been geologically correlated from well logs over much of the San Joaquin Valley (R. W. Page, U.S. Geological Survey, written commun., 1983). Its lateral boundary, where known, roughly coincides with the area of predevelopment flowing wells (fig. 17). In many areas, water levels from wells completed above and below the Corcoran Clay Member are substantially different. These factors are the basis for the assumption that other fine-grained beds in the valley are much less significant than the Corcoran Clay Member in their effect on confinement. However, there is substantial evidence to suggest that this is not true.

As stated earlier, there are numerous fine-grained beds throughout the entire Central Valley. Though they individually have small lateral extent, the aggregate thickness of these beds is as much as several thousand feet (R. W. Page, U.S. Geological Survey, written commun., 1983), whereas the Corcoran Clay Member thickness ranges from zero to 160 ft with a mean thickness of 55 ft. Water-level differences with depth have been measured in many areas such as northwestern Sacramento Valley and the southeastern San Joaquin Valley where the Corcoran Clay Member has not been mapped. Also, in several areas on the west side of the San Joaquin Valley, the Corcoran Clay Member has had numerous wells drilled through it and the wells commonly are perforated immediately above and below the clay layer. This condition has allowed almost free flow through the well casings and gravel packs with the results that the piezometric head has been equalized in the vicinity of the clay. Despite this head equalization through wells adjacent to the Corcoran Clay Member, head differences are as much as 400 ft have occurred between very shallow wells (less than 250 ft deep) and deeper wells. These head differences are the result of numerous clay stringers between the shallow wells and the deeper wells which, when combined, have a low enough vertical permeability to restrict the vertical movement of water.

The amount of vertical flow and head gradient will depend mainly on the vertical hydraulic conductivity (K_z) and the thickness of the aquifer system. The aquifer system in the Central Valley is composed of interbedded coarse- and fine-grained beds, with about 55 percent of the thickness composed of fine-grained beds (R. W. Page, U.S. Geological Survey, written commun., 1983). This percentage varies little (standard deviation of about 8 percent) and is usually in the range from 40 to 70 percent. Therefore, under predevelopment conditions, significant vertical head gradients probably existed throughout the valley except where the flow was entirely horizontal or local areas where sediments were predominantly coarse-grained.

Predevelopment vertical head differences are difficult to estimate because they are very sensitive to ground-water development and there is little data for heads at depth before development occurred. Hall (1886) reported data on about 350 deep wells that had been drilled between 1858 and 1885. Most of these wells were flowing artesian wells, ranging in diameter from 2 to 12 in. and depth to 1,200 ft (one was 2,160 ft). Only one had a measured static head (water level was reported as 11 ft above land surface), though most had a reported flowing head and flow rate. The flows ranged up to 1,100 gal/min. To convert the flowing head measurements to static head values, a form of the Thiem equation was used to compute drawdown:

$$\Delta h = Q \frac{\ln \frac{R_a}{R_w}}{2 \pi T} \quad (24)$$

where:

Δh = static head minus flowing head in the well, in feet.

Q = discharge of the well, cubic feet per second.

R_a = radius from the well where water level is static, in feet.

R_w = radius of the well, in feet.

T = transmissivity of the aquifer penetrated by the well, feet per second.

Several assumptions had to be made to apply the equation. The value chosen for R_a (2,100 ft) is somewhat arbitrary; however, changing it will not have a great effect on the result because the ratio of radii is in a logarithm term. The transmissivity chosen was equal to the depth of the well times the estimated hydraulic conductivity. The well radius used was 0.58 ft (7 in.), an average for the reported wells. The estimated static head was from nearly zero to over 50 ft above the flowing-head measurement.

Vertical head differences were estimated by using the static water levels in the deeper aquifers calculated from Hall's data and subtracting them from the estimates of the water-table altitudes reported by Bryan (1923) and Mendenhall and others (1916). In areas with large lakes, the surface of lake water was used for the water-table altitude. The vertical resistance to flow in the model (TK) was adjusted where data were available so that the simulated head difference approximated the observed head difference between layers 3 and 4. Observed head differences between layers 3 and 4 ranged from zero to 40 ft; in the Tulare Lake area, it was 55 ft.

Ground-water development in the valley has caused the hydraulic head to decline at depths where water is partially confined; presently, only a very few areas have artesian water rising above land surface. This occurs in some areas of the central Sacramento Valley that have very little deep pumping; wells drilled by the U.S. Geological Survey (fig. 2) in 1979-80 near Zamora (12N/1E-34Q) (French and others, 1982) and Butte City (19N/1W-32G) (French, J. J., Page, R. W., Bertoldi, G. L., and Fogelman, R. P., 1983) with 2,500- and 1,500- ft depths, respectively, had water levels rising above land surface.

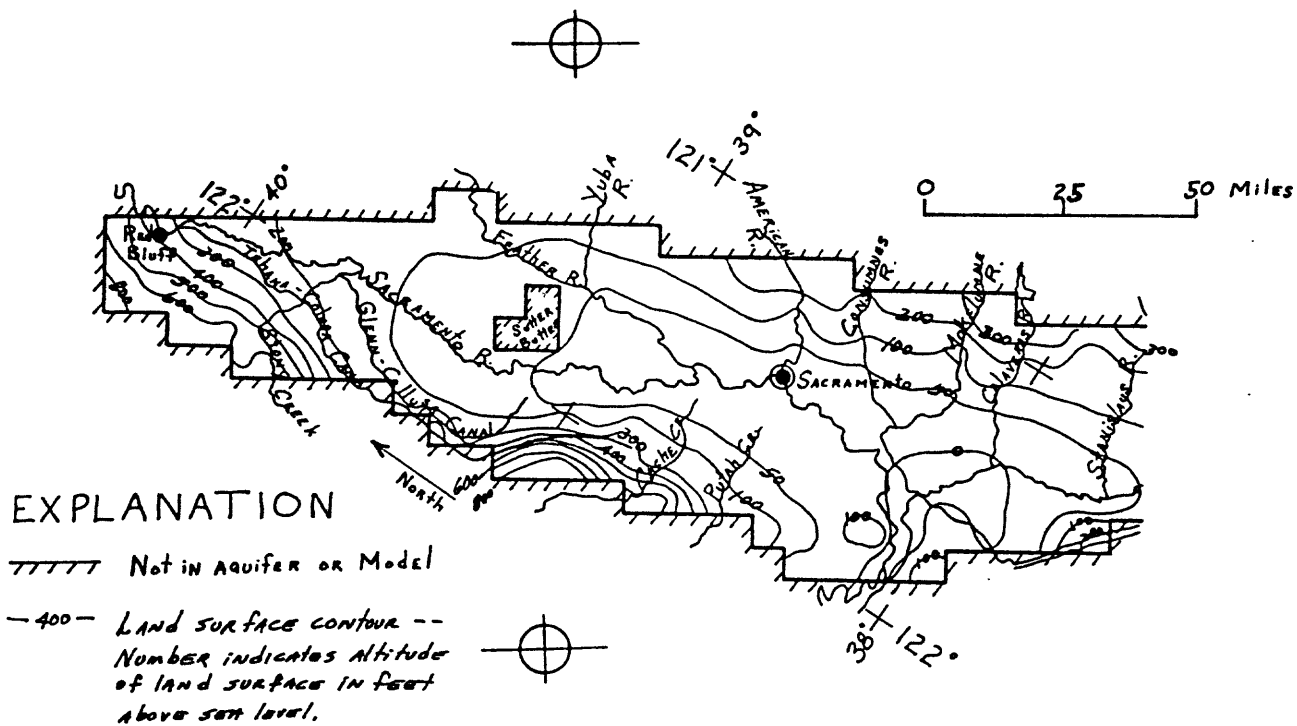


FIGURE 14A. -- Land surface altitude, circa 1957.

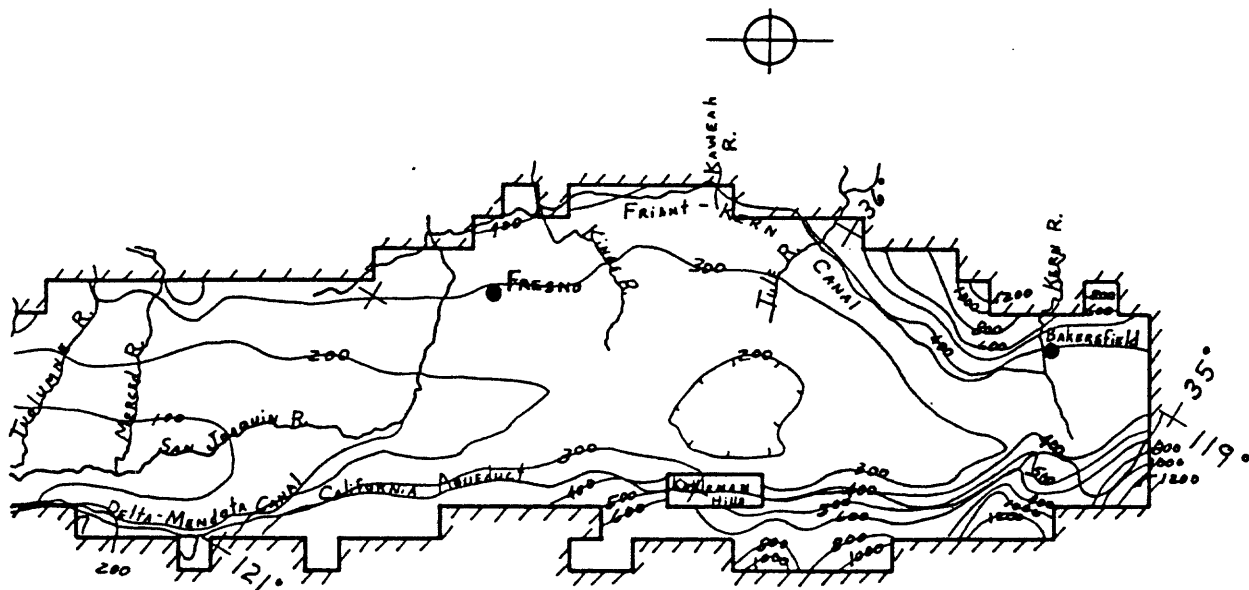


Fig. 14 A - (right side)



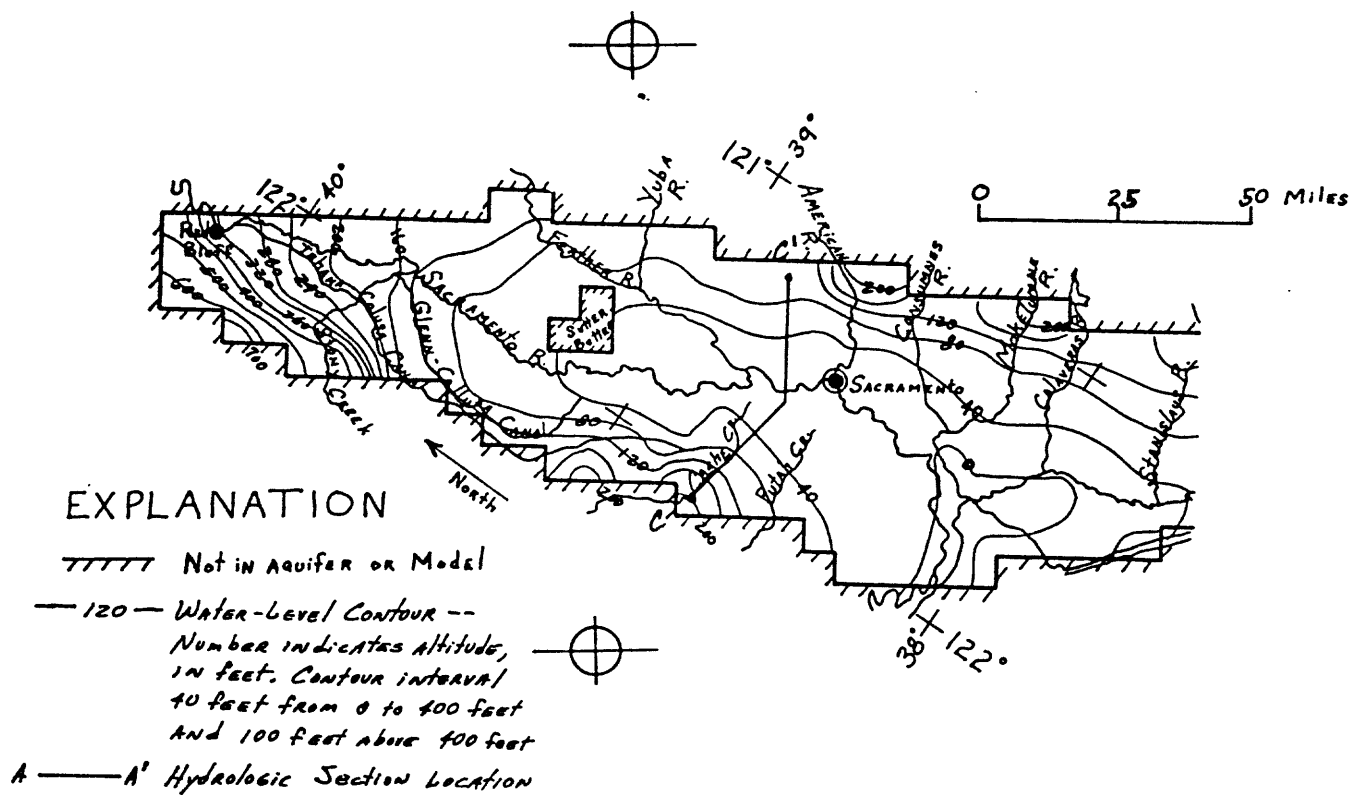


Figure 14 b. -- Pre-development water-table altitude and hydrologic section locations.

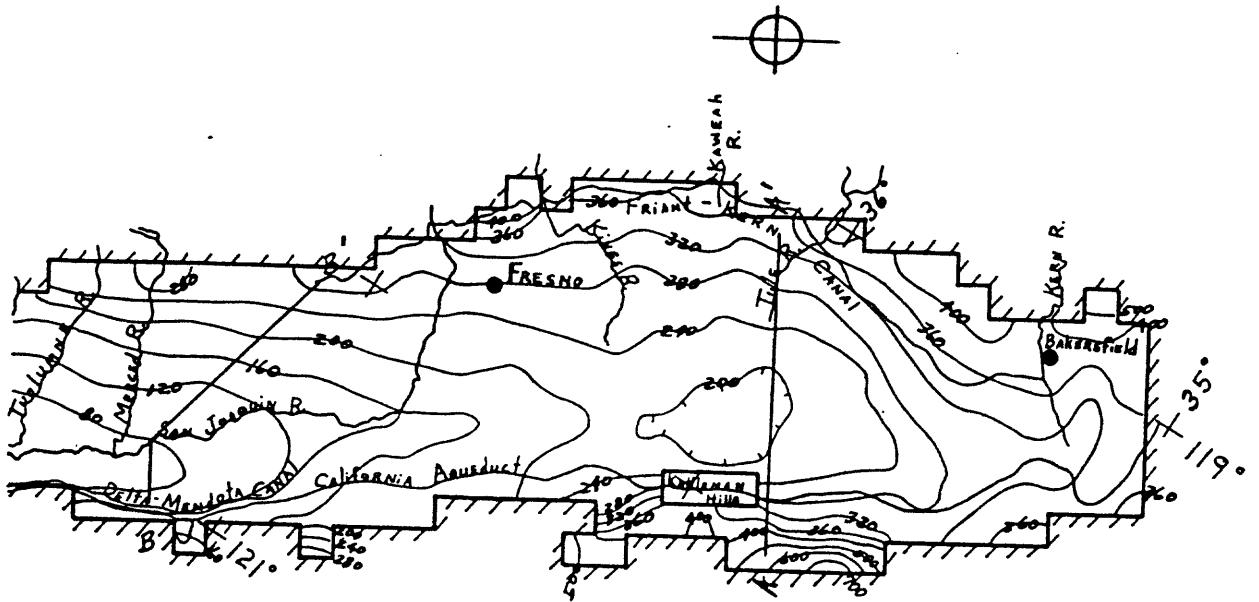


Fig 14 B - (right side)

+

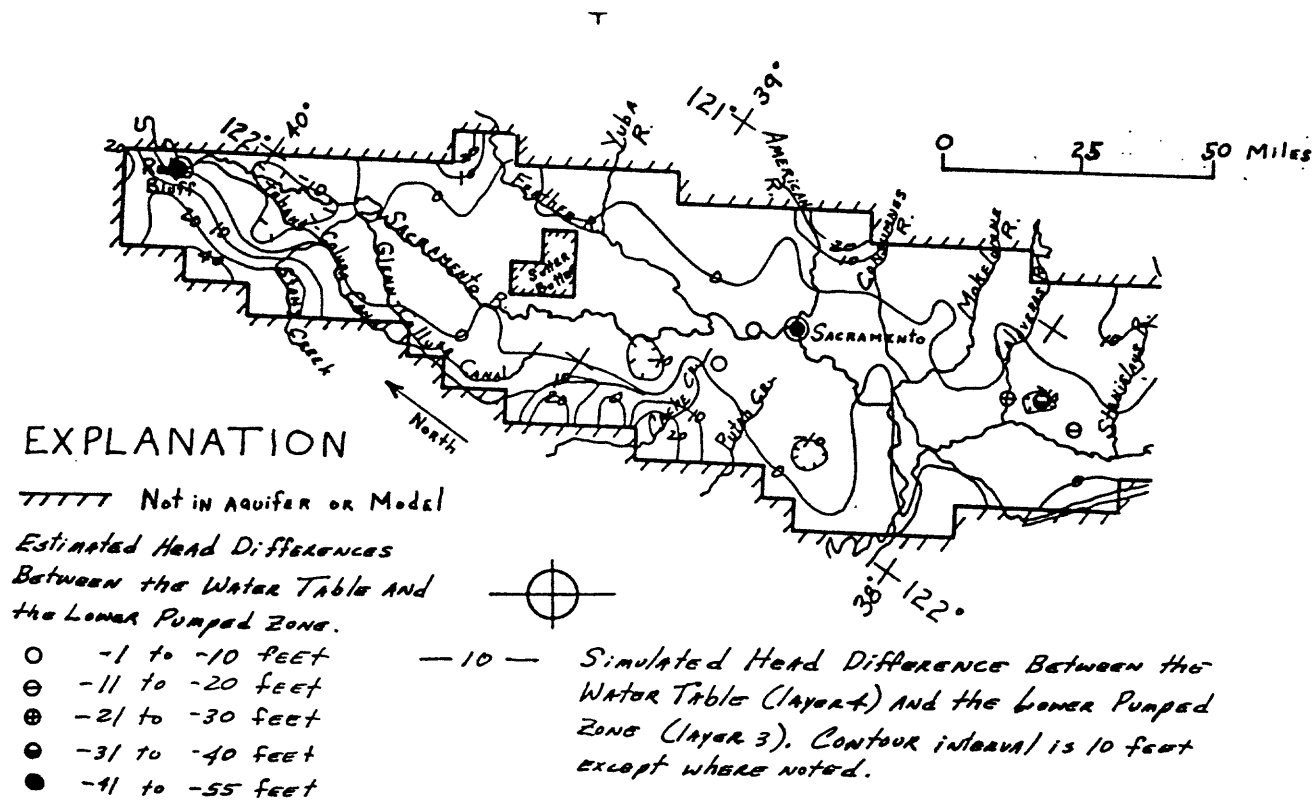


FIGURE 15. -- Simulated and estimated head difference between the water table (layer 4) and the lower pumped zone (layer 3) under predevelopment conditions.

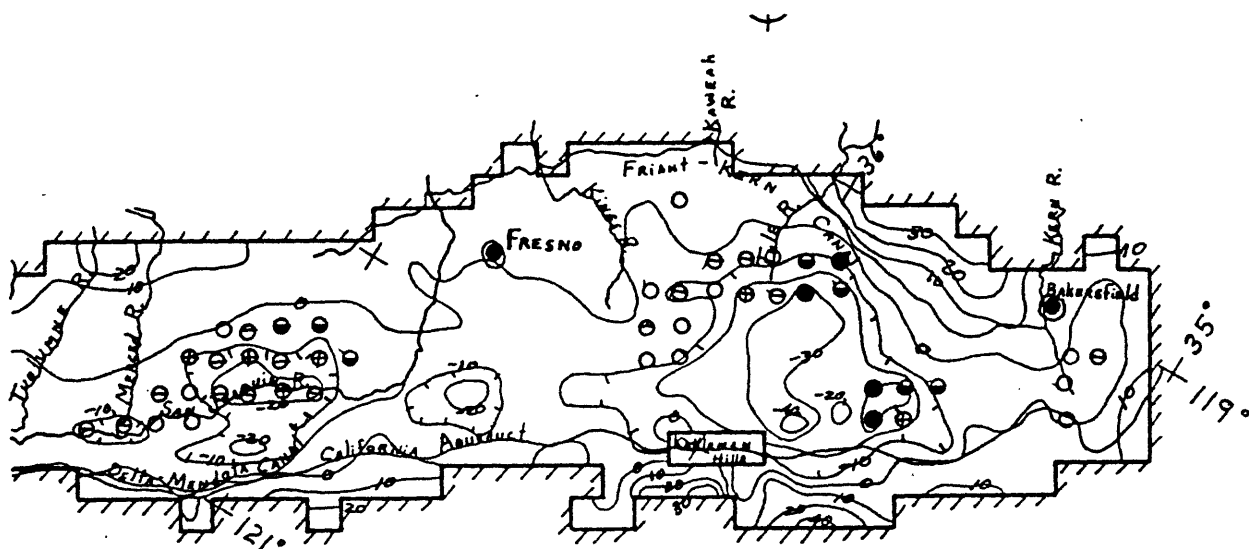


Fig. 15-(right side)

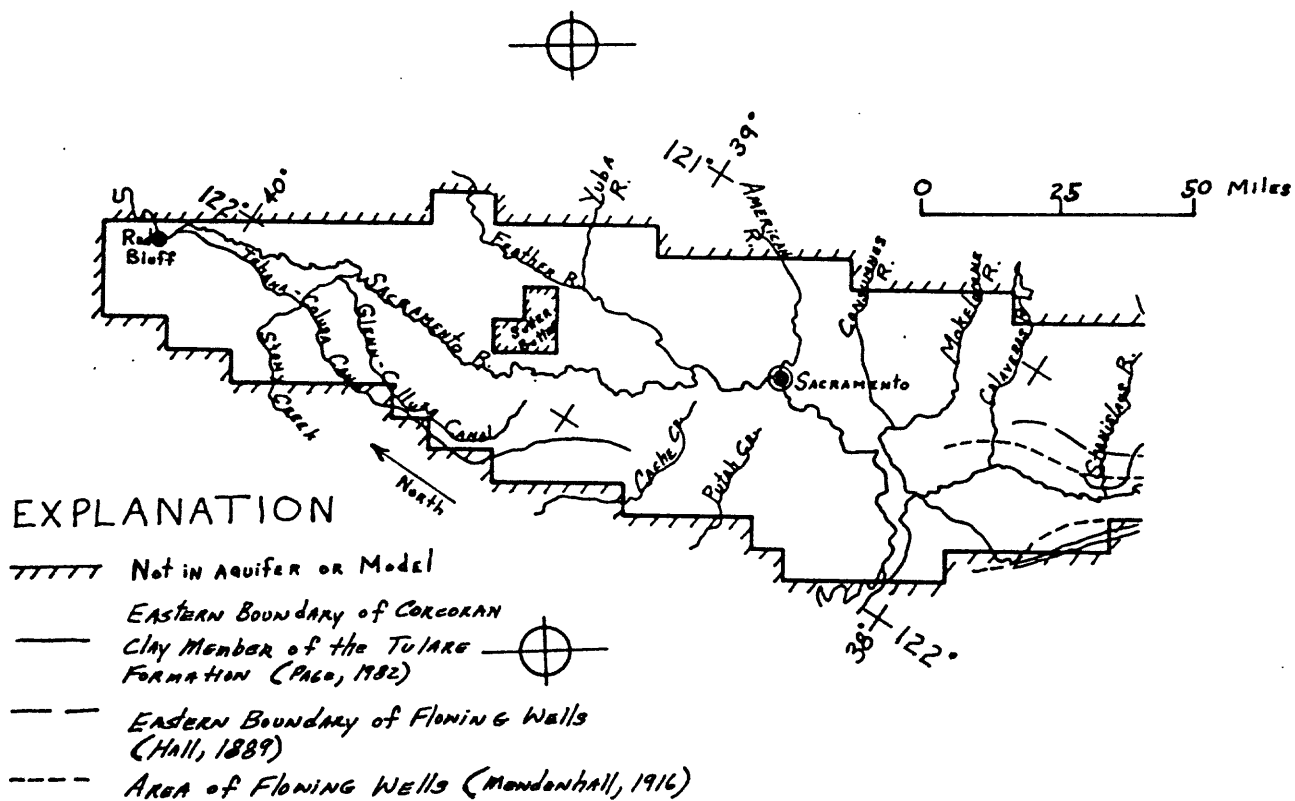


FIGURE 17.-- Areas of preddevelopment flowing wells and the Corcoran Clay Member of the Tulare Formation

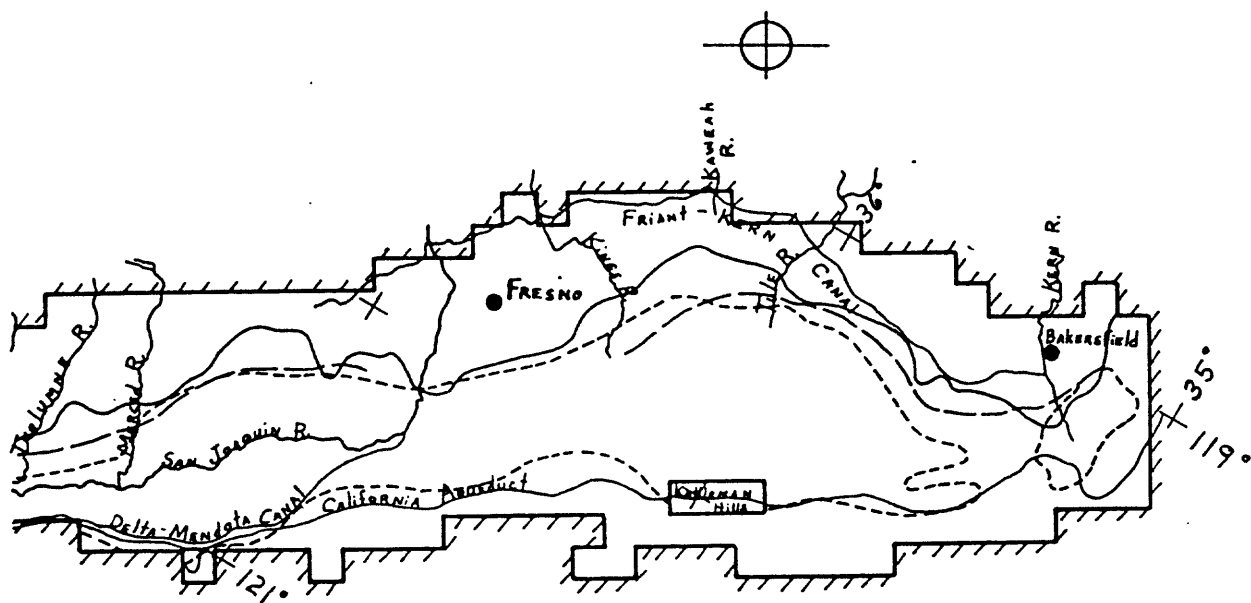


Fig. 17- (right side)



Recharge and Discharge

Most natural recharge to the valley occurs from seepage through stream channels along their upper reaches, and downstream from where the streams exit from the mountain canyons. This process may continue for many miles out into the valley. Most of this type of recharge occurs on the east side of the valley where large streams flow from the Sierra Nevada. The Coast Ranges on the west side are not as high and have much less precipitation available to sustain streamflow.

Deep percolation of precipitation on the valley floor, upgradient from the swampy areas and lakes, is a significant source of recharge in the wetter areas and during the wetter years. The potential evapotranspiration (calculated as the evapotranspiration of irrigated grass) is about 49 in/yr. This value varies little in the valley or from year to year (California Department of Water Resources, 1975) but it is highest in the summer. Precipitation occurs mainly in the winter (fig. 5). Therefore, in the winter, precipitation exceeds evapotranspiration so that excess is stored in the soil until all of its storage capacity is filled. Additional precipitation will either run off or percolate into the aquifer. In the summer, evapotranspiration in excess of precipitation is withdrawn from soil storage until it is depleted. Monthly soil-moisture budgets (see section on "Precipitation"), indicate that no recharge occurs until annual precipitation exceeds about 12 in. This occurs in most years on the north and east side of the valleys, but only in extremely wet years in the southwest part where the average annual precipitation is less than 6 in.

Ground-water discharge occurs mainly through evapotranspiration and discharge to streams where ground-water levels are near land surface; or above it, as in some lakes and streams. Assuming no evapotranspiration from ground water where the depth to water is greater than 10 ft, and also assuming a linear increase to the potential evapotranspiration of 4.1 ft/yr where the water table is at land surface, there would have been about 13 million acre-ft/yr of evapotranspiration from about 8,000 mi². About 40 percent of that amount (5 million acre-ft/yr) would have been supplied from direct precipitation. Most of the remainder would have to have been supplied from surface-water flows. Discharge also occurs to stream channels, generally in their lower reaches, where the head in the aquifer is higher than the water level in the channel.

Natural recharge could not be estimated reliably because conditions were not adequately documented before the system changed substantially because of water development. The mean annual inflow to the valley in stream channels is about 31.7 million acre-ft/yr. The average annual precipitation on the valley floor is about 12.4 million acre-ft/yr. There is no evidence to suggest that these values have changed much since the 1800's. However, probably only a small portion of these waters is recharged to the ground-water system. Probably the best regional estimates of recharge and discharge in the natural system are from the model calculations. This was done using the aquifer properties calibrated during the 1961-77 period, with adjustments for changes because wells were not present during the predevelopment period. The uppermost model layer (layer 4) was held constant at the best estimates of the predevelopment water table (fig. 14). Simulations with these constant heads produced an estimate of the amounts of water that recharged and discharged through each of the model blocks in layer 4 as shown in figure 18. These values do not represent the total recharge/discharge to the aquifer system that occurs in the Central Valley, but rather they represent the difference between recharge and discharge (net recharge/discharge) in each model block. Thus, the values in figure 18 represent the amount of water that recharged and discharged the aquifer system in the Central Valley. In general, more recharge than discharge occurs along the margins of the valley while more discharge than recharge occurs in the low-lying central parts. In the San Joaquin Valley, the areas of discharge generally correspond to areas of flowing wells (compare figs. 17 and 18). Total calculated recharge and discharge were slightly over 200,000 acre-ft/yr each. Ground-water outflow to Suisun Bay was negligible.

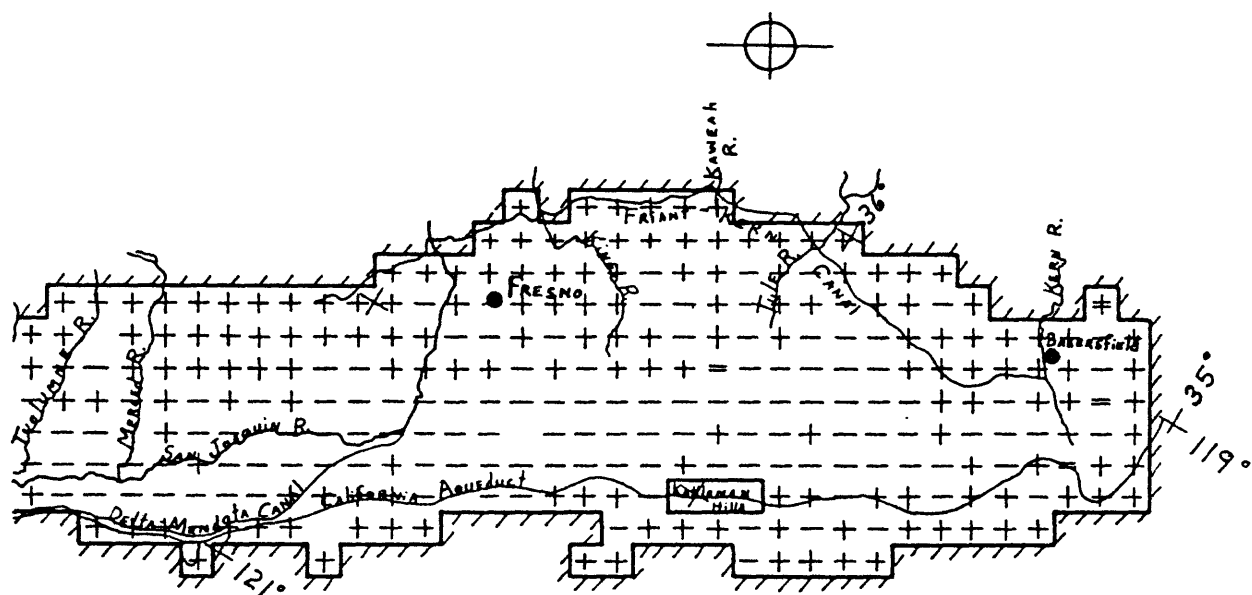


Fig. 18 (right side)

1

Extent of Freshwater

The post-Eocene continental deposits constitute the primary fresh ground-water reservoir in the Central Valley. Freshwater in the Central Valley is defined as water that has a specific conductance of less than 3,000 micromhos per centimeter at 25° C (Olmsted and Davis, 1961, p. 134; Page, 1973, and Berkstresser, 1973). This corresponds to about 2,000 mg/L of dissolved solids. Beneath the body of freshwater is saline water. In general, the salinity of the water beneath the base of freshwater increases gradually with depth at least in the San Joaquin Valley, however, at certain locations it may increase rapidly (Page, 1973).

The vertical extent of freshwater varies greatly throughout the valley (fig. 19). The greatest thickness of freshwater occurs near Bakersfield where it exceeds 4,500 ft. In the San Joaquin Valley, the occurrence of freshwater is not related to any specific formation, but rather is generally within the post-Eocene continental deposits. The base of freshwater in the San Joaquin Valley in places reflects the underlying structure of the thick Tertiary basin, particularly near Bakersfield. It also reflects the anticlinal structures of some of the oil and gas fields in that valley (Page, 1973). In the Sacramento Valley, the base of freshwater is generally coincident with the base of continental and volcanic deposits and rarely does it reflect deeper structures such as faults and gas reservoirs (Berkstresser, 1973). The shallow body of saline water west of Sutter Buttes (fig. 19) is found in marine deposits while the shallow body of saline water to the south of Sutter Buttes may be a body of evaporation residue. Another possible cause was thought to be from upward migration of marine connate waters through defective, abandoned, or improperly constructed deep wells (Olmsted and Davis, 1961, p. 136). However, after investigation, G. H. Davis could not find evidence of more than one or two deep wells ever drilled in this area (oral commun., 1983).

Within the freshwater body are zones of water that approach and exceed the specific conductance limit that defines freshwater. These zones of saline water are surrounded by freshwater and may represent evaporation residues or bodies of estuarine marine water trapped when the sediments were deposited (Olmsted and Davis, 1961, p. 136, and Davis and others, 1959, p. 181).

The initial simulation assumptions were that the interface between fresh and saline water was static and that the thickness of the aquifer system was equal to the thickness of the freshwater body. However, simulation results indicated that the assumption of a static interface between fresh and saline waters was not correct. Where the thickness of freshwater was small, the simulation required hydraulic conductivities in the aquifer system which were unrealistically large, and where the thickness of freshwater was large, the hydraulic conductivities required were unrealistically small. Davis and others (1959, p. 43) suggest that because there is little evidence of the marine sediments being flushed with freshwater (except on the southeast side of the San Joaquin Valley) and because of comparatively recent structural deformation, not enough time has elapsed for the interface between the freshwater and the saline water to reach a stable position. Thus, the thickness of the aquifer system used in the final analysis of ground-water flow was increased to include most of the post-Eocene continental deposits.

Density variations between the freshwater and the saline water were not accounted for in the analysis of ground-water flow, nor was any analysis done to determine the effect of pumping in the freshwater body on the movement of the saline waters. Not incorporating density differences in the analysis was thought to yield only minor errors in the overall analysis of ground-water flow because most of the flow occurs in the upper part of the aquifer system. Most of the post-Eocene continental deposits that contain saline water were incorporated into the lowest model layer where hydraulic head data is largely unknown and where essentially no ground water is pumped. Simulation results indicate that the amounts of water that move into and out of the lowest model layer are small. Under predevelopment conditions, only about 70,000 acre-ft/yr (23 percent of the layer 4 vertical flow) flows into or out of layer 1. In 1961, total layer 1 vertical flows are only 6 percent of the layer 4 flows. These simulations assume that only hydraulic gradients cause the movement of brine waters.

POSTDEVELOPMENT GROUND-WATER FLOW

The period 1961-77 was studied intensively to understand the present flow system and attempt to detect any trends. This period is hydrologically representative of the climatic variation in the valley (fig. 7). The period from predevelopment (before about 1860) until 1961 was not studied intensively because very little data are available and it would be difficult to extrapolate back in time because so many conditions have changed.

History of Water Development

The favorable climate for agriculture in the Central Valley combined with the ability of water managers who anticipate needs to transfer water from areas of abundant water to areas of scarcity has resulted in one of the most productive agricultural areas in the nation that is dependent on irrigation. With the development of ground water, this agricultural area has further expanded such that the valley is one of the Nation's largest users of ground water. Water development for irrigation has had a major effect on the hydrologic budget of the valley, in both ground water and surface water. Development of both surface- and ground-water sources for domestic and industrial needs has also expanded greatly over the years. The quantity of domestic and industrial water needed, however, has always been small compared to the quantity needed for irrigation.

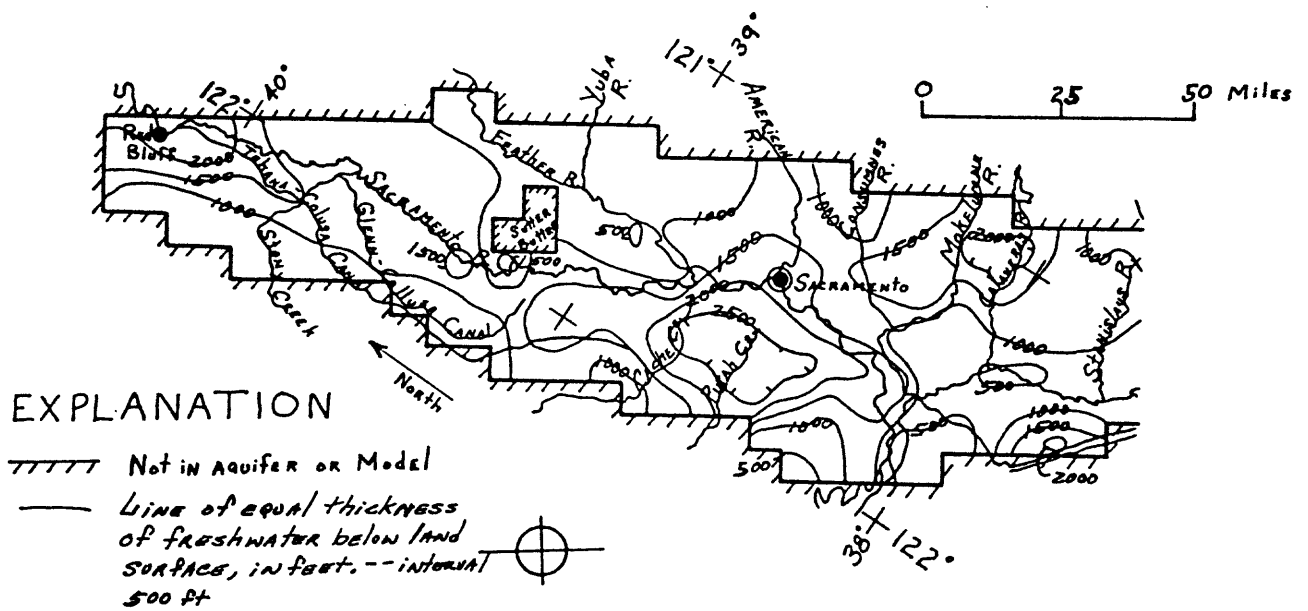


Figure 19.-- Depth to base of freshwater

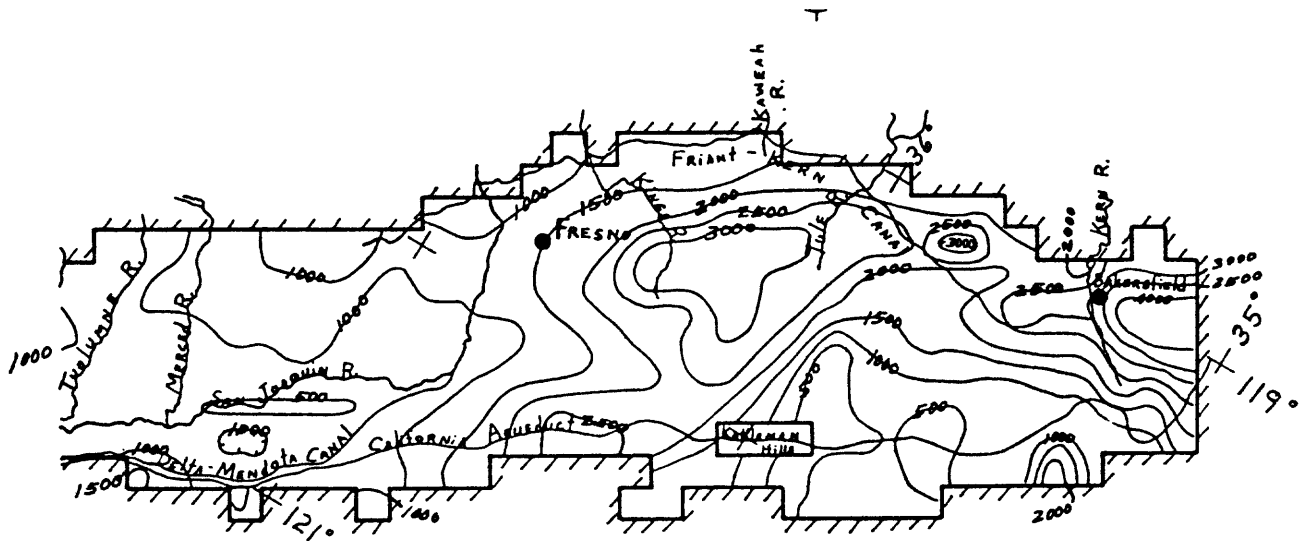


Fig. 19 (right side)

Irrigation

Irrigation was introduced to California around 1790 by Roman Catholic priests from Mexico (Hall, 1889). From 1790 to about the late 1860's, development spread into the Central Valley in a sporadic manner. In the initial phases of irrigation development, local interests were responsible for developing and managing their own resources. In the foothill area of the Sierra Nevada and adjacent sections of the valley, development after 1849 was accelerated as a result of the Gold Rush. After mining had ceased, the ditches were used to convey water for irrigation.

In 1857, an act was passed by the California State Legislature that offered patents to anyone who would drain and reclaim river-bottom lands (Manning, 1967). As a result, most of the earliest expansion in irrigation was concentrated on the valley floor where broad plains had been subject to annual flooding from the main rivers that traversed these lowland areas. Thousands of miles of canals and laterals were constructed to drain the wetlands. Additional diversion began as a result of appropriation of sustained flows from the main rivers. By 1900, the entire flow of the Kern River and much of the Kings River had been diverted by a series of canals constructed to serve lands throughout the southern San Joaquin Valley (Nady and Larragueta, 1983a). Because no significant construction of storage facilities accompanied these earliest diversions, the amount of irrigation water was limited by the low summer flow.

When the drought around 1880 caused a great decrease in surface water in the San Joaquin Valley, ground water began to be developed to supplement the decreased supply as well as to serve lands beyond the reach of the diversion canals (Manning, 1967). In the earliest period of ground-water development, shallow ground water was plentiful and flowing wells were common especially around the old lake basins in the central parts of the San Joaquin Valley. By 1910, almost all of the surface-water supply in the San Joaquin Valley had been diverted, causing an increased impetus to develop ground-water resources.

Even though ground-water use prior to 1900 was increasing, it was only a very minor part of the total irrigation supply. With increased production from the ground-water system, flow rates declined steadily in the once naturally flowing wells and it became necessary to install pumps for irrigation. Around 1930, the development of a greatly improved deep-well turbine pump spurred additional ground-water development for irrigation, because it allowed more efficient pumping from greater depths.

Further expansion of irrigation development was dependent upon the provision of additional sources or more elaborate means for transporting existing streamflow to the land. Again, it was local efforts that conceived and completed the first reservoirs along the eastern margin of the valley.

Construction of larger storage reservoirs, major canals, and large-scale pumping plants was expensive and, therefore, beyond the means of most groups of water users. It was in response to this need that the Federal government became involved with irrigation and was responsible for construction of substantial storage, pumping, and conveyance facilities in California, beginning in the 1940's. Tables 4 and 5 summarize the development of major water facilities in the valley.

TABLE 4.--Surface-water reservoirs

[Abbreviations: USBR, U.S. Bureau of Reclamation; CoE, U.S. Army Corps of Engineers; SWP, California Department of Water Resources State Water Project; Priv., private]

	Average annual flow (acre-ft/yr)	Dam/Reservoir	Storage capacity (acre-ft)	Year com- pleted	Owner
Putah Cr.	373,000	Monticello Dam/ Lake Berryessa	1,592,000	1957	USBR
Stony Cr.	458,600	Black Butte	147,600	1963	CoE, USBR
Sacramento R.	6,223,000	Shasta	4,436,000	1949	USBR
Feather R.	4,263,000	Oroville	2,685,000	1968	SWP
Yuba R.	1,800,000	Englebright	70,000	1941	CoE
North Yuba R.	112,300	New Bullards Bar	727,400	1969	Priv.
Bear R.	326,700	Camp Far West	102,200	1963	Priv.
American R.	2,714,000	Folsom	1,010,000	1956	USBR
Mokelumne R.	577,400	Camanche	431,500	1963	Priv.
Calaveras R.	158,700	New Hogan	323,700	1963	CoE
Stanislaus R.	974,500	New Melones	2,420,000	1978	USBR
Tuolumne R.	1,826,000	New Don Pedro	2,030,000	1970	Priv.
Merced R.	969,400	New Exchequer Dam/ Lake McClure	1,024,000	1967	Priv.
Chowchilla R.	71,870	Buchanan Dam/ Eastman Lake	150,600	1975	CoE
Fresno R.	78,970	Hidden Dam/ Hensly Lake	85,300	1975	CoE
San Joaquin R.	1,721,000	Friant Dam/ Millerton Lake	503,200	1942	USBR
Kings R.	1,655,000	Pine Flat	1,001,000	1951	Priv., CoE
Kaweah R.	475,300	Terminus Dam/ Lake Kaweah	142,900	1962	Priv., CoE
Kern R.	668,000	Isabella	567,900	1954	Priv., CoE
Tule R.	134,800	Success	81,700	1961	Priv., CoE
Calif. Aqueduct ¹	N/A	San Luis	2,040,000	1967	SWP, USBR
TOTAL	25,580,000		21,572,000		

¹Not a river, but a major water conveyance connected to large reservoir.

TABLE 5.--Major water-conveyance facilities

[Abbreviations: USBR, U.S. Bureau of Reclamation; CoE, U.S. Army Corps of Engineers; SWP, California Department of Water Resources State Water Project; Priv., private]

	Average annual flow (acre-ft/yr)	Canal	1975 flow (acre-ft/yr)	Year com- pleted	Owner
Sacramento R.	9,629,000	Tehama-Colusa	1,509,500	1971	USBR
Sacramento R.	11,510,000	Glenn-Colusa	811,200	1905	Priv.
Putah Cr.	373,100	Putah So. Canal	222,500	1959	USBR
Delta	N/A	Delta-Mendota	2,348,000	1951	USBR
Delta	N/A	Calif. Aqueduct	1,510,000	1968	SWP, USBR
San Joaquin R.	1,721,000	Madera Canal	226,000	1944	USBR
San Joaquin R.	1,721,000	Friant-Kern	1,002,000	1949	USBR
TOTAL -----			6,630,000		

¹Based on 1978-81 average.

The Bureau of Reclamation's Central Valley Project (CVP) is one of these large-scale projects. The CVP, consisting of major storage and conveyance facilities, is a major conservation and reclamation project, designed to be a multipurpose development to supply water for irrigation, municipal, industrial and other uses. The project has several key features. Shasta Dam on the upper Sacramento River was built to store winter flows to be released in the summer irrigation season and the following year if necessary. Sacramento River water is diverted from the Delta south through the Delta-Mendota Canal to supply irrigation needs in the southern San Joaquin Valley (see fig. 3). This allows diversion of San Joaquin River water from below Friant Dam, north in the Madera Canal, and south in the Friant-Kern Canal.

In the late 1950's and early 1960's, the California State Water Plan (SWP) was initiated. Because of the great cost, this project was an effort of the entire State. A major project of the SWP is the Oroville Dam on the Feather River, which allows diversion of water in the Delta into the California Aqueduct. From the Delta, water flows south, to San Luis Reservoir, then to the southern San Joaquin Valley and is pumped over the Tehachapi Mountains to southern California.

Figure 20 shows the increasing irrigated acreage in California from 1870 to 1975 and in the Central Valley and its subregions from 1959 to 1975. The proportion of irrigation from ground water compared to surface water has changed greatly over the years, as well. Until 1900, only a small amount of the irrigation was from ground water. T. R. Simpson (Pacific Gas and Electric Co., written commun., 1949) states that in the San Joaquin Valley, the combined capacity of wells south of Chowchilla was 5.3 million acre-ft/yr in 1919 and about 14.9 million acre-ft/yr by 1929. The combined gross pumpage of more than 35,000 wells in the San Joaquin Valley south of Merced in 1948 was close to 6 million acre-ft/yr. As the amount of ground water pumped increased, so did its proportion of total irrigation because surface-water use did not increase as much. Davis and others (1964) reported that in the San Joaquin Valley in 1952, gross diversion of surface water was about 8.5 million acre-ft/yr and ground-water pumpage for irrigation was about 7.5 million acre-ft/yr.

During the period 1961-77, ground-water use accounted for about 50 percent of the irrigation supply in the Central Valley. As shown in figure 21, the proportion between surface water and ground water varies substantially from dry to wet years. Many farms are equipped to use either ground water or surface water. Therefore, in wet years, abundant and inexpensive surface water is used, whereas, in dry years (note 1976-77), ground-water use is predominant. Most surface water is distributed from the streams or Federal and State canals or reservoirs to one of several hundred irrigation districts that distribute to individual farms. Most of the fields are irrigated by some type of flooding method (border or furrow), but in about 20 percent of the area, sprinklers are used (Stewart, 1975, p. 20). Based on the number of agricultural power accounts in the late 1960's, there were about 100,000 active irrigation wells in the valley. The distribution of ground-water pumpage, shown in figure 22, is more toward the southern and eastern parts in the valley where irrigation is most extensive. The distribution and magnitude varies, as shown by comparing the two dry years (1961 and 1977) with the near-normal years (1962 and 1975). Trends through the period are also evident. Well-construction data for about 3,000 irrigation wells show that most wells are perforated throughout the lower two-thirds of their depth. The vertical distribution of pumpage is shown in figure 23. Variation in the depth of major production zones is because of water quality and aquifer-yield considerations. A more complete treatment of the distribution of ground-water pumpage is given by Diamond and Williamson (1983).

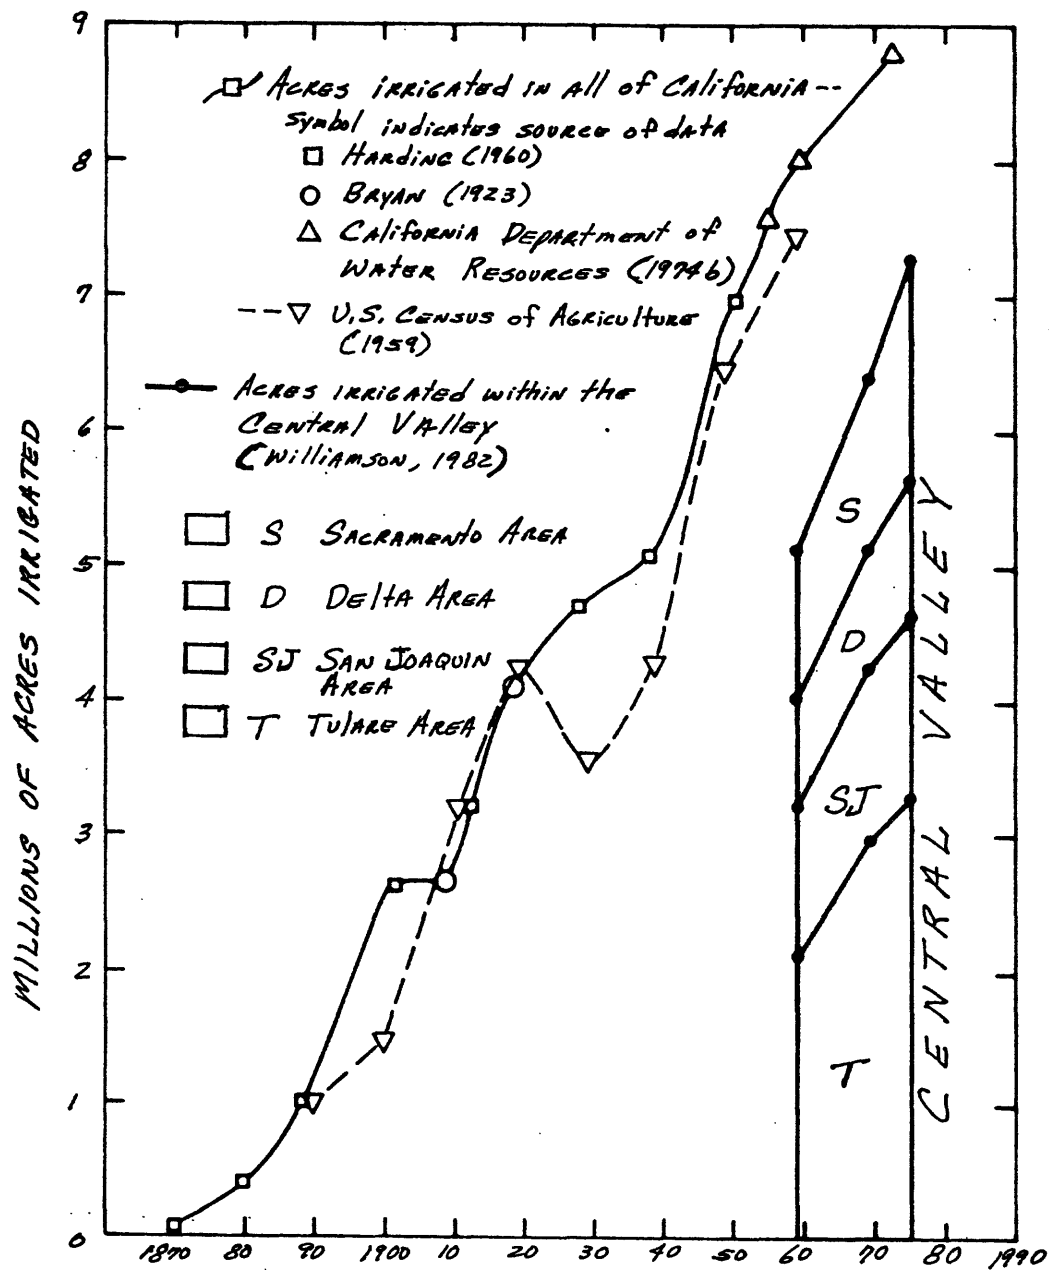


FIGURE 20. -- INCREASE OF IRRIGATED ACREAGE IN CALIFORNIA SINCE 1870 AND IN THE CENTRAL VALLEY SINCE 1959

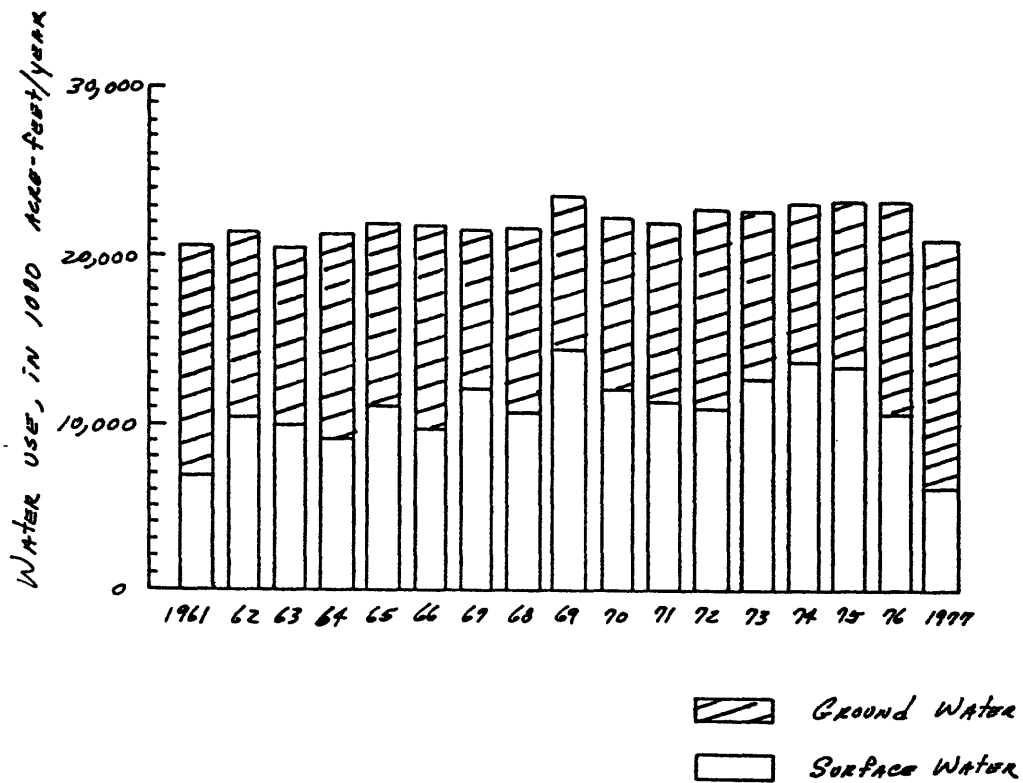


FIGURE 21.-- IRRIGATED WATER USE FROM 1961 TO 1977

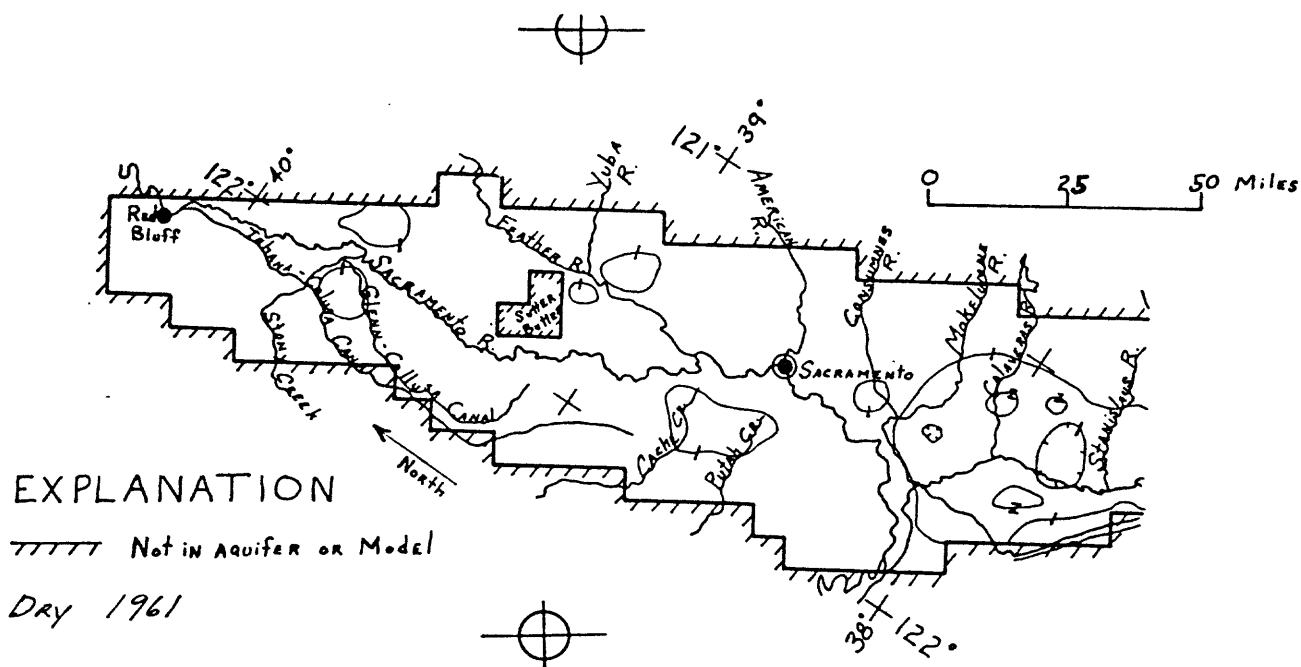


Figure 22.--Ground-water pumpage for 1961, 1962, 1975, and 1977.

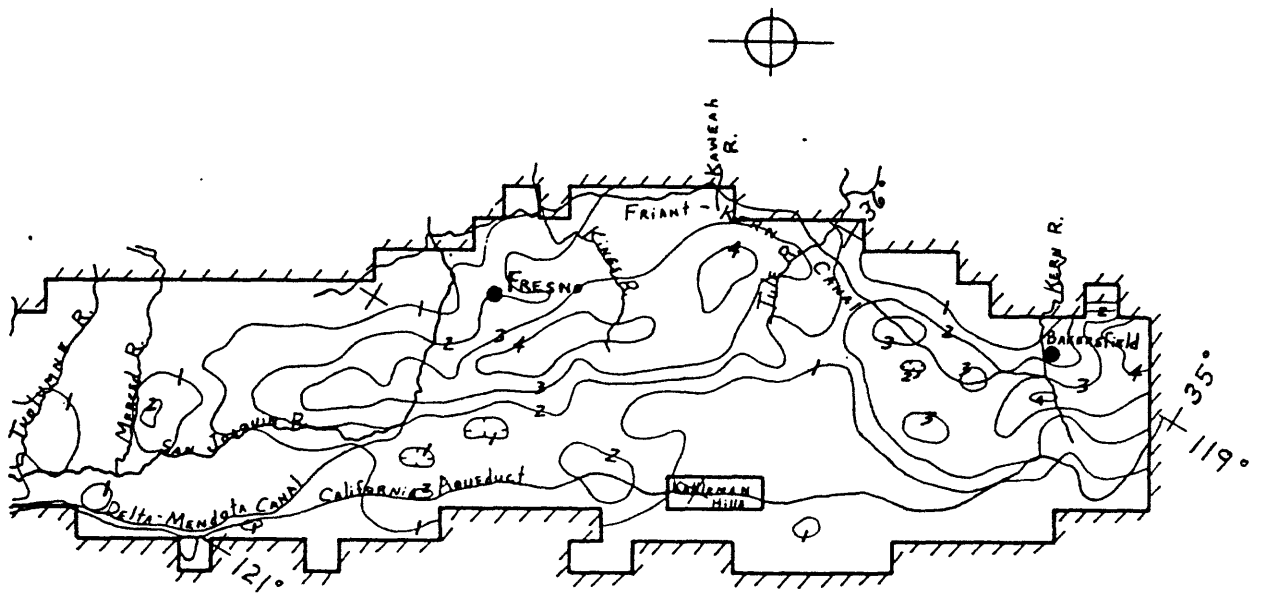


Figure 22.--(1961 right side).



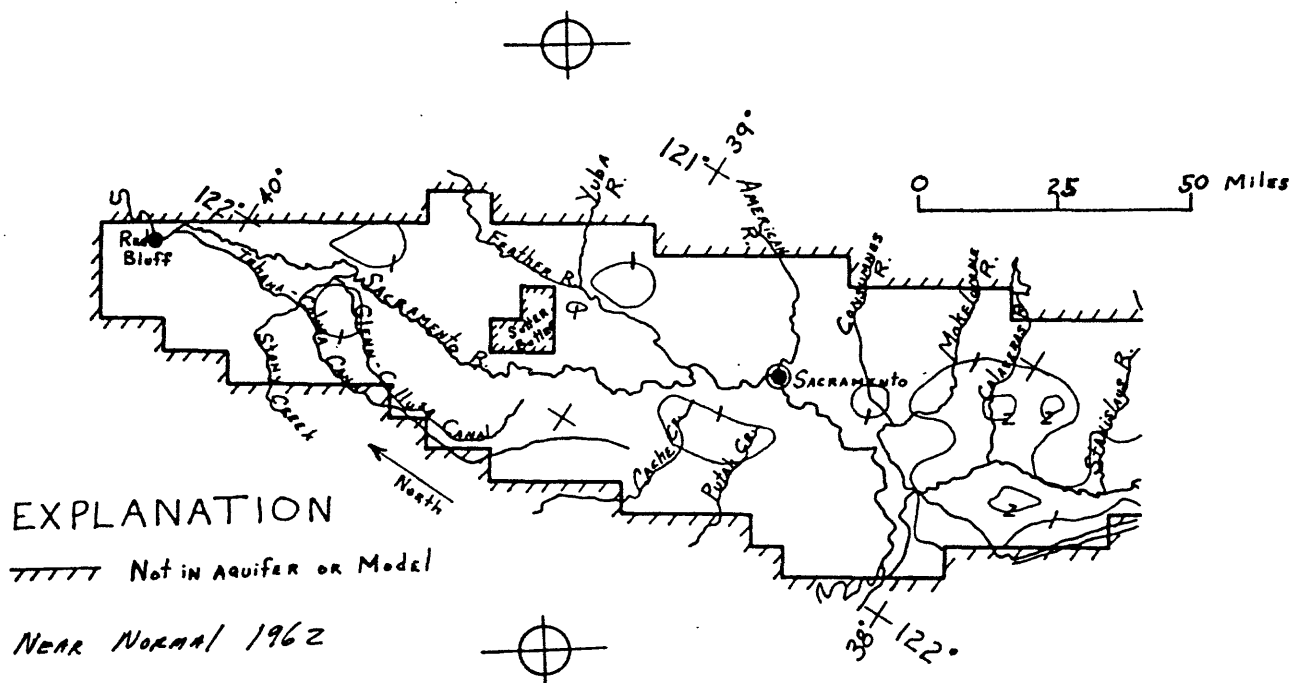


Figure 22.--Ground-water pumpage for 1961, 1962, 1975, and 1977.--Continued

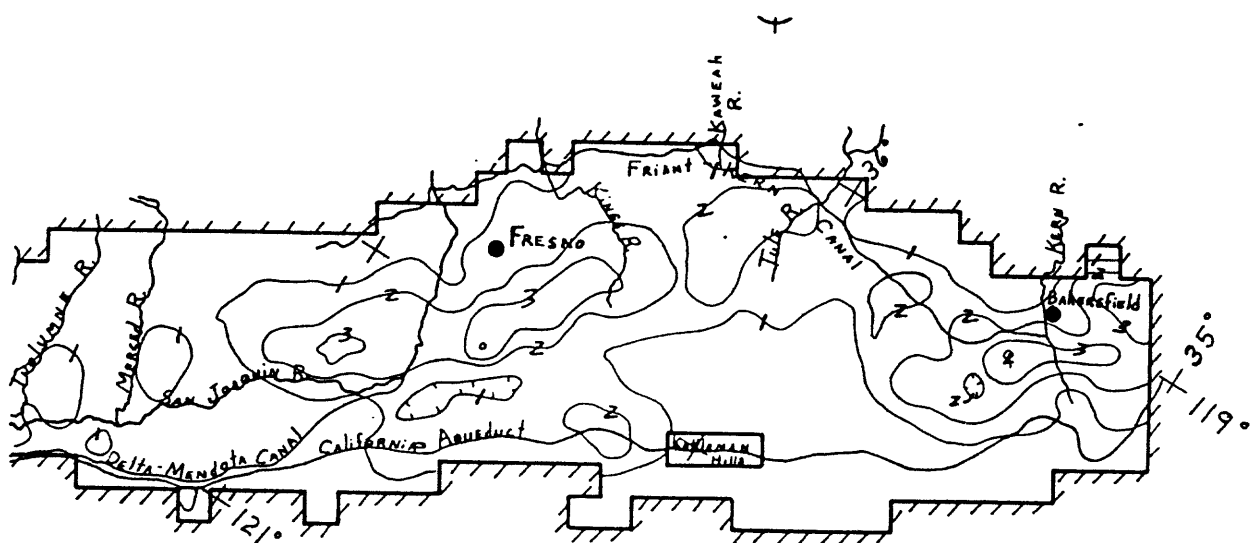


Figure 22.--(1962 right side).

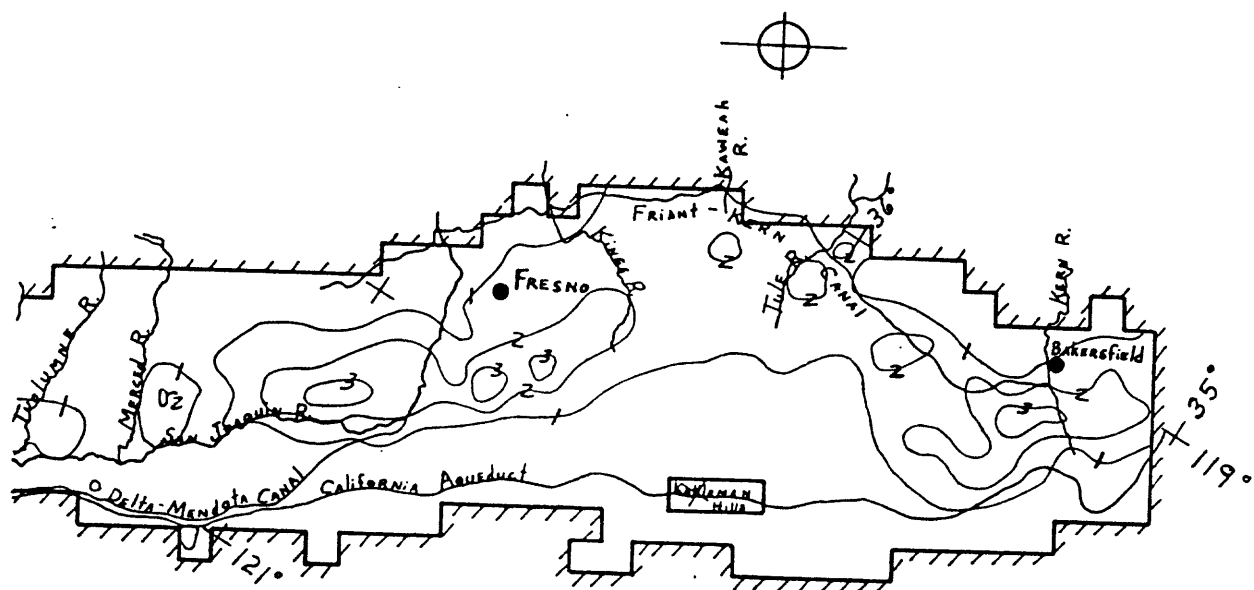


Figure 22.--(1975 right side).


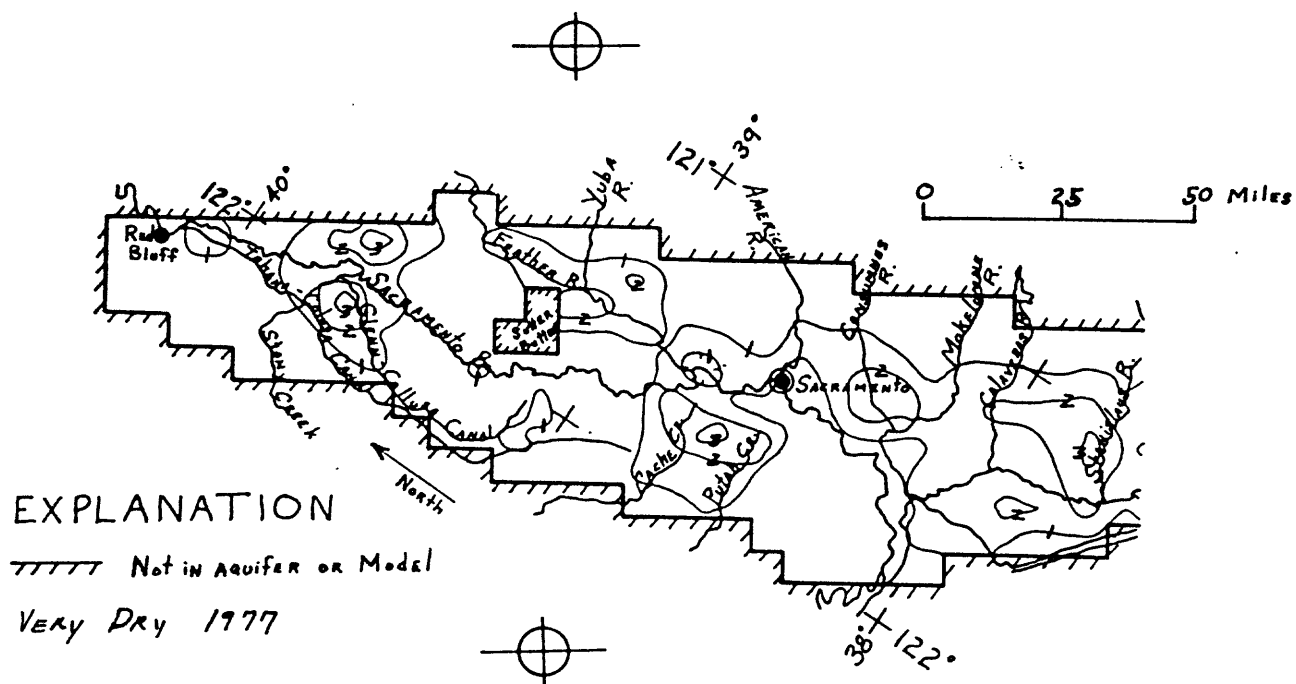


Figure 22.--Ground-water pumpage for 1961, 1962, 1975, and 1977.--Continued ,

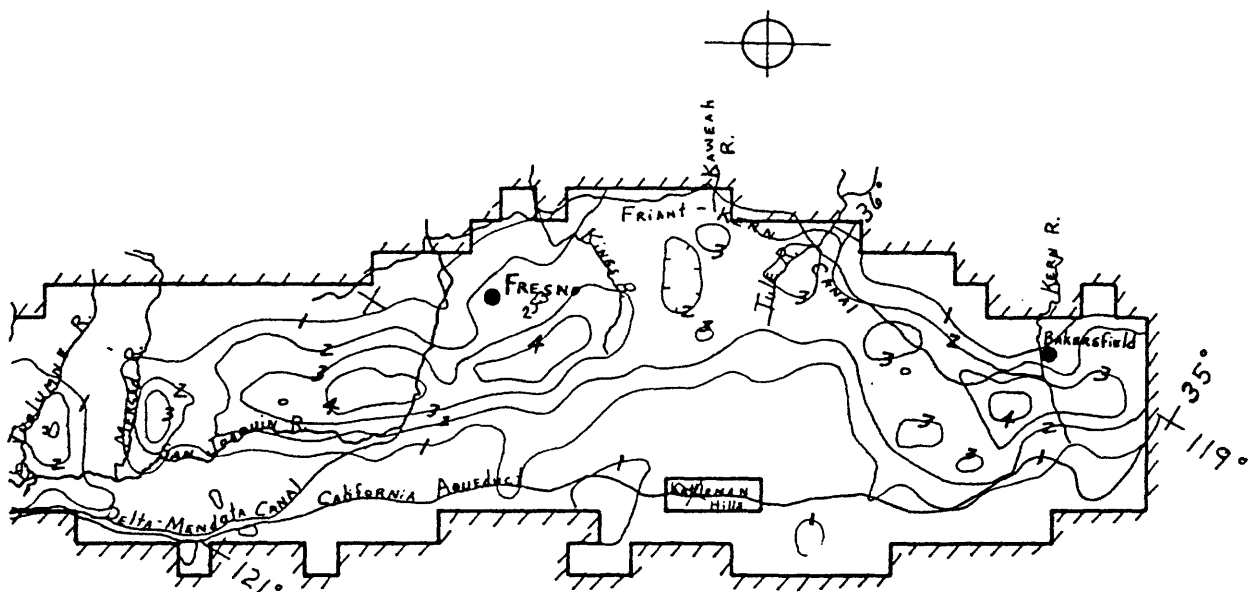

EXPLANATION

Very Day 1977

- 2 — Contours of pumpage in acre-feet per year -- interval is one foot per year. Computed as pumpage/year in a model block divided by the area of the block. Farm use values would be higher



Figure 22.--(1977 right side).

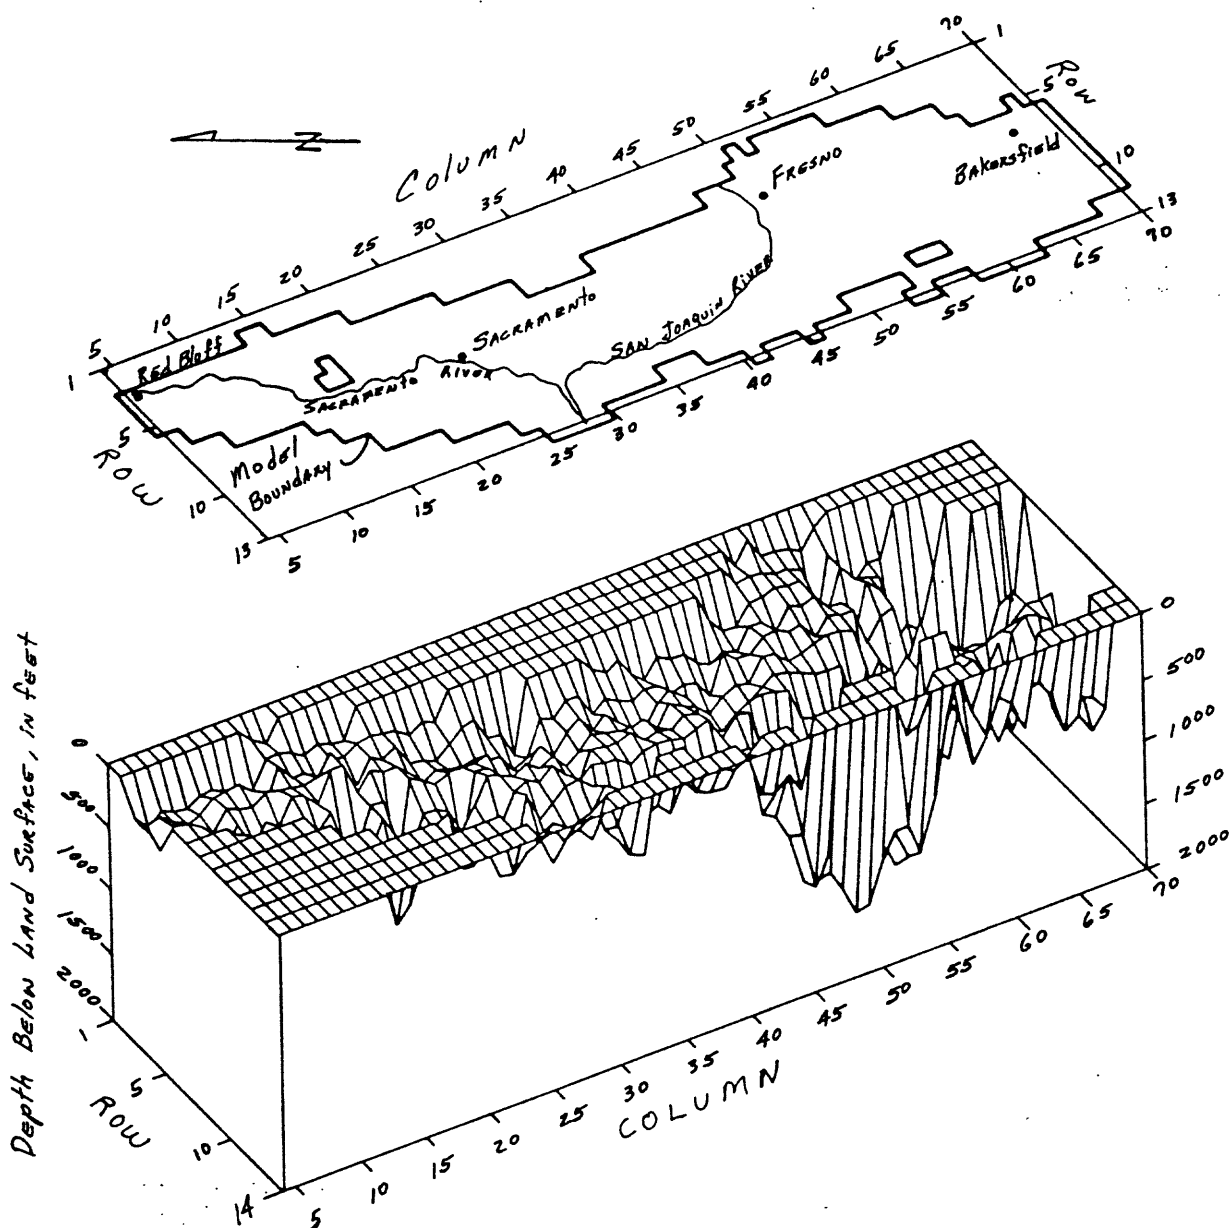


FIGURE 23.-- Approximate depth to the weighted center of the pumped zone

Domestic and Industrial

A small proportion of water used in the valley is for domestic and industrial purposes. Ground-water pumpage for domestic use increased about 3 percent per year from about 300,000 acre-ft in 1961 to about 490,000 acre-ft in 1977 (Diamond and Williamson, 1983). Industrial water use in 1970 was 132,000 acre-ft (California Department of Water Resources, 1977c, p. 74-75). This figure includes both surface-water and ground-water use.

Effects of Development

Development of water resources has had major effect on the aquifer system. In many areas pumpage has lowered water levels, which has altered the direction and rates of ground-water flow (fig. 23A), and, in places, caused the land to subside. Large diversion of surface water for irrigation has altered the amount and distribution of recharge to the aquifer system which has caused a change in the configuration of the water table. All of these causes, but principally surface-water diversions, have decreased the volume of surface water discharged into Suisun Bay. Changes in or to the aquifer system caused by development are discussed in the following paragraphs.

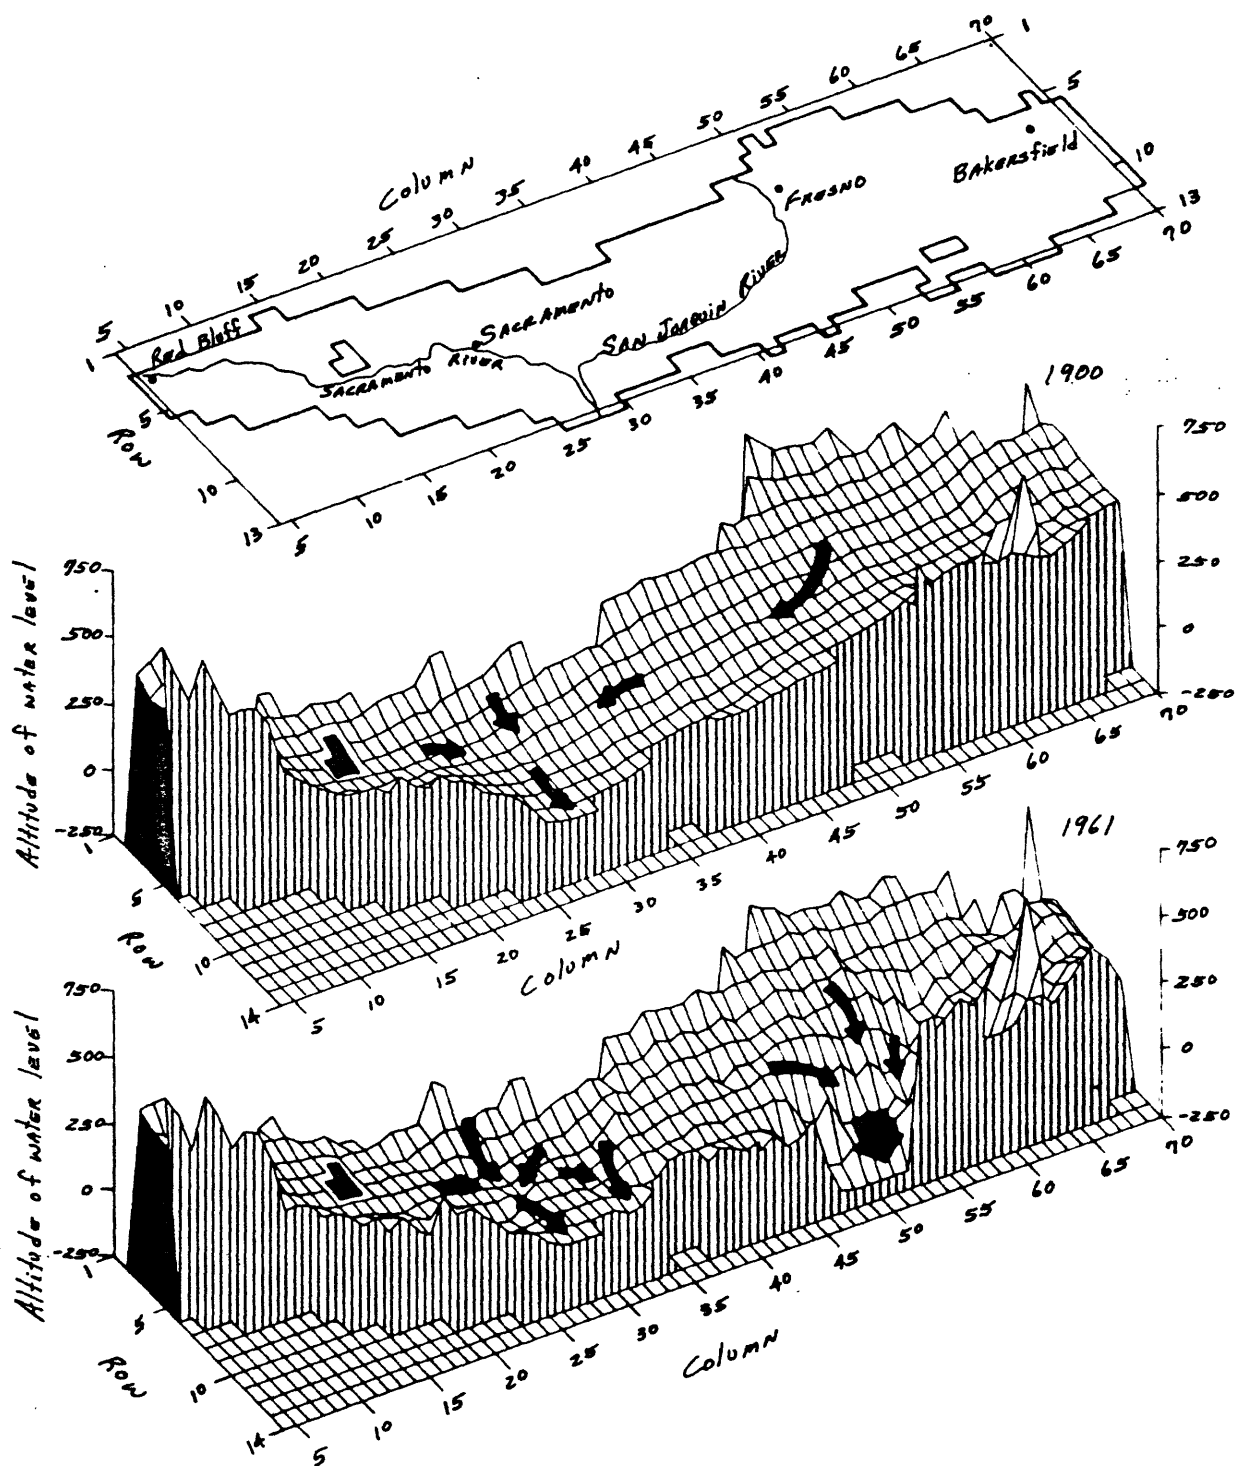


FIGURE 23 A.-- Change in water level and direction of flow from 1900 to 1961 in the lower pumped zone, due to groundwater pumping

Changes in Recharge and Discharge

Development of irrigated agriculture has had major effects on the volume and distribution of ground-water recharge and discharge in the valley. This is shown by comparing recharge and discharge values from the predevelopment and postdevelopment simulations. As previously described in "Estimates of Recharge and Discharge," the simulation is controlled by values of net recharge/discharge (the difference between recharge and discharge) at individual model blocks. During predevelopment conditions, the net recharge or discharge was about 200,000 acre-ft/yr each. During the period 1961-77, the discharge had increased to 11.8 million acre-ft/yr and recharge increased to 11 million acre-ft/yr.

Agricultural development in the valley has changed the paths of most of the 31.7 million acre-ft of surface-water inflow. Figure 24 shows the magnitude and postdevelopment changes in the major components of a hydrologic budget for the valley. More detail on how the budget components were estimated is found in the "Model Development" section. Average budget components for 1961-77 for each area and subarea (fig. 25) are given in table 6.

An index of surface-water outflow from the Delta was estimated for the period 1922-80 by summing the gaged annual flows into the Delta and adjusting for use, precipitation, and export. A linear multiple regression was used to relate Delta outflow to year and annual precipitation as a mean of four gaging stations; a decrease of outflow with time was noted. Average Delta outflow declined from about 24 million acre-ft/yr to about 15 million acre-ft/yr in the period 1920-80. The adjusted R-square for the relation was about 0.67. This decrease was caused mainly by increased evapotranspiration within the valley because of irrigation. Irrigation caused other substantial effects on the hydrology of the valley. A large volume of water flows through the irrigation cycle in the form of net surface-water diversions and ground-water pumpage becoming evapotranspiration of applied water, infiltration, and crop consumption. Net surface diversions do not include volumes that are reused by other irrigators or returned to some surface-water body. In figure 24, the term showing evapotranspiration (ET) from streams includes ET from non-irrigated lands and was calculated as residuals in the budgets presented. The losses and gains from streams for the predevelopment conditions are poor estimates because they were derived from the postdevelopment estimates which are not necessarily the same. The values shown on figure 24 do not correspond to the previously mentioned sums of predevelopment recharge and discharge (200,000 acre-ft/yr each) because the previous values were summed from simulation output which causes some cancelations of recharge and discharge within model blocks.


Postdevelopment average overall recharge comes mostly from irrigation return flow (82 percent), but also from precipitation (14 percent), and streams (4 percent). The actual proportion of overall recharge from streams to the aquifer system is probably larger, however, some recharge will discharge to nearby streams through local or intermediate flow systems which are not modeled in the regional model.

Variation in the components of the water budget during the simulation period are shown in figure 26; wet years (1967, 1969, and 1973) and dry years (1961, 1976, and 1977) are easily identified. It is notable that the overall irrigation efficiency improved from about 53 percent to about 64 percent during the period 1961-77. This can be inferred by the growth rate of irrigated acreage (fig. 20) because it exceeds the growth rate of irrigation water use (fig. 21). This is probably a result of economic and other conditions that encouraged irrigators to conserve water.


During early calibration of the simulation model, it was obvious that the estimates of river losses/gains and small stream recharge were too large. Water levels in some losing sections of rivers rose hundreds of feet and in some gaining sections of rivers levels dropped similarly. No reasonable adjustment in any other model value could correct the imbalance. Individual values of stream losses could be greatly in error owing to the increase of the measurement error in the residual analysis of the stream budgets. However, long-term averages should be closer to the actual values if the errors are randomly distributed. Nevertheless, all of the estimated values of stream losses/gains were divided by five to allow the model to respond within the limits of reasonable adjustments in other values. This adjustment was necessary because of systematic errors in estimating stream losses/gains, local recharge and discharge within a model block, and inability of the model to simulate the real aquifer system.

After this calibration, the simulated water levels in the Sacramento Valley remained too high compared to observed values. To adjust for apparent overestimates of surface-water diverted for irrigation, the diversion values in the Sacramento area (fig. 1) were multiplied by 0.75. This improved the simulation substantially.

In order to fit the observed water-table altitudes, additional small adjustments in the net recharge/discharge term were necessary. This was done because the process of allocating water-budget volumes to model blocks introduced errors that would result in too much water in one model block and too little in an adjacent one. The adjustment was made by relating change in simulated head to change in net recharge/discharge. The distribution of the resulting adjustments to net recharge/discharge is shown in figure 27. A spacial trend in these values of adjustment would indicate an underlying problem in the concepts or methods, such as a missing component of recharge. No such trend was detected, indicating that the net recharge/discharge errors were a result of distribution errors and random measurement error.

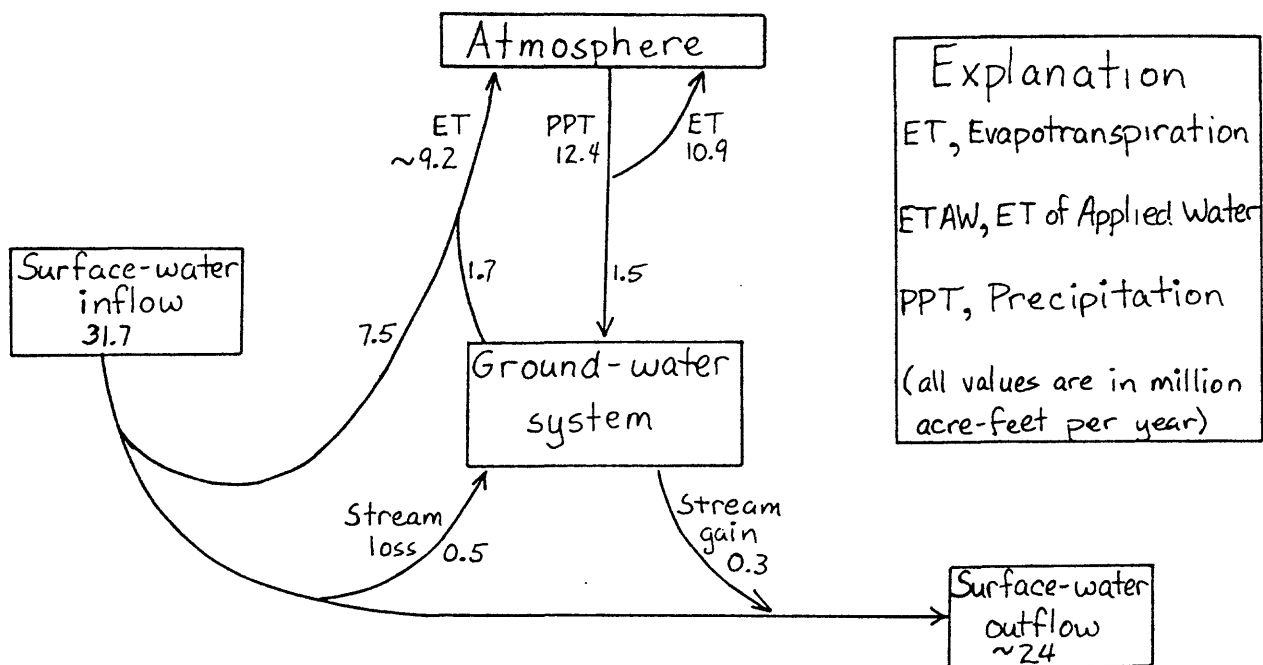


A. PREDEVELOPMENT

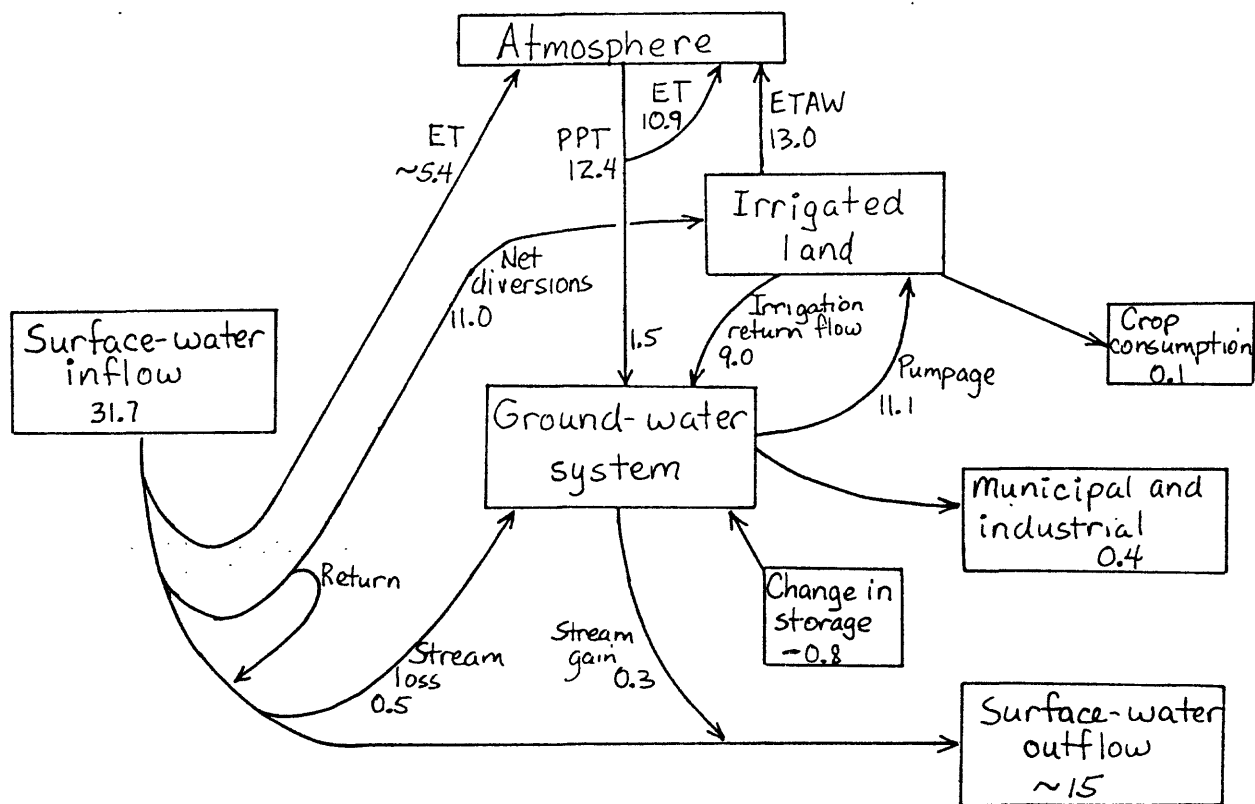

B. POSTDEVELOPMENT (1961-77 average)

Figure 24--Changes in water-budget terms due to development in the Central Valley.

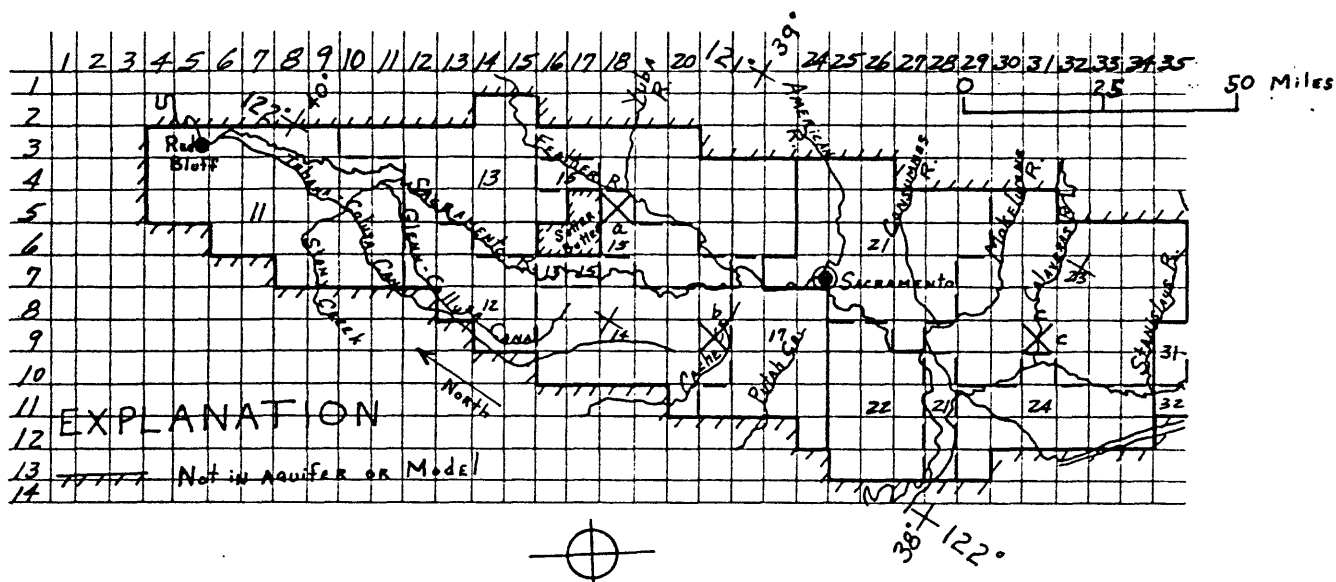

EXPLANATION

☒^a Model block where observed
and simulated hydrographs
are shown (FIG. 33 a-h)

— Area boundary

-- Subarea boundary

SACRAMENTO AREA

- 11 TEHAMA
- 12 GLENN-COLUSA
- 13 BUTTE BASIN
- 14 COLUSA-KNIGHTS LANDING
- 15 SUTTER BASIN
- 16 EAST OF FEATHER RIVER
- 17 CATCH-PUTAH

DELTA AREA

- 21 SACRAMENTO COUNTY
- 22 SOLANO
- 23 E. SAN JOAQUIN COUNTY
- 24 TRACY

SAN JOAQUIN AREA

- 31 MODESTO
- 22 DELTA-MANDOTA
- 33 TURLOCK
- 34 MERCED
- 35 CHONCHILLA
- 36 MADERA

TULARE AREA

- 40 PLEASANT VALLEY
- 41 WEST SIDE
- 42 KINGS
- 43 TULARE LAKE
- 44 KAMAH
- 45 TULE
- 46 WEST KERN COUNTY
- 47 NORTH KERN COUNTY
- 48 KERN DELTA
- 49 ARVIN-MARIPOSA

Figure 25--Area and subarea boundaries.

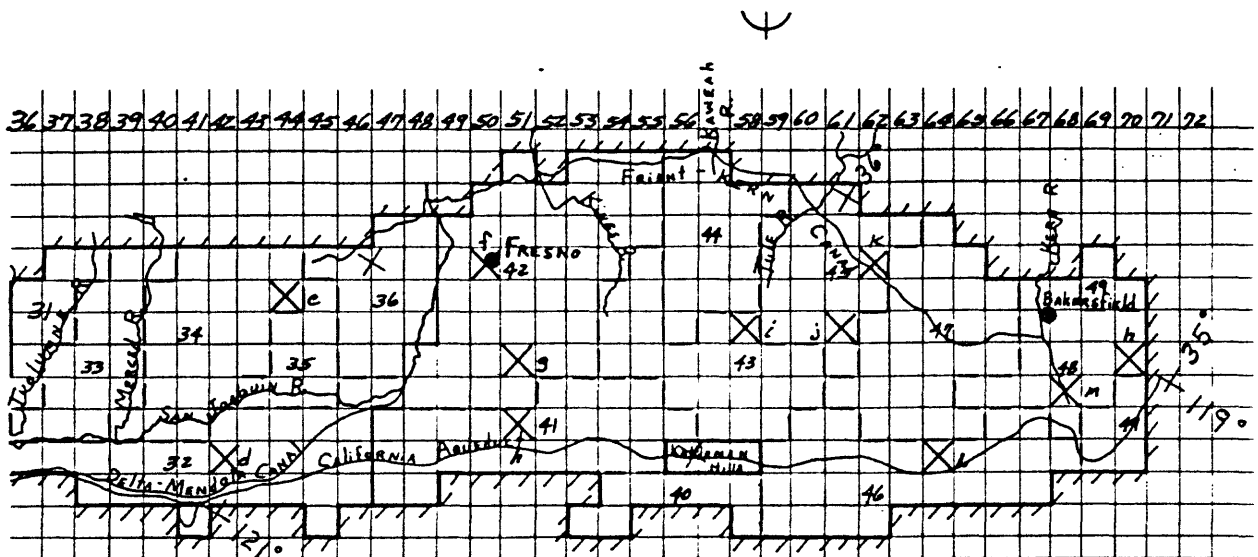


Fig. 25-(right side)

TABLE 6.--Summary of the components of ground-water recharge and discharge, 1961-77 average

[All values in 1000 acre-ft/yr. Columns 8-13 are calculated as follows: Column 8 = columns 4/(5 + (6+14-7)); Columns 9 and 10 are sums of -(discharge) and +(recharge) values of = columns (1 + 2 - 3 - 4 + 5 - 7 + 14); Columns 11 and 12 are sums of +, - adjustments to layer 4 net recharge; Column 13 = columns (- 9 + 10 - 11 + 12)]

Sub- area (See fig. 25)	Excess precip- itation	River Loss	River Gain	Evapotrans- piration of applied water	Surface water diverted	Pumpage, layer 4	Municipal pumpage	Irrigation efficiency	Net estimated Discharge	Recharge	Adjustments + -	Net recharge/ discharge, layer 4	Pumpage, layer 3
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
11 -----	220	57	6	281	178	182	6	0.64	33	282	195	5	87
12 -----	40	7	3	373	44	44	7	0.51	3	356	337	--	16
13 -----	134	17	10	476	351	188	18	0.77	50	144	98	45	95
14 -----	83	9	11	362	258	111	--	0.76	28	113	70	53	108
15 -----	43	10	45	345	538	76	1	0.53	8	251	236	--	43
16 -----	158	42	59	389	324	215	10	0.65	74	214	116	59	73
17 -----	67	13	3	378	343	140	29	0.67	58	180	99	72	109
Sacramento --	746	155	137	2,605	2,642	956	70	0.64	254	1,539	1,150	234	555
21 -----	200	87	4	381	299	217	61	0.63	28	322	218	9	155
22 -----	80	0	--	219	297	21	1	0.67	17	183	185	12	9
23 -----	153	49	16	905	638	391	4	0.65	58	335	210	198	362
24 -----	23	3	11	396	173	170	6	0.69	51	77	13	215	241
Delta -----	456	139	31	1,901	1,407	799	73	0.66	153	917	626	434	767
31 -----	41	0	26	236	353	97	27	0.50	12	168	105	0	50
32 -----	29	56	38	835	1152	231	8	0.54	51	582	360	47	176
33 -----	44	8	42	424	465	110	9	0.65	33	161	107	11	85
34 -----	59	27	10	497	489	92	17	0.53	64	498	243	62	382
35 -----	8	0	3	296	187	110	1	0.53	17	178	--	41	202
36 -----	21	17	1	321	182	189	6	0.47	15	231	1	44	324
San Joaquin -	203	109	120	2,609	2,828	830	68	0.54	193	1,819	816	204	1,284
40 -----	5	2	--	63	18	18	3	0.75	14	25	5	77	51
41 -----	8	3	0	804	425	89	2	0.83	63	154	1	216	463
42 -----	50	46	7	1,601	1,107	1,303	90	0.56	351	419	50	460	562
43 -----	9	16	0	748	473	249	17	0.92	215	54	--	267	104
44 -----	16	12	--	627	571	335	19	0.49	60	415	32	81	402
45 -----	14	13	--	607	428	194	12	0.59	43	306	8	129	426
46 -----	5	2	--	228	221	149	2	0.50	133	33	33	81	86
47 -----	8	5	--	678	386	152	5	0.49	12	566	45	126	839
48 -----	2	19	3	390	355	234	32	0.38	23	434	112	93	460
49 -----	1	13	--	144	97	36	2	0.46	5	152	44	96	182
Tulare -----	119	131	10	5,891	4,081	2,758	183	0.58	834	2,657	330	1,626	3,119
Central Valley -----	1,524	534	299	13,005	10,958	5,342	395	0.59	1434	6,933	2,922	2,499	5,076
													6,181


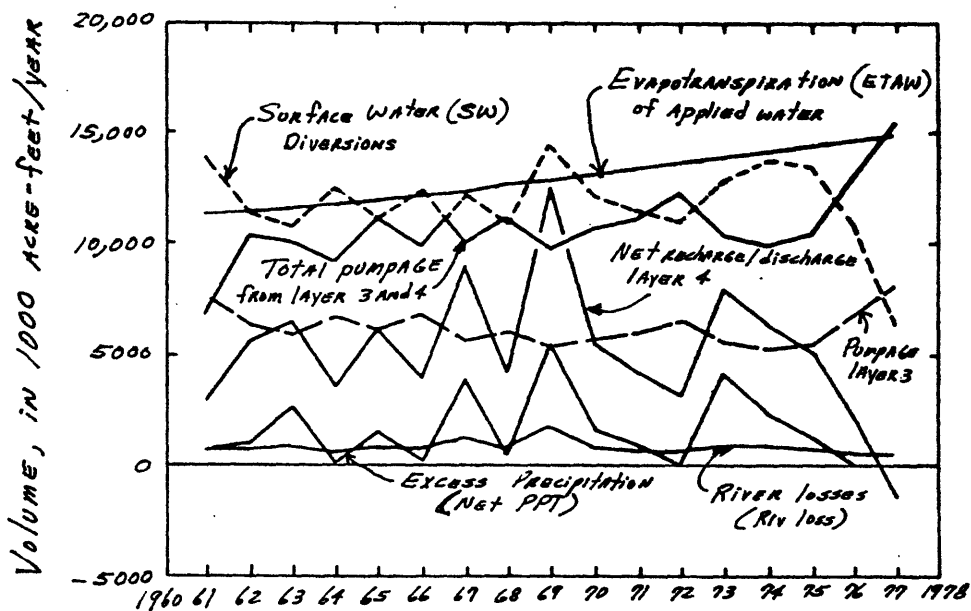


Figure 26--Components of a recharge and discharge water budget, 1961-77. Components are all shown with positive signs. Net recharge/discharge for layer 4 equals $SW - ETAW + NetPPT + RivLoss$, thus it can be positive or negative. Pumpage from layer 3 is discharge for that layer.



Changes in Water Levels

Water-level changes resulting from water resources development have occurred over most of the valley and have been of major proportions in many large areas. Generally, deeper pumped zones have much smaller storage coefficients than the specific yield of water-table systems because changes in head do not result in immediate dewatering of aquifer materials. Consequently, in deeper pumped zones, heads decline more rapidly and the cone of depression extends farther out than in a water-table system which is stressed by similar amounts of pumpage. This is generally true in the Central Valley, and the result is that water-level changes have been more pronounced in the lower pumped zone than at the water table. When water levels decline to a point that compaction of sediments begins to occur, the amount of water released from fine-grained sediments increases, and tends to slow the rate of water-level decline. Figure 28 shows long-term hydrographs for wells that were chosen for the length of their record and the different stages of development that they represent (locations are shown on fig. 2) .

Predevelopment to 1961.--Water-table altitudes and lower pumped zone heads for spring 1961 are shown in figure 29. The changes in water level that have occurred since predevelopment conditions are shown in figure 30. Note that the changes were calculated from the simulated lower zone heads for predevelopment conditions. The most substantial changes were in the western and southern parts of the San Joaquin Valley. There were smaller changes in most of the remaining areas of the valley. The period between predevelopment conditions and 1961 was not simulated because of the absence of data for many critical components of recharge and discharge.

Just north of the Delta area, a depression in the water table to below sea level developed (fig. 29A). In the lower pumped zone, a depression developed north of Sacramento. These areas rely on ground-water pumpage for irrigation. Much of the lowlands of the Sacramento Valley sustained a small rise in the water table because of recharge from surface-water irrigation. Water levels for both the shallow and deep zones of eastern San Joaquin County declined substantially. The area encompassed by the zero-altitude contour grew much larger, especially in the lower pumped zone, indicating seawater intrusion that has caused difficulties for the city of Stockton.

The water table rose in the Delta-Mendota and the Westside areas (fig. 25) because of recharge from surface-water irrigation. The water table declined substantially in the Chowchilla, Madera, Raisin City, Pleasant Valley, Tule, and Kern County areas which depend heavily on ground-water for irrigation and which have many relatively shallow irrigation wells. In 1950, the Friant-Kern Canal (fig. 3) began delivering surface water along the east side of the San Joaquin Valley. In parts of the service area, water-level declines were reversed because of reduction in pumping (fig. 28I).


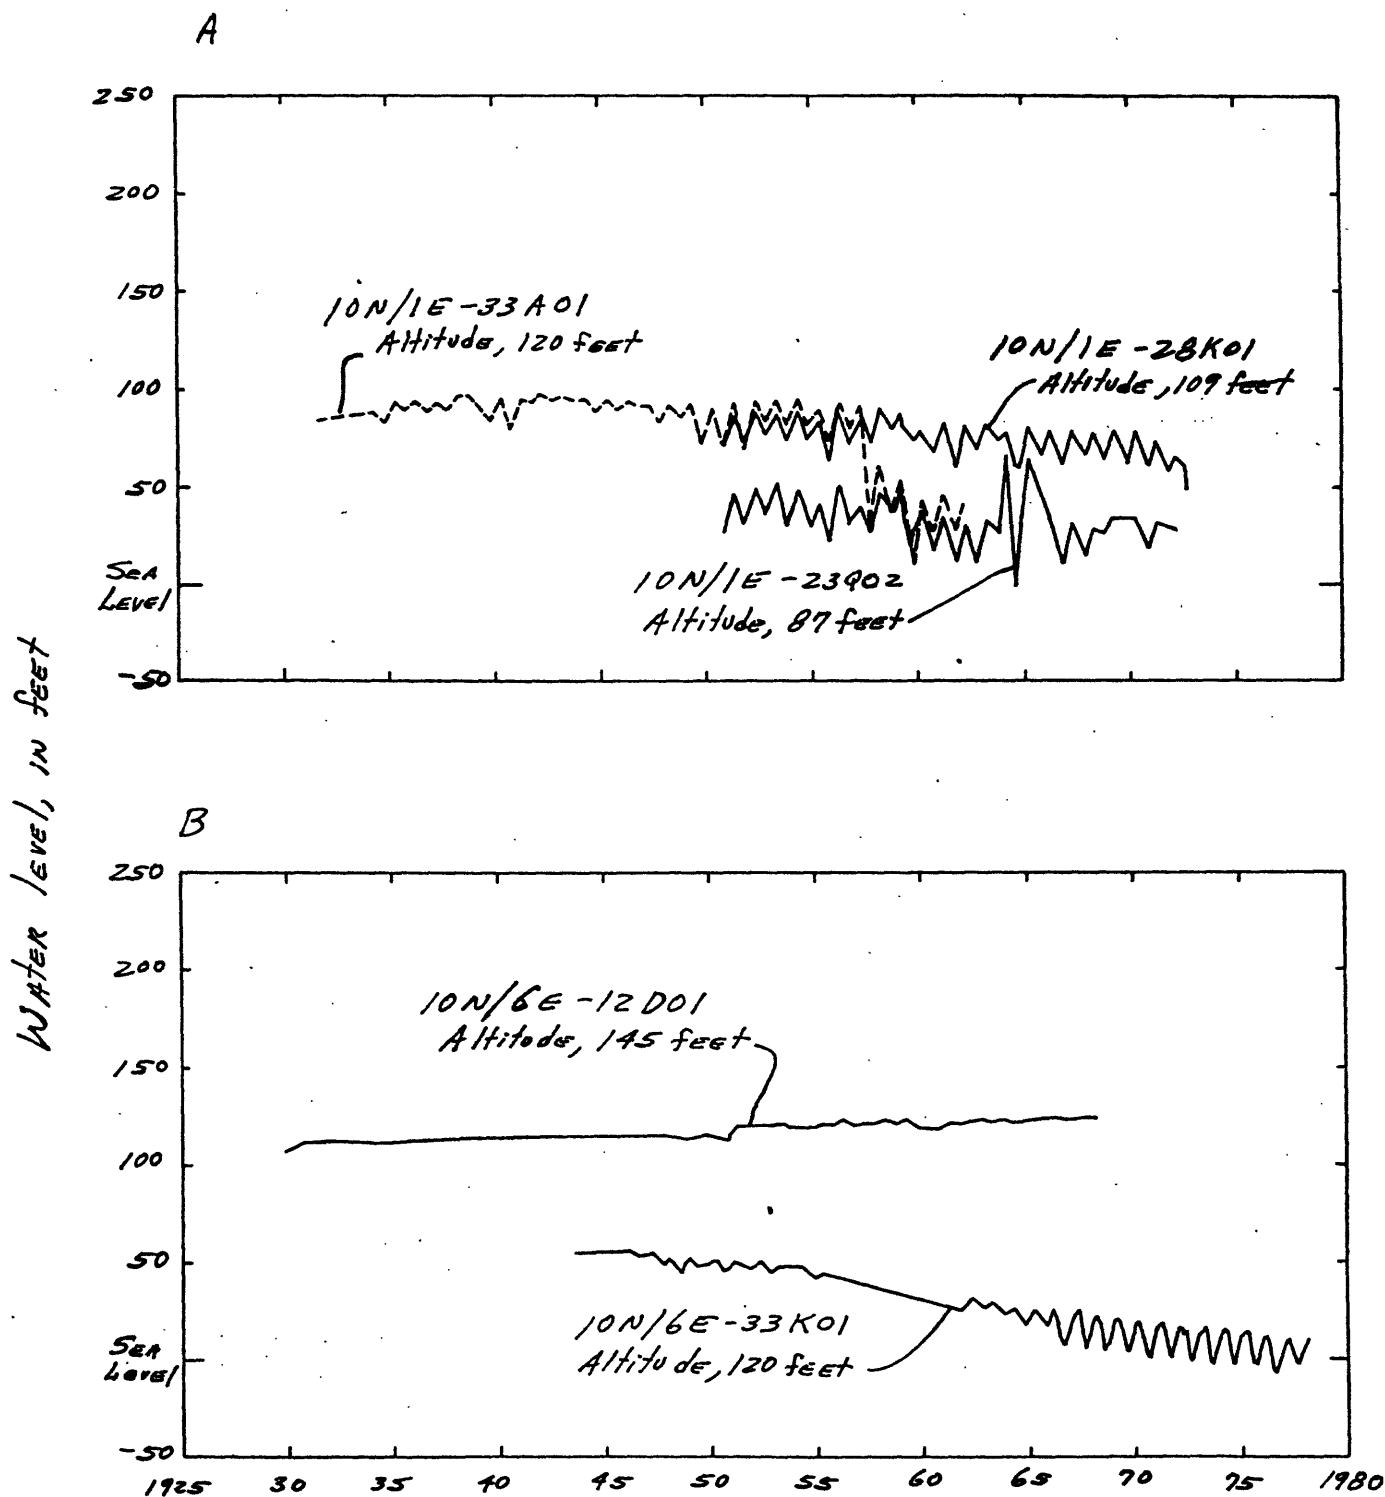


Figure 28--(A-J) Measured water level in wells showing long-term water-level change, 1925-80. Altitude shown is that of land surface at the well.

C

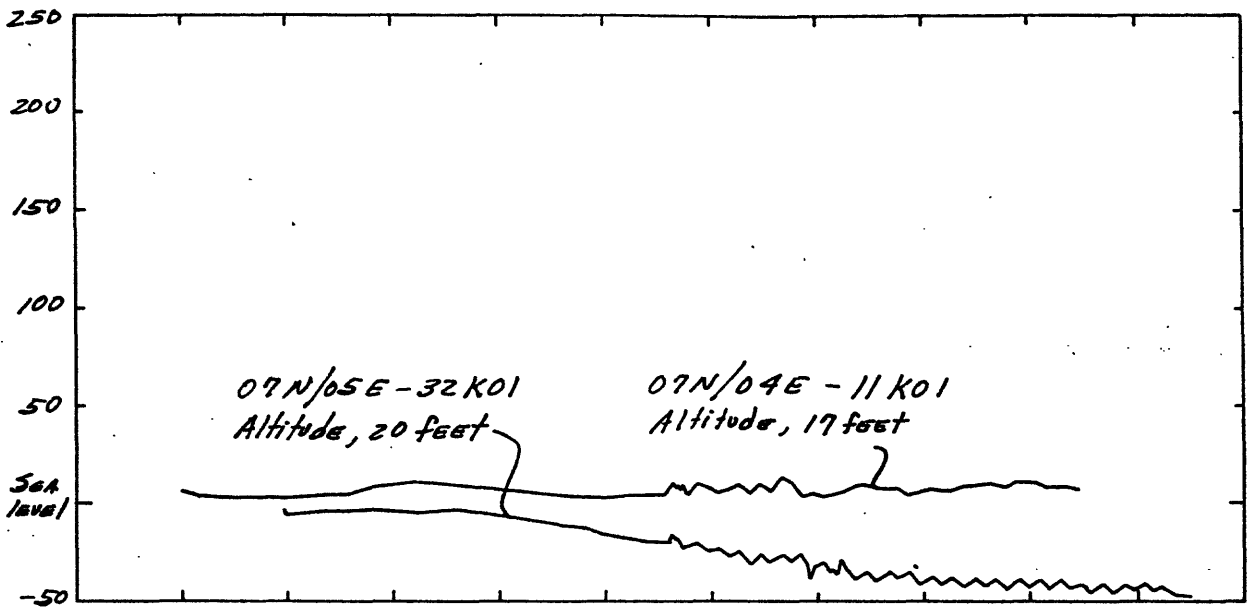

D


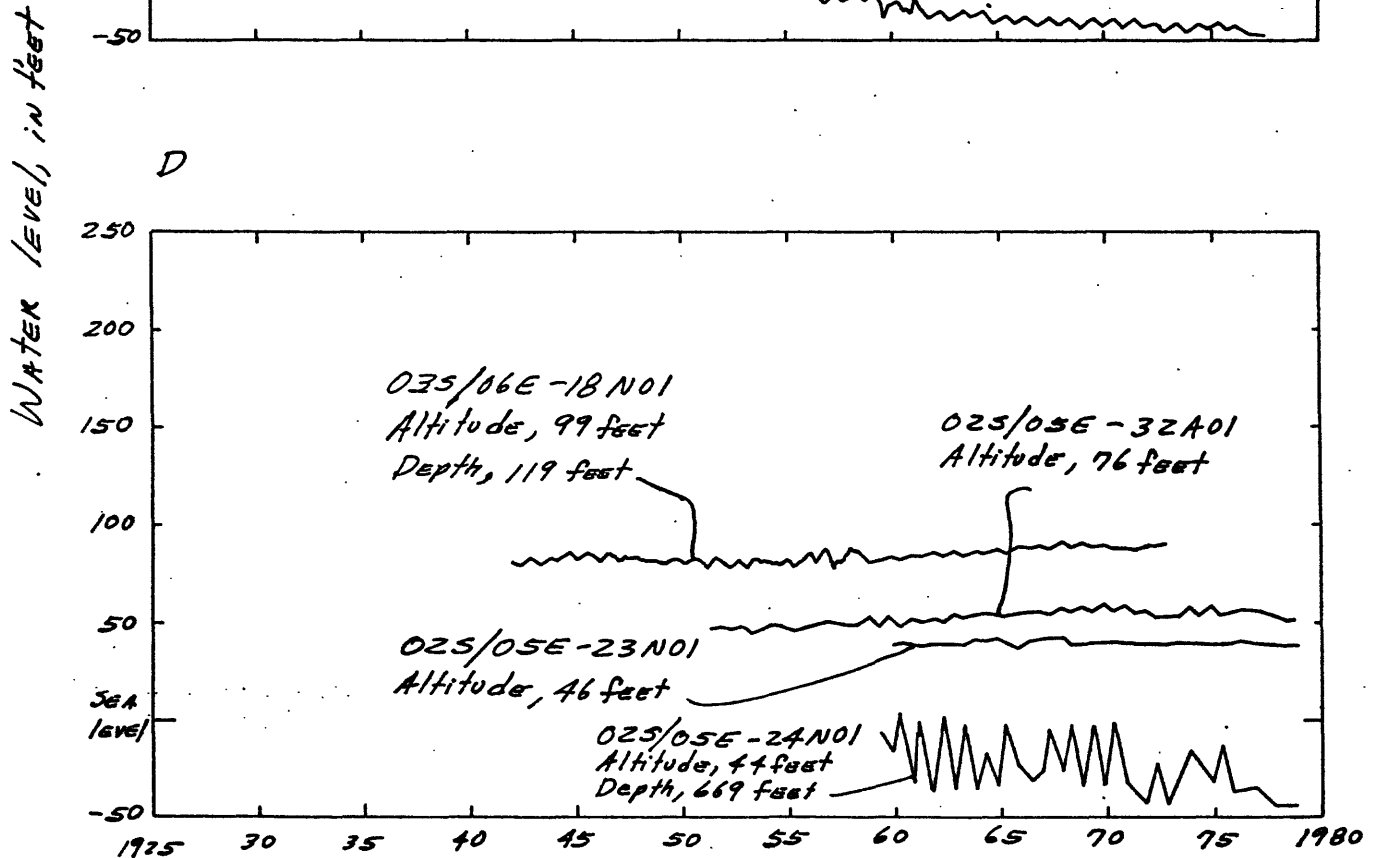


Figure 28--(A-J) Measured water level in wells showing long-term water-level change, 1925-80. Altitude shown is that of land surface at the well--Continued.

E

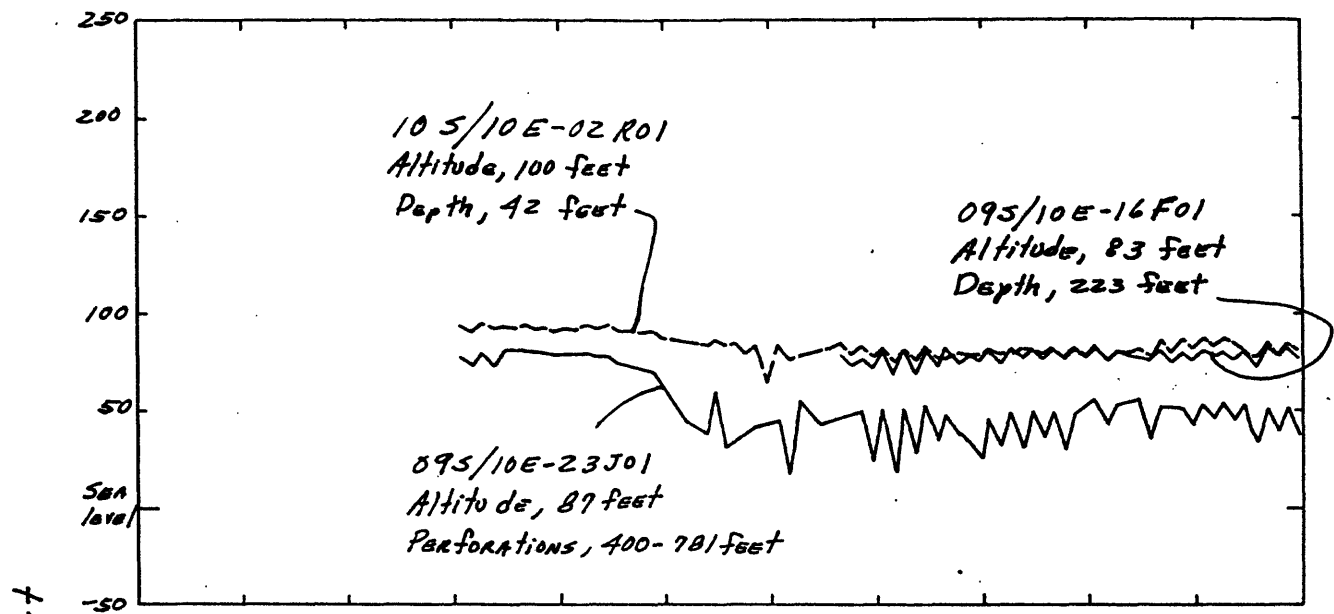

F


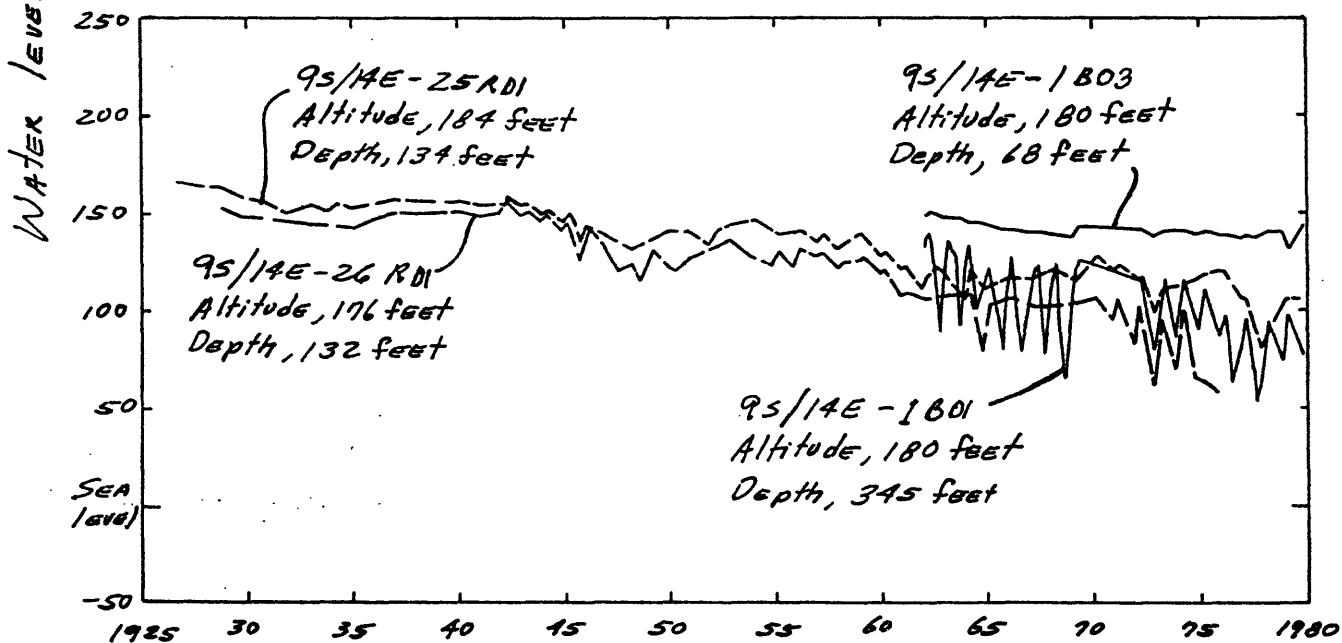


Figure 28--(A-J) Measured water level in wells showing long-term water-level change--Continued.

G

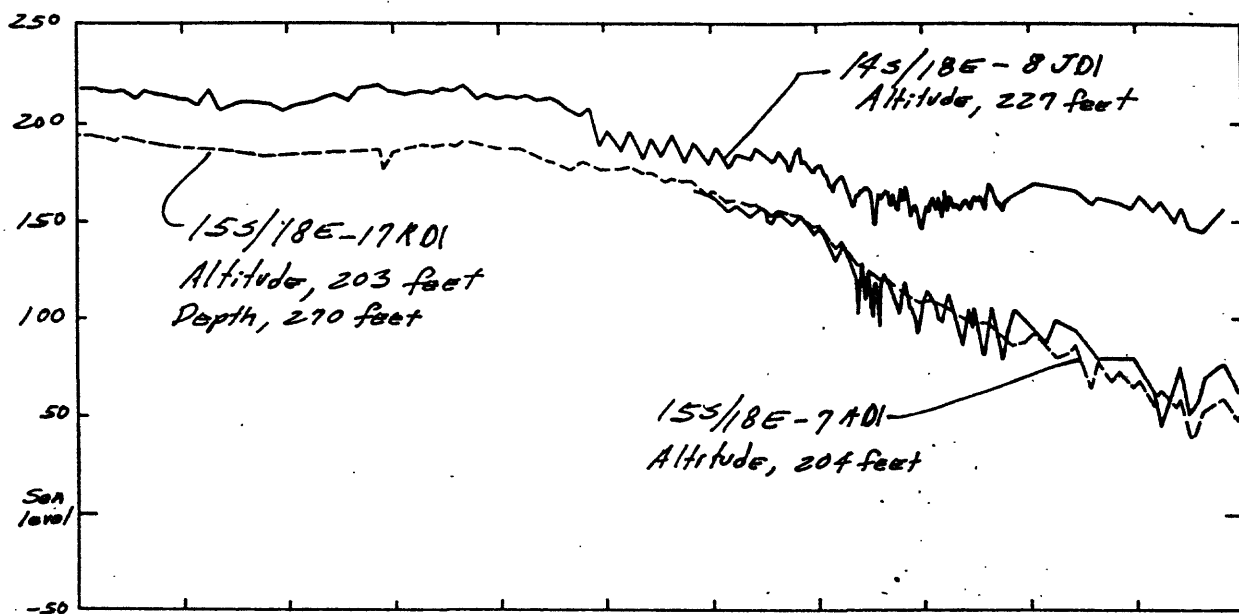

H

(Note: Vertical scale is 2 times that of other hydrographs)

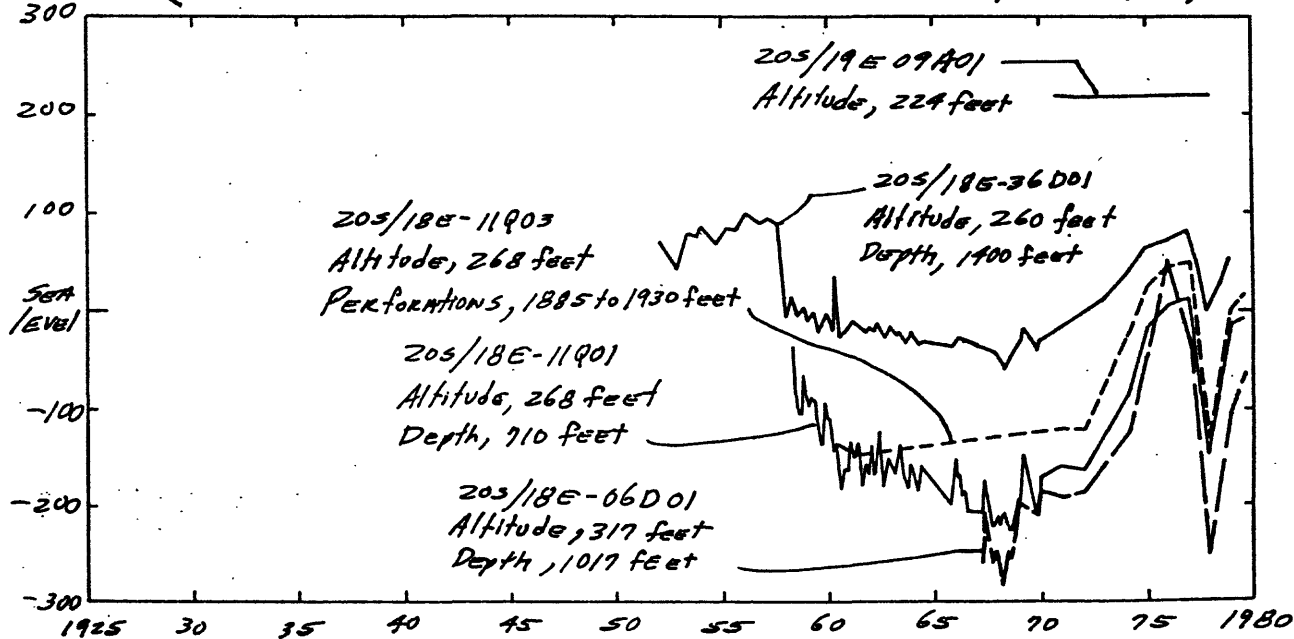


Figure 28--(A-J) Measured water level in wells showing long-term water-level change--Continued.

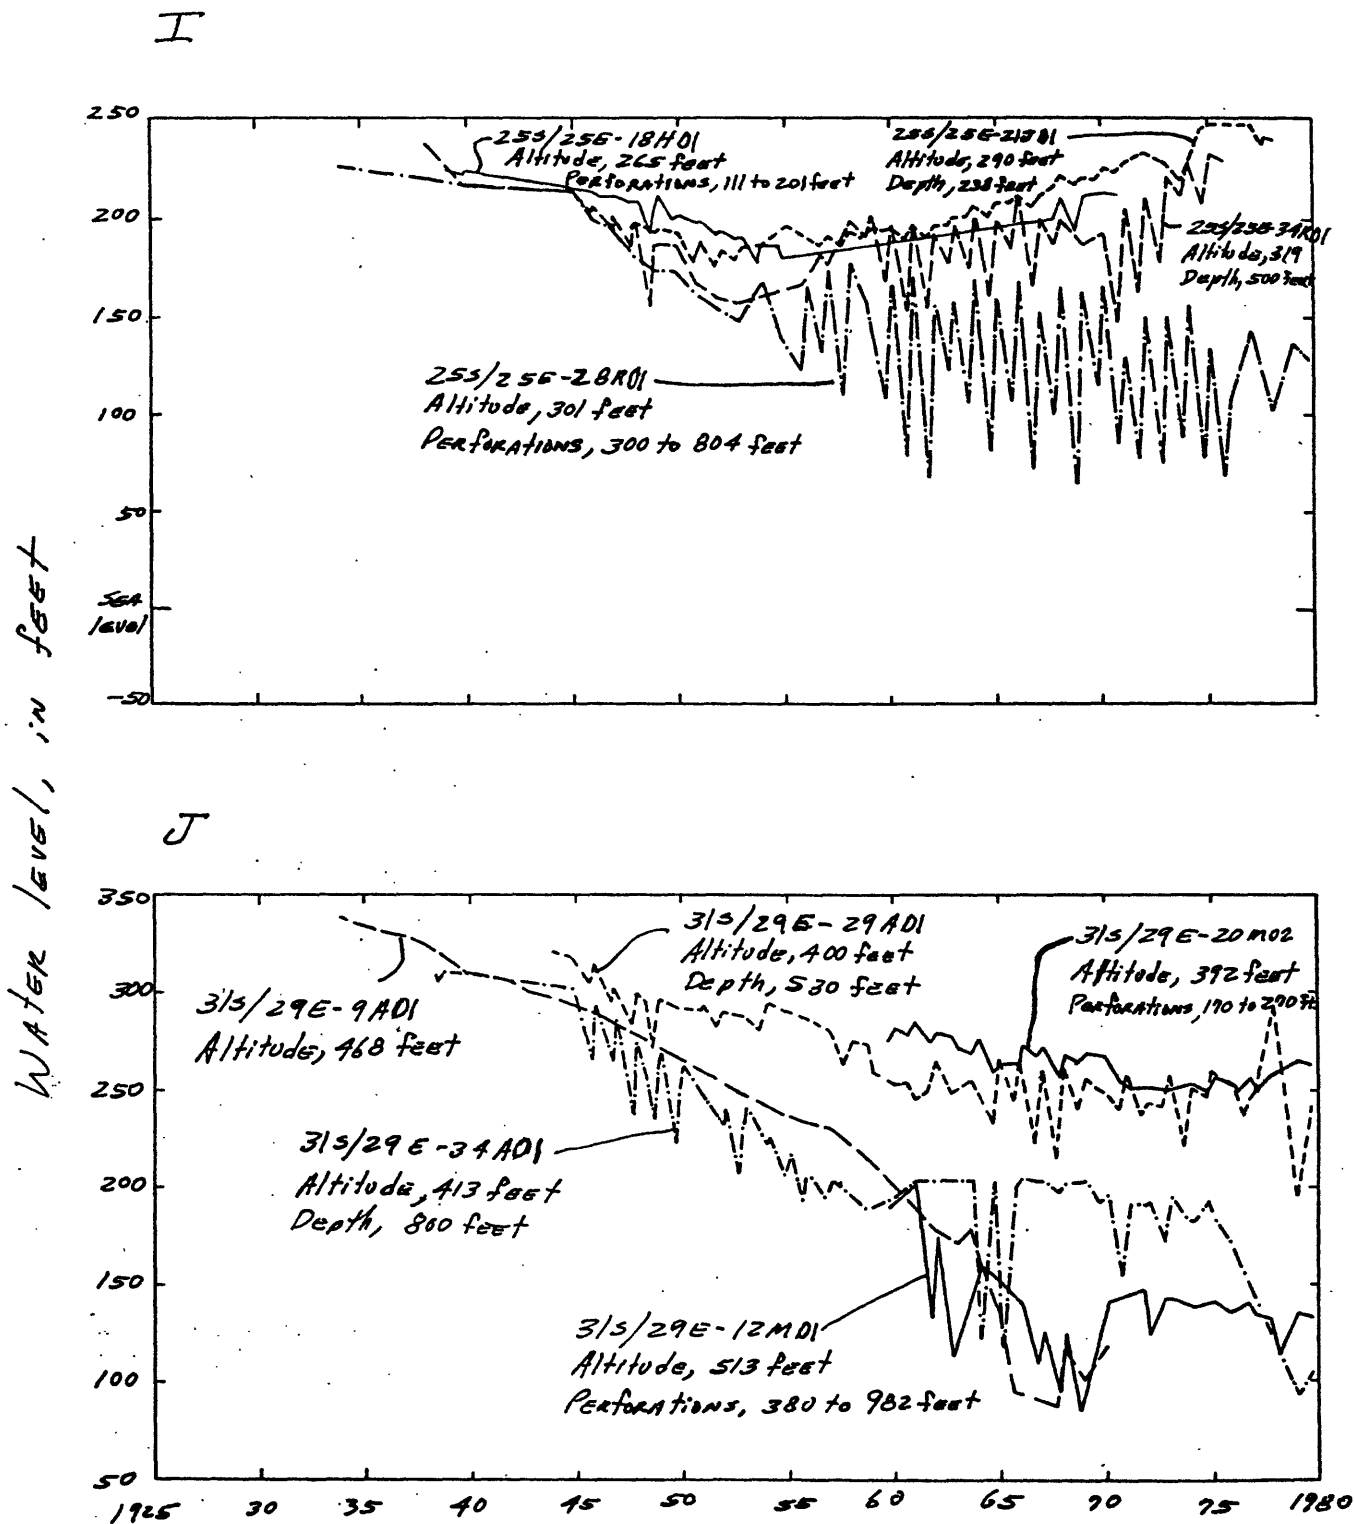


Figure 28--(A-J) Measured water level in wells showing long-term water-level change--Continued.

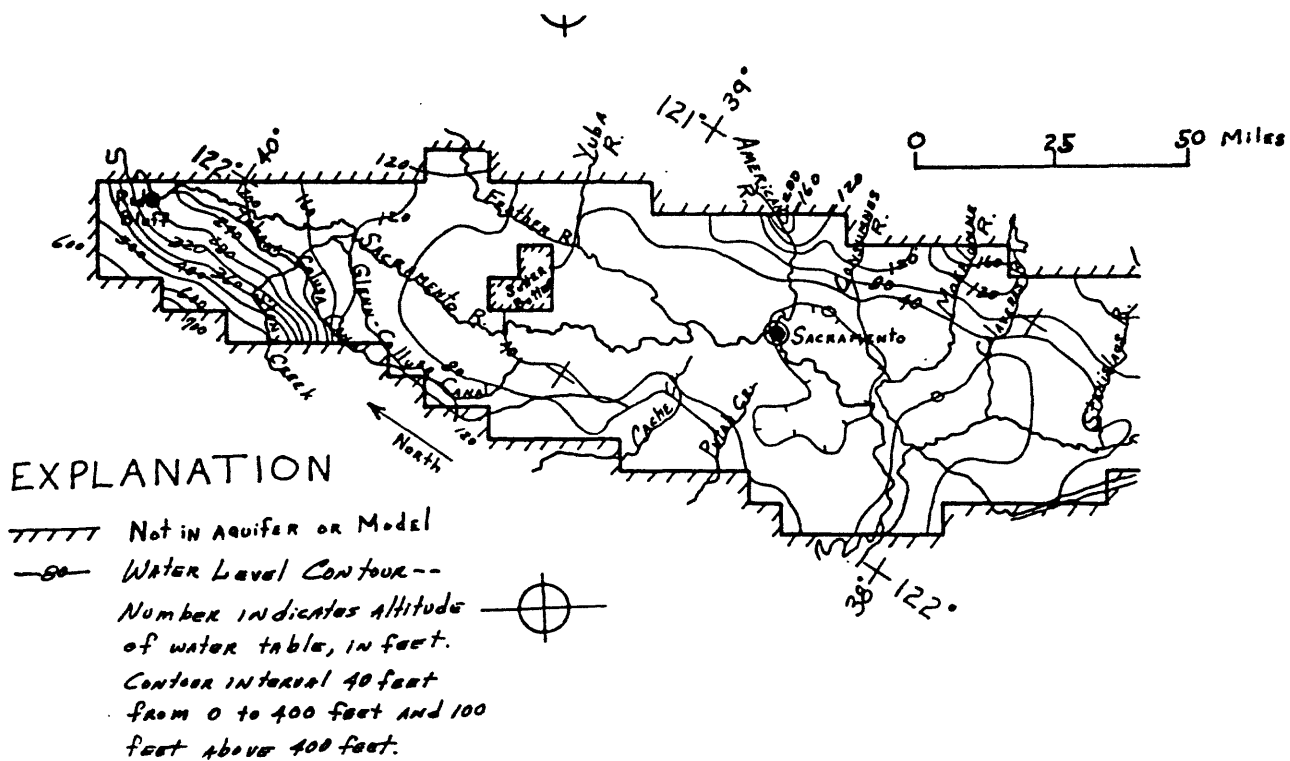


Figure 29--Spring 1961 (A) water-table altitude, (B) hydraulic head in the lower pumped zone, and (C) hydraulic head difference between the water table and the lower pumped zone.

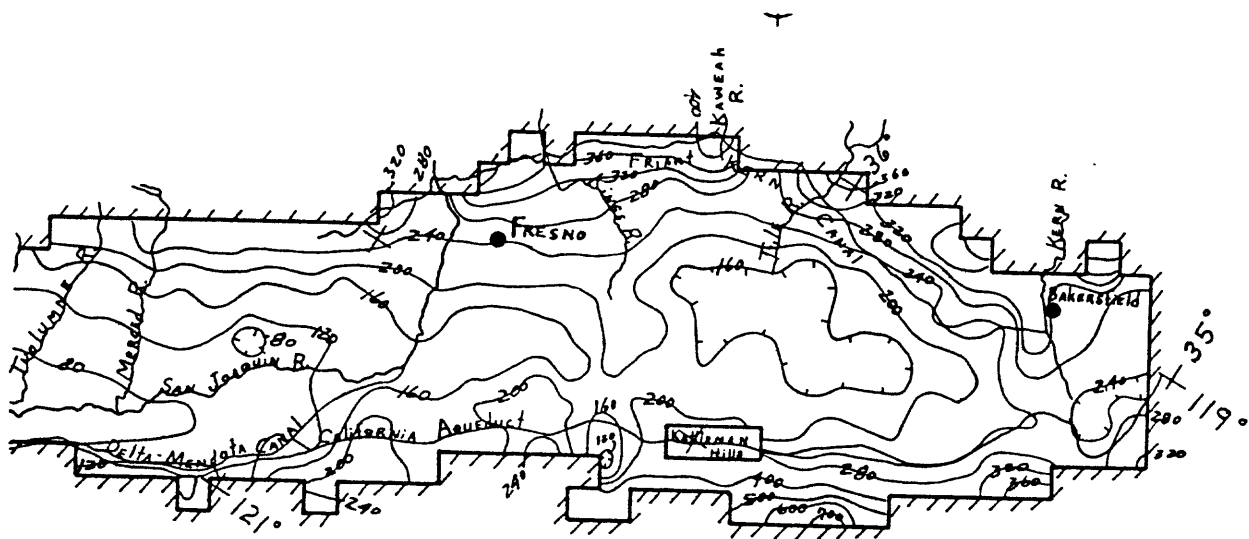


Fig. 29A (right side)

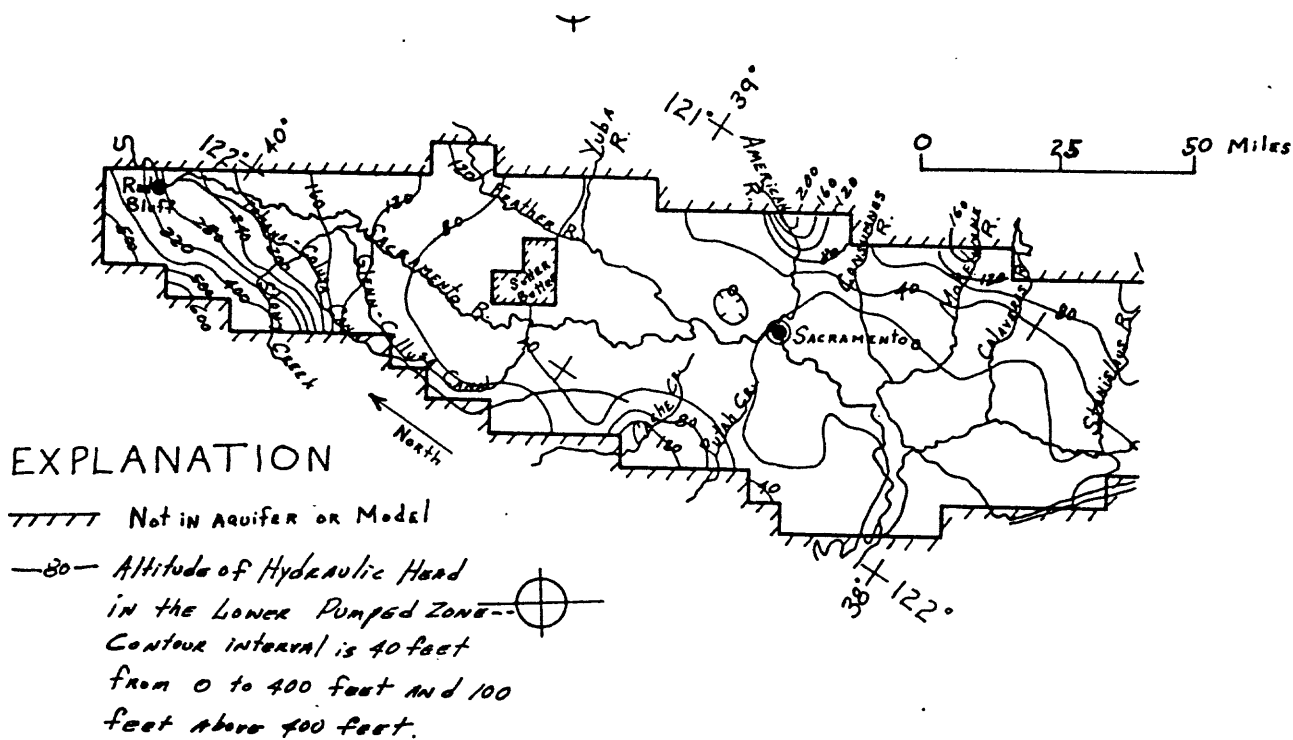


Figure 29--Spring 1961 (A) water-table altitude, (B) hydraulic head in the lower pumped zone, and (C) hydraulic head difference between the water table and the lower pumped zone--Continued.



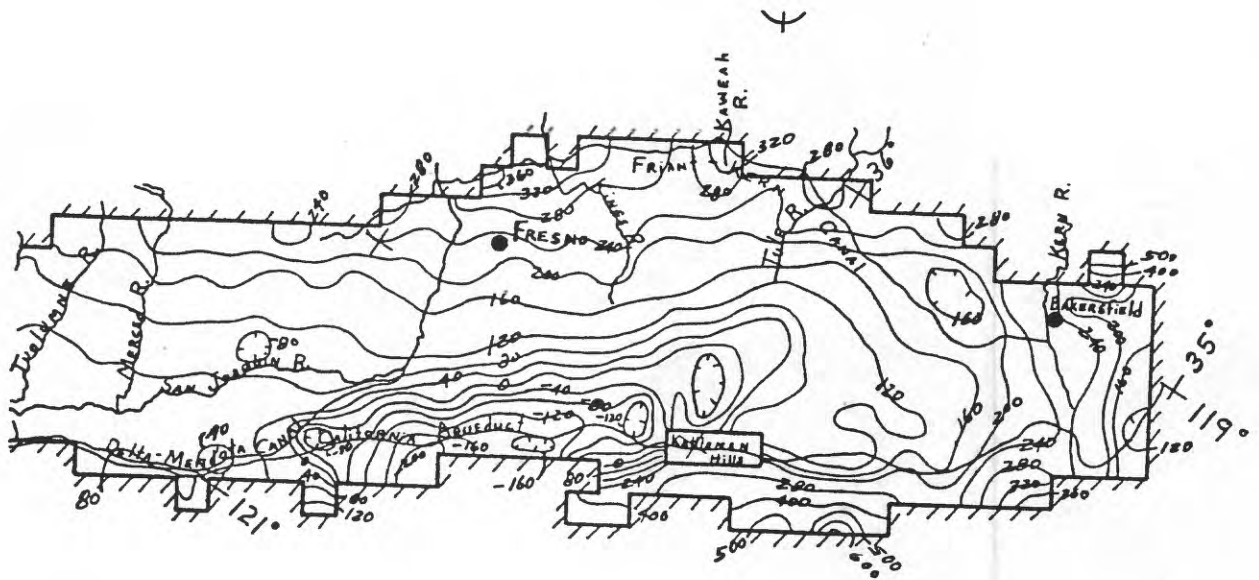



Fig. 29b-(right side)

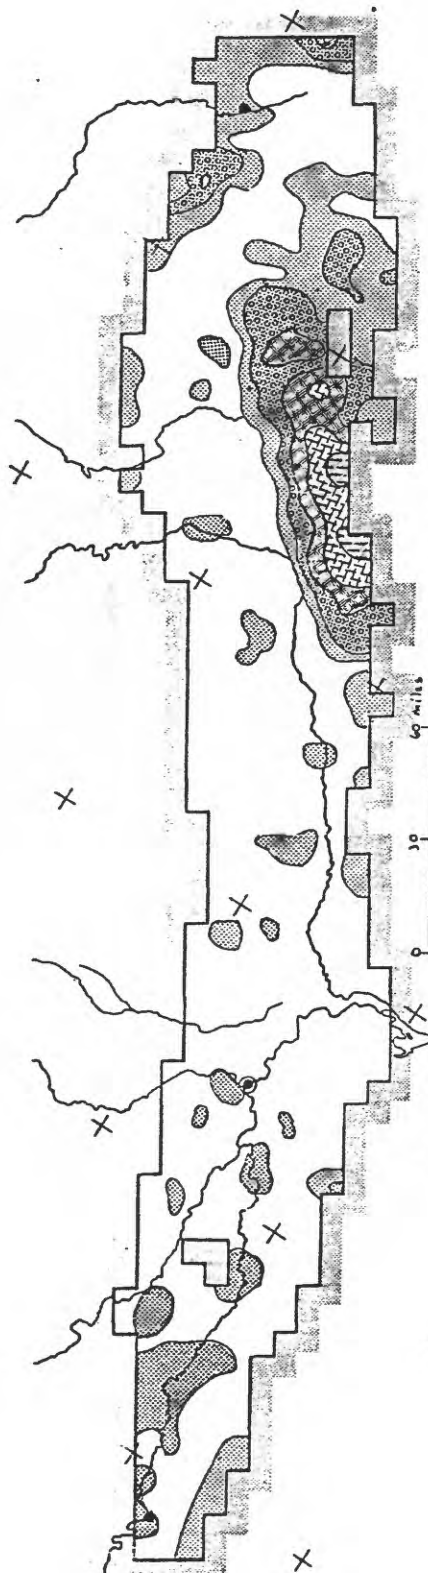

- EXPLANATION**
- X Hydraulic head in lower pumped zone is 0 to 10 feet above the water table
 - [Pattern: diagonal lines] Hydraulic head in the lower pumped zone is 10 to 40 feet below the water table
 - [Pattern: horizontal lines] Hydraulic head in the lower pumped zone is 40 to 100 feet below the water table
 - [Pattern: vertical lines] Hydraulic head in the lower pumped zone is 100 to 200 feet below the water table
 - [Pattern: cross-hatch] Hydraulic head in the lower pumped zone is 200 to 300 feet below the water table
 - [Pattern: dots] Hydraulic head in the lower pumped zone is 300 to 400 feet below the water table
 - [Pattern: wavy lines] Hydraulic head in the lower pumped zone is more than 400 feet below the water table

Figure 29 c ^{Hydraulic} Head difference between the water table and the lower pumped zone, Spring, 1961.

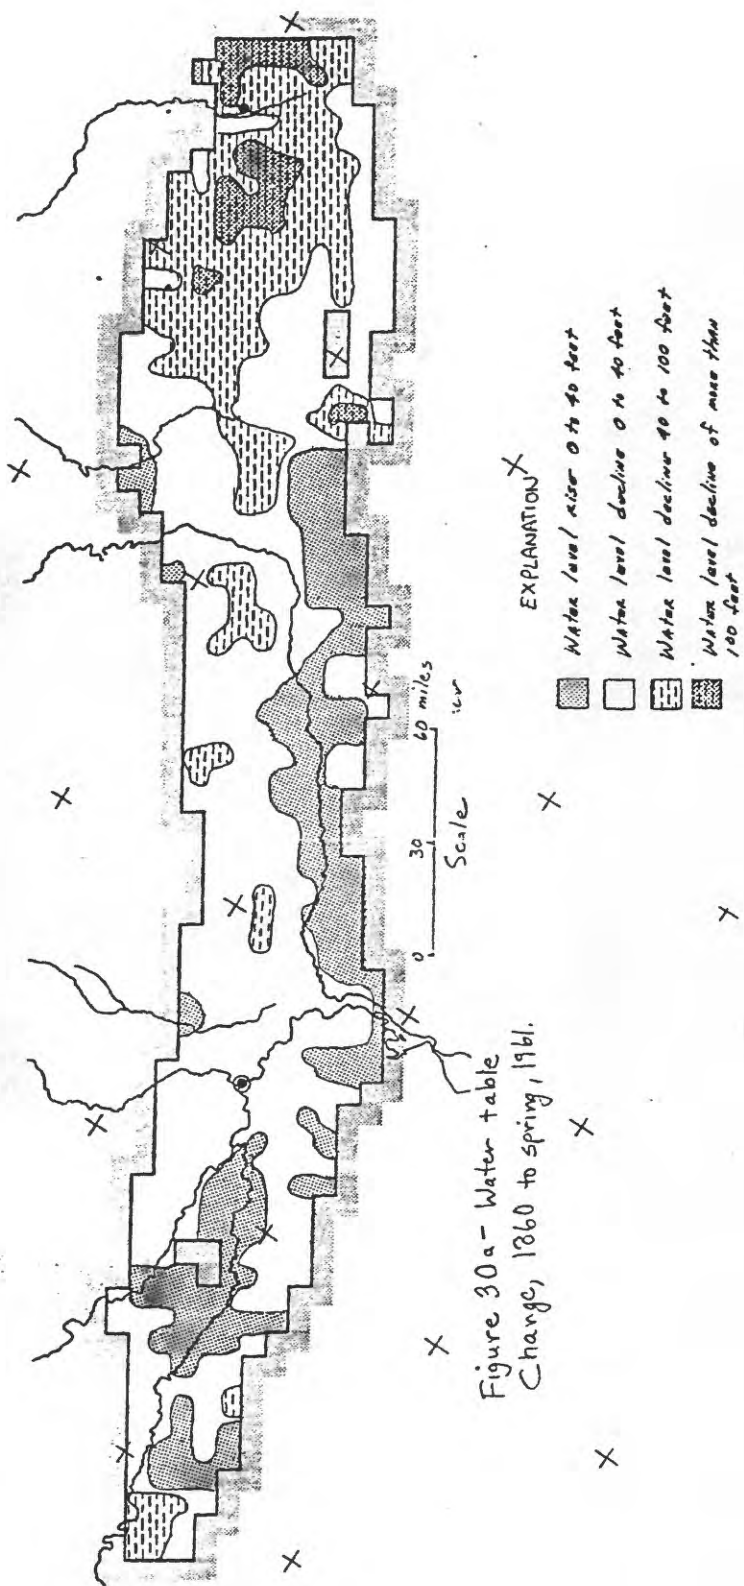

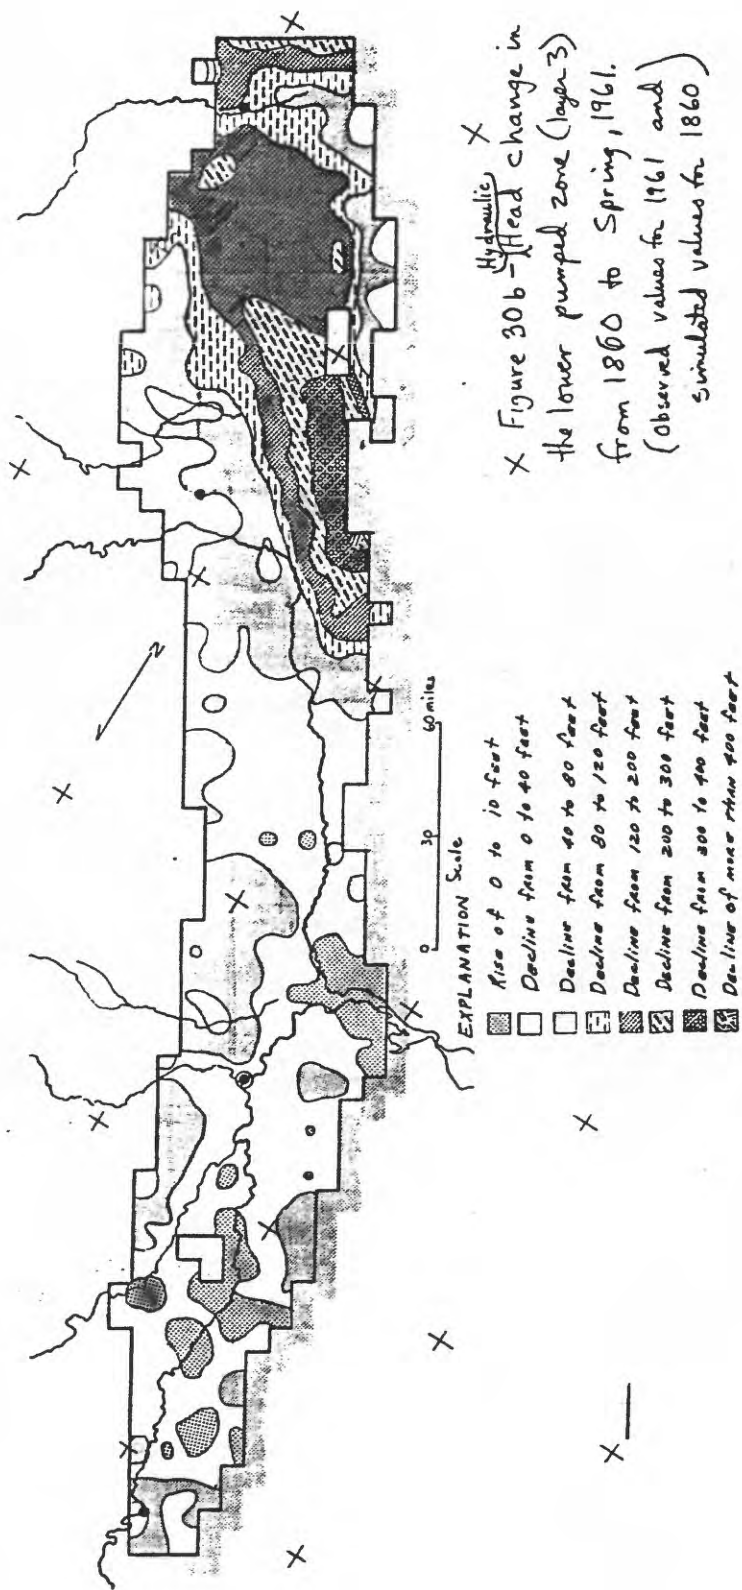

Water levels in the lower pumped zone declined as much as 400 ft in the Westside area from predevelopment to 1961. Until 1968, the irrigation in this area was supplied almost entirely by ground water. Around 1960, the lower pumped zone water levels were declining at the rate of about 10 ft/yr.

In the southeast and southern areas of the San Joaquin Valley, water levels in the lower pumped zone were declining, though not as dramatically as in the Westside area because there was some surface water available for irrigation.

1961-77.--The observed and simulated water-table altitude for spring 1976, and the change in water table from 1961-76, are shown in figure 31. In the Sacramento Valley, areas of past water-level decline showed continued and often accelerated decline. The depression of water level north of the Delta dropped to more than 40 ft below sea level. The area with water-table altitudes below sea level enlarged substantially. The water-level depression in eastern San Joaquin County developed in magnitude and areal extent.

In the San Joaquin Valley, the rate of water-table decline increased in the Chowchilla, Madera, and Raisin City areas. Significant water-table declines occurred in the Kern Delta area as well. In parts of the eastern side of the Tule area, water-table rises continued resulting from recharge from the delivery of surface water begun in 1950 through the Friant-Kern Canal, and reduction of pumpage (Poland and others, 1975, p. 46).

The simulated changes in water-table altitude agree well with the observed data (fig. 31B), except in a few areas. The model simulates too much decline in the Chowchilla and eastern San Joaquin areas and the area just north of the Sutter Buttes in the Sacramento Valley. The boundaries of the various areas of similar change (decline or rise) are often shifted slightly from their position on the observed map. This is probably because the location of values of recharge and discharge is not precise.

The observed and simulated spring 1976 water-levels altitudes in the lower pumped zone and 1961-76 changes are shown in figure 32. Water levels in the lower pumped zone in the Sacramento Valley continued to decline, especially in the areas east of the Feather River, the Cache-Putah subarea, and the areas just north and south of Sacramento (fig. 32). Two depressions developed in the Delta area with minimum water levels more than 40 ft below sea level (fig. 32A).

In some areas of the San Joaquin Valley, lower pumped zone water levels continued to decline whereas other areas showed a reversed trend. In 1967, the California Aqueduct began delivering surface water to farms along the west side and near the southern end of the San Joaquin Valley. Ground-water pumpage began decreasing as farms converted to surface-water irrigation, with the result that water levels in the Westside area rose as much as 200 ft by spring, 1976 (Ireland and others, 1984, p. 72). In the Raisin City area, just to the east, the decline continued because there was still very little surface water delivered to this area. Also, because most of the wells in this area are perforated through the water table and the lower pumped zone, both zones react to the pumping stress as one zone. Some of the areas in the east side, where surface water is now being delivered by the Friant-Kern Canal, showed continued water-level rises in the lower pumped zone through the 1960's. Most of Kern County showed a continued or slightly increased decline.


The simulated changes in lower pumped zone water level also agree well with the observed data (fig. 32), except in a few areas. The model simulated too little decline in the central part of Kern County and the Raisin City area. It simulated too much decline in the eastern San Joaquin County, apparently owing an overestimated amount of discharge, because the water table decline was also too large. In the Westside area, the 1961-76 period included a period of moderate decline and a period of large recovery. The average simulated overall rise matched the observed average well, but was quite variable as shown on fig. 32. The cause is not known but may be related to the size of the model blocks.

The first year of the 1976-77 drought produced very little surface-water runoff, yet most of the reservoirs were near capacity at the beginning of the season, so that there was little effect on the amount of surface water delivered for irrigation (fig. 21). This was especially true in the areas served by the State Water Project. The operation of the Federal Central Valley Project was more conservative and as a result, relatively less water was delivered in 1976 so that relatively more water was left to deliver in 1977 as the drought continued and actually became more severe. As a result of the drought, many farmers drilled or restored the operation of wells to compensate for anticipated surface-water shortages. The State Department of Water Resources received about 4,500 new drillers' logs for irrigation and municipal wells that were drilled in 1977 and 1978 in the San Joaquin Valley. The total number of wells drilled in the valley was probably larger. Water levels declined substantially all over the valley, as shown in the selected hydrographs of observed and simulated water levels in figure 33. The very steep decline in the lower-pumped zone shown in figure 33H was caused by a reduction of the amount of water released from compaction during a second period of drawdown for the same head interval. The seasonal decline was much greater than during the 1960's, though the pumpage in the Westside area was only one-half as much.

These hydrographs represent average water levels for a given model block (locations shown on fig. 25), and were selected because they represented different conditions for the valley where substantial data were available. The hydrographs were prepared in the final stages of calibration, therefore, prompting little additional calibration of these particular model blocks. The accuracy of the model simulations is shown during the calibration period, 1961-75, and also through the drought during which time the capabilities of the model were tested.

Rapidly changing water levels at the beginning of a simulation period would indicate that the initial conditions were incorrectly specified. The consistent trends in water-level decline or rise shown in figure 33 suggest that initial conditions were reasonable. Hydrographs for each model block were prepared to check for this problem and no significant problems were discovered. The hydrographs also allowed comparison of the simulated and observed seasonal water-level fluctuation. This comparison was somewhat hampered because most of the autumn observations were not representative of the lowest water level. The simulated seasonal fluctuation is probably too large (for example see fig. 33E) because of the allocation of the components of recharge and discharge entirely to one season or the other.

The hydrograph for column 61, row 7 (fig. 33J), shows the observed water table rising slightly and the simulated heads dropping slightly. The simulated water levels for model blocks in the southern end of the valley did not decline as much as the observed water levels did during the drought. In the westside area (for example, fig. 33H, column 51, row 10), the observed decline during 1977 was very large because water levels had been substantially above the record lows, therefore, little subsidence occurred and the water levels reacted to the small confined storage coefficient. The model simulated this occurrence, but with a smaller magnitude than the observed data.

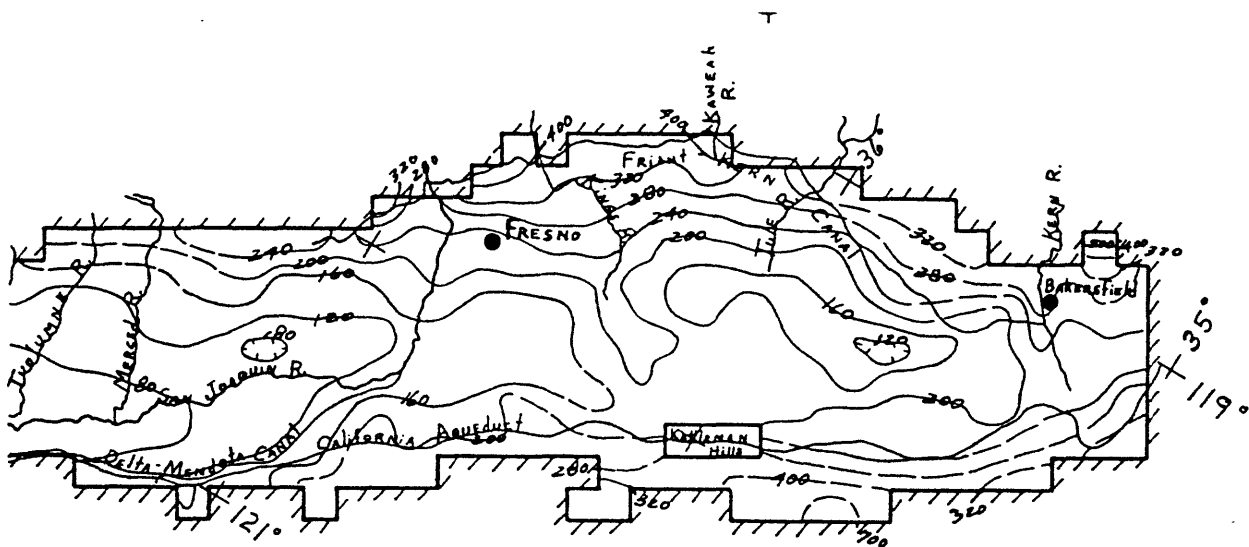

EXPLANATION

- Observed
 - 120-- Water Level / Contour-- Number
 indicates Altitude, in feet.
 Contour interval is 40 feet
 from - 40 to 320 feet and 100
 feet for more than 400 feet



Fig. 31a-(right side) Observed.



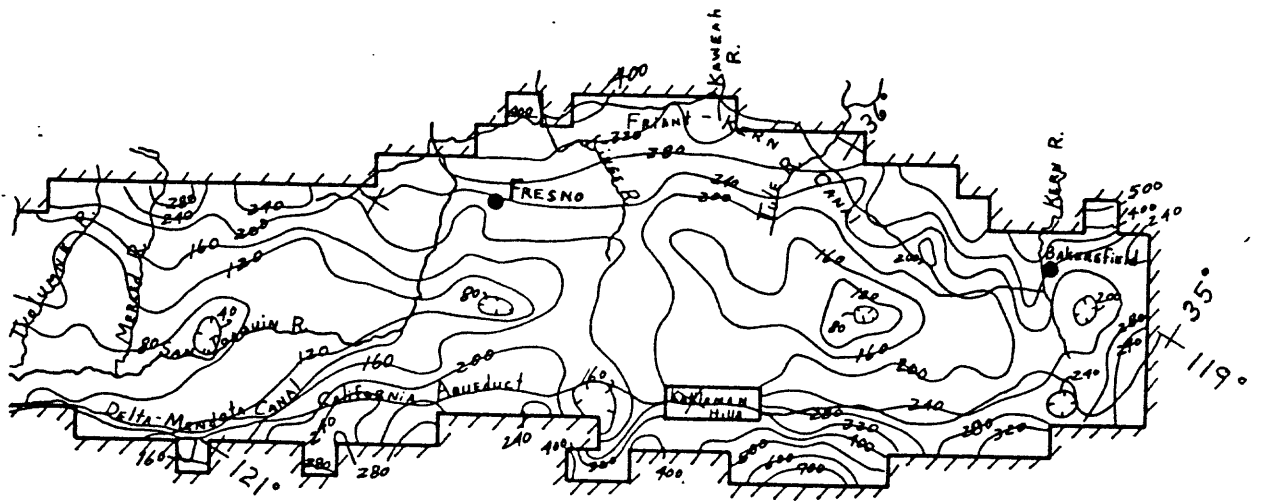


Fig. 31a - Simulated (right side)

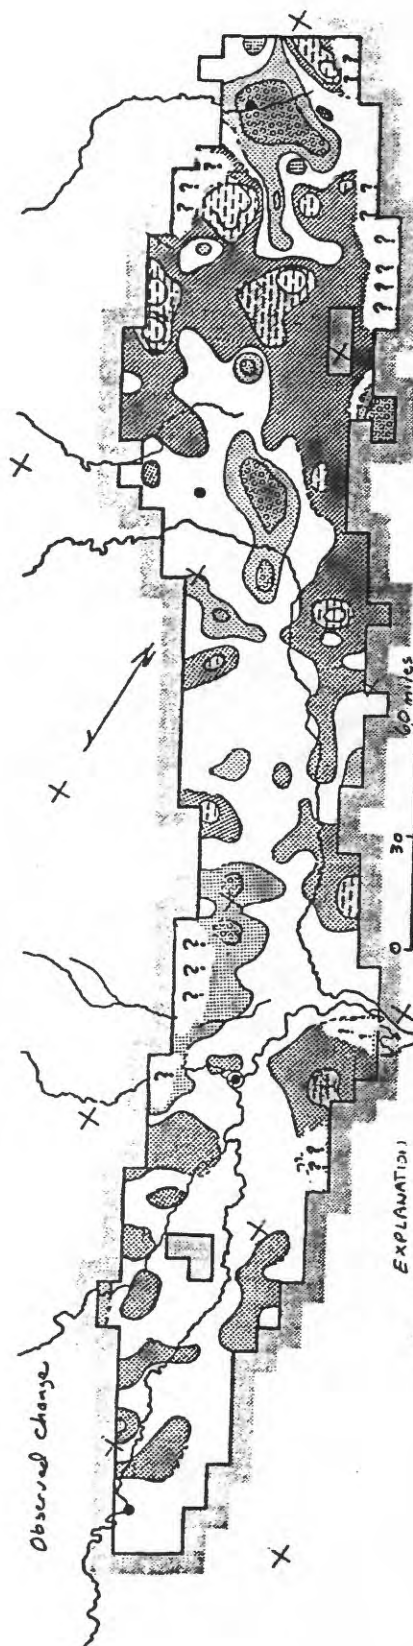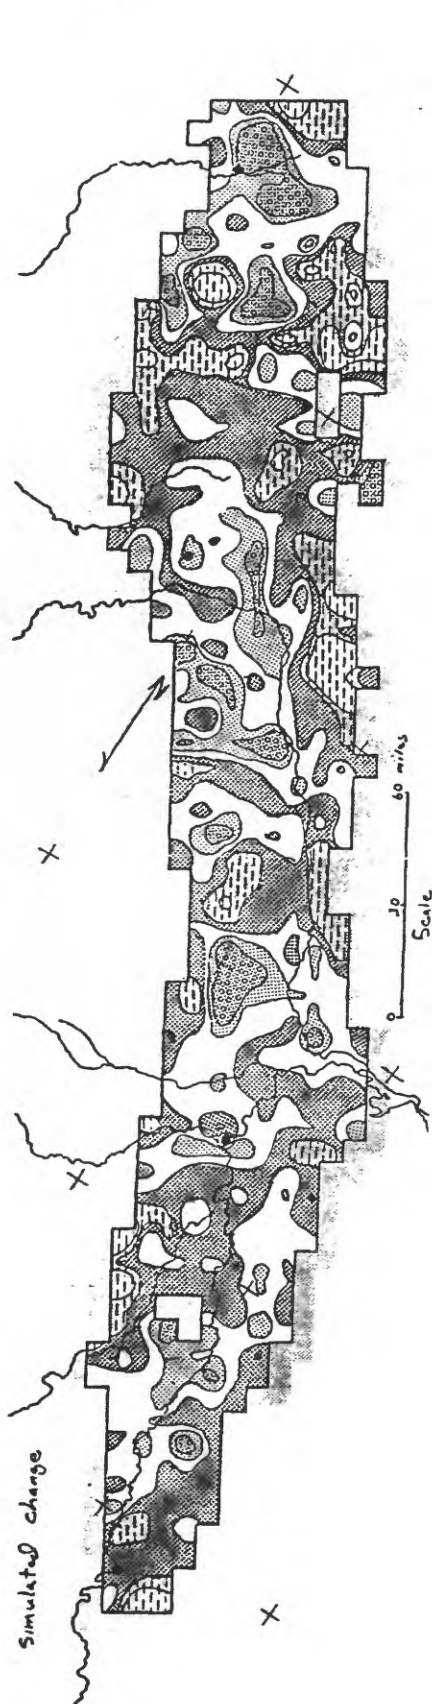

- EXPLANATION
- X Rise in water table of more than 40 feet
 - █ Rise in water table between 20 to 40 feet
 - ▨ Rise in water table between 0 to 20 feet
 - Decline in water table between 0 to 20 feet
 - ▩ Decline in water table between 20 to 40 feet
 - ▧ Decline in water table of more than 40 feet

Figure 31b - Observed and Simulated change
in water table altitude,
Spring, 1961 to Spring, 1976

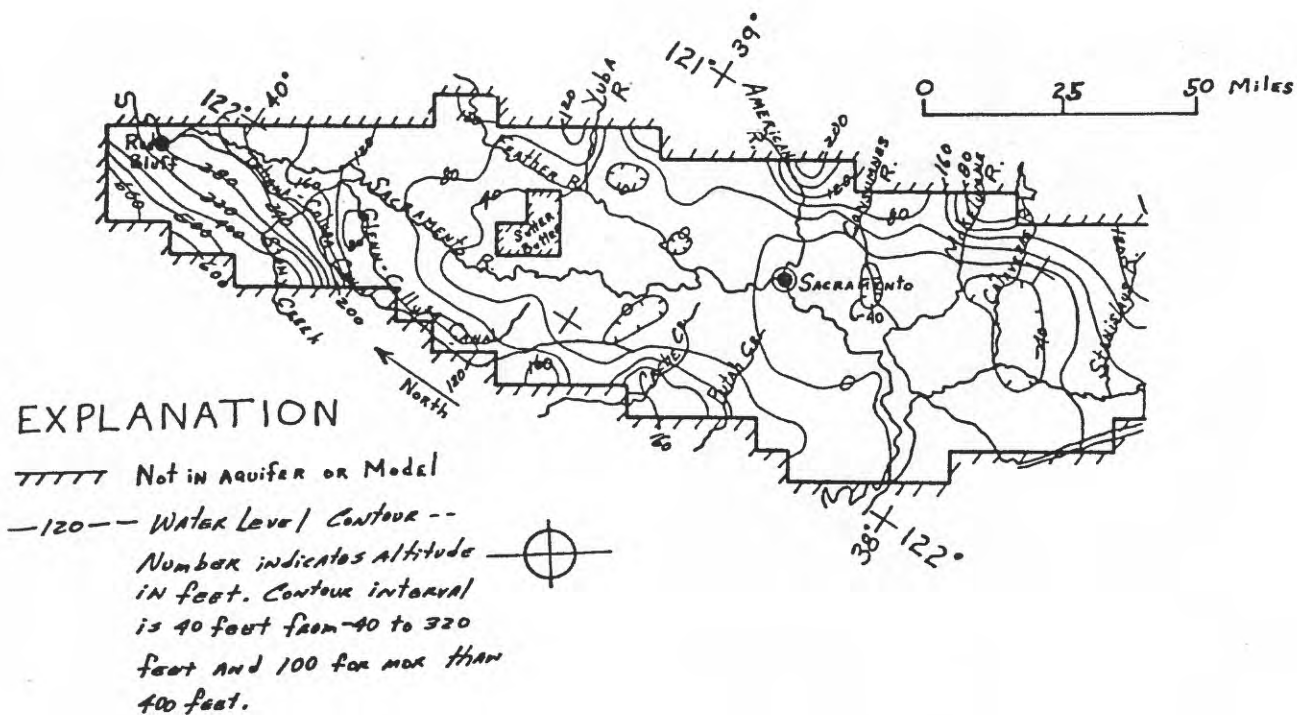


Figure 32--Observed and simulated (A) hydraulic head in the lower pumped zone (layer 3), spring, 1976, and (B) change in hydraulic head in the lower pumped zone (layer 3), from spring, 1961 to spring, 1976.

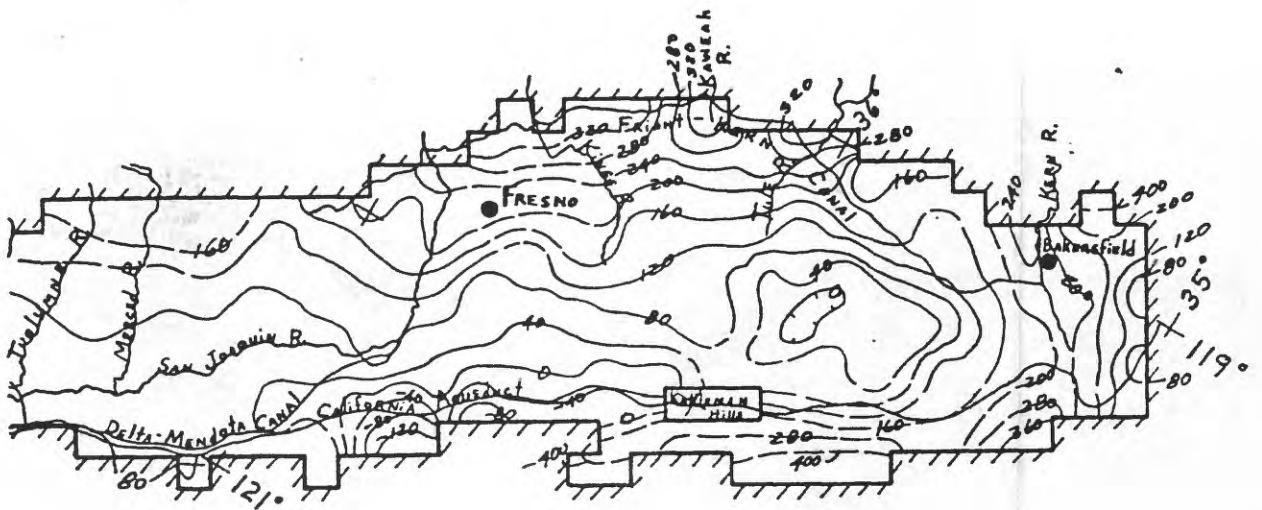


Fig. 32a - Observed (right side)

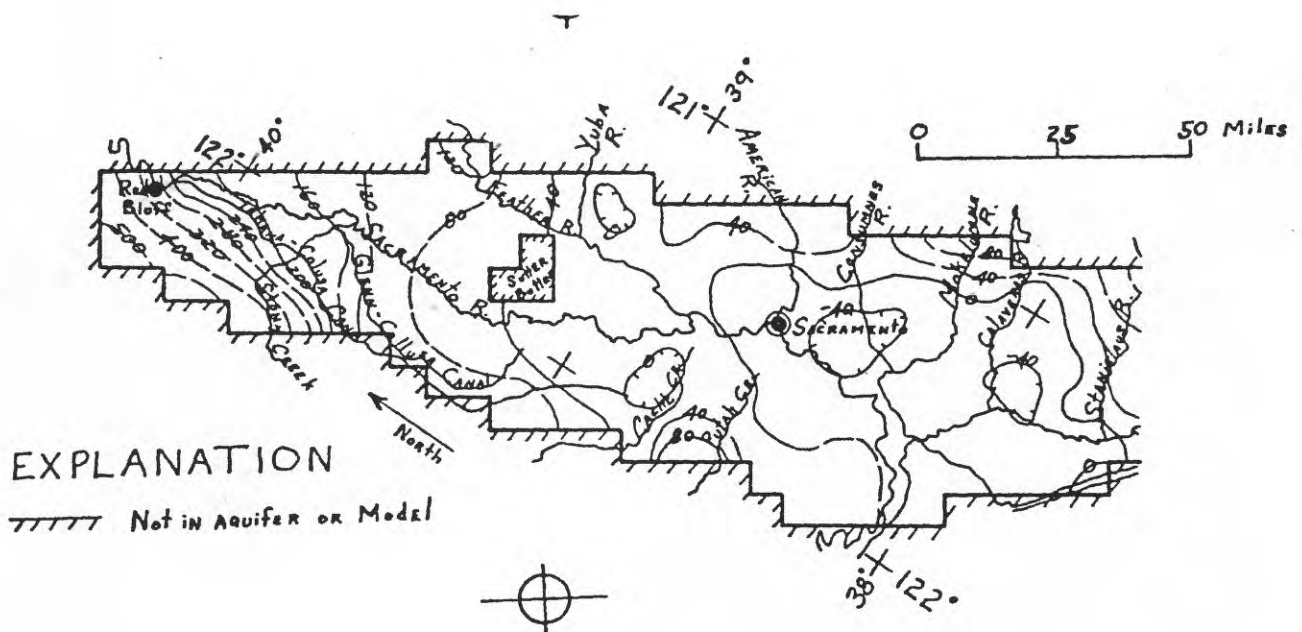


Figure 32--Observed and simulated (A) hydraulic head in the lower pumped zone (layer 3), spring, 1976, and (B) change in hydraulic head in the lower pumped zone (layer 3), from spring, 1961 to spring, 1976--Continued.

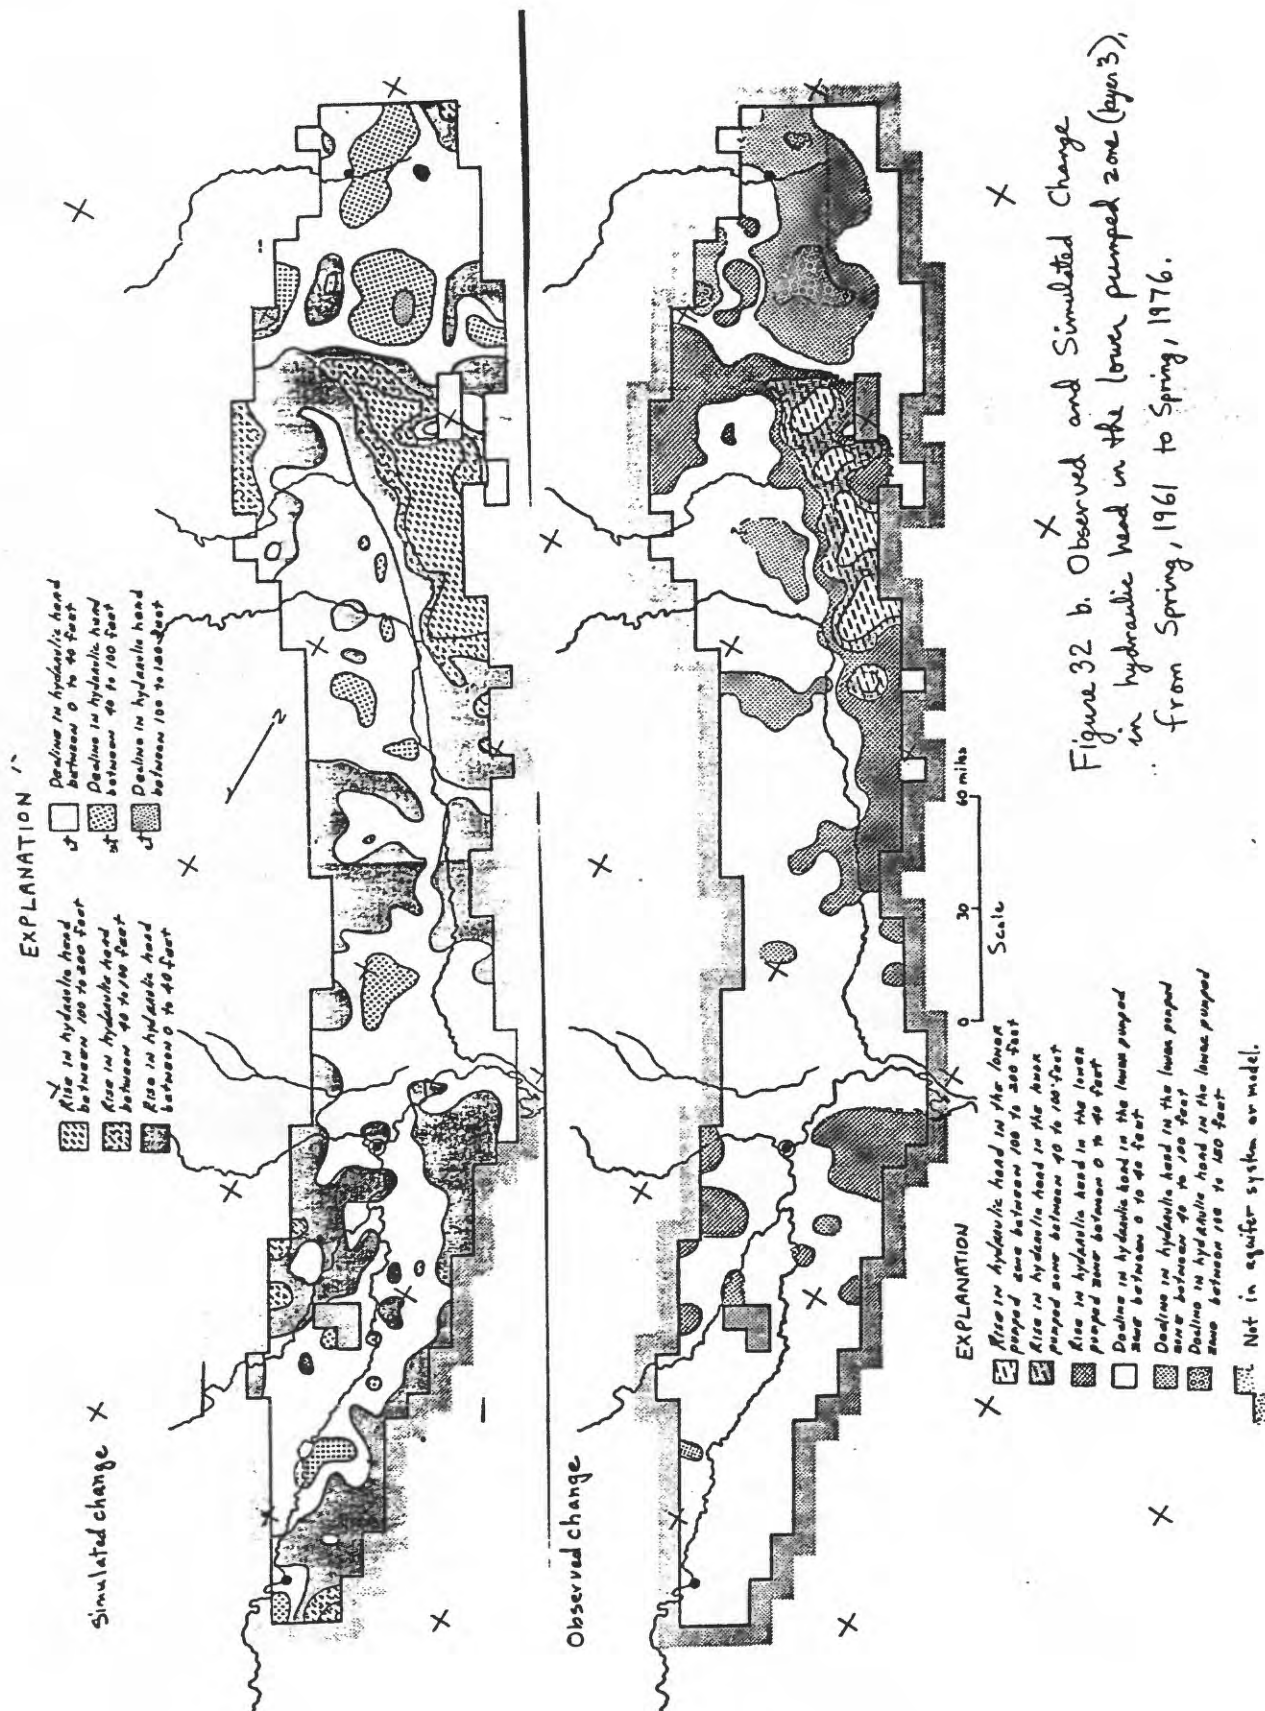


Figure 32 b. Observed and Simulated Change in hydraulic head in the lower pumped zone (layer 3), from Spring, 1961 to Spring, 1976.

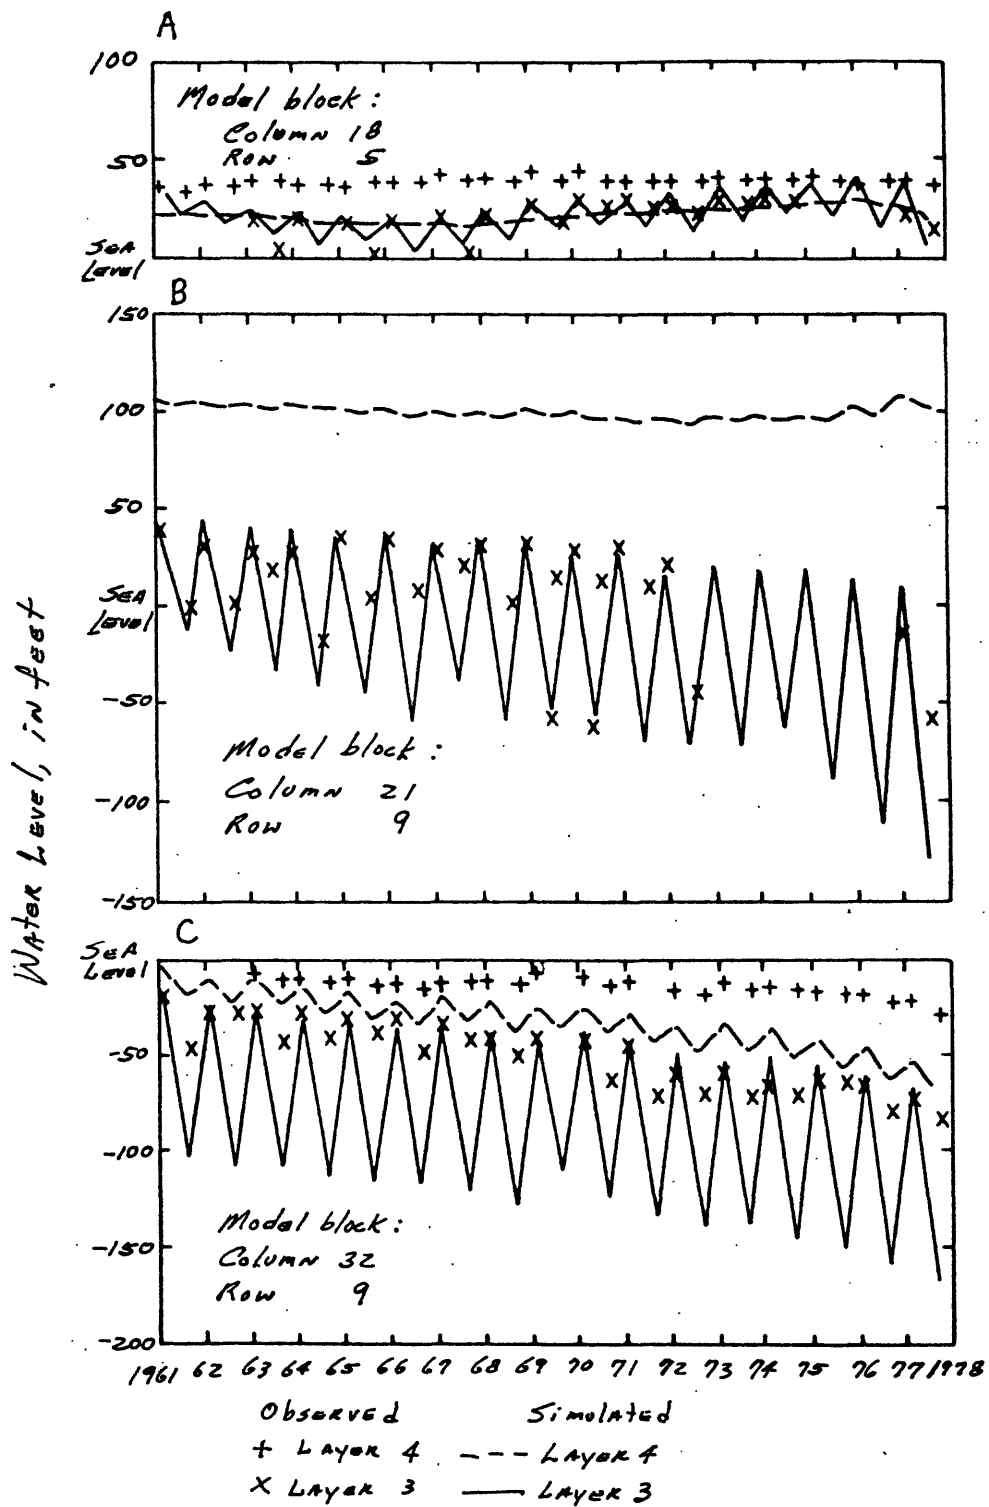


Figure 33A-N--Observed and simulated water levels, 1961-77.

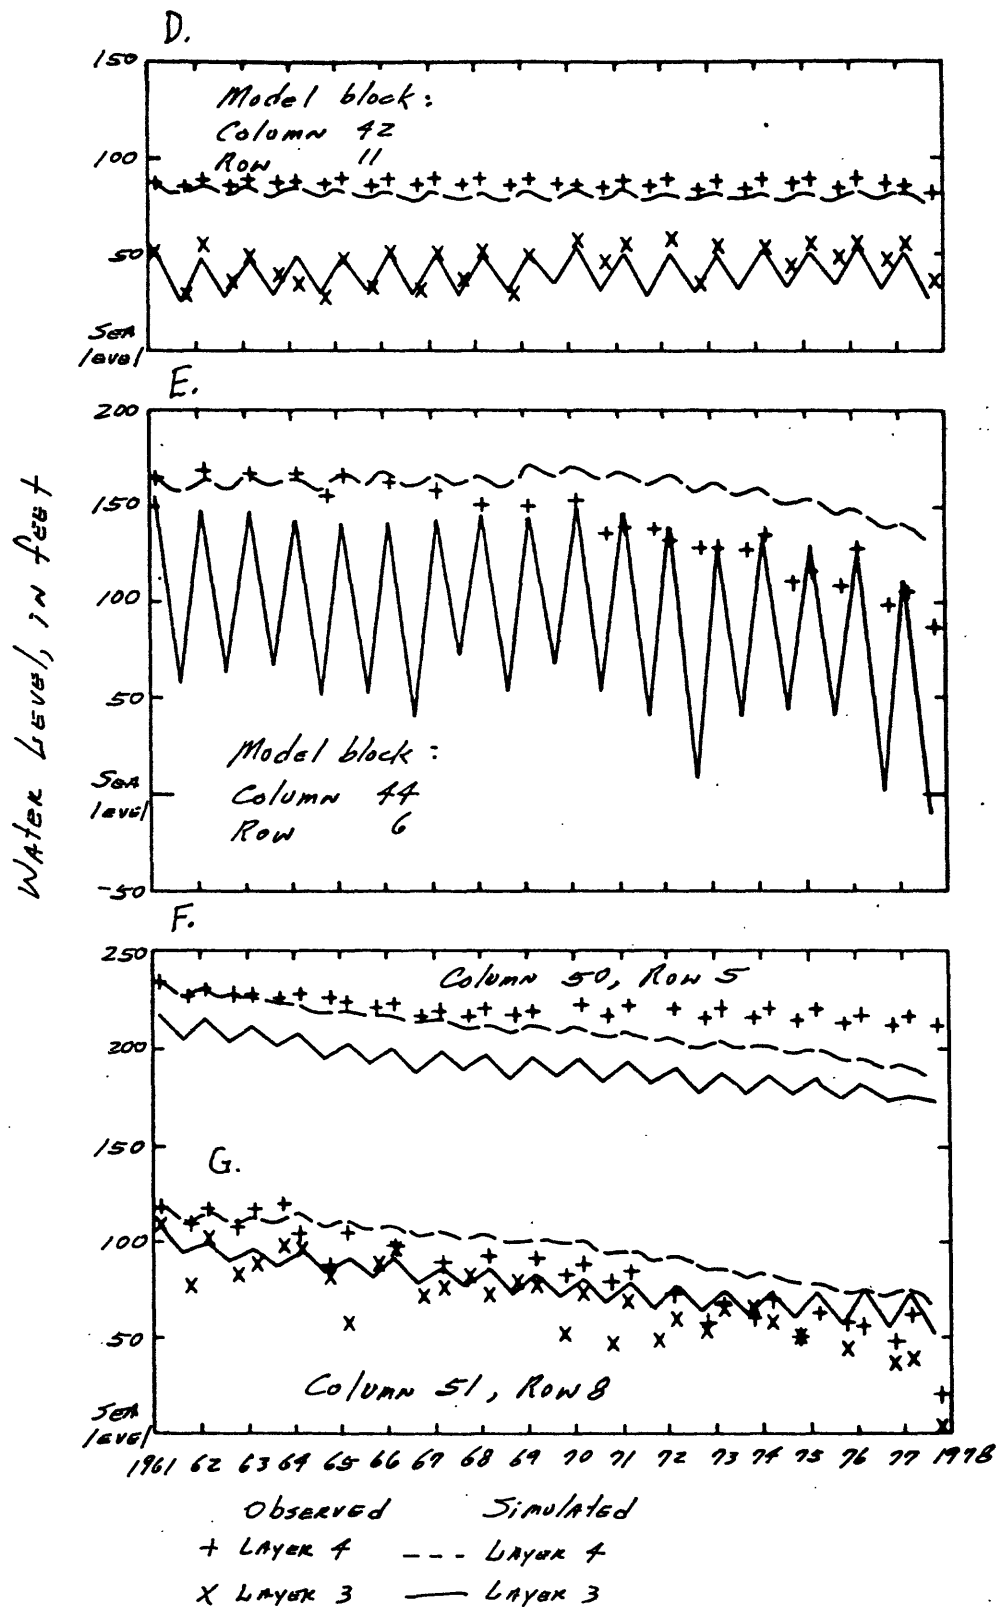


Figure 33A-N--Observed and simulated water levels, 1961-77--Continue

H.

(Note: Vertical scale is 2 times that of other hydrographs)

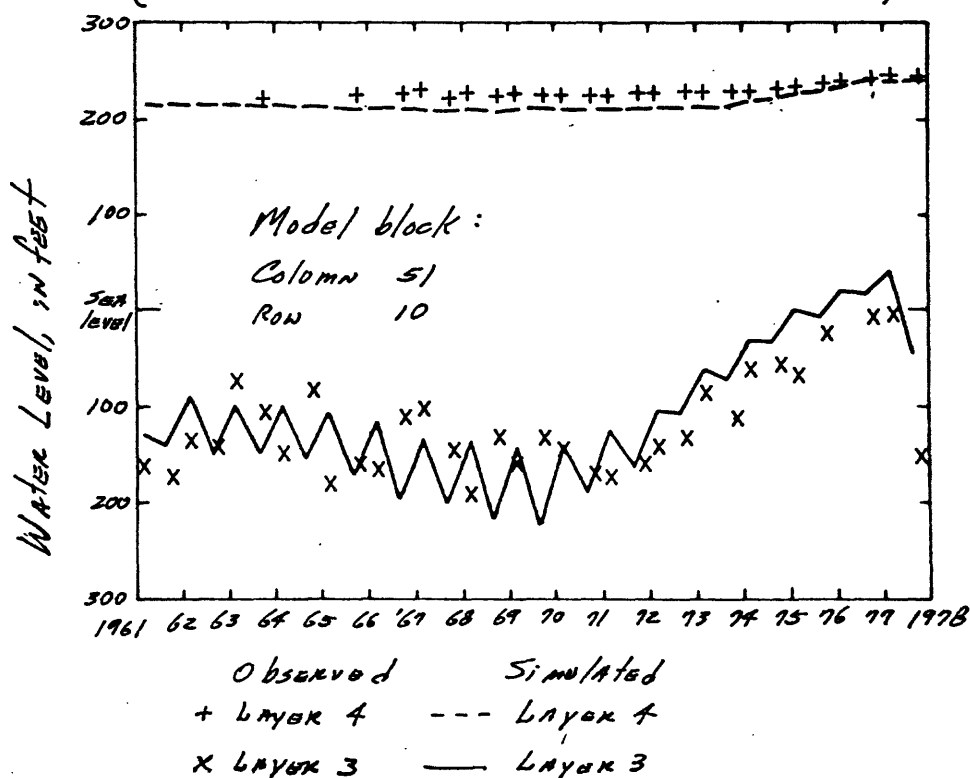


Figure 33A-N--Observed and simulated water levels, 1961-77--Continued.

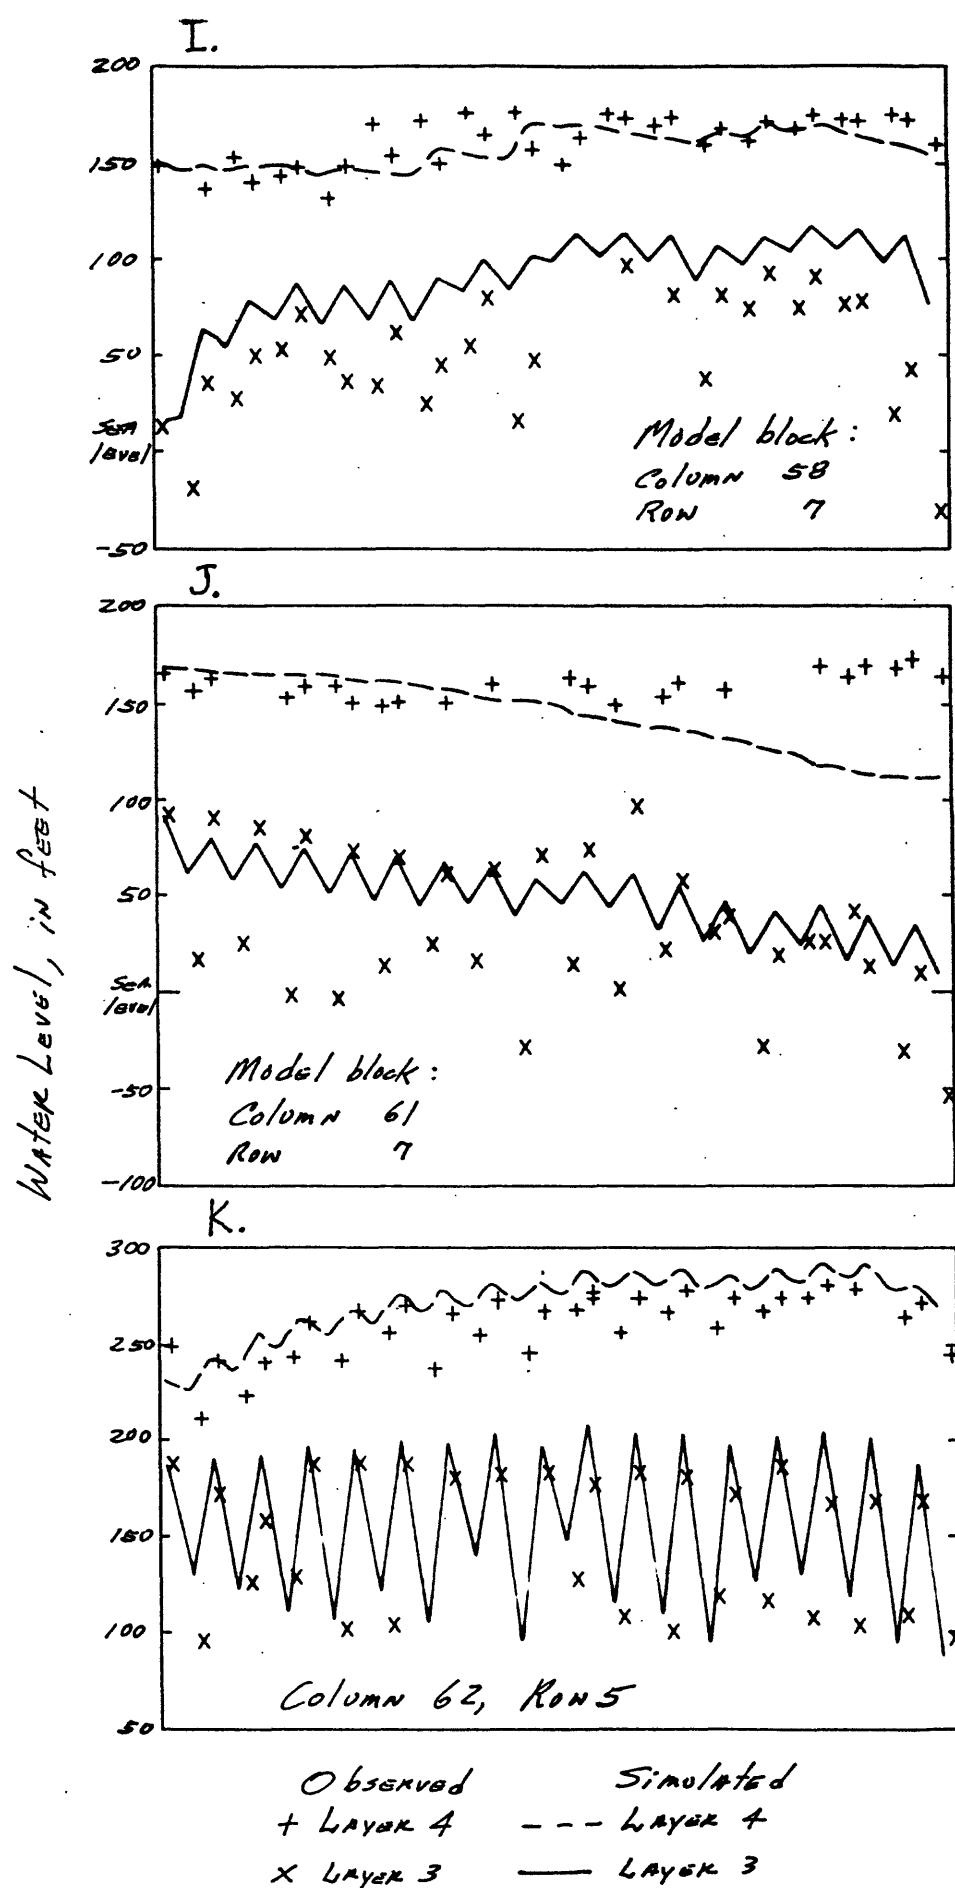


Figure 33A-N--Observed and simulated water levels, 1961-77--Continued.

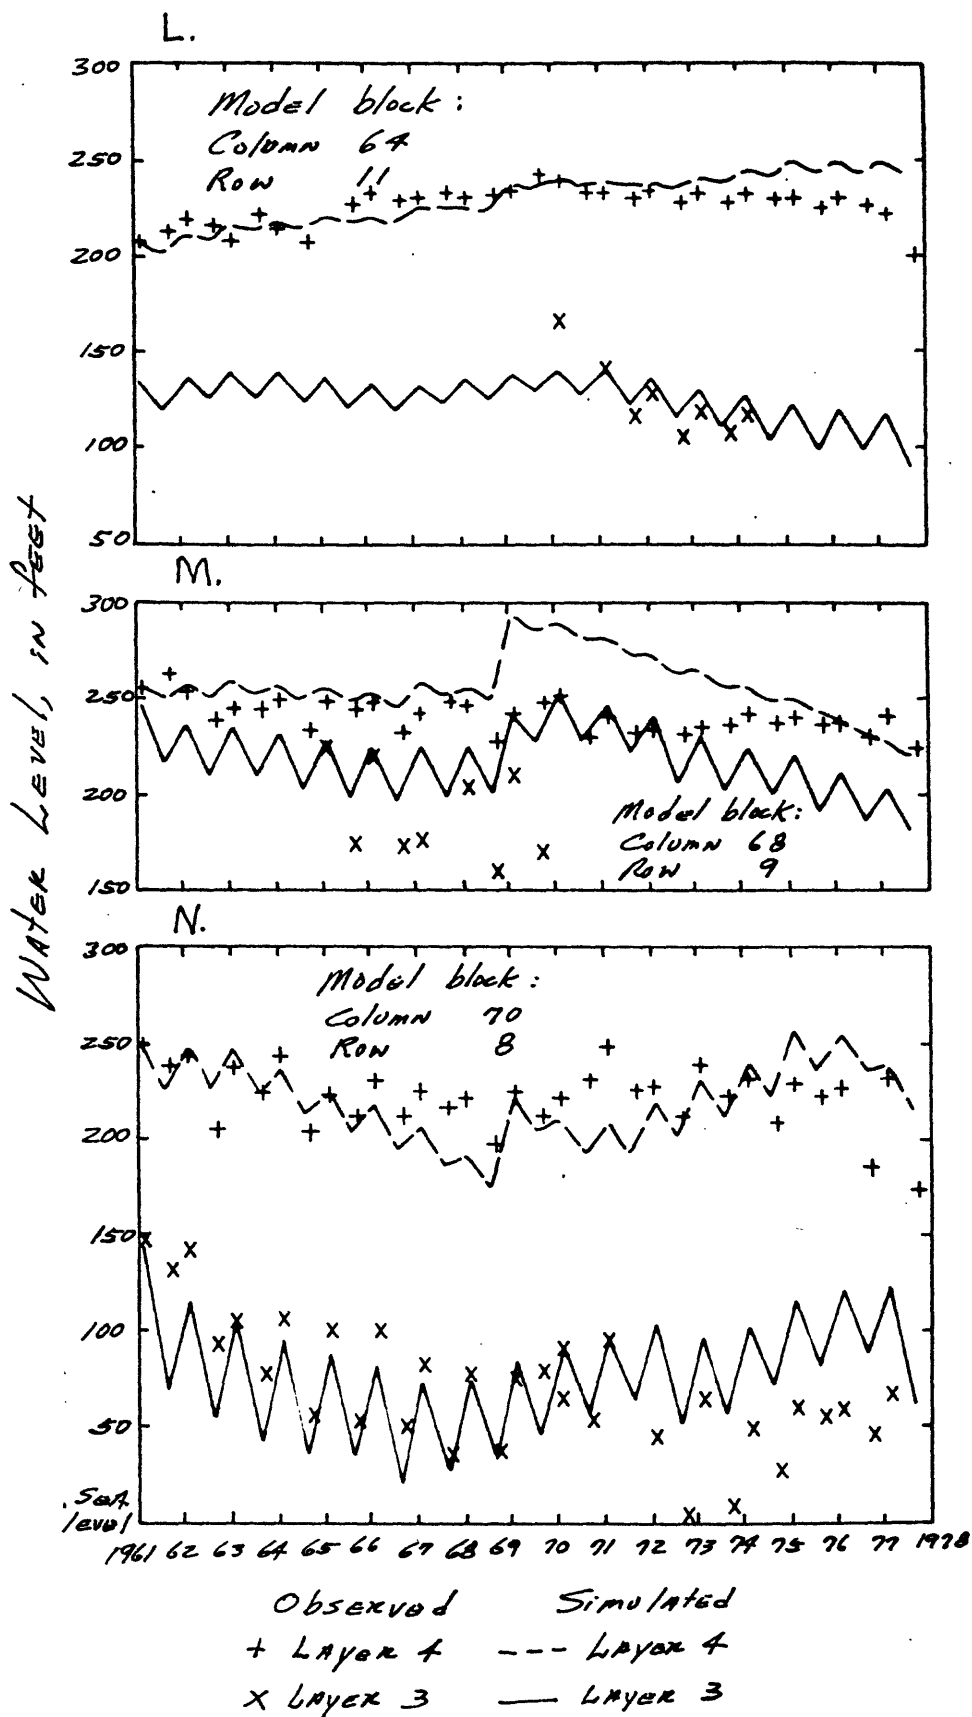


Figure 33A-N--Observed and simulated water levels, 1961-77--Continu

Changes in Ground-Water Flow

Changes in ground-water flow are a secondary effect of changing water levels resulting from changes in recharge and discharge owing to development. In a heterogeneous ground-water system like that in the Central Valley, there are changes to vertical and horizontal flow which, though closely interrelated, will be discussed separately, for clarity. The direction of ground-water flow at a point is along the path of steepest gradient and its rate is proportional to the slope of that gradient. Comparing figure 14B with figure 29B shows the dramatic change in the pattern of flow since development. Before development the lower pumped zone heads were near the water-table altitudes. The greatest change was the location of ground-water discharge. During predevelopment, flow was toward the Delta because that was the location of lowest head. By 1961, pumping in the Westside area had lowered water levels enough so that it became a major discharge area, receiving flow from much of the San Joaquin Valley. In this area, heads in the lower pumped zone were far below sea level in the early 1960's. Notice the very steep gradient towards this area from all sides (fig. 29B). This indicates flow, especially from the east side of the valley toward the west. This large, well-developed depression of water levels in the San Joaquin Valley simplified the calibration of the transmissivities for the simulation model. Often, transmissivities are calibrated during steady-state conditions. This requires detailed and accurate knowledge of the volumes of recharge and discharge. There is a greater certainty for the estimates of pumpage during 1961-77 than for values of recharge and discharge during predevelopment. In calibrating transmissivities, the relative differences in thickness and permeabilities among areas were preserved, with the factor for the whole set of values being adjusted so that the gradients and the amounts of land subsidence matched observed values. The simulated flow from adjacent areas into the Westside area during the early 1960's accounted for about 13 percent of the ground water withdrawn from the area. The remainder was supplied from inelastic compaction (about 47 percent), leakage from the water table (about 32 percent), and elastic storage and upward leakage from below the lower pumped zone (about 8 percent).


Table 7 shows thickness and hydraulic conductivity (K) for all four model layers, and specific yield for the water table. All K values shown have been reduced by a factor of 4 as a result of model calibration. Specific yield and K values are both related to the coarseness of sediments, which increases toward the south. The average K value for the San Joaquin Valley is almost double that for the Sacramento Valley in layers 1 and 2, and about 50 percent larger for layers 3 and 4. This may be a result of the higher proportion of volcanic sediments in the Sacramento Valley which are finer grained. The larger proportion of fine-grained sediments may also mean that there is significant potential for future land subsidence in the Sacramento Valley if enough pumpage develops at depth in some locations. The subareas that have large alluvial fan deposits (especially Kings and Kern Delta) have the largest K values. The smallest values are found in the flood plains and along the west side of the Central Valley.

TABLE 7.--Summary of specific yield, thickness, and permeability values

Sub- area No.	Specific Yield	Thickness (feet)				Horizontal hydraulic conductivity after model calibration (ft/d)				Volume of water in storage (1961) to depth 5 1000 feet (million acre-ft/yr)
		Layer 1	Layer 2	Layer 3	Layer 4	Layer 1	Layer 2	Layer 3	Layer 4	
(See fig. 25)										
11	0.077	759	227	245	174	3.0	3.1	4.4	4.9	43
12	0.062	423	414	235	200	2.0	2.0	3.0	3.7	14
13	0.074	487	301	304	246	4.1	4.1	5.0	4.7	27
14	0.072	870	340	340	219	2.3	2.3	4.7	4.8	25
15	0.079	670	609	313	220	2.0	2.0	3.0	5.5	14
16	0.074	45	179	233	228	3.0	3.2	4.9	4.7	17
17	0.081	1,029	491	421	321	3.4	3.4	5.2	6.0	26
Sacramento										
21	0.074	622	328	292	223	2.9	3.0	4.5	4.9	166
22	0.076	580	367	267	237	1.8	1.8	4.1	5.0	40
23	0.080	1,050	377	282	228	2.0	2.0	4.1	5.3	21
24	0.084	965	418	257	243	3.7	3.7	5.1	5.6	51
25	0.103	1,925	439	315	175	2.3	2.3	4.4	7.9	22
Delta										
31	0.084	998	398	273	228	2.6	2.6	4.5	5.7	134
32	0.098	507	595	238	191	4.6	4.6	5.8	6.1	14
33	0.112	1,205	519	370	207	5.4	4.6	5.5	9.1	51
34	0.093	1,148	546	268	199	4.9	4.9	6.3	6.8	23
35	0.097	1,114	404	293	119	5.3	5.3	6.5	6.9	37
36	0.090	1,562	434	498	201	3.9	3.9	4.6	6.1	15
37	0.096	921	696	360	219	5.7	5.7	6.4	7.3	24
San Joaquin										
40	0.100	1,094	522	333	185	5.2	4.9	5.9	7.5	164
41	0.099	878	356	404	213	6.7	3.7	5.5	7.1	4
42	0.103	2,234	908	1,073	267	7.1	3.6	4.2	7.5	52
43	0.113	1,734	984	319	281	6.9	6.9	8.1	9.4	93
44	0.083	1,328	802	696	576	7.2	6.7	8.6	7.1	37
45	0.109	1,147	803	507	266	6.4	6.7	7.5	8.6	34
46	0.085	1,339	832	642	306	5.0	5.0	6.4	5.5	33
47	0.090	163	501	461	356	3.8	4.2	3.9	5.1	15
48	0.094	1,141	950	746	322	5.6	5.5	6.3	6.4	42
49	0.124	3,437	1,015	688	379	6.8	6.8	9.0	10.1	42
50	0.124	1,530	856	846	306	7.5	7.1	7.7	10.0	13
Tulare										
51	0.101	1,488	835	614	331	6.2	5.7	6.7	7.6	365
Central Valley										
52	0.092	1,121	578	424	260	4.6	4.3	5.6	6.6	828

To study changes in flow conditions before and after development, the authors used simulations to calculate amount of flow across each block face. Due to the difficulty of summarizing the changes in flow across the great number of block faces, the flows are summarized in cumulative frequency distributions to compare them. The downward flow across a block face is assigned a negative sign and the upward flow assigned a positive sign. Because there are four block faces in a horizontal plane, the flow direction cannot be meaningfully summarized; therefore, the authors grouped the calculated horizontal flows by magnitudes only without consideration of flow direction. The authors also calculated flow velocity in both horizontal and vertical directions by dividing the flow quantity by the product of the respective block face area and an assumed effective porosity of 30 percent. The cumulative frequency distributions of flow quantity and flow velocity are shown in figures 34A through 34H, respectively.

Figure 34A suggests that the amount of vertical flow was balanced between upward and downward flow before development. This is required under the assumption of steady-state flow conditions before development. In this situation the long-term recharge was equal to discharge; therefore, the downward flow in recharge areas was balanced by upward flow in discharge areas. However, this balanced flow condition in the vertical direction was changed by development. Figure 34C shows the distribution of vertical flow during simulation of 1961 flow conditions. Most of the pumping in the Central Valley in 1961 was located in layers 3 and 4; therefore, the amount of downward flow from surface-water bodies to layer 4 (a water-table aquifer) and from layer 4 to layer 3 was increased by an order of magnitude greater than that of the predevelopment amounts. The downward flow from layer 3 to layer 2 and from layer 2 to layer 1 was reduced somewhat. The upward flow from layer 3 to layer 4 and from layer 4 to surface-water bodies was also reduced and the upward flow from layer 1 to layer 2 and from layer 2 to layer 3 was increased (fig. 34C). This indicates that pumping has induced recharge and captured natural discharge. One interesting point should be noted that in a very small area there was more downward flow from layer 3 to layer 2 during development than that of predevelopment amount (17 acre-ft/yr versus 5.7 acre-ft/yr, fig. 34C). This probably was caused by inducing more recharge from upper layers due to pumping, thus, there was more water recharging into layer 2 from layer 3.

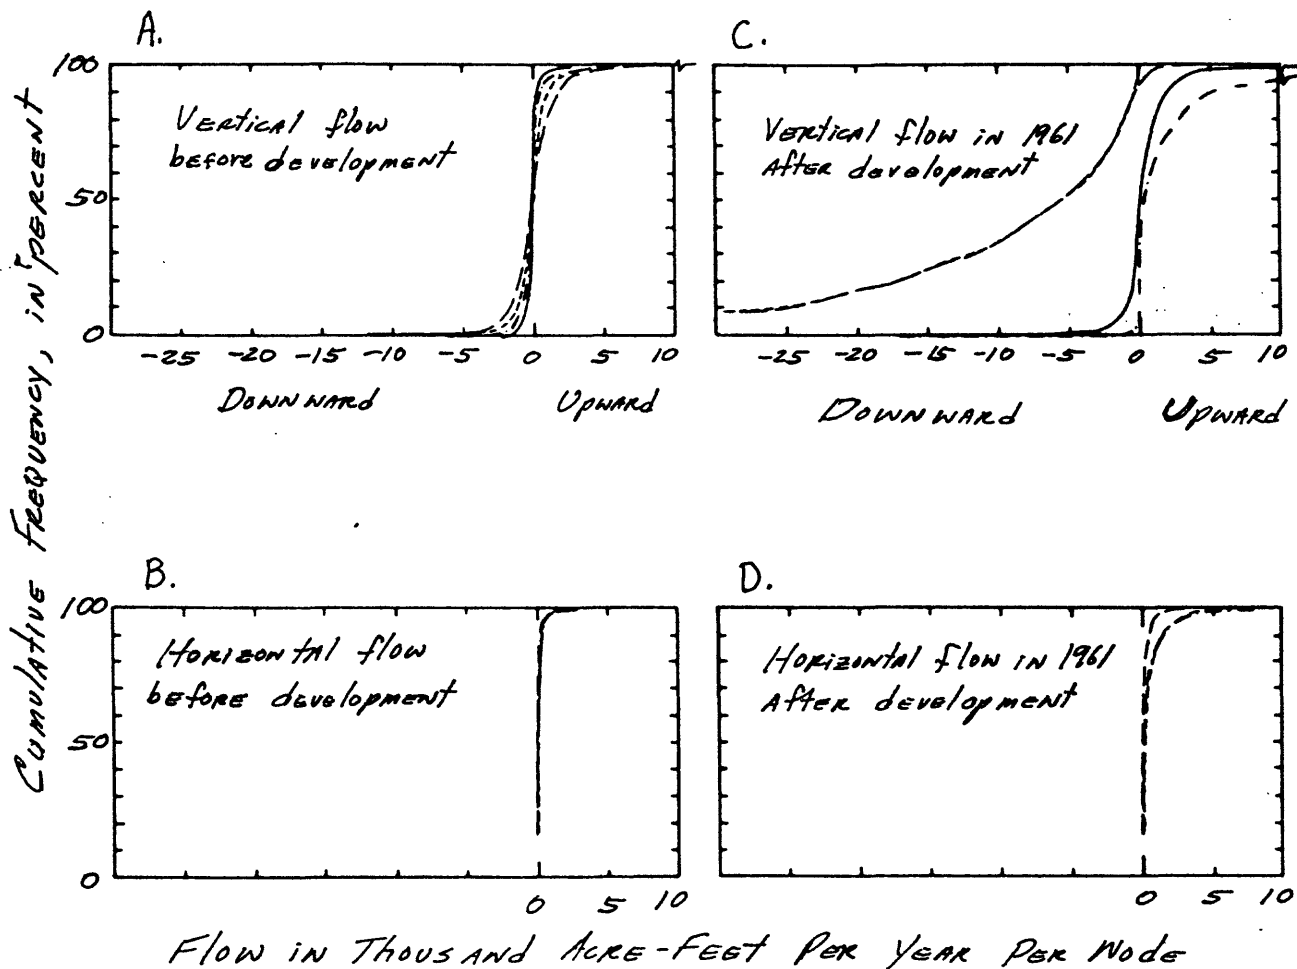

EXPLANATION

Layer for Horizontal Flow		Layer for Vertical Flow	
-----	4	4 - Land Surface	
- - - - -	3	3 - 4	
- - - - -	2	2 - 3	
—————	1	1 - 2	

Figure 34A-H--Variation in horizontal and vertical average pore velocities and flow during predevelopment and 1961 flow conditions.

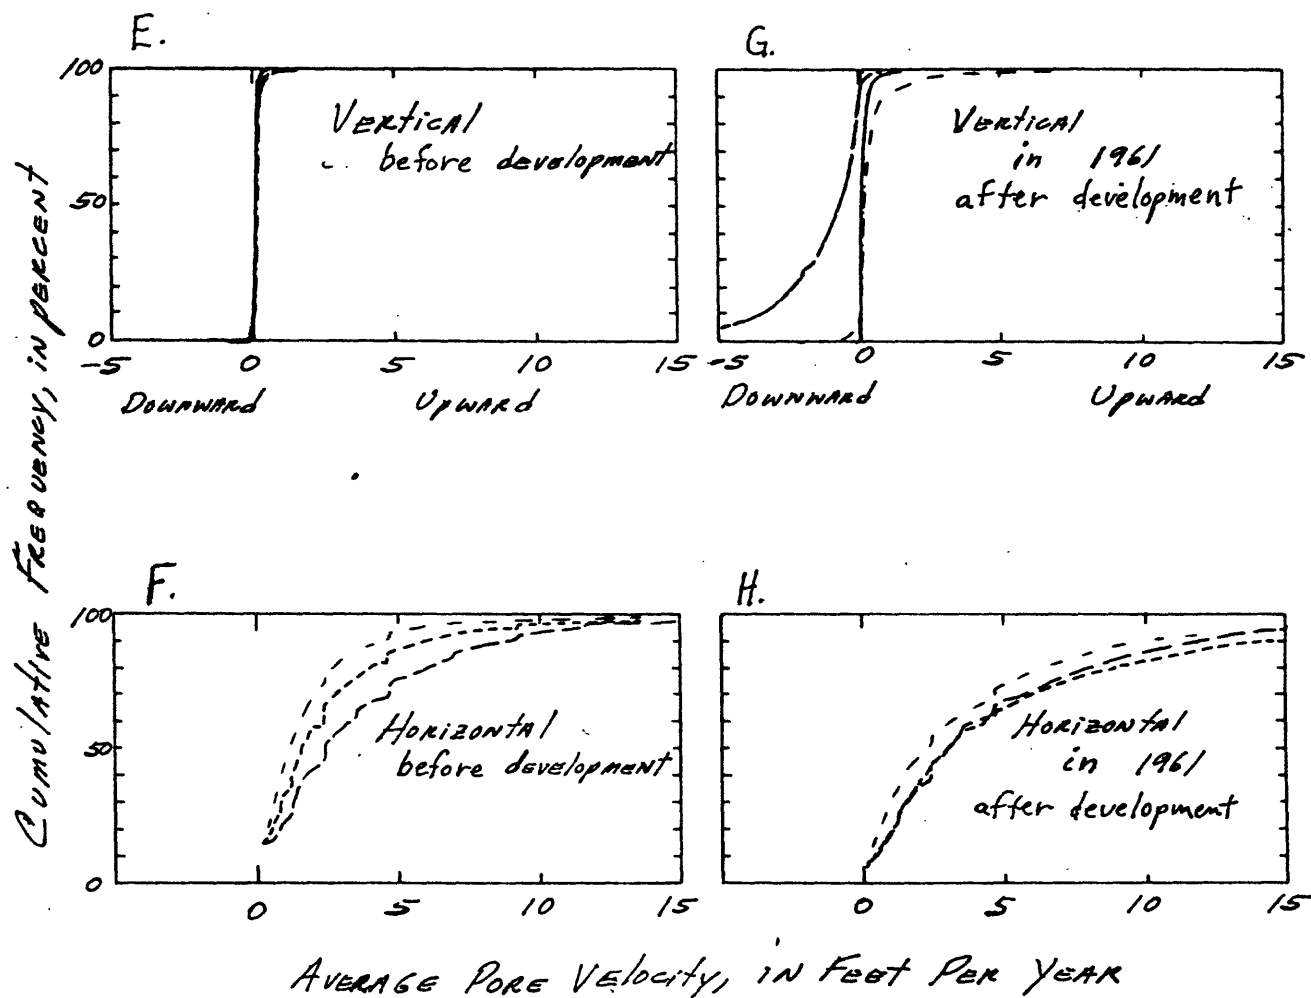


Figure 34A-H--Variation in horizontal and vertical average pore velocities and flow during predevelopment and 1961 flow conditions--Continued.

The amounts of horizontal flow reveal more interesting points. About one-half of the total block faces in the horizontal direction have very little flow as indicated by figure 34B, because those block faces perpendicular to the main flow direction have little horizontal flow. The amount of horizontal flow in layer 3 was increased by pumping; however, horizontal flow in layer 4 shows very little effect by development even though there were wells in that layer. This probably was due to plenty of recharge to layer 4 (a water-table aquifer), and because the pumping in layer 4 was fairly evenly distributed valley-wide. On a regional scale there probably was little change in the magnitude of the hydraulic gradient in layer 4 before and after development. The interesting point was that the change in horizontal flow in layer 2 was the same magnitude as the change in layer 3 (fig. 34D), even though there was little pumping in layer 2. This probably could be explained that after development more downward flow was induced by pumping in recharge areas from layer 3 to layer 2 as suggested by figure 34C. This increased downward flow moved horizontally and flowed upward in pumping or natural discharge areas (fig. 34C). Because there was very little horizontal flow in layer 1, the cumulative frequency curve would not show on the scale chosen to present flow for the other layers.

Figures 34A through 34D suggest that the magnitudes of flow in the vertical direction are much larger than those in the horizontal. Yet the horizontal flow velocities are larger than the vertical flow velocities (fig. 34E and 34H). This contrast in flow magnitudes and flow velocities is due to the geometry of the aquifer and its discretization for simulation. The flow area for vertical flow across horizontal planes is much greater than the area for horizontal flow across vertical planes. The length of the flow paths for vertical flow are much shorter than the length of flow paths in the horizontal direction. The magnitudes of flow are proportional to the area of flow and inversely proportional to the length of the flow paths. Therefore, even though horizontal permeabilities are much larger than vertical permeabilities, vertical flows on a regional scale can be very large. On a local scale, of course, most of the flow nearby a well is mostly horizontal.

Changes in vertical flows by pumping have resulted from: (1) changes in the direction and magnitude of the vertical hydraulic gradient caused by changes in recharge and discharge, and (2) an increase in the vertical leakance (T_k) values (vertical hydraulic conductivity divided by thickness of the layer) caused by drilling of wells with long lengths of perforated openings and a possible decrease in the vertical leakance caused by compacting of sediments.

The vertical hydraulic gradient changed dramatically from predevelopment to 1961 as can be seen by comparing figures 15 and 29C. Under predevelopment conditions, the vertical gradient was downward around the margins of the valley and upward in the center. Model simulations indicate that the predevelopment head difference between water-table altitudes and water levels in the lower pumped zone was always less than 85 ft and generally less than 25 ft. Irrigation development had two effects on this head difference. First, recharge from canal losses and deep percolation of water from irrigated fields added to the recharge of the water table, which caused water-table rises in several areas. Second, ground-water pumpage, about one-half of which was withdrawn from the lower-pumped zone (layer 3), increased the upward discharge from the deep zone. The cumulative effect of these development impacts was to reverse the head gradient in the center of the Central Valley so that the head gradient was in a downward direction almost everywhere instead of upward as it was during predevelopment. Exceptions occurring in test holes with nested piezometers drilled near Zamora (12N/1E-34Q, fig. 2), and Butte City (12N/3E-2G, fig. 2) where it shows the head gradient is still upward from depths of 2,120 ft and 1,330 ft, respectively, to the water table (French and others, 1982, 1983).

During calibration of the model, it was soon obvious that the model-computed heads were very sensitive to the leakance (Tk) value, much more so than to any other value. This is because the head in a model block is very dependent on the vertical head difference between layers, which is controlled by the Tk values. Horizontal gradients, dependent on the distribution of recharge and discharge and the hydraulic conductivity, were less important in affecting the head in a model block. This situation required calibration of the Tk values before anything else in the model could be tested. However, it also made calibration of these values relatively simple as described in the section on sequence of calibration. The postdevelopment leakance varied several orders of magnitude between different nodes and averaged 6×10^{-10} per second for the whole Central Valley. Laboratory values of vertical hydraulic conductivity, given by Johnson and others (1968), were tested in the early phases of calibration, but not used because they represent point data rather than areal averages necessary in a regional model.

In the Central Valley, perforation data for about 3,000 irrigation wells show that generally the lower two-thirds of the depth of the well is perforated. Because it is common for the wells to be over 2,000 ft deep, especially in the areas dominated by ground-water irrigation, this perforated interval is a substantial part of the aquifer thickness. Because of the many wells with long intervals of perforations and because of the compaction of the clay layers, an assumption was made that the predevelopment and postdevelopment Tk values were different. Several types of evaluations were made to test these hypotheses.

Davis and others (1964, p. 81-88) discussed the "interaquifer circulation of ground water." Their analysis assumed that the only resistance to vertical flow was because of the presence of the Corcoran Clay Member of the Tulare Formation. Their analysis dealt only with the west-side area in the San Joaquin Valley. They analyzed the flow through "thousands of wells which puncture the clay" by current-meter traverses in 16 wells which were not pumped. The average measured flow, excluding the zero measurements, was about 0.3 ft³/s. Their conclusions about the flow through wells is as follows:

<u>Well type</u>	<u>Number of wells</u>	<u>Average Flow rate (ft³/s)</u>	<u>Percentage of time that flow was measurable</u>	<u>Annual volume (acre-ft)</u>
Active	1,000	0.26	40	75,000
Inactive	2,000	0.026	100	40,000

Thus they attributed about 100,000 acre-ft/yr to flow among aquifer layers through well perforations. The sound of falling water in idle irrigation wells was cited as evidence that ground water has been cascading downward from perforations above the Corcoran Clay Member. More recent mapping of the Corcoran Clay Member (E-clay of Croft, 1972) indicates that most of the flow measurements taken at depths above and slightly below the base of the clay unit showed there was no flow. However, flow measurements at deeper depths, entirely below the clay unit, indicated downward flow. The measurements were all taken in May and June when water levels in the deeper layers were changing rapidly in response to the pumping season. It now seems that those flow measurements in May and June reflect circulation of water to equalize water levels within the lower-pumped zone. Lofgren and Klausing (1969, p. 48) presented data that suggests the vertical head gradient below the clay unit is larger than the gradient directly across the clay unit in well 23S/23E-33A1 in the Tulare-Wasco area.

Wells which penetrate confining beds and are open to both aquifer layers above and below the clay beds, whether or not they are pumped, can have a major effect on the hydraulics of the confining system. The wells establish a direct hydraulic link between the aquifer layers above and below the clay beds. Bennet and others (1982) suggest that this hydraulic effect may be evaluated approximately by adaptation of the Thiem equation.

Let C_w be defined as a well conductance which is the increase in leakance of clay beds caused by a well open to aquifer layers above and below the clay beds, then by definition,

$$C_w = \frac{Q}{H_u - H_1} \quad (25)$$

where,

Q = flow through well casing and,
 H_u, H_1 = head in aquifer layers above and below the clay beds, respectively, at some radial distance, R_a , from the well which is assumed to be the limit of the local cone in the potentiometric surface due to the influence of the well.
 R_a is further defined below.

If the head in the aquifer layer above the clay beds is higher than the head in the aquifer layer below the clay beds, then water will flow from the aquifer layer above and recharge the aquifer below through the well opening. The amount of the flow can be estimated by the Thiem equation, if the following two assumptions are valid--(1) well entrance losses and head losses within the well are negligible when compared to head losses in the aquifer and (2) storage effects in the aquifers within the cone of influence in each aquifer also are negligible. According to the Thiem equation, flow leaving the aquifer layer above the clay beds can be described by the equation,

$$Q = \frac{2\pi b_u K_u (H_u - h_w)}{\ln(R_a/R_w)} \quad (26)$$

For flow recharging to the aquifer layer below the clay beds, the Thiem equation is,

$$Q = \frac{2\pi b_1 K_1 (h_w - H_1)}{\ln(R_a/R_w)} \quad (27)$$

where,

- R_a = radial distance from center of the well to a concentric circle along which the head is assumed to be the average head in the aquifer block, H_u or H_1 , respectively,
- R_w = radius of the well,
- K_u, K_1 = hydraulic conductivity of the aquifers above and below the clay beds, respectively and,
- b_u, b_1 = thickness of the aquifer layers, respectively.

The other variables have been defined in equation 25. If R_a is assumed to be equal to $a/4.81$ as proposed by Prickett (1967), where a is the size of a rectangular block containing the well of interest, then the terms $(R_a - R_w)$ in equation 26 and equation 27 are equal and h_w can be calculated by equating equation 26 to equation 27. The value of h_w is given by

$$h_w = \frac{b_u K_u H_u + b_1 K_1 H_1}{b_u K_u + b_1 K_1} \quad (28)$$

Substituting equation 28 into either equation 26 or equation 27, the following expression is obtained:

$$Q = \frac{2\pi b_u K_u b_1 K_1 (H_u - H_1)}{\ln(R_a/R_w) (b_u K_u + b_1 K_1)} \quad (29)$$

Substituting equation 29 into equation 25, then C_w is given by,

$$C_w = \frac{2\pi b_u K_u b_1 K_1}{\ln(R_a/R_w)(b_u K_u + b_1 K_1)} \quad (30)$$

If $K_u = K_1$, then equation 30 can be simplified and it is given by,

$$C_w = \frac{2\pi K}{\ln(R_a/R_w)} \frac{b_u b_1}{(b_u + b_1)} \quad (31)$$

The grid used in simulating Central Valley ground-water flow is 6 miles by 6 miles, so R_a can be assumed to be about 6,500 ft. The average well radius (R_w) in the Central Valley is about 0.75 ft. The thickness of aquifers above (layer 4) and below (layer 3) is about 250 ft and 1,000 ft, respectively. The hydraulic conductivity (K) of both aquifer layers is about 6 ft/d (the valley average), so the conductance per well (C_w) is estimated to be 830 ft²/d.

The conductance of the clay beds (C_c) can be estimated by the Darcy equation:

$$C_c = \frac{Q}{H_u - H_1} = \frac{K A}{dL} \quad (32)$$

where,

A = area of the model block,

dL = length over which the vertical head difference is measured.

Using $K/dL = Tk = 4.1 \times 10^{-6}$ per day (the model-calibrated average for the Westside subarea), and $A = 10^9$ ft², C_c is about 4,100 ft²/d. According to these calculations, the leakance of about five wells in one model block would be equal to the leakance of the clay beds. There is a range of values that can be computed with reasonable inputs, however, this at least shows that wells probably have a significant contribution to leakance of the clay beds.

If the leakance of clay beds is greatly increased by multiaquifer wells, then there should not be large vertical head differences across the clay beds. The existence of the large vertical head difference in the west-side areas of the San Joaquin Valley in the 1960's probably is due to a large amount of pumpage withdrawn from the lower aquifer zones and large resistance of the shallow clay beds to vertical flow. Davis and others (1964) observed cascading water down nonpumping wells and assumed that this demonstrated flow through the multiaquifer wells from the water-table aquifer above the Corcoran Clay Member to the confined aquifer below it. Using the estimated hydraulic conductance of multiaquifer wells discussed previously, the number of wells measured by Davis and others, and the vertical head difference across the clay beds of 400 ft which was common in the early 1960's in the Westside area of the San Joaquin Valley, the estimated interaquifer flow through the multiaquifer wells would be about 10 times the total pumpage in the area. This volume of leakage would have dissipated the vertical head difference. Due to additional information which was not available to Davis and others, the authors believe that the measured flow by Davis and others (1964) was the circulation of ground water through well casings within the pumped zone (layers 3 and 2) which had the effect of equalizing the head differences in the pumped zone during the pumping season over a large vertical interval of about 1,500 ft. J. F. Poland (U.S. Geological Survey, oral commun., 1979) noted that in two piezometers installed in a well near Westhaven, in the Westside area of the San Joaquin Valley, head differences within the lower pumped zone were small during the 1960's when pumping was large. The piezometers were installed at 700- and 1,900-foot depths, respectively (20S/18E-11Q2,Q3).

Compaction of sediments should reduce vertical hydraulic conductivity. Helm's (1976, p. 389) calculations suggest that the vertical hydraulic conductivity of fine-grained sediments was reduced to about one-fifth of the original values but noted that the calculated reduction in addition to compaction may account for: (1) the complex hydraulic conductivity distribution within a fine-grained bed or several beds in the actual aquifer system, and (2) the range and distribution of thicknesses of the many fine-grained beds. Laboratory tests by loading six samples from a test well (12N/1E-34Q, fig. 2) near Zamora (Page, 1982) indicate that vertical permeability of clays from consolidation decreased by factors of 1.5 to 6. The simulations to test this hypothesis were inconclusive because of the larger counteracting effect of the well perforations in some areas and absence of data in other areas.

A comparison was made in 51 model blocks where both steady state and postdevelopment T_k values were calibrated (fig. 35). In 44 model blocks the T_k increased and in 7 model blocks it decreased. The median ratio of the postdevelopment to predevelopment T_k in those 51 model blocks was about 6 times, while the mean ratio was about three orders of magnitude. This indicates that the leakance increased because of the movement of water within casings of the multiaquifer wells or gravel packs around the wells.

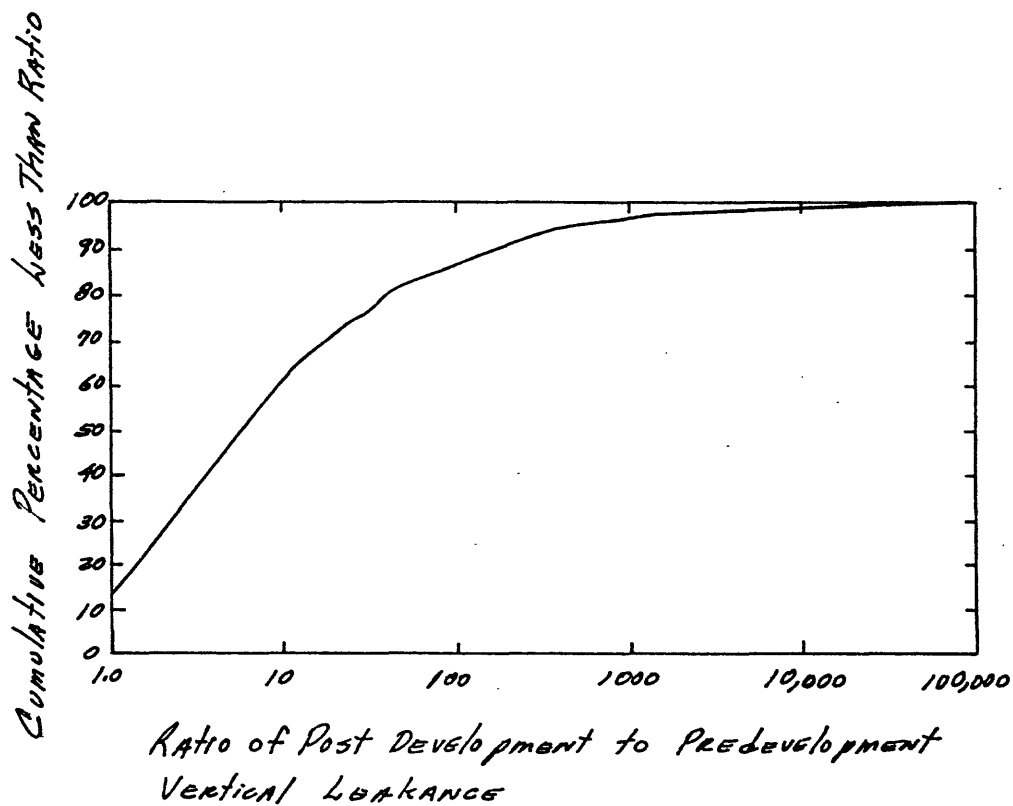


Figure 35--Ratio of postdevelopment to predevelopment vertical leakance in 51 model blocks where predevelopment heads were known.

Land Subsidence

The extent and magnitude of land subsidence in the San Joaquin Valley that exceeded 1 ft from 1926 to 1970 is shown in figure 36A. Comparing this figure to figure 17 which shows the area of the modified E-clay and areas of flowing wells in the late 1800's, it is noted that land subsidence mostly occurs where the E-clay exists. Poland and others (1975, p. H8) separated the subsidence area into three areas (fig. 36A). These areas include: (1) the Los Banos-Kettleman City area west of Fresno where a maximum subsidence of 29.6 ft was observed in 1977 (Ireland and others, 1982); (2) the Tulare-Wasco area between Fresno and Bakersfield which includes two areas where subsidence has exceeded 12 ft; and (3) the Arvin-Maricopa area 20 mi south of Bakersfield where maximum subsidence exceeded 9 ft as of 1970.

Man-induced subsidence in the Central Valley probably began in the middle to late 1800's when the peat soils of the Sacramento-San Joaquin Delta were drained for cultivation. Weir (1950) noted that in 1922 the entire Delta area was in cultivation, and that farmers in the area were concerned about subsidence. Weir also estimated that subsidence in the lower Jones Tract was 4½ ft between 1902 (when the tract was first drained) and 1917. This type of subsidence is caused mainly by the oxidation and compaction of the organic peat soils since the lands were drained (Weir, 1950; Newmarch, 1981). The peat lands had to be drained in order to cultivate, which meant that the water table had to be lowered. The draining of the lands is done by a series of ditches that drain to a central location where the water is pumped out into the nearby surface channels. During the summer growing season, water is siphoned back into these same ditches to raise the water level in the ground to within the root zone. However, because the land continues to subside, the water table must continually be lowered. The volume of water removed from storage in this area is equal to the specific yield times the change in the water table because the removal of water is more a function of draining the sediments rather than the release of water from compaction.

Subsidence caused primarily by compaction of the fine-grained sediments in the aquifer system began in the San Joaquin Valley in the middle 1920's. However, the cumulative volume of subsidence and hence the volume of water released from compaction remained small until after World War II (Poland and others, 1975). Subsidence in the Sacramento Valley presumably began in the early 1950's although data are sparse (Lofgren and Ireland, 1973). This type of subsidence caused other problems such as: cracks in road and canal linings, changing slopes of water channels, and ruptured well casings. During the early 1960's, in parts of the Westside area, large and expensive irrigation wells had a useful life of about seven years because of casing failures.

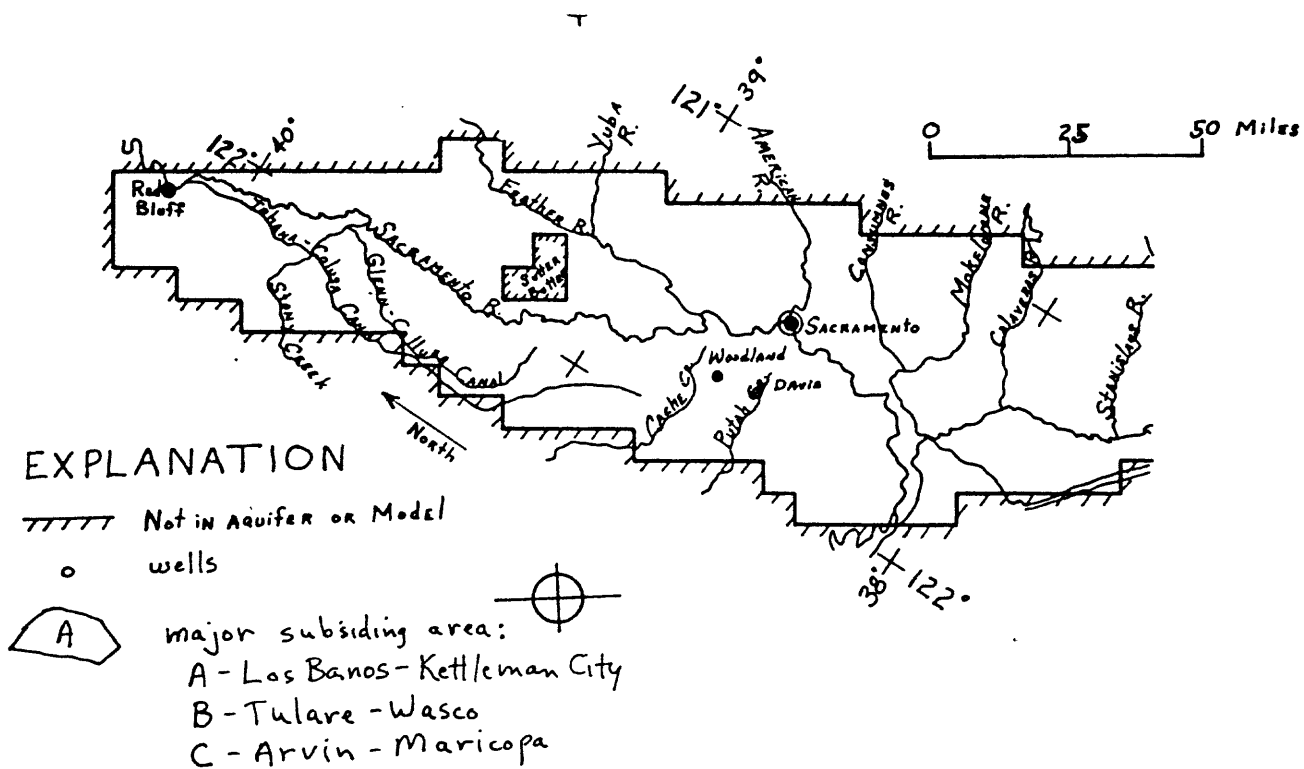


Figure 36--(A) Major subsiding areas and locations of wells with water level and compaction data (modified from Ireland, Poland, and Riley, 1982, figs. 6 and 32) and (B) land subsidence, 1926-70 (modified from Poland and others, 1975, fig. 6). Contour interval is variable.

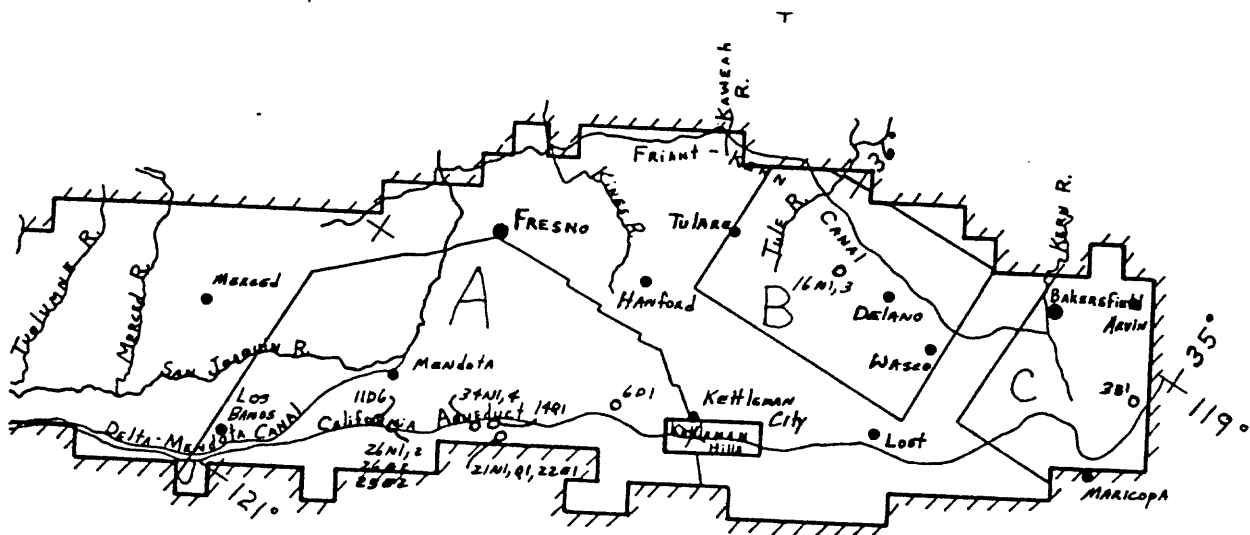


Fig 36a - (right side)

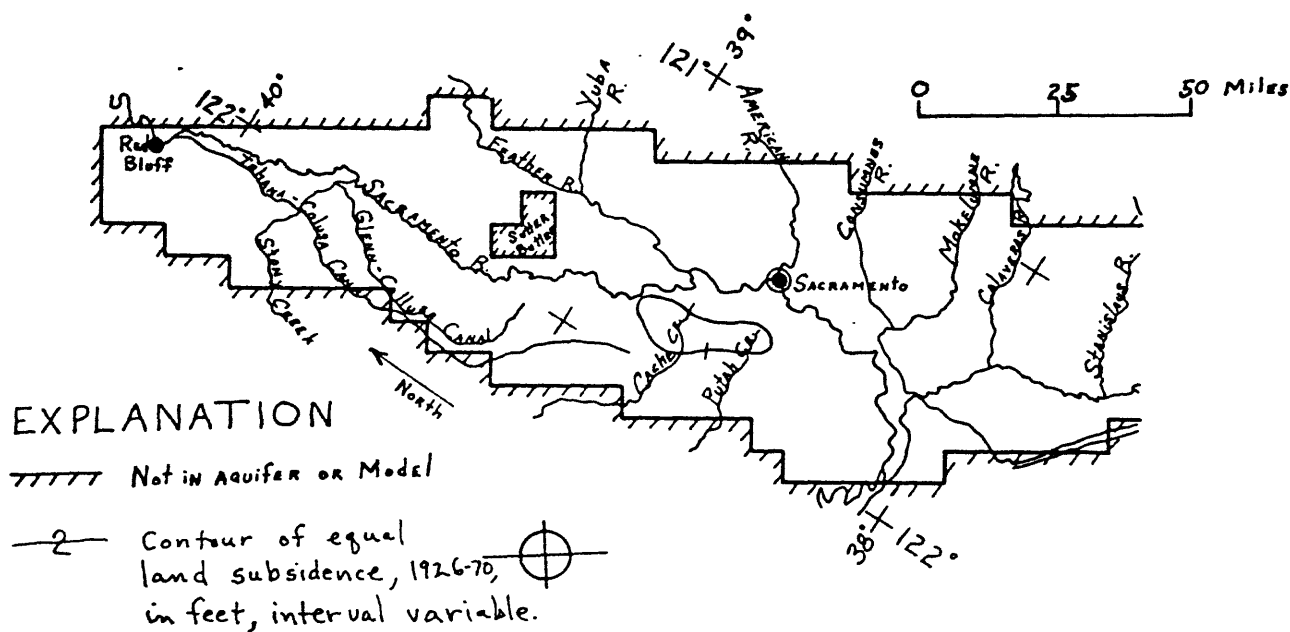


Figure 36--(A) Major subsiding areas and locations of wells with water level and compaction data (modified from Ireland, Poland, and Riley, 1982, figs. 6 and 32) and (B) land subsidence, 1926-70 (modified from Poland and others, 1975, fig. 6). Contour interval is variable--Continued.

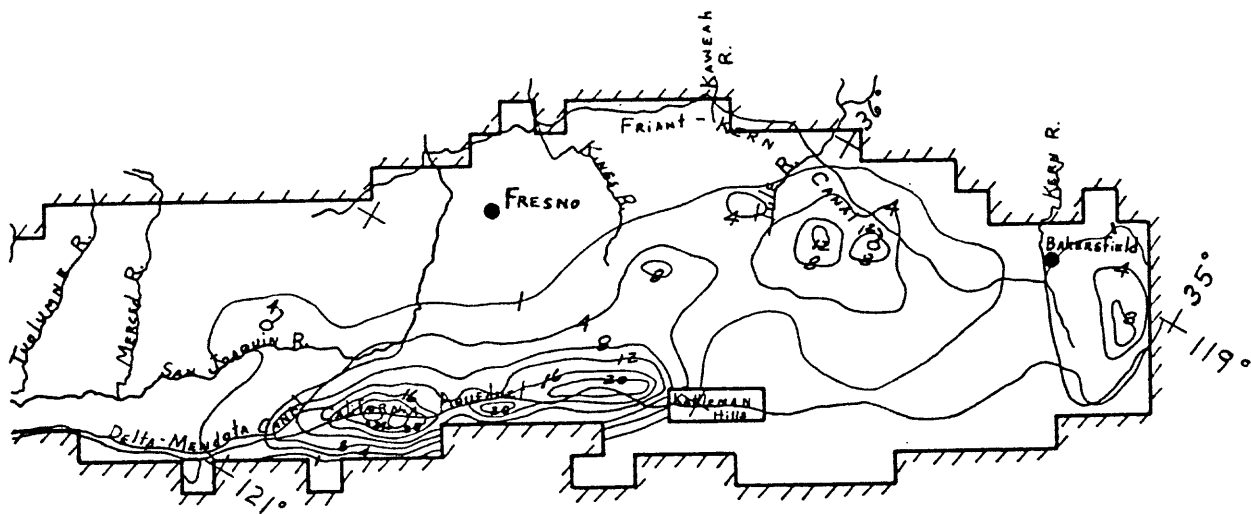


Figure 36 b - (right side)

Figure 37 shows the cumulative volume of subsidence in the San Joaquin Valley. The total volume of subsidence in the San Joaquin Valley by 1970 was 15.6 million acre-ft (Poland and others, 1975, p. H9). Also included in figure 37 are cumulative volumes of subsidence for each of the three major subsiding areas. The volume of subsidence in the Los Banos-Kettleman City area west of the Fresno Slough and the San Joaquin River (fig. 36A) accounted for nearly two-thirds the total volume of subsidence as of 1970. Between 1970 through 1975 there was little subsidence in this area because of surface-water imports from the California Aqueduct, which greatly reduced the annual amount of pumpage from the aquifer system. However, subsidence recurred during the drought of 1976 through 1977 due to an increase in ground-water withdrawal. In addition to the cumulative volume of subsidence, ground-water pumpage was also plotted for the Los Banos-Kettleman City area. The correlation between pumpage and the volume of subsidence is good, indicating that about one-third of the water pumped was derived from compaction of the aquifer system (Poland and others, 1975). The pumpage, however, included all pumpage in the area (both shallow and deep). Bull and Miller (1975) estimated that at least 75 to 80 percent of the water pumped came from the lower pumped zone. Assuming that compaction occurs only in the lower zone, about 43 percent of the water pumped from the lower-pumped zone came from compaction of the fine-grained beds. Similar comparisons of water pumped versus volume of subsidence from 1926 to 1970 were not done in the Tulare-Wasco or the Arvin-Maricopa area, mostly because of the absence of pumpage data and partly because the relation between pumpage and subsidence is not as pronounced as discussed in the following section, "Factors that affect the relation of subsidence to pumpage."

Observed land subsidence in the San Joaquin Valley reported by Poland and others (1975) and Ireland and others (1984) was primarily dependent on periods when detailed leveling lines were made in the areas of major land subsidence. However, the level lines were not always measured during the same years for each of the major subsiding areas. The last detailed leveling for the Tulare-Wasco area was done in 1969-70, while the Arvin-Maricopa area was done in 1970, and the Los Banos-Kettleman City area in 1971-72 (Ireland and others, 1984, p. 14). Since 1972, only partial leveling of selected lines (particularly along the California Aqueduct) has been done.

Because the times of detailed leveling did not always correspond among areas of subsidence and because the principal simulation period of the aquifer system was from spring 1961 to autumn 1977, yearly estimates of land subsidence from 1961 to 1977 were made based primarily on average rates of subsidence between times of leveling and were prorated to individual years according to extensometer data from wells as reported in Poland and others (1975) and Ireland and others (1984). An estimate of land subsidence was also made for the period during the drought based largely on extensometer data in wells and from a few level lines. The yearly estimated rate of subsidence in the San Joaquin Valley decreased in the 1970's (fig. 37), mostly because of decreased subsidence in the Los Banos-Kettleman City area, although the yearly estimated subsidence rate increased during the drought of 1976 through 1977 when ground-water pumpage increased greatly. Estimates of pumpage from 1973 through 1977 in the Los Banos-Kettleman City area were also added to figure 37. The relation between pumpage and land subsidence changed following 1970, after which, a reduced proportion of the water pumped came from compaction of the fine-grained sediments. This reduction probably is due to hydraulic head recovery which accompanied the reduction in pumpage during 1968-75.

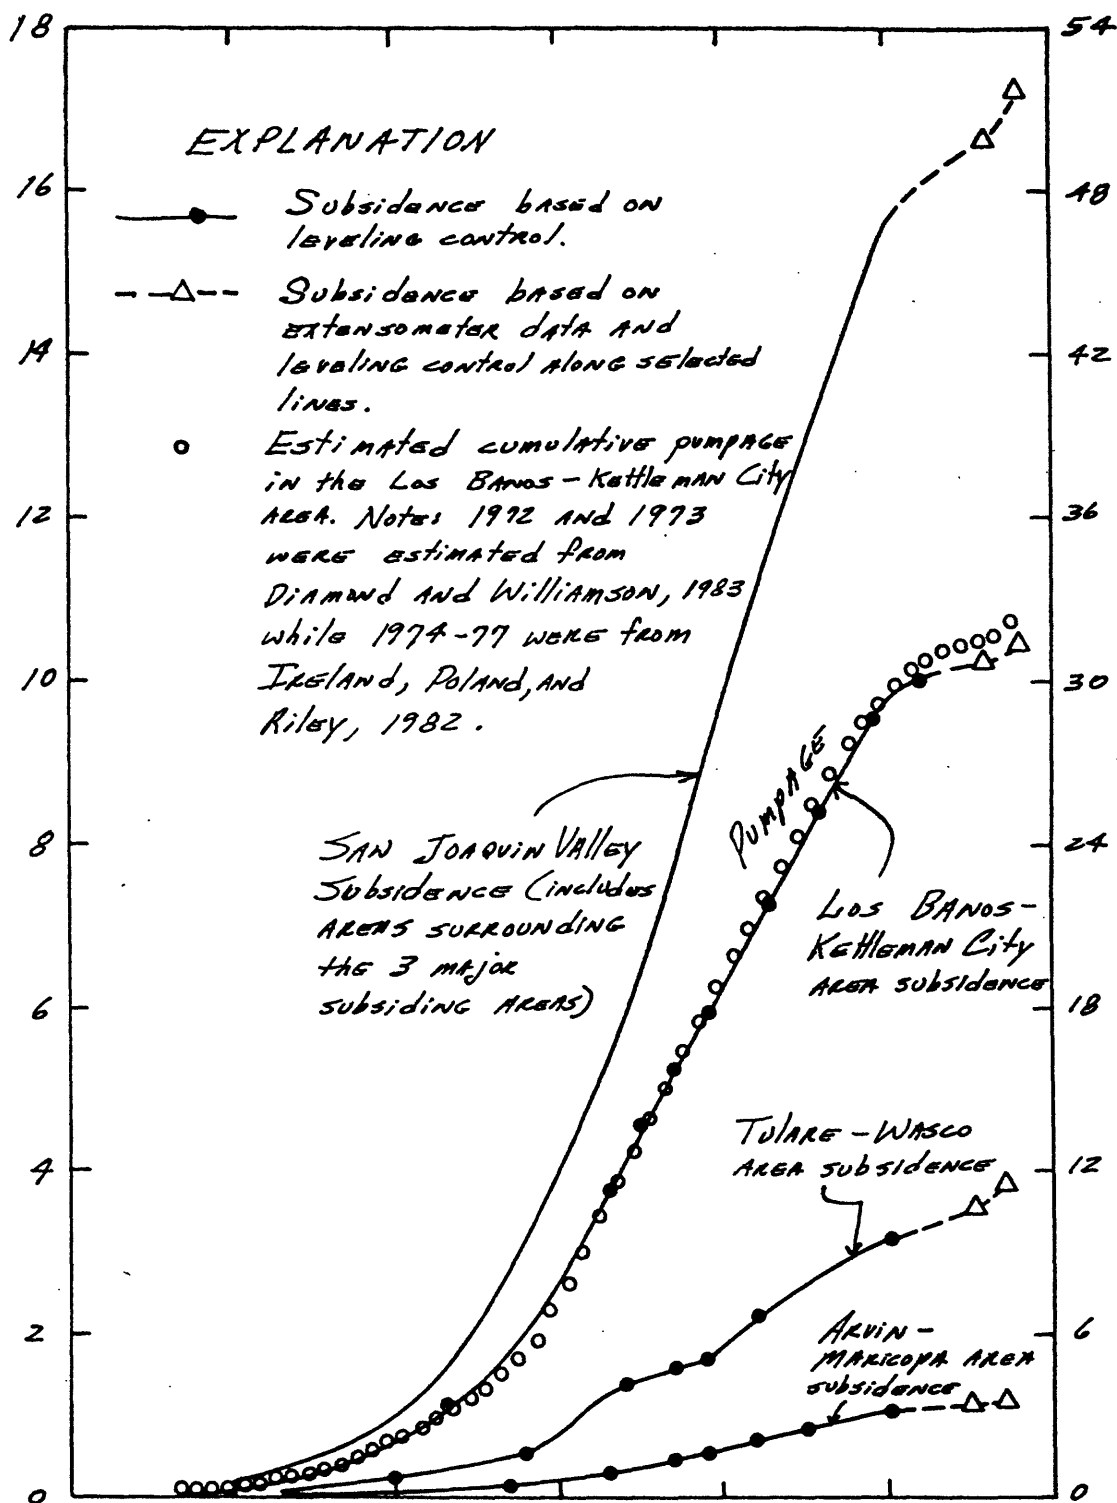


Figure 37--Volumes of land subsidence in the major subsiding areas of the San Joaquin Valley, and pumpage in the Los Banos-Kettleman City area, 1925-77 (modified from Poland and others, 1975, figs. 6, 19, 29, and 38).

Simulated subsidence, 1961-77.--Overall, the simulated volume of subsidence from 1961-77 both in the San Joaquin and Sacramento Valleys compared well to the estimated volumes of subsidence from leveling and extensometer data for the same period (table 8). Simulated and estimated volume of subsidence for both the Arvin-Maricopa and the Tulare-Wasco areas also compared closely (table 9 and fig. 38). In both areas, the simulated subsidence from 1961-69 was slightly more than the estimated subsidence, while during the period of 1970-75, it was slightly less. This is consistent with the simplified approach to land subsidence in the simulation processes because all water is assumed to be released simultaneously during a given head decline in the simulations whereas in the actual aquifer system, water may be slowly released due to compaction of the fine-grained (clayey) beds for some time after a given head decline. In the area between the Tulare-Wasco and the Los Banos-Kettleman City areas, simulated subsidence was slightly less than the estimated subsidence.

In the Los Banos-Kettleman City area, the simulated subsidence west of the Fresno Slough and San Joaquin Rivers was generally less than the estimated subsidence (table 9). The simulated subsidence for the period 1961-69 should have been more than the estimated subsidence because the time-lag was not simulated, and presumably as much as the amount estimated for 1961-75. During the drought of 1976-77, the water levels in the lower pumped zone did not decline below the previous lows observed in the 1960's, yet subsidence was observed along the California Aqueduct and in the few wells with extensometers (Ireland and others, 1984, and fig. 39). Simulated subsidence in the same area was very small as expected because most of the heads in the model blocks did not decline below previous lows. Some of the observed subsidence may have been elastic as indicated by negative compaction values following 1977 (fig. 39). The period 1970-76 was a time when generally the water levels recovered and subsidence was probably caused by the time-lag between the head change in the aquifer materials and the water released from compaction of the fine-grained (clayey) beds to the aquifer system.

TABLE 8.--Comparison of estimated and simulated volumes of land subsidence in the San Joaquin and Sacramento Valleys from 1961 through 1977

[Millions of acre-ft]

Years	San Joaquin Valley		Sacramento Valley	
	Estimated ¹	Simulated	Estimated ²	Simulated
1961-69	5.2	4.8	0.17	0.10
1970-75	1.1	.48	.12	.04
1976-77	.60	1.2	.06	.22
1961-77	6.9	6.5	0.35	0.36

¹Estimates obtained from Poland and others (1975); Ireland and others (1982), and from unpublished data.

²Estimates obtained from Lofgren and Ireland (1973), and unpublished data.

TABLE 9.--Comparison of estimated and simulated volumes of subsidence to pumpage for major subsiding areas from 1961 through 1977

[Pumpage and land subsidence are in millions of acre-ft.
Pumpage for the lower pumped zone only]

Years	Total pumpage from lower pumped zone	Estimated volume of subsidence	Estimated percentage of pumpage from compaction	Simulated volume of subsidence	Simulated percentage of pumpage from compaction
<u>Arvin-Maricopa area</u>					
1961-69	6.8	0.41	6	0.54	8
1970-75	6.8	.11	2	.04	1
1976-77	1.4	.04	3	.10	7
1961-77	12.6	0.56	4	0.68	5
<u>Tulare-Wasco area</u>					
1961-69	7.5	1.0	13	1.2	16
1970-75	5.4	.36	7	.20	4
1976-77	2.2	.31	14	.27	12
1961-77	15.1	1.7	11	1.7	11
<u>Los Banos-Kettleman City area</u>					
1961-69	8.0	3.3	42	2.8	35
1970-75	2.8	.51	18	.11	4
1976-77	1.0	.23	23	.05	5
1971-77	11.8	4.1	35	2.9	25
<u>Davis-Zamora area</u>					
1961-69	2.0	0.17	9	0.03	2
1970-75	1.4	.12	9	.01	1
1976-77	.46	.06	12	.07	14
1961-77	3.9	0.35	9	0.11	3

The simulated distribution of subsidence as compared to the estimated distribution is shown in figure 38. The variations in simulated versus estimated subsidence may be explained in several ways:

- (1) In the simulation of the aquifer system, pumpage from the lower pumped zone was the primary cause of land subsidence. The estimates of pumpage were summed by quarter townships then transferred as the model input. The model grids, however, did not correspond to the township grid. Errors in transferring the pumpage from the township grid to the model grid can cause the amount and distribution of subsidence to be shifted in the model simulations.
- (2) Estimates of land subsidence, particularly after 1972, are based primarily on projecting localized data to areas without data. Because several parts of the Central Valley have not been releveled since 1970, these estimates of subsidence are subject to error.
- (3) The simulated amount of subsidence in any model block is dependent on the head at which inelastic compaction begins (the critical head). In the simulations, the critical head in the clayey beds within the aquifer system was assumed equal to the head in the aquifer system. In reality, this assumption is not true because of the time needed for a change in head in the aquifer to propagate through the thicker clayey beds. Estimates of the critical head initially used in the simulation from 1961 through 1977 were made for areas of known subsidence by subtracting an estimated average head fluctuation in the 1960's from the heads of spring 1961. For critical heads in areas outside of known subsidence, a head of 80 ft less than the simulated steady-state head was used. Holzer (1981) estimated a change in head of 85 ft before the ratio of subsidence to water-level decline increased dramatically in two wells in the Tulare-Wasco area. The critical head in several of the model blocks, particularly in the active subsiding areas were adjusted such that the simulated and estimated subsidence and drawdowns corresponded. The adjustments of head were usually small, less than 20 ft in most model blocks. These adjustments were not significant because the method used to estimate critical heads was not exact. Errors in estimating the critical head for each model block affect the distribution and amount of subsidence as well as the heads in the lower pumped zone.

- (4) Simulated subsidence was computed by multiplying the inelastic storage value by the amount of drawdown that was simulated when the inelastic storage value was actively used. However, if the computed head decreased below the critical head in the first time step of a pumping period, no subsidence was computed. This error was reduced by using a short initial time step.
- (5) In the model simulations, when heads declined below the critical head values, water was released from compaction instantaneously. When the heads recovered above the lowest computed head, subsidence would not begin again until after the head was lower than the new critical head value. However, continuation of subsidence in the aquifer system has been observed (although at greatly reduced rates) for years after the time that heads recovered in the aquifer system. These observations are supported by water levels and extensometer data in the major subsiding areas (figs. 39A-F). In fact, observed subsidence in figures 39A, 39C, 39D, and 39E increased during the drought of 1976-77 even though water levels in wells did not go below the previous low water level. However, some of the observed subsidence during the drought may have been caused by elastic compression as indicated by the negative compaction (rebound) values following the drought. Similarly, water levels in a well near Delano in the Tulare-Wasco area did not show a continued yearly water-level decline yet compaction (although somewhat variable) was continuous from 1958-77 (fig. 39E). The yearly simulated subsidence for this area was zero for the periods when the heads did not decline below the previous lowest head. Not being able to simulate subsidence during these conditions is the result of using a simplified approach to the complicated mechanics of subsidence. In particular, the assumption that the head in the coarse-grained deposits in the aquifer system is equal to the heads in the fine-grained deposits also is not correct (see "Limitations" section).

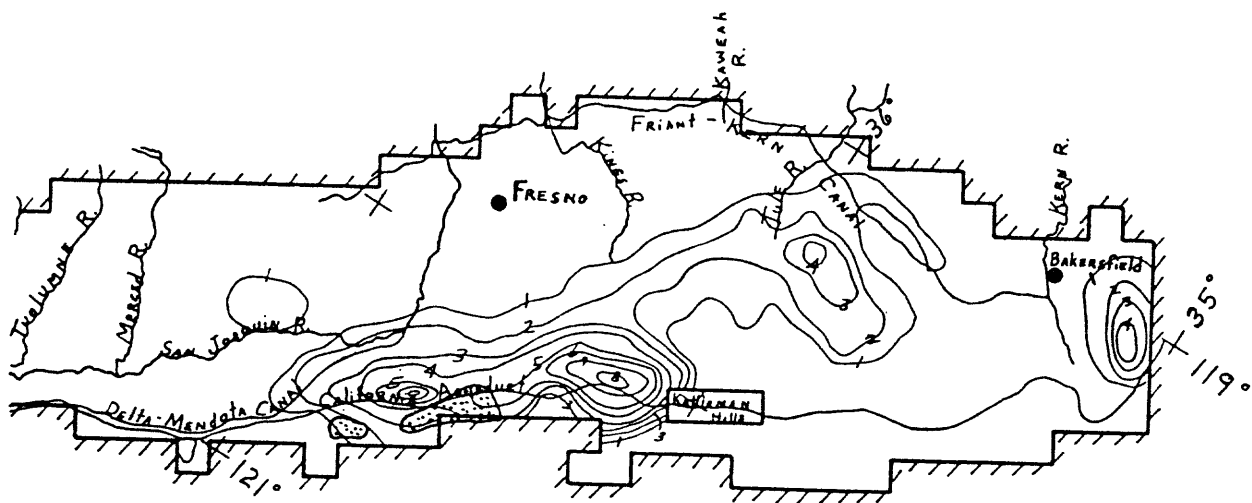


Fig. 38a - (right side)

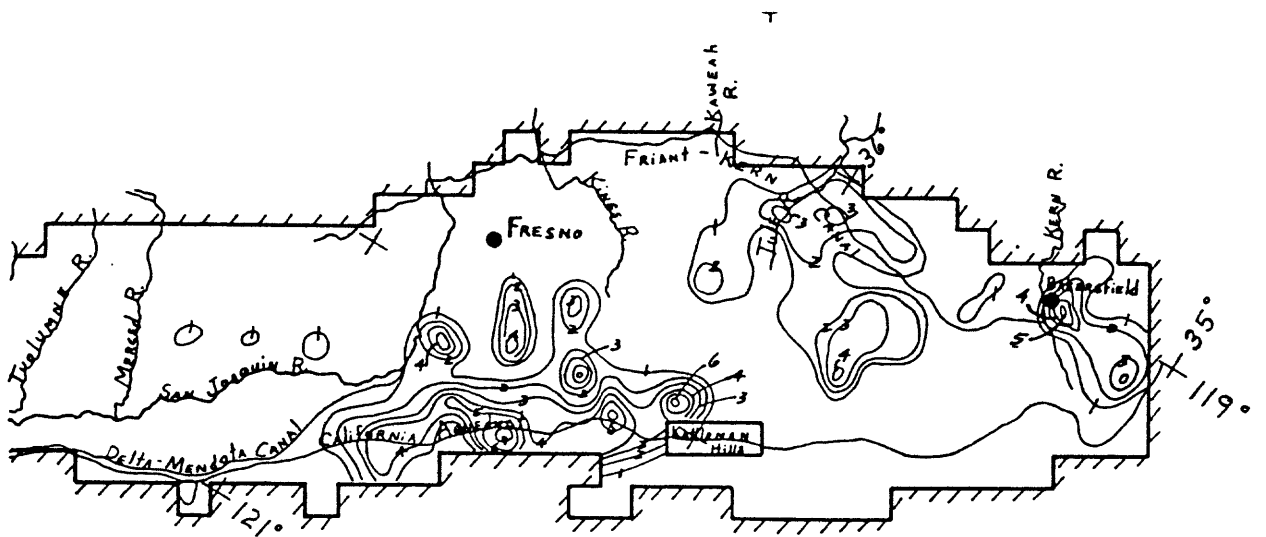


Fig. 38 b - (right side)

Factors that affect the relation of subsidence to pumpage.--Estimates of ground-water pumpage, based primarily on electric power consumption and pump-efficiency tests, have been compiled yearly from 1961 through 1977 for most of the Central Valley (Diamond and Williamson, 1983). In addition, pumpage estimates were divided between the upper water-table zone and the lower pumped zone. A comparison between subsidence or the amount of compaction of the fine-grained sediments and pumpage in the lower pumped zone was done for each of the major subsidence areas (table 9).

The percentage of the total water pumped that was released from the fine-grained (clayey) sediments, caused compaction, and varied from area to area (table 9). The lowest overall percentage from 1961 through 1977 occurred in the Arvin-Maricopa area where presumably only 2 to 6 percent of the water pumped from the lower pumped zone came from compaction. In contrast, as much as 42 percent of the pumpage came from compaction in the Los Banos-Kettleman City area during a period of major subsidence in 1961 through 1969.

The difference of the proportion of water released during compaction to total pumpage among the major subsidence areas is probably caused by: (1) variations in amount, compressibility and origin of the fine-grained sediments, and (2) variations in applied stress that compacts the deposits (Poland and others, 1972, p. 6). These variations are discussed in the following paragraphs.

Texture maps showing the amount of coarse-grained deposits with depth were prepared by R. W. Page, (U.S. Geological Survey, written commun., 1983). These maps indicate that the amount of coarse-grained material is consistently less to depths of 2,100 ft in the Los Banos-Kettleman City area as opposed to the other major subsidence areas. The Arvin-Maricopa area consistently shows more coarse-grained material. Thus, the variations in proportions of water released during compaction to total pumpage can generally be explained by differences in the percentage of fine-grained deposits.

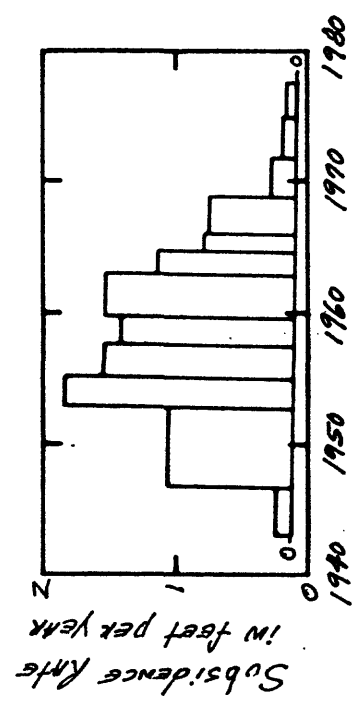
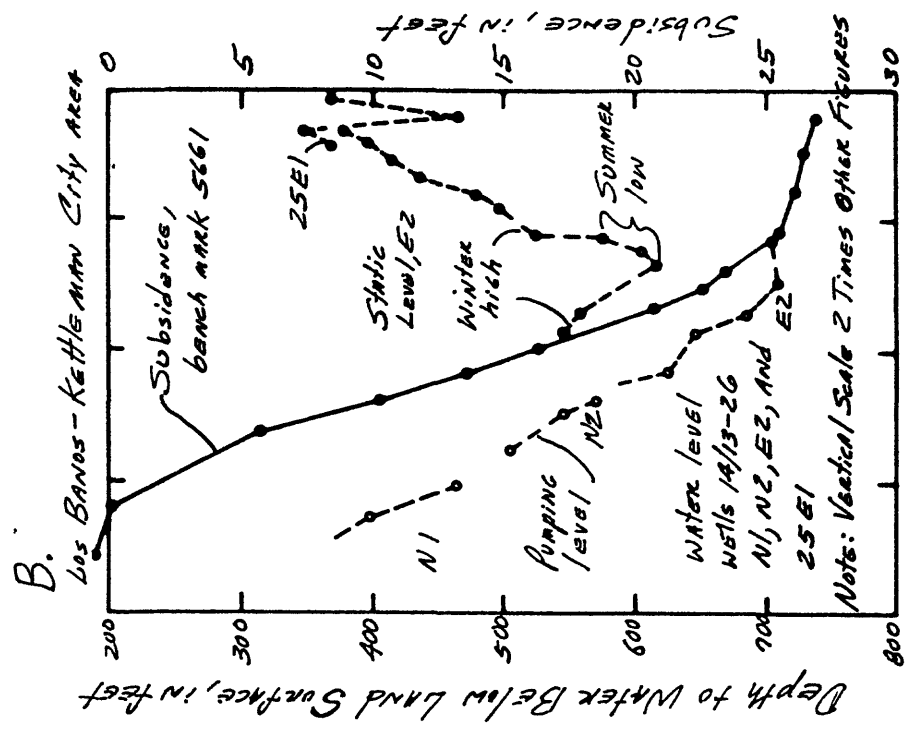
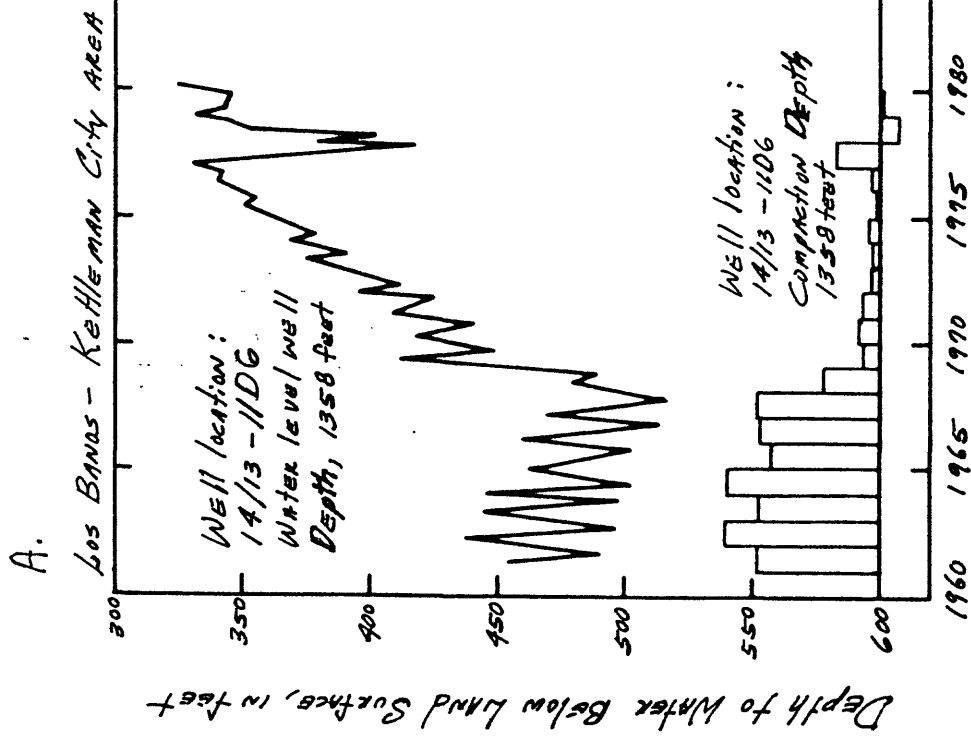


Figure 39---(A-F) Measured water levels and compaction of selected wells in the major subsiding areas of the San Joaquin Valley, 1940-80.

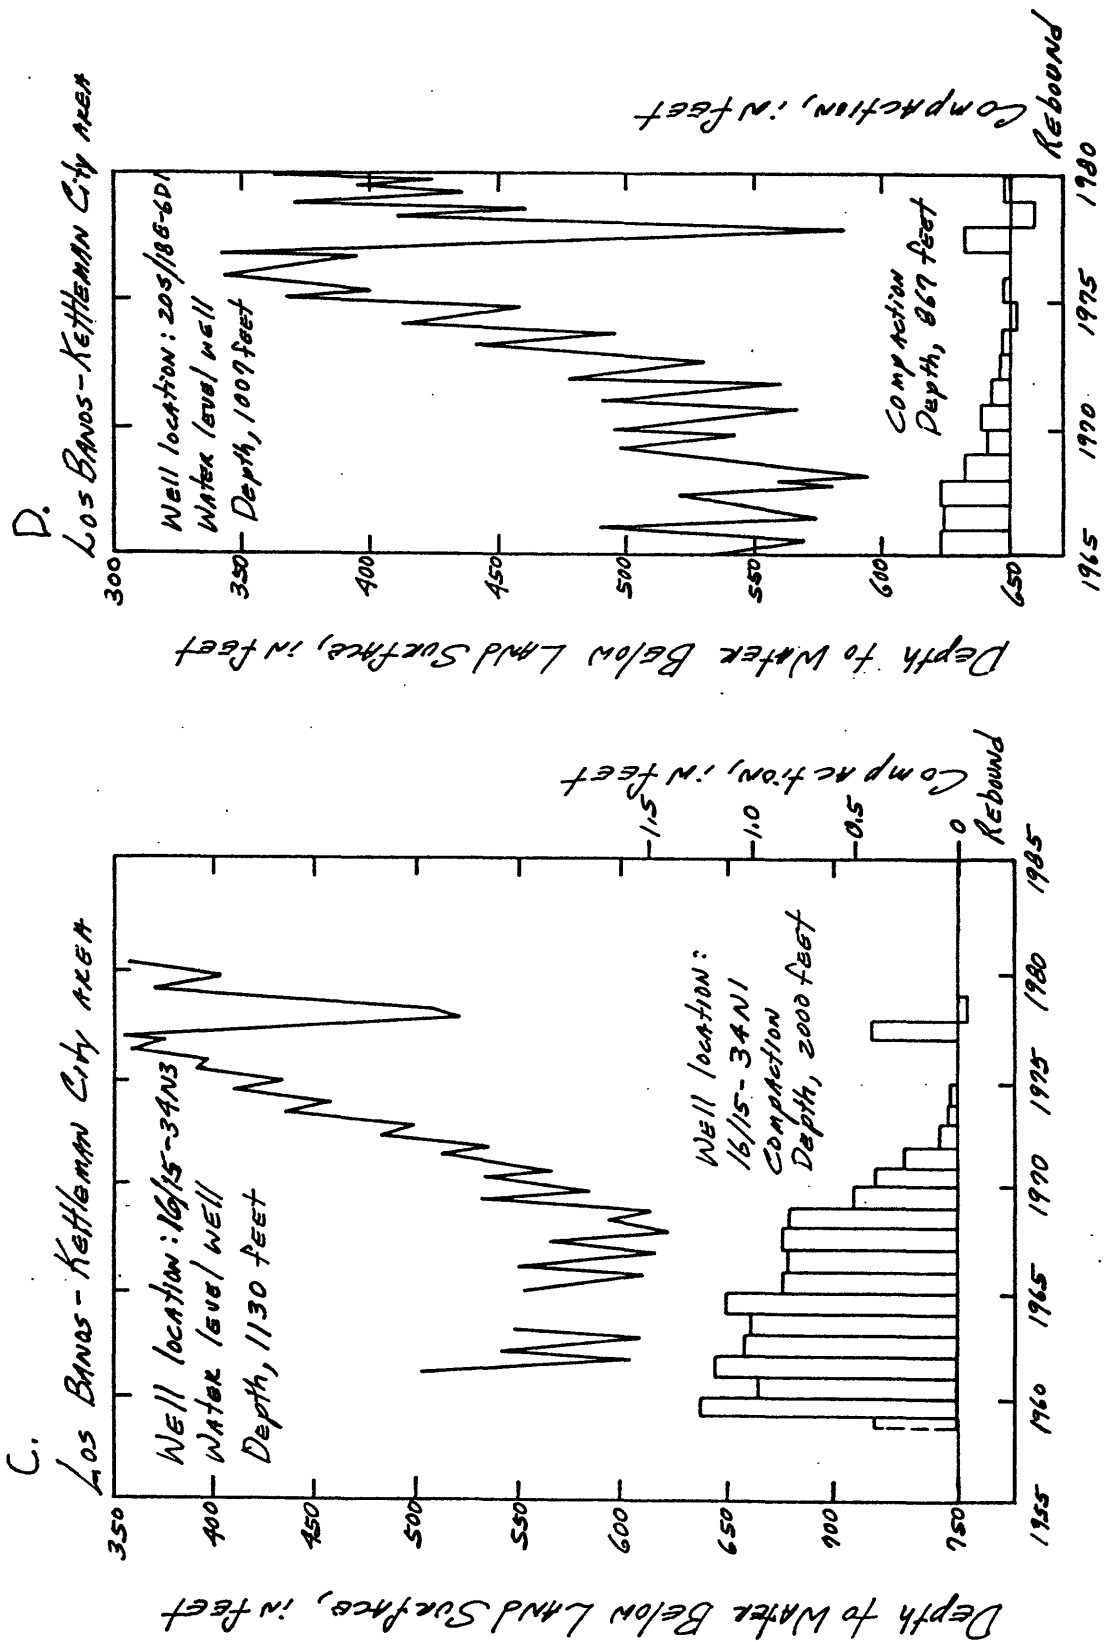


Figure 39---(A-F) Measured water levels and compaction of selected wells in the major subsiding areas of the San Joaquin Valley, 1940-80---Continued.

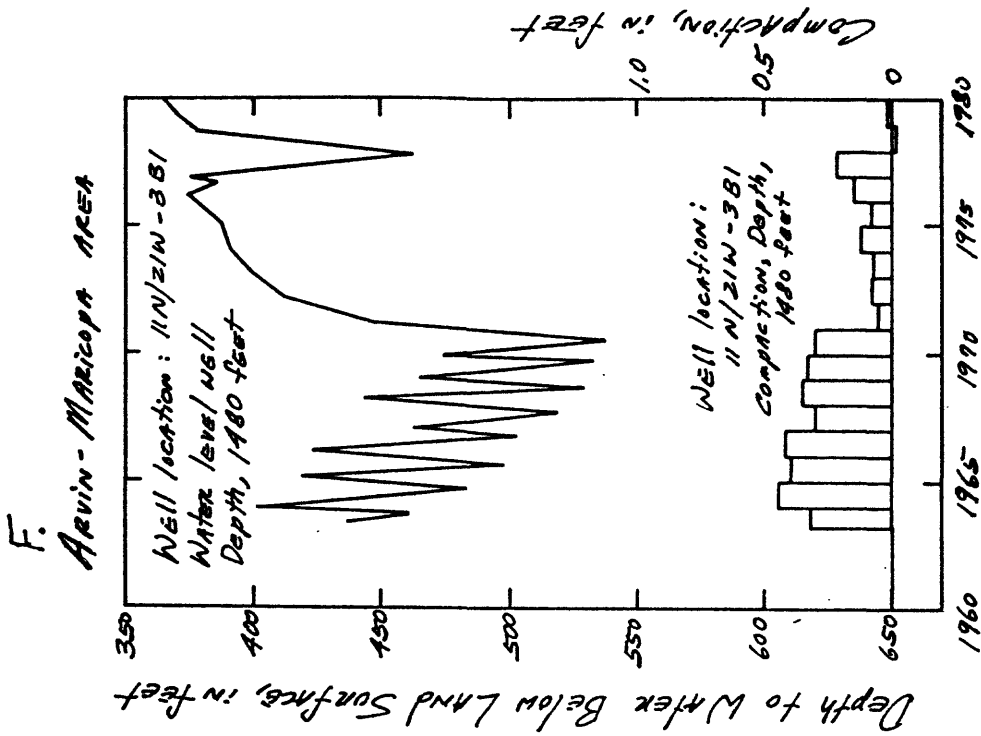
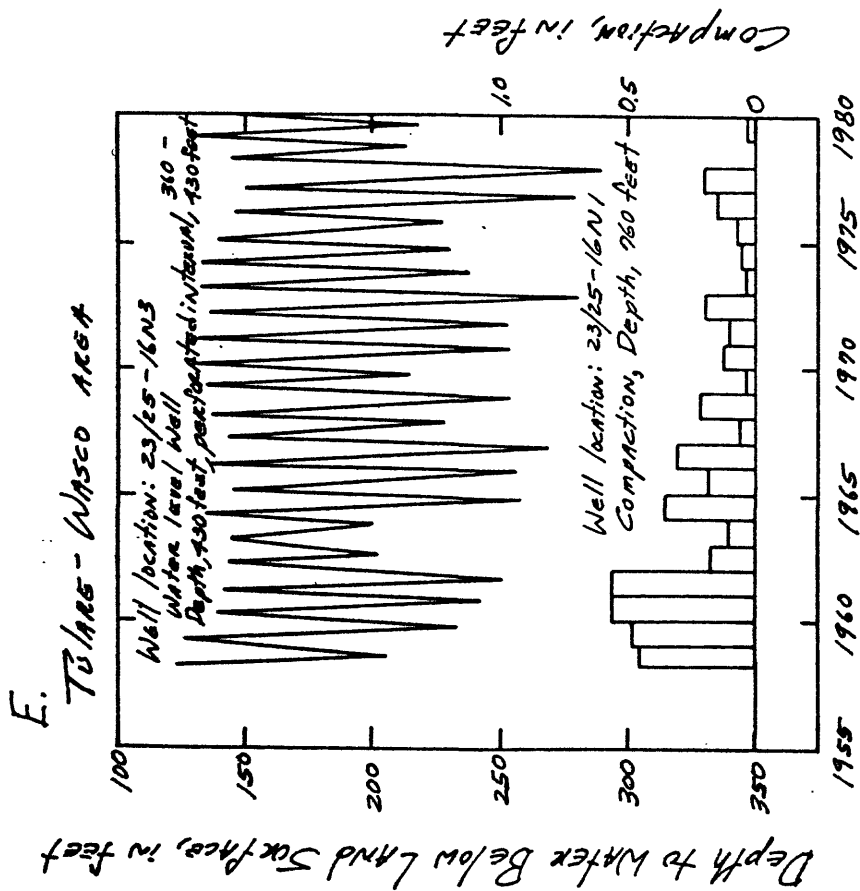


Figure 39--(A-F) Measured water levels and compaction of selected wells in the major subsiding areas of the San Joaquin Valley, 1940-80--Continued.

Meade (1968, p. 4) indicates that montmorillonite was more susceptible to compaction than either illite or kaolinite. In each of the major subsidence areas in the San Joaquin Valley, montmorillonite was determined to be the major clay mineral, and was between 65 to 75 percent of the total clay minerals as shown in the table below (from Meade, 1967, p. C18, C34, and C46).

Clay minerals	Los Banos- Kettleman City (percent)	Tulare- Wasco (percent)	Arvin- Maricopa (percent)
Montmorillonite	70	60	75
Illite	10	20	10
Chlorite	10	0	10
Kaolinite-type mineral	5	10	5
Vermiculite	--	10	--
Mixed-layer montmorillonite- illite and low-grade illite-montmorillonite	5	trace	--

The results are based on 85 samples from four deep test holes in the Los Banos-Kettleman City area; 26 samples from two test holes in the Tulare-Wasco area, and 8 samples from one test hole in the Arvin-Maricopa area.

In contrast, the principal clay mineral in soils and alluvium of the upper San Joaquin River basin was kaolinite and in many of the samples montmorillonite was absent (Meade, 1967, p. C21). Similarly, analyses of core samples from three test holes in the Sacramento Valley (one near Zamora) indicate that kaolinite is also the dominant clay mineral and that no montmorillonite was found in any of the samples to a measureable extent (French and others, 1982, and R. W. Page, U.S. Geological Survey, written commun., 1983).

The montmorillonite in the Los Banos-Kettleman City area is in part derived from transport by the streams that originate in the Diablo Range to the west (Meade, 1967, p. C18); aggregates of montmorillonite clays were found in the fan deposits. Some of the montmorillonite was also formed after the sediments were deposited. The source of montmorillonite in sediments from the Sierra Nevada is uncertain. Meade (1967, p. C18) listed possible sources as the belt of metamorphic rocks in the western foothills of the Sierra Nevada or clays from the Coast Ranges which were mixed with sediments from the Sierra Nevada, or they may have formed by alteration or transformation of other minerals soon after they were deposited in the valley.

Reasons for the absence of montmorillonite in test holes in the Sacramento Valley or from analyses of soils and alluvium in the upper San Joaquin River basin are unknown, because the source areas of the sediments are essentially the same (Coast Ranges and the Sierra Nevada). Although the major subsidence areas in the San Joaquin Valley contain principally montmorillonite, and differences in the amount of compaction compared to pumpage cannot be explained by differences in the types of clay minerals. The absence of montmorillonite in other areas might contribute to a lesser amount of subsidence.

The origin of deposition of the sediments may also contribute to differences in the amounts of water contributed to pumpage from compacting clays in the major subsidence areas. Bull (1975) determined that in the Los Banos-Kettleman City area the highest apparent compressibility of the sediments in the lower-pumped zone coincides with the area of flood-plain deposits, as opposed to areas of alluvial fan deposits, and that the bedding of the deposits is an important factor controlling the magnitude and rate of compaction. In the Arvin-Maricopa area, the proportion of flood plain or lacustrine sediments is small (Lofgren, 1975, pl. 1) and in the Tulare-Wasco area, the proportion of flood-plain or lacustrine sediments increases to the west, where beneath the present day Tulare Lake bed, the sediments are largely lacustrine or flood plain in origin (Lofgren and Klausning, 1969, p. B9). Also, Meade (1967, p. C27) noted that the alluvial fan deposits in the Tulare-Wasco area differed from those in the Los Banos-Kettleman City area because the deposits in the Tulare-Wasco area are generally coarser grained and contain fewer fine clays. Thus, for these reasons, the variations in amount of water contributed to pumpage from compacting clays may, in part, be explained by the depositional environment of the sediments.

Variations in the change in the effective stress among major subsidence areas may also affect the proportion of water contributed to pumpage from compacting clays. The change in effective stress in a confined aquifer system is proportional to the head difference between the hydraulic head in the confined zone and the water table (Lofgren, 1968). Thus, the greatest change in effective stress occurs when the hydraulic head in the lower confining zone is declining and head in the water-table zone is rising or staying nearly constant. However, when both water levels in the confining zone and in the water-table zone are declining, the change in effective stress then would be small. Thus, variations in well construction or in the amount of water pumped that came from the water-table zone in the major subsidence areas may cause variations in the amount of water released due to compaction.

Differences in well construction in the major subsidence areas may in part explain the differences in the amount of water released from compaction to the amount of water pumped. The amount of water pumped per unit area in the Los Banos-Kettleman City area is smaller than it is in the Arvin-Maricopa area (see fig. 22 for pumpage fig. 36A for location) yet the amount of water released from compaction compared to pumpage is high (table 9). Most of the wells in the Los Banos-Kettleman City area are perforated below the shallow water-table zone because of poor quality water which occurs in the water-table zone (Davis and others, 1959, p. 184; Bull and Miller, 1975, p. E25). However, in the Tulare-Wasco and the Arvin-Maricopa areas, water is obtained from a greater interval of the aquifer system (Lofgren and Klausning, 1969, p. 43 and Lofgren, 1975, p. D44), and the perforated intervals commonly extend from the water-table zone into the lower pumped zone.

The effect is threefold: (1) some of the water pumped from the wells in the Tulare-Wasco and the Arvin-Maricopa area probably came from the water-table zone; (2) the water levels in both the water-table zone and the lower pumped zone were lowered, thus reducing the vertical hydraulic gradient and consequently the rate of compaction of the fine-grained sediments, and (3) the wells with perforations open to both water-table zone and lower pumped zone essentially increased the vertical leakance of the fine-grained sediments and hence the amount of circulation between the water-table zone and the lower pumped zone, as described in the section "Changes in vertical flow."

In summary, the variations in the amount of water released during compaction to the amount of water pumped can be explained by several factors. These are: the amount of fine-grained sediments, the types of clay minerals, the environment of deposition of the sediments, and the change in vertical hydraulic gradient that is dependent on the perforated intervals of wells.

Change in Aquifer Storage

Increase in discharge (such as pumpage) or decrease in recharge causes decline in water levels, which indicates release of water from storage in the aquifer system. There are three types of release from aquifer storage: (1) water-table release, where water released from storage is a result of gravity drainage of water stored in pores of the sediments; (2) elastic release, where water released from storage is a result of the expansion of the compressed water and sediments when the hydraulic pressure is reduced; and (3) release from inelastic compaction, which occurs only when applied stress exceeds preconsolidation stress so that the pores of the sediments are rearranged and pore volume is reduced, and the action is irreversible (permanent).

The total estimated decrease in ground-water storage from predevelopment conditions until 1961 was about 47 million acre-ft and through 1977, 60 million acre-ft. The decrease in aquifer storage for the period of 1961 through 1977 was estimated to be about 13 million acre-ft, or about three-quarters of a million acre-ft/yr. This decrease in aquifer storage represents discharge (mainly pumpage) in excess of recharge. Water table and elastic change in storage were calculated as the product of water-level changes, covered area, and the appropriate storage coefficients. This calculation probably is better than the calculation of storage changes from a water-budget approach, because small errors in recharge/discharge can cause large errors in the calculations of aquifer-storage changes. It would be desirable to determine aquifer-storage changes for shorter time periods to see the status of the system before and after the major water-importation development began. However, it is not feasible to determine aquifer-storage changes accurately for any shorter period of time because of the high variability in climatic conditions that overwhelms the short-term effects of development.

The volume of aquifer-storage change is substantial, however, it is still very small compared to the total volume of water in the aquifer storage (table 7). The storage values shown in table 7 were calculated from the product of the specific yield and the thickness determined from the difference between the altitudes of the 1961 water table and altitudes of aquifer materials (1) a depth of 1,000 ft, or (2) the base of continental deposits, or (3) the base of freshwater. There was more than 800 million acre-ft of freshwater in storage in the aquifer system at depths less than 1,000 ft in the Central Valley as of spring 1961.

Water-table zone.--The volumetric change in storage resulting from head changes in the water-table zone was estimated by analyzing the water-level data. The model-simulation results were not used because slight differences in the balance of recharge and discharge causing a small mean difference in observed and simulated water levels would substantially affect the simulated changes in aquifer storage in the water-table zone.

Seasonal high or low water levels for each measured well (usually spring high and autumn low) were averaged for the four geographic areas of the Central Valley (see fig. 25). December to May was used as the spring season and June to November as the autumn season. Depth-to-water was chosen over water-level altitudes because its variation was less dependent on the selection of wells in a given season. Variation in water-level altitude is largely related to variations in land-surface altitude and so it is dependent on the selection of wells measured. Averages were made over large areas to minimize the effect of outliers. The change in depth-to-water was multiplied by the land area where the changes occurred and the average specific yield to obtain the values of changes in aquifer storage in the water-table zone. Using the average specific yield introduces some errors if the specific-yield values are not distributed evenly with respect to the distribution of depth-to-water measurements. There were more than 2,000 water-level measurements for most of the spring seasonal averages. Estimates of the change in aquifer storage in the water-table zone were 34 million acre-ft in the period from predevelopment until 1961, and about 5.5 million acre-ft in 1961-77.

Elastic storage.--Elastic storage is a result of the expansion of water and compression of the sediments because of change in fluid pressure. Change in elastic storage is computed as the product of the elastic specific storage, the thickness of the confined aquifer, the aquifer area, and the decline in head. This was calculated for each of the 484 model blocks that had head declines, using the thickness of layer 3, or the sum of the thicknesses of layers 2 and 3 in the 163 model blocks where many wells penetrated layer 2. The thickness of layer 1 was ignored because the drawdown was much less. The change of elastic storage in layer 4 is obscured by and included with the change in water-table storage. The average estimated elastic specific storage was 3×10^{-6} per ft. The estimates of elastic specific storage were increased by a factor of two in most areas during calibration of the model with six-month time periods. The calibrated elastic specific storage may be too large because agricultural pumpage allocated to the autumn period and recharge allocated to the spring period exaggerated the seasonal change in stress. The average lower-pumped-zone head decline was 80 ft. The amount of water released from elastic storage was about 3 million acre-ft from predevelopment to 1961.

The average head decline in the lower pumped zone from spring 1961 to spring 1976 was small because in many areas water levels declined, however, in other areas, they rose sharply. Therefore, the net change in elastic storage during that period was negligible.

Water released from inelastic compaction.--The process of compaction of fine-grained sediment in the aquifer system caused by head decline has been discussed in the section, "Treatment of subsidence." When the fine-grained sediments in the aquifer are compacted, grains are reoriented and there is a reduction in the pore space within the compacted beds, thus releasing water. The volume of water released by compaction is approximately equal to the volume of land subsidence observed at the surface. Four other processes also cause land subsidence in the Central Valley (Poland and others, 1975). These include the oxidation and compaction of peat soils, compaction of moisture-deficient sediments near land surface when water is first applied, compaction of deep deposits caused by the withdrawal of gas and oil, and tectonic settling. These processes only cause localized subsidence, or else the rate of subsidence is small when compared to subsidence caused by the decline of hydraulic heads within the aquifer system. Thus an estimate of how much water has been released from compaction in the Central Valley was estimated by the volume of land subsidence through 1977 which is 17 million acre-ft.

The loss of pore space is a loss of storage capacity in the aquifer system. Therefore, if water levels recover to their previous highest altitude, the amount of water stored in the aquifer system is not the same as that stored before compaction; it is less. Inelastic compaction means permanent compaction. This type of land subsidence represents a one-time withdrawal of water from storage. However, the storage capacity of the coarse-grained sediments is unchanged.

Table 10 compares the amounts of water released from inelastic compaction to ground-water pumpage and water released from the water-table zone. From 1961 to 1978, about 7.3 million acre-ft of water was released from inelastic compaction or about 4 percent of the total estimated pumpage of 189 million acre-ft for the entire Central Valley (table 10). Almost three-fourths of the water released from inelastic compaction occurred between 1961 and 1970, a period of major subsidence in the Los Banos-Kettleman City area (see table 9).

Most of the water released from the inelastic compaction occurred in the Tulare area (see fig. 1 for location). The amount of water released from the inelastic compaction was about 8 percent of the estimated pumpage (table 10, spring 1961 to spring 1970). The amount of water released from inelastic compaction in the other areas was generally less than 2 percent. Similarly, the amount of water released from the water-table zone also was less than 5 percent of the estimated pumpage (table 10). Thus, it can be concluded that most of the water pumped from 1961-78 came from recharge.

TABLE 10.--Proportion of pumpage from water table and compaction storage

[Pumpage and water released from water table and compaction storage are in millions of acre-ft. Note that the main source of water for pumpage is not storage, but recharge. Location of areas in the Central Valley are shown in Figures 1 and 25]

		Estimated water released from or recharged into aquifer storage ¹			
	Pumpage ²	Water table zone	Contributed to pumpage in percent	Compaction	Contributed to pumpage in percent
<u>Sacramento Valley - area 1</u>					
Spring 1961 to spring 1970	11.3	0.6	5	0.17	2
Spring 1970 to spring 1976	9.0	1.6	18	.12	1
Spring 1976 to autumn 1977	4.7	.6	13	.06	1
Autumn 1977 to spring 1978	(³)	-1.8	--	--	--
Spring 1961 to spring 1978	25.0	1.0	4	0.35	1
<u>Delta Area - area 2</u>					
Spring 1961 to spring 1970	12.3	-0.6	--	(⁴)	--
Spring 1970 to spring 1976	8.9	.05	1	--	--
Spring 1976 to autumn 1977	3.7	1.1	30	--	--
Autumn 1977 to spring 1978	(³)	-1.0	--	--	--
Spring 1961 to spring 1978	24.9	-0.5	--	--	--
<u>San Joaquin Valley - area 3</u>					
Spring 1961 to spring 1970	17.0	-0.02	--	0.48	3
Spring 1970 to spring 1976	12.3	1.3	11	.18	1
Spring 1976 to autumn 1977	5.4	3.9	72	.08	1
Autumn 1977 to spring 1978	(³)	-2.3	--	--	--
Spring 1961 to spring 1978	34.7	2.9	8	0.74	2
<u>Tulare Basin - area 4</u>					
Spring 1961 to spring 1970	58.9	-1.6	--	4.7	8
Spring 1970 to spring 1976	32.1	1.8	6	.89	3
Spring 1976 to autumn 1977	13.6	5.0	37	.54	4
Autumn 1977 to spring 1978	(³)	-2.3	--	--	--
Spring 1961 to spring 1978	104.5	2.0	2	6.1	6

See footnotes at end of table.

TABLE 10.--Proportion of pumpage from water table and compaction storage-Cont.

	Pumpage ²	Estimated water released from storage ¹			
		Water table	Percentage of pumpage	Compaction	Percentage of pumpage
<u>Entire Central Valley - Total</u>					
Spring 1961 to spring 1970	99.5	-1.6	--	5.4	5
Spring 1970 to spring 1976	62.2	4.8	8	1.2	2
Spring 1976 to autumn 1977	27.4	10.6	39	.7	2
Autumn 1977 to spring 1978	(³)	-8.3	--	--	--
Spring 1961 to spring 1978	189.1	5.4	3	7.3	4

¹Negative values indicate an increase in the volume of water stored in the aquifer system. Estimates of the amount of water released from elastic storage in the lower pumped zone is not shown because the values are small (less than 0.05 million acre-ft) for each of the major areas, even though head declines may be large in the lower pumped zone at several locations.

²Pumpage includes estimates of all pumpage from both the water-table zone and the lower pumped zone. Estimates in the Delta area are considerably more than those shown in table 2 of Diamond and Williamson (1983). In this table the estimates represent the entire Delta area.

³Pumpage that occurs during this period is excluded from the study period.

⁴Water released from compaction of sediments (land subsidence) in the Delta area is caused primarily by drain of peat lands and the amount of water released is incorporated into the specific yield of the water table.

MODEL LIMITATIONS

The model represents only the significant features of the aquifer system. The model grossly simplifies the system, both in its temporal and spacial variability, and in its processes. The following discussion is intended to alert readers not to overextend conclusions drawn from results of the simulations and provide suggestions for further study.

Calibration

Calibration of a ground-water-flow model is achieved by adjusting the values of one or more aquifer properties or recharge/discharge such that the computer simulated hydraulic heads match (within the limits of the investigation) the observed heads in the aquifer system. Calibration is a continuous process until a point that the head difference between the simulated and observed values reaches a preset value (a criteria set by an investigator that the model is closely reflecting the real aquifer system). Further improvement is still possible because of the vast number of values that can be adjusted. However, the process is constrained by the amount of data available to determine how closely the observed data can represent the true system. The differences among observed and simulated water-level changes from 1961 through 1975 are summarized in table 11. The following are discussions of these differences:

- (1) The errors in matching observed water-level changes in layer 4, (the water-table zone), are less than those in layer 3 (the lower pumped zone). This is not surprising because the smaller elastic storage coefficient in layer 3 causes its hydraulic head to respond faster to pumpage, hence any head change is magnified.
- (2) Simulated water levels in layers 3 and 4 at the end of the calibration period are too high, by a model-wide average of 2.6 ft in layer 4 and 12.0 ft in layer 3. This probably indicates that the estimates of recharge were too high, or that the estimates of discharge were too low, or both. This systematic error, which is cumulative as indicated by the increasing observed average minus simulated-head difference with time (fig. 40), could have been adjusted by multiplying recharge and discharge values by a factor. This adjustment was not made because there is no hydrologic basis for it and because it would not really add significantly to the overall fit or to the understanding of the system. This error appears to have little relation to whether or not the block was one where the observed water levels rose or declined.
- (3) Figure 41 indicates that 80 percent of the observed minus simulated water-level differences are within +23 to -26 ft for the water table, and +15 to -45 ft for the lower pumped zone.

TABLE 11.--Summary of water-level changes, 1961-75
observed and simulated, in feet

Layer	Number of blocks	Observed decline or rise	Observed water-level change		Observed change - simulated change		Absolute value of observed change - simulated change	
			Mean	Standard deviation	Mean ¹	Standard deviation	Mean	Standard deviation
4	529	both	5.1	20.3	-2.6	21.9	16.5	14.6
4	396	decline	15.0	16.2	-2.3	21.9	17.1	13.8
4	133	rise	-13.0	13.5	-3.1	22.0	15.5	16.0
3	529	both	8.0	48.8	-12.0	27.4	22.0	20.2
3	435	decline	30.3	28.4	-10.8	24.9	20.9	17.4
3	94	rise	-41.6	48.1	-14.5	32.3	24.5	25.4

¹Observed change - simulated change: negative sign means model water level above observed.

Comparison of observed and simulated water levels would not have much meaning unless something is known about the errors in estimating observed average water level for a block at a time period. Because of the size of the blocks chosen and the variability of water levels in space, time, and depth, the accuracy of estimating a block's water level is in the range of approximately 20 ft. In light of this fact, the statistics about the model fit seem reasonable.

The absence of knowledge about water levels is even more pronounced at depth. In addition, two-thirds of the wells in which water levels are monitored, do not have drillers' logs or other construction data available. Only three known piezometers which measure water levels in the deep zone (layer 1) below the lower pumped zone, and these are all in the Sacramento Valley. There are other indications of water level at depth, such as gas well shut-in pressures. A problem in interpreting these gas-well data is that the shut-in pressures were observed only when the wells were drilled, and that the gas pressure changes as the field is developed.

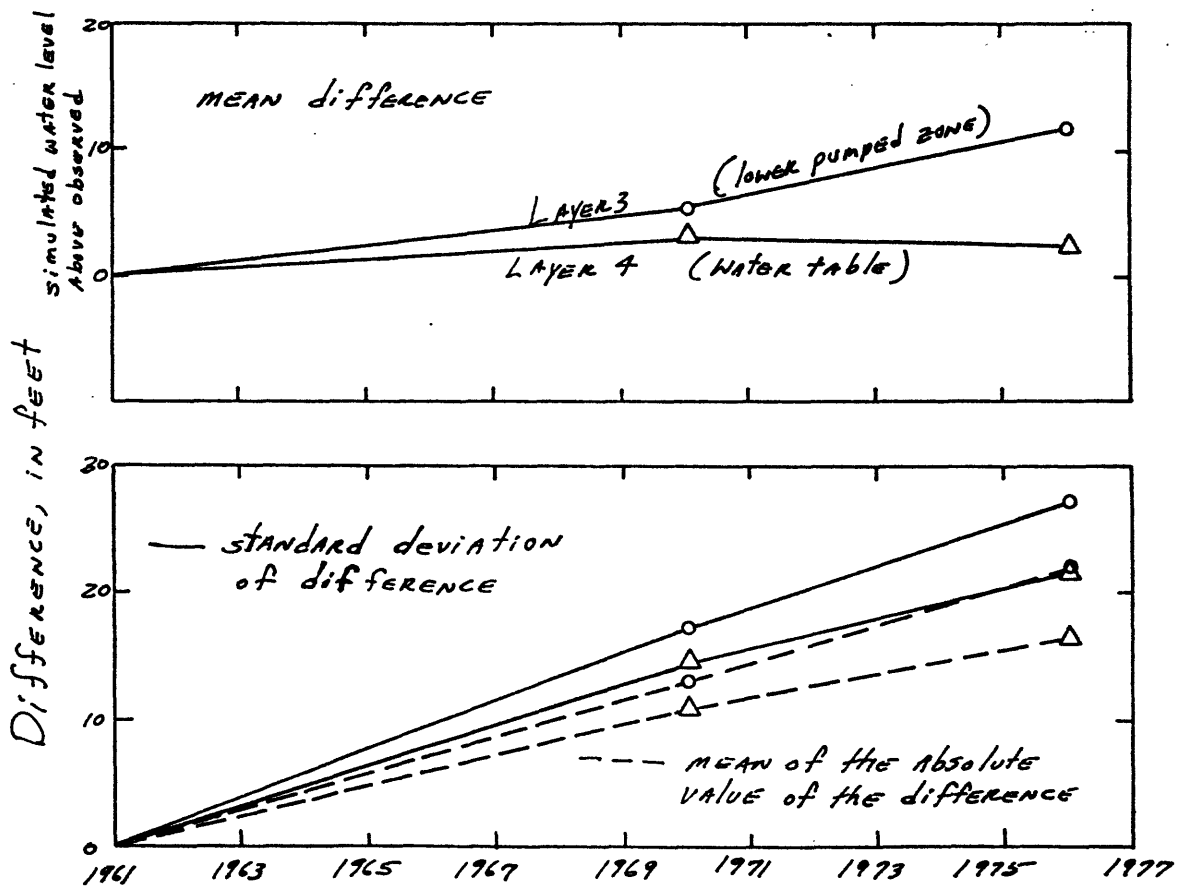


Figure 40--Departure of simulated and observed water levels, 1961-76.

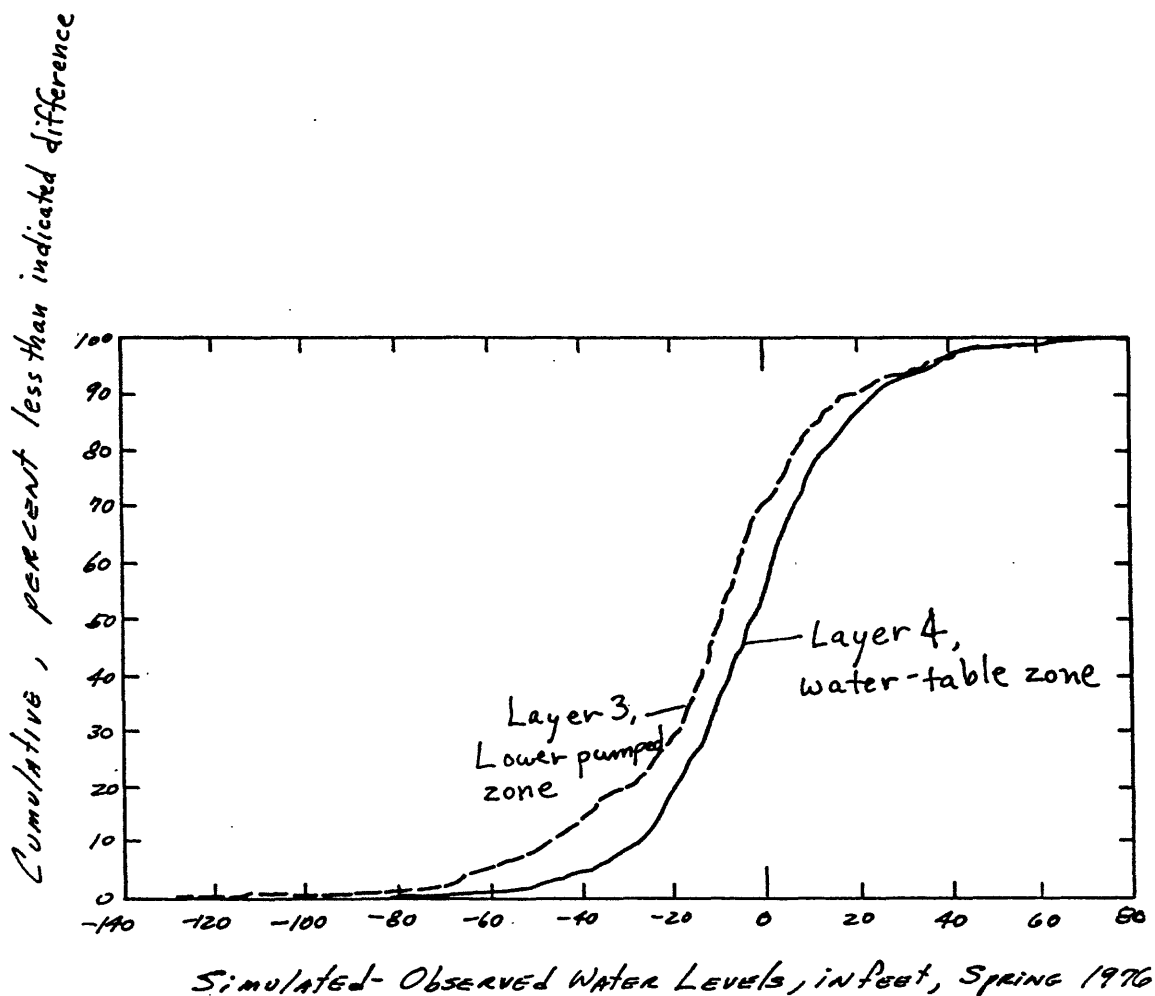


Figure 41--Cumulative distribution of the deviation of simulated from observed levels for the end of the calibration period, spring, 1961 to spring, 1976, for the water table (layer 4) and the lower pumped zone (layer 3).

Variable Density

As previously described in the section, "Extent of Freshwater," saline water is found below the freshwater body throughout much, if not all, of the Central Valley. Salinity of water in these deeper zones may exceed that of seawater (Hill, 1972). Model simulations made during this study did not account for the differences in density of the waters. Because the ratio of seawater density to freshwater density is 41 to 40, therefore, a freshwater head of 41 ft would be equal to a seawater head of 40 ft. Ignoring the density difference introduces an error of about 2.5 percent in the head values from the deepest part of the aquifer system where saline water occurs. The source and movement of this saline water is not known. A preliminary analysis of shut-in pressure data shows that the simplest assumption of a static head distribution in the saline water system is invalid. The rate of movement of the interface between the fresh and saline water has not been analyzed.

Recharge and Discharge Estimates

A significant limitation of the simulation of the aquifer system is the inability to relate variability of recharge and discharge to the water-table fluctuations. Regression analyses using estimated values of recharge from, and discharge to, streams showed a poor correlation with depth-to-water, although this kind of correlation should exist. This poor correlation is probably due to the depth-to-water data which were not always observed near the streams. Recharge and discharge did not need to be head-dependent in the simulation algorithm because there was no need for prediction capabilities in the simulation. The relation was assumed to be inherent in the estimated data collected for the calibration period.

As mentioned earlier, the estimates of net recharge/discharge were adjusted during calibration by adding a factor that was constant in time for each block. The relation of the final calibrated estimates to the initial estimates is shown in figure 42. These values represent 1961-77 averages of net recharge/discharge to and from the water-table zone. As shown by figure 42, there were many values that were changed by a factor several times greater than the initial estimated values. This may not be indicative of a large absolute change, because some values were very small to start with. However, there is a definite need for improvement in data, methods of estimating, and methods of distributing the values geographically.

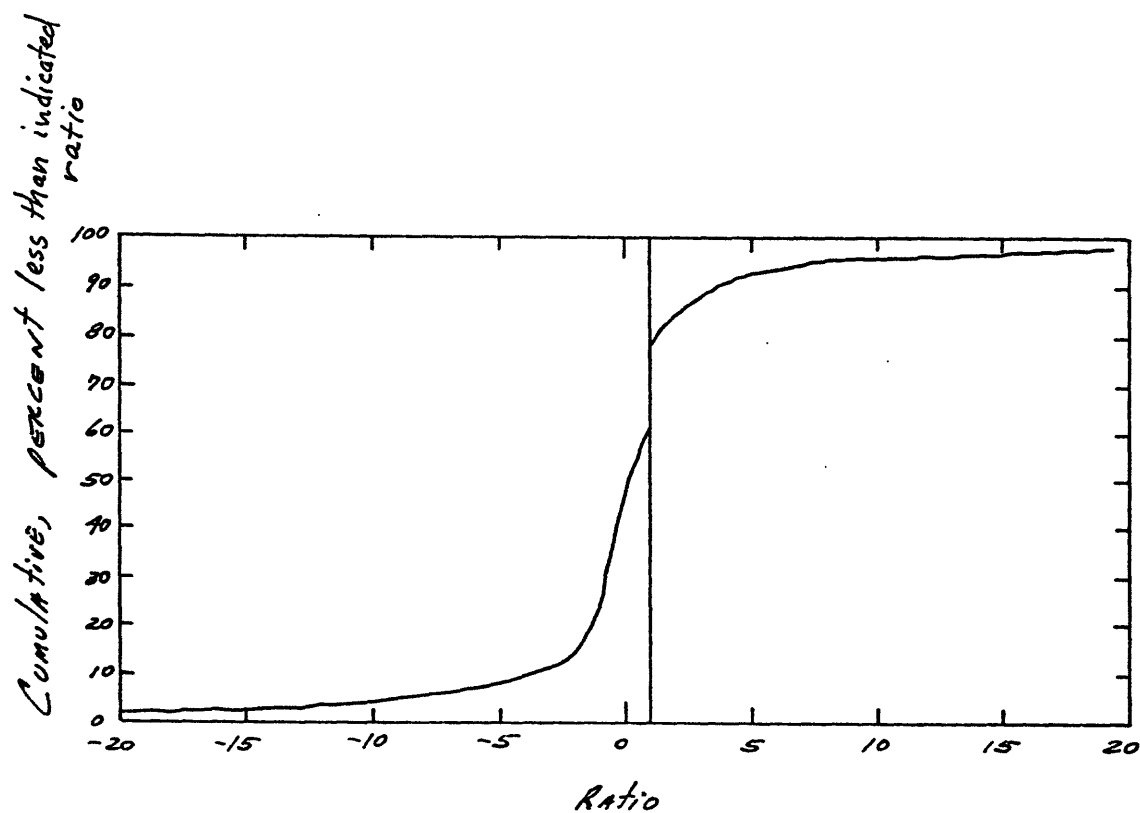


Figure 42--Ratio of calibrated to estimated water table net recharge/discharge to and from the water-table zone.

Negative ratios indicate that the sign changed during calibration.

Modeling Subsidence

The modification of the Trescott (1975) ground-water-flow model which was used to simulate land subsidence, had two major shortcomings. First, the subsidence resulting from head declines was simulated as if it all occurred during the same time step as the head decline, while in the aquifer system there is a significant time lag for all of the subsidence to occur. Therefore, the short-term subsidence simulations are in error, but the magnitude of the error decreases with time. Second, the change from one storage value to another was explicit; it was done at the beginning of each time step based on whether or not the head in the previous time step dropped below the critical head. Thus, small time steps were necessary in the simulations to minimize this error which increased the computer time and cost of each simulation.

The method of simulating subsidence used during this investigation also did not accurately simulate the effects of the 1976-77 drought. Simulated subsidence was less than the observed subsidence because in many model blocks, the head did not decline below the previous lowest head. However, some of the observed compaction, as measured from wells with extensometers, was elastic. This is demonstrated by the negative compaction after the drought, indicating elastic rebound.

Another problem with the technique of simulating water released from compaction was the value used for the starting "critical" head--the head at which inelastic compaction begins. The simulated volume of subsidence, especially for the early years was sensitive to the initial estimate of the critical head. Initial critical-head values were estimated to be 80 ft less than the predevelopment water levels of the early 1900's. The 80-foot difference was based on estimates by Holzer, (1981) at a few locations in California. Model simulations began in 1961 during a period of major subsidence in several parts of the Central Valley, and water levels in several areas were many feet below the initial estimate of the critical heads. Thus, in areas where the water levels in 1961 were below the initial estimate of critical head, the critical head was estimated to be the previous observed low water level, which commonly had occurred during the 1960 irrigation season. Critical-head values were adjusted as much as 15 ft in several model blocks during the calibrations.

SUMMARY AND CONCLUSIONS

Agricultural production of the Central Valley is dependent on the availability of water for irrigation. One-half of this irrigation water is supplied by ground water. Ground-water pumpage in the Central Valley accounts for 74 percent of California's total pumpage and about 20 percent of the Nation's irrigation pumpage. Ground-water pumpage is especially important in dry years because it supplements highly variable surface-water supplies. In 1975, about 57 percent of the total land area (12.8 million acres) in the Central Valley was irrigated. This heavy agricultural development during the past 100 years has had major impacts on the aquifer system. Flow conditions before and during development were simulated using a three-dimensional finite-difference flow model.

The Central Valley is a large structural trough, filled with marine sediments that are overlain by continental deposits. More than half of the thickness of the continental sediments is composed of fine-grained sediments. When development began in the 1880's, flowing wells and marshes were found throughout most of the central part of the Central Valley. Ground-water flow in the continental sediments was simulated on a regional scale. Most previous investigators have conceptualized the northern one-third of the valley, the Sacramento Valley, as one water-table aquifer and the southern two-thirds, the San Joaquin Valley, as a two-aquifer system that is separated by a regional confining clay layer. A somewhat different new conceptual model of the aquifer system is suggested during this investigation by analysis of water-level measurements, lithologic analysis, and the simulated flow conditions. Vertical hydraulic-head differences are present nearly throughout the valley. The new conceptual model assumes that the entire thickness of the continental deposits is one aquifer system that has varying vertical leakance and confinement depending on the proportion of fine-grained sediments.

The average horizontal hydraulic conductivity for the Central Valley is about 6 ft/d and the average thickness of the continental sediments is about 2,400 ft. The average horizontal hydraulic conductivity for the Sacramento Valley is about one-half of the average for the San Joaquin Valley, probably because of the greater amount of volcanic sediment found in the Sacramento Valley. These conditions could be significant in evaluating the potential for land subsidence in the future. Saline water underlies the freshwater throughout most of the Central Valley. The difference in density between fresh and saline waters was not considered in the simulations during this investigation because the aquifer system below the base of freshwater is poorly understood.

During 1961-77, an average of 22 million acre-ft/yr of water was used for irrigation, about one-half of the water was ground water. This level of development has increased evapotranspiration and decreased surface-water outflow by about 9 million acre-ft/yr over its predevelopment value. This is a large value compared to the average annual surface-water inflow to the Central Valley of 31.7 million acre-ft. Precipitation on the valley floor is mostly lost to evapotranspiration. The overall irrigation efficiency (an average of 59 percent) increased during the 1961-77 period, apparently as the result of water conservation. Overall, the postdevelopment recharge and discharge values for the aquifer system were more than forty times greater than the predevelopment values. Postdevelopment average recharge came mostly from irrigation return (81 percent), but also from precipitation (14 percent) and infiltration from streams (5 percent). The actual proportion from streams is probably larger, but owing to the scale of the regional model constructed during this investigation, some stream recharge cancels with local discharge to other nearby stream reaches.

The increases in pumpage because of agricultural development, especially where little surface water was available, has caused water-level declines that exceed 400 ft in places and has contributed to the largest volume of land subsidence in the world due to ground-water withdrawal. From predevelopment until 1977, the volume of water in aquifer storage has declined about 60 million acre-ft, with 40 million acre-ft from the water-table zone, 17 million acre-ft from inelastic compaction of the fine-grained sediments, and 3 million acre-ft from elastic storage. During 1961-77, ground water withdrawn from storage averaged about 800,000 acre-ft/yr. As of 1961, over 800 million acre-ft of freshwater was in aquifer storage in the upper 1,000 ft of sediments. Aquifer storage greatly exceeds surface-water storage, which is about equal to the average annual surface-water inflow (31.7 million acre-ft). This was evident during the 1976-77 drought, when surface storage was depleted and many farmers switched to ground water for irrigation.

The simulation model was calibrated principally according to the hydrologic data observed during the 1961-75 period because little predevelopment data are available. The simulated water levels were found to be most sensitive to the leakance value. Of the five types of causes that resulted in land subsidence occurring in the valley, the most significant cause is that resulting from withdrawal of ground water. Subsidence of this type was incorporated into the flow model. The computer program was modified to include both an elastic and an inelastic storage coefficient, using the inelastic storage coefficient values only if the aquifer head for the previous time step was lower than it had been before. The simulated volume of land subsidence was within six percent of the total estimated volume. However, the time lag associated with this type of subsidence was not adequately simulated, nor was the subsidence during periods when the aquifer head was not lower than its previous lowest level, as occurred at times during the 1976-77 drought. At the end of the 1961-75 calibration period, simulated water-level changes averaged 2.6 and 12 ft above observed water-level changes for the water-table zone and lower pumped zone; the standard deviation was 22 and 27 ft, respectively, which is nearly within the error of the estimated average water-level changes observed in a model block.

The simulations showed that vertical leakance greatly increased from the predevelopment values as a result of water flowing through some of the more than 100,000 irrigation well casings which are open to different aquifer layers. This may affect the ground-water quality by allowing poor quality water in one of the aquifer layers to mix with good quality water in another aquifer layer. The simulations also showed that on a regional scale there is more vertical flow than horizontal, despite the fact that the vertical velocities are much lower. This is due to the larger area of the aquifer in a horizontal plane than it is in a vertical plane. These factors should be considered in plans for improving and protecting ground-water quality in the valley.

During 1961-77, only seven percent of the annual pumpage (11 million acre-ft) was being taken from aquifer storage. The remainder was being supplied by recharge, mostly from irrigation return flow. Only about seven percent of the total freshwater in aquifer storage in the upper 1,000 ft of the aquifer system had been removed as of 1977. In addition, as water levels decline, more recharge is captured and less discharge to surface waterbodies would occur. Therefore, at the present level of development, the withdrawal from aquifer storage will eventually diminish and the aquifer system will reach a new equilibrium condition. However, if ground-water development continues at an increasing rate, then the aquifer system will take a longer time to reach a new equilibrium. This is one of the reasons that a goal of the U.S. Bureau of Reclamation's Central Valley Project to eliminate depletion in aquifer storage has not been reached. Although the Bureau of Reclamation imported surface-water into the Central Valley to decrease ground-water pumpage in some areas, ground-water development was allowed to be continued in other areas.

There are other impacts from water-level declines which need to be considered. Land subsidence continues to be a problem in some areas of the Sacramento and San Joaquin Valleys, though the areas of greater subsidence have been controlled by importing surface water and decreasing in ground-water pumpage. In those areas, the recovery of lower pumped zone water levels to nearly their predevelopment altitude may mislead to an over appraisal of the available ground-water resources in those areas. If pumpage increases again, water levels will drop rapidly towards the previous lows, as happened in the Westside area during the 1976-77 drought. This is because loss of the aquifer storage capacity resulted from the compaction of sediments. Water-level declines also cause increased energy consumption and associated costs. The effect (if any) on the movement of the deeper saline waters in response to water-level declines is unknown and was not evaluated during this study.

The regional aquifer-system analysis during this investigation indicates that, although there are areas of severe localized aquifer depletion occurring in the Central Valley, the ground-water resources of the entire valley are sufficient to supply the existing needs, assuming the development is being carefully planned and managed. To assure adequate ground-water resources in the future will require a cooperative effort by local water districts, State, and Federal agencies to monitor the ground-water conditions in the Central Valley.

SELECTED REFERENCES

- Bennett, G. D., 1976, Introduction to ground-water hydraulics: U.S. Geological Survey Techniques of Water-Resources Investigations, Book 3, Chapter B2, 172 p.
- Bennett, G. D., Kontis, A. L., and Larson, S. P., 1982, Representation of multi-aquifer well effects in three-dimensional ground-water flow simulation: Ground Water, v. 20, no. 3, p. 334-341.
- Berkstresser, C. F., 1973, Base of fresh ground water, approximately 3000 micromhos, in the Sacramento Valley and the Sacramento-San Joaquin Delta, California: U.S. Geological Survey Water-Resources Investigations 40-73, map.
- Bertoldi, G. L., 1979, A plan to study the aquifer system of the Central Valley of California: U.S. Geological Survey Open-File Report 79-1480, 48 p.
- Bloyd, R. M., Jr., 1978, Ground-water conditions in the Sacramento Valley, California, 1912, 1961, and 1971, in Evaluation of ground-water resources--Sacramento Valley: California Department of Water Resources Bulletin 118-6, p. 97-136.
- Bryan, Kirk, 1923, Geology and ground-water resources, Sacramento Valley, California: U.S. Geological Survey Water-Supply Paper 495, 285 p.
- Bull, W. B., 1964, Alluvial fans and near surface subsidence, western Fresno County, California: U.S. Geological Survey Professional Paper 437-A, 71 p.
- 1975, Land subsidence due to ground-water withdrawal in the Los Banos-Kettleman City area, California. Part 2, Subsidence and compaction of deposits: U.S. Geological Survey Professional Paper 437-F, 90 p.
- Bull, W. B., and Miller, R. E., 1975, Land subsidence due to ground-water withdrawal in the Los Banos-Kettleman City area, California. Part 1, Changes in the hydrologic environment conducive to subsidence: U.S. Geological Survey Professional Paper 437-E, 71 p.
- California Department of Water Resources, 1966, Livermore and Sunol Valleys ground-water resources: California Department of Water Resources Bulletin 118-2, 153 p.
- 1974a, Evaluation of ground-water resources: Sacramento County: California Department of Water Resources Bulletin 118-3, 142 p.
- 1974b, The California water plan, outlook in 1974: California Department of Water Resources Bulletin 160-74, 186 p.
- 1975, Vegetative use of water in California, 1974: California Department of Water Resources Bulletin 113-3, 114 p.
- 1977a, Artificial recharge of ground water in the San Joaquin-Central Coastal area: California Department of Water Resources, San Joaquin District Report, 63 p.
- 1977b, Kern County ground-water model: California Department of Water Resources, San Joaquin District Report, 138 p.
- 1977c, Water use by manufacturing industries in California--1970: California Department of Water Resources Bulletin 124-2, 113 p.
- 1978a, Evaluation of ground-water resources--Sacramento Valley: California Department of Water Resources Bulletin 118-6, 136 p.
- 1980, Ground-water basins in California: California Department of Water Resources Bulletin 118-80, p. 34-44.
- 1982, The hydrologic-economic model of the San Joaquin Valley: California Department of Water Resources Bulletin 214, 177 p.

- Cady, J. W., 1975, Magnetic and gravity anomalies in the Great Valley and western Sierra Nevada metamorphic belt, California: Geological Society of America, Special Paper 168, 56 p.
- Corapcioglu, M. Y., and Brutsaert, Wilfried, 1977, Viscoelastic aquifer model applied to subsidence due to pumping: Water Resources Research, vol. 13, no. 8, p. 597-604.
- Croft, M. G., 1968, Geology and radiocarbon ages of late Pleistocene lacustrine clay deposits, southern part of the San Joaquin Valley of California, in Geological Survey Research 1968: U.S. Geological Survey Professional Paper 600-B, p. B151-B156.
- 1972, Subsurface geology of the late Tertiary and Quaternary water-bearing deposits of the southern part of the San Joaquin Valley, California: U.S. Geological Survey Water-Supply Paper 1999-H, 29 p., 6 plates.
- Davis, G. H., Green, J. H., Olmsted, F. H., and Brown, D. W., 1959, Ground-water conditions and storage capacity in the San Joaquin Valley, California: U.S. Geological Survey Water-Supply Paper 1469, 287 p., 29 plates.
- Davis, G. H., Lofgren, B. E., and Mack, Seymour, 1964, Use of ground-water reservoirs for storage of surface water in the San Joaquin Valley, California: U.S. Geological Survey Water-Supply Paper 1618, 125 p.
- de Laveaga, Miguel, 1952, Oil fields of central San Joaquin Valley province: in AAPG-SEPM-SEG Guidebook field trip routes, Joint Annual Meeting, American Association of Petroleum Geologists, Society of Economic Paleontologists and Mineralogists, and Society of Exploration Geophysicists, p. 99-103.
- Diamond, J. D., and Williamson, A. K., 1983, A summary of ground-water pumpage in the Central Valley of California, 1961-77: U.S. Geological Survey Water-Resources Investigation 83-4037, 70 p.
- French, J. J., Page, R. W., and Bertoldi, G. L., 1982, Data for ground-water test hole near Zamora, Central Valley Aquifer Project, California: U.S. Geological Survey Open-File Report 82-510, 72 p.
- 1983, Data for ground-water test hole near Nicolaus, Central Valley Aquifer Project, California: U.S. Geological Survey Open-File Report 83-273, 60 p.
- French, J. J., Page, R. W., Bertoldi, G. L., and Fogelman, R. P., 1983, Data for ground-water test hole near Butte City, Central Valley Aquifer Project, California: U.S. Geological Survey Open-File Report 83-697, 54 p.
- Grunsky, C. E., 1898a, Irrigation near Bakersfield, California: U.S. Geological Survey Water-Supply Paper 17, 96 p.
- 1898b, Irrigation near Fresno, California: U.S. Geological Survey Water-Supply Paper 18, 94 p.
- 1899, Irrigation near Merced, California: U.S. Geological Survey Water-Supply Paper 19, 59 p.
- Hall, W. H., 1886, Physical data and statistics of California: State Engineering Department of California, 396 p.
- 1889, Irrigation in California: National Geographic Magazine, v. 1., no. 4, p. 281.
- Harding, S. T., 1927, Ground-water resources of the southern San Joaquin Valley: California Division of Engineering and Water Rights Bulletin 11, 146 p.
- Helm, D. C., 1975, One-dimensional simulation of aquifer system compaction near Pixley, California; 1, Constant Parameters: Water Resources Research, v. 11, no. 3, p. 465-478.
- 1976, One-dimensional simulation of aquifer system compaction near Pixley, California; 2, Stress-dependent parameters: Water Resources Research, v. 12, no. 3, p. 375-391.

- Helm, D. C., 1977, Estimating parameters of compacting fine-grained interbeds within a confined aquifer system by one-dimensional simulation of field observations, in Proceedings of the Second International Symposium of Land Subsidence, Anaheim, California: International Association of Hydrological Sciences Publication 121, p. 145-156.
- 1978, Field verification of a one-dimensional mathematical model for transient compaction and expansion of a confined aquifer system, in Proceedings of the specialty conference on verification of mathematical and physical models in hydraulic engineering: American Society of Civil Engineers, College Park, Maryland, p. 189-196.
- 1982, Conceptual aspects of subsidence due to fluid withdrawal, in Geological Society of America Special Paper No. 189, Part 1, no. 6, p. 103-142.
- Hill, F. L., 1972, Oil and gas field waters in the southeast San Joaquin Valley, Kern County, California, in State Division of Oil and Gas Technical Papers: v. 58, no. 1, p. 31-44.
- Holzer, T. L., 1981, Preconsolidation stress of aquifer systems in areas of induced land subsidence: Water Resources Research, v. 17, no. 3, p. 698-704.
- Ireland, R. L., Poland, J. F., and Riley, F. S., 1984, Land subsidence in the San Joaquin Valley through 1980: U.S. Geological Survey Professional Paper 497-I, 93 p.
- Jacob, C. E., 1940, On the flow of water in an elastic artesian aquifer: American Geophysical Union Transactions, part 2, p. 574-586.
- Johnson, A. I., Moston, R. P., and Morris, D. A., 1968, Physical and hydrologic properties of water-bearing deposits in subsiding areas in central California: U.S. Geological Survey Professional Paper 497-A, 71 p.
- Kahrl, W. L., 1978, The California water atlas: California Governor's office of Planning and Research and California Department of Water Resources, 113 p.
- Lofgren, B. E., 1968, Analysis of stresses causing land subsidence, in Geological Survey Research 1968: U.S. Geological Survey Professional Paper 600-B, p. B219-B225.
- 1969, Land subsidence due to the application of water; in Varnes, D. J., and Kiersch, George, eds., Reviews in Engineering Geology, Vol. II: Boulder, Colo., Geological Society of America, p. 271-303.
- 1975, Land subsidence due to ground-water withdrawal, Arvin-Maricopa area, California: U.S. Geological Survey Professional Paper 437-D, 55 p.
- Lofgren, B. E., and Ireland, R. L., 1973, Preliminary investigation of land subsidence in the Sacramento Valley, California: U.S. Geological Survey Open-File Report, 40 p.
- Lofgren, B. E., and Klausning, R. L., 1969, Land subsidence due to ground-water withdrawal, Tulare-Wasco area, California: U.S. Geological Survey Professional Paper 437-B, 103 p.
- Lohman, S. W., 1972, Ground-water hydraulics: U.S. Geological Survey Professional Paper 708, 70 p.
- Londquist, C. J., 1981, Digital model of the unconsolidated aquifer system in the Modesto area, Stanislaus and San Joaquin Counties, California: U.S. Geological Survey Water-Resources Investigations 81-12, 36 p.
- McClelland, E. J., 1962, Aquifer test compilation for the San Joaquin Valley, California: U.S. Geological Survey Open-File Report, 40 p. (revised 1966).
- Manning, J. C., 1967, Report on ground-water hydrology in the southern San Joaquin Valley; American Water Works Association Journal, v. 59, no. 12, p. 1513-1526.
- Meade, R. H., 1967, Petrology of sediments underlying areas of land subsidence in central California: U.S. Geological Survey Professional Paper 497-C, 83 p.

- Meade, R. H., 1968, Compaction of sediments underlying areas of land subsidence in central California: U.S. Geological Survey Professional Paper 497-D, 39 p.
- Mendenhall, W. C., 1908, Ground waters of the San Joaquin Valley, California: U.S. Geological Survey Water-Supply Paper 222, 53 p.
- Mendenhall, W. C., Dole, R. B., and Stabler, Herman, 1916, Ground water in the San Joaquin Valley, California: U.S. Geological Survey Water-Supply Paper 398.
- Meyer, W. R., and Carr, J. E., 1979, A digital model for simulation of ground-water hydrology in the Houston area, Texas: Texas Department of Water Resources Report LP-103, 131 p.
- Mitten, H. T., 1983, Ground-water model of the Fresno area, California--A progress report: U.S. Geological Survey Water-Resources Investigations Report 83-4246, 15 p.
- Morris, D. A., and Johnson, A. I., 1967, Summary of hydrologic and physical properties of rock and soil materials, as analyzed by the Hydrologic Laboratory of the U.S. Geological Survey, 1948-1960: U.S. Geological Survey Water-Supply Paper 1839-D, 42 p.
- Mullen, J. R., and Nady, Paul, 1985, Major stream budgets in the Central Valley of California: U.S. Geological Survey Open-File Report 85-401, 87 p.
- Murray, C. R., and Reeves, E. B., 1977, Estimated use of water in the United States in 1975: U.S. Geological Survey Circular 765, 39 p.
- Nady, Paul, and Larragueta, L. L., 1983a, Development of irrigation in the Central Valley of California: U.S. Geological Survey Hydrologic Investigations Atlas HA-649.
- 1983, Estimated average annual streamflow into the Central Valley of California: U.S. Geological Survey Hydrologic Investigations Atlas HA-657.
- Newmarch, George, 1981, Subsidence of organic soils: California Geology, v. 34, no. 7, p. 135-141.
- Olmsted, F. H., and Davis, G. H., 1961, Geologic features and ground-water storage capacity of the Sacramento Valley, California: U.S. Geological Survey Water-Supply Paper 1497, 241 p., 5 plates.
- Page, R. W., 1973, Base of fresh ground water (approximately 3,000 micromhos), San Joaquin Valley, California: U.S. Geological Survey Hydrologic Investigations Atlas HA-489.
- 1974, Base and thickness of the post-Eocene continental deposits in the Sacramento Valley, California: U.S. Geological Survey Water-Resources Investigations 45-73, 16 p.
- 1977, Guide for data collection to calibrate a predictive digital ground-water model of the unconfined aquifer in and near the city of Modesto, California: U.S. Geological Survey Water-Resources Investigations 76-41, 46 p.
- 1981, Data on depths to the upper Mya zone of the San Joaquin Formation in the Kettleman City area, San Joaquin Valley, California: U.S. Geological Survey Open-File Report 81-699, 12 p.
- 1982, Texture maps, a guide to deep ground-water basins in the Central Valley, California: in Proceedings of the American Society of Civil Engineers, Water Forum '81, August 10-14, 1981, San Francisco, 10 p.
- 1983, Geology of the Tulare Formation and other continental deposits, Kettleman City area, San Joaquin Valley, California, with a section on ground-water management considerations and use of texture maps: U.S. Geological Survey Water-Resources Investigations Report 83-4000, 24 p.

- Page, R. W., In press, Geology of the Central Valley fresh ground-water basin, with a section on texture of the sediments: U.S. Geological Survey Professional Paper 1401-C, 137 p.
- Page, R. W., and Bertoldi, G. L., 1983, A Pleistocene diatomaceous clay and a pumiceous ash, Sacramento Valley, California: California Geology, v. 36, no. 1, p. 14-20.
- Poland, J. F., 1961, The coefficient of storage in a region of major subsidence caused by compaction of an aquifer system, in Geological Survey Research 1961: U.S. Geological Survey Professional Paper 424-B, p. B52-B54.
- Poland, J. F., and Davis, G. H., 1969, Land subsidence due to withdrawals of fluids, in Varnes, D. J., and Kiersch, George, eds., Reviews in Engineering Geology, v. 2: Boulder, Colo., Geological Society of America, p. 187-269.
- Poland, J. F., and Evenson, R. E., 1966, Hydrogeology and land subsidence, Great Central Valley, California, in Bailey, E. H., ed., Geology of northern California: California Division of Mines and Geology Bulletin 190, p. 239-247.
- Poland, J. F., Lofgren, B. E., Ireland, R. L., and Pugh, R. G., 1975, Land subsidence in the San Joaquin Valley, California, as of 1972: U.S. Geological Survey Professional Paper 437-H, 78 p.
- Poland, J. F., Lofgren, B. E., and Riley, F. S., 1972, Glossary of selected terms useful in studies of the mechanics of aquifer systems and land subsidence due to fluid withdrawal: U.S. Geological Survey Water-Supply Paper 2025, 9 p.
- Prickett, T. A., 1967, Designing pumped well characteristics into electrical analog models: Ground Water, v. 5, no. 4, pp. 38-46.
- Rantz, S. E., 1969, Mean annual precipitation in the California Region: U.S. Geological Survey Open-File Map, scale 1:1,000,000.
- Remson, Irwin, Hornberger, G. M., and Molz, F. J., 1971, Numerical methods in subsurface hydrology: New York, John Wiley and Sons, 389 p.
- Repenning, C. A., 1960, Geologic summary of the Central Valley of California with reference to disposal of liquid radioactive waste: U.S. Geological Survey Open-File Report 61-127, 69 p.
- Riley, F. S., 1969, Analysis of borehole extensometer data from central California, in Tison, L. J., ed., Land subsidence, v. 2: International Association of Scientific Hydrology Publications 89, 423-431.
- Riley, F. S., and McClelland, E. J., 1972, Application of the modified theory of leaky aquifers to a compressible multiple-aquifer system: U.S. Geological Survey Open-File Report, 96 p.
- Simpson, T. R., 1949, Ground water and water rights in California: Unpublished transcript of presentation January 11, 1949 at the Annual Pump Test Conference of Pacific Gas and Electric Company at Stockton, Calif.
- Stewart, J. I., 1975, Irrigation in California: Sacramento, Calif., California State Water Resources Control Board, 45 p.
- Suppe, John, 1978, Cross section of southern part of northern Coast Ranges and Sacramento Valley, California: Geological Society of America, MC-28B, 8 p.
- Theis, C. V., 1938, The significance and nature of the cone of depression in ground-water bodies: Economic Geology, v. 33, no. 8, p. 899-902.
- Thomas, H. E., and Phoenix, D. A., 1976, Summary appraisal of the Nation's ground-water resources--California region: U.S. Geological Survey Professional Paper 813-E, 51 p.
- Torak, L. J., 1982, Modifications and corrections to the finite-difference model for simulation of three-dimensional ground-water flow: U.S. Geological Survey Water-Resources Investigations Report 82-4025, 30 p.

- Trescott, P. C., 1975, Documentation of finite-difference model for simulation of three-dimensional ground-water flow: U.S. Geological Survey Open-File Report 75-438, 101 p.
- Trescott, P. C., and Larson, S. P., 1976, Supplement to Open-File Report 75-438, Documentation of finite-difference model for simulation of three-dimensional ground-water flow: U.S. Geological Survey Open-File Report 76-591, 21 p.
- U.S. Bureau of Reclamation, 1977, Intermittent surface-water supplies for the artificial recharge of ground-water reservoirs in the Central Valley Project: U.S. Bureau of Reclamation office report, 29 p.
- U.S. Department of Commerce, 1978, 1974 census of agriculture: Bureau of the Census, Special Reports, v. 4, Part 2, Ranking Counties and States, 99 p.
- Vaughn, F. W., 1943, Geophysical studies in California: California Division of Mines Bulletin 118, p. 67-70.
- Waananen, A. O., 1966, Water resources development, in Mineral and water resources of California, Part 2. Water resources appraisal: Report of the U.S. Geological Survey to the Committee on Interior and Insular Affairs, United States Senate, 89th Congress, second session, p. 515-598.
- Weir, W. W., 1950, Subsidence of peat lands of the Sacramento-San Joaquin Delta, California: *Hilgardia*, v. 20, no. 3, p. 37-56.
- Williamson, A. K., 1982, Evapotranspiration of applied water, Central Valley, California, 1957-78: U.S. Geological Survey Water-Resources Investigations 81-45, 56 p.
- Wilson, L. G., DeCook, K. J., and Neuman, S. P., 1980, Regional recharge research for southwest alluvial basins: Tucson, University of Arizona, 393 p.
- Wood, P. R., and Dale, R. H., 1964, Geology and ground-water features of the Edison-Maricopa area, Kern County, California: U.S. Geological Survey Water-Supply Paper 1656, 108 p.

APPENDIXES A AND B

Recharge and discharge values used in simulations (Appendix A) and aquifer
properties used in simulations (Appendix B)

APPENDIX A.--Recharge and Discharge Values used in Simulations

Recharge and discharge data consisting of 10 variables for 529 nodes for a period of 17 years were stored on a machine-readable magnetic tape in a standard sequential format. The volume of data is too large to be printed here. Most of the data are not available elsewhere, (at least in machine-readable form) and may be useful to other investigators.

The tape-file format (on standard labeled tape) is as follows: File number is 1, data set name is APENDX.A.RECHARGE; tape is a high density (6250 BPI) tape with EBCDIC coding; record format is fixed blocked; logical record length is 80; block size is 4,000, number of blocks is approximately 223; and number of records is 11,107.

Each record contains 10 data fields, each field is of length 8 in G8.0 format. The first 3 data fields are: (1) year as number past 1900 (for example, "77" is 1977); (2) column in model grid; and (3) row in model grid. The other 7 data fields, all in 1,000 acre-ft/year are: (1) excess precipitation, (2) ungaged runoff from small streams, (3) river losses (+ or positive) and gains (- or negative), (4) evapotranspiration of applied irrigation water, (5) surface water diverted to irrigation districts, (6) agricultural pumpage, and (7) municipal pumpage.

A duplicate of the tape (tape no. 112312) may be obtained from:

U.S. Geological Survey, WRD
ATTN: Computer Specialist
Federal Building, Rm. W-2235
2800 Cottage Way
Sacramento, CA 95825

APPENDIX B - Aquifer Properties Used in Simulations
 [Layer 1 is deepest zone of aquifer; layer 4 is water-table zone]

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK) ($\times 10^{-6} d^{-1}$)						Insula- tic storage co- effi- cient	1961 criti- cal load (ft)
			Layer				Layer				Layer				Predevelopment			Post- development				
			1	2	3	4	1	2	3	4	1	2	3	4	1-2	2-3	3-4	Between layers 2-3	Between layers 3-4	Between layers 2-3	Between layers 2-3	
4	3	0.09	6.5	6.6	6.5	6.5	1,350	150	250	100	57	58	56	61	1.9	7.2	8.1	140	8.1	0.0370	340	
4	4	0.04	1.3	1.3	1.3	1.4	1,020	288	100	87	57	58	56	61	0	0	11	0	11	0.0260	480	
4	5	0.08	-	-	0.2	4.8	0	0	180	100	57	58	56	61	0	0	31	0	31	0.0000	555	
5	3	0.07	1.3	1.3	1.3	3.0	1,220	100	500	200	57	58	56	61	6.7	15	13	92	13	0.0560	247	
5	4	0.06	1.3	1.2	1.2	3.2	1,180	382	218	200	57	58	56	61	0.64	1.7	2.3	90	2.3	0.0410	330	
5	5	0.05	-	0.3	3.1	1.7	0	162	238	200	57	58	56	61	0	3.8	3.4	90	3.4	0.0370	470	
6	3	0.08	5.3	5.3	5.3	6.0	1,150	303	300	200	57	58	56	61	37	90	120	90	120	0.0620	160	
6	4	0.06	2.5	2.5	2.5	2.4	1,540	255	230	200	57	58	56	61	5.2	19	21	110	21	0.0390	270	
6	5	0.05	2.1	2.1	2.1	2.1	150	340	170	100	57	58	56	61	0.14	0.14	0.26	110	0.26	0.0390	335	
6	6	0.04	0.3	0.3	0.3	0.3	260	50	100	62	57	58	56	61	0.3	0.63	0.57	75	0.57	0.0130	580	
7	3	0.10	7.3	7.2	7.3	7.0	1,110	400	300	300	57	58	56	61	36	77	140	77	140	0.0570	158	
7	4	0.07	6.1	6.1	6.1	3.8	1,600	100	500	267	57	58	56	61	4.4	13	9.6	92	9.6	0.0560	212	
7	5	0.06	2.8	2.8	2.8	2.8	489	460	251	200	57	58	56	61	0.31	0.41	0.64	76	0.64	0.0560	269	
7	6	0.05	1.8	1.8	1.8	1.8	37	100	225	200	57	58	56	61	17	7.3	5.4	170	5.4	0.0280	442	
8	3	0.10	6.7	6.7	6.7	6.7	885	200	300	300	57	58	56	61	0.011	0.026	0.02	110	0.02	0.0440	148	
8	4	0.07	3.0	3.0	3.0	3.5	1,460	300	290	200	57	58	56	61	19	56	66	92	66	0.0580	175	
8	5	0.07	2.8	2.8	2.8	4.4	1,000	200	300	178	57	58	56	61	0.0022	0.0065	0.0063	110	0.0063	0.0380	198	
8	6	0.06	1.3	1.3	3.4	3.4	218	300	160	52	57	58	56	61	0.39	0.44	0.95	120	0.95	0.0400	327	
8	7	0.10	2.5	2.5	5.0	7.7	78	50	75	22	57	58	56	61	2.4	2.5	3.2	110	3.2	0.0110	472	
9	3	0.10	2.0	2.0	7.5	7.5	1,440	125	200	200	57	58	56	61	8	38	30	170	30	0.0330	140	
9	4	0.08	2.8	2.8	5.2	5.2	1,290	50	240	200	57	58	56	61	0.17	0.78	0.5	190	0.5	0.0290	137	
9	5	0.09	2.5	2.5	5.0	6.5	1,290	100	200	150	57	58	56	61	0.026	0.13	0.1	180	0.1	0.0230	139	
9	6	0.08	2.5	2.5	5.2	5.1	421	175	184	100	57	58	56	61	2.1	3.5	4.3	150	4.3	0.0320	250	
9	7	0.09	2.5	2.5	5.0	7.9	375	50	50	25	57	58	56	61	0.94	4	5.3	150	5.3	0.0081	386	
10	3	0.08	1.2	1.2	1.2	5.9	1,050	250	400	352	-	42	42	63	29	66	46	150	46	0.0520	106	
10	4	0.10	1.6	1.6	7.8	7.8	965	415	300	285	-	42	42	63	0.0086	0.019	0.02	140	0.02	0.0570	104	
10	5	0.10	2.1	2.1	8.6	8.6	510	245	500	265	57	58	56	61	40	41	39	73	39	0.0640	105	
10	6	0.09	1.6	1.6	6.5	6.5	620	400	400	200	57	58	56	61	36	46	60	68	60	0.0560	160	
10	7	0.05	0.8	0.8	1.3	1.9	42	50	100	25	57	58	56	61	27	17	20	76	20	0.0110	289	
11	3	0.07	2.4	2.5	3.7	3.7	725	200	405	400	-	42	42	63	92	160	100	160	100	0.0510	80	
11	4	0.11	8.3	8.3	8.3	9.2	830	500	250	250	-	42	42	63	12	23	28	130	28	0.0560	82	
11	5	0.10	8.6	8.6	8.6	8.6	557	550	233	200	57	58	56	61	6.6	9.4	17	69	17	0.0530	72	
11	6	0.09	2.2	2.2	6.1	6.1	840	400	300	300	57	58	56	61	4.9	8.8	10	77	10	0.0610	58	
11	7	0.07	-	3.9	4.1	4.1	0	70	200	200	57	58	56	61	0	33	21	110	21	0.0210	64	
12	3	0.07	5.3	5.3	3.2	3.2	599	400	300	341	-	42	42	63	88	140	200	140	200	0.0810	62	
12	4	0.09	6.6	6.6	6.9	6.9	790	365	340	300	-	42	42	63	7.2	13	12	140	12	0.0530	46	
12	5	0.09	6.6	6.6	6.6	6.6	695	760	140	100	-	42	42	63	15	27	84	110	84	0.0510	25	
12	6	0.09	0.5	0.6	3.5	6.6	505	400	300	300	59	51	42	60	63	95	100	120	100	0.0510	30	
12	7	0.06	2.0	2.1	2.9	2.9	25	300	300	200	59	51	42	60	160	98	110	150	110	0.0590	44	
13	3	0.07	6.5	6.5	6.5	3.5	242	100	483	400	-	42	42	63	250	170	160	170	160	0.0670	53	
13	4	0.06	4.0	4.0	4.0	2.9	390	400	400	200	-	42	42	63	57	61	70	120	70	0.0730	16	
13	5	0.10	8.6	8.6	8.6	8.7	397	650	228	200	-	42	42	63	15	19	31	110	31	0.0640	3	
13	6	0.08	5.3	5.3	5.2	5.2	775	625	100	75	59	51	42	60	9.1	17	92	89	92	0.0580	1	
13	7	0.06	4.0	4.0	3.2	3.2	580	500	300	200	59	51	42	60	40	63	97	110	97	0.0920	6	
13	8	0.05	0.1	0.1	2.4	2.3	45	600	200	175	59	51	42	60	13	11	23	110	23	0.0580	38	
14	2	0.06	-	2.5	2.5	2.5	0	50	100	100	-	42	42	63	0	1.7	1	330	1	0.0110	80	
14	3	0.06	-	5.1	4.3	3.1	0	200	250	300	-	42	42	63	0	0.026	0.016	160	0.016	0.0270	38	
14	4	0.06	2.8	2.8	2.9	2.9	585	420	275	200	-	42	42	63	14	22	26	140	26	0.0310	10	
14	5	0.07	1.3	1.2	5.8	5.0	670	320	300	280	-	42	42	63	18	33	28	160	28	0.0370	-6	
14	6	0.09	2.5	2.5	7.0	7.0	983	400	282	200	-	42	42	63	5.2	12	14	140	14	0.0470	-12	
14	7	0.02	1.3	1.2	3.7	3.4	755	400	300	200	59	51	42	60	61	120	160	120	160	0.0500	-10	
14	8	0.05	-	0.8	1.2	2.6	0	400	300	200	59	51	42	60	0	78	100	120	100	0.0610	7	
14	9	0.05	-	0.3	1.0	2.0	0	50	75	88	59	51	42	60	0	7.1	4.8	180	4.8	0.0110	45	
15	2	0.10	-	7.0	6.9	7.0	0	50	75	100	-	42	42	63	0	20	11	330	11	0.0096	65	
15	3	0.08	2.4	2.4	5.0	5.5	120	300	275	200	-	60	49	40	4.6	3.5	5.2	110	5.2	0.0370	18	
15	4	0.06	3.1	3.1	3.1	3.1	785	300	290	200	-	42	42	63	29	61	61	170	61	0.0120	-3	
15	5	0.06	2.5	2.5																		

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK) ($\times 10^{-6} d^{-1}$)						Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)
			Layer				Layer				Layer				Predevelopment			Post- development				
			1	2	3	4	1	2	3	4	1	2	3	4	Between layers			Between layers				
			1-2	2-3	3-4		1-2	2-3	3-4		1-2	2-3	3-4		1-2	2-3	3-4	2-3	3-4	2-3		
18	3	0.08	-	2.5	5.4	5.1	0	75	140	100	-	-	-	-	0	27	24	200	24	0.0091	12	
18	4	0.10	-	2.5	6.3	8.6	0	400	200	275	-	60	49	40	0	23	37	100	37	0.0230	-10	
18	5	0.08	2.5	2.5	2.5	5.8	448	440	275	275	-	60	49	40	0.052	0.063	0.1	88	0.1	0.0200	-40	
18	6	0.08	2.5	2.5	2.6	5.1	1,050	500	275	200	-	60	49	40	18	34	69	81	69	0.0570	-54	
18	7	0.08	2.5	2.5	3.0	5.8	1,450	325	350	300	64	60	58	56	13	36	39	75	39	0.0740	-55	
18	8	0.07	2.5	2.5	7.9	4.1	1,320	325	375	300	64	60	58	56	9.1	23	25	72	25	0.0530	-58	
18	9	0.07	2.5	2.5	4.2	4.8	1,120	500	300	200	64	60	58	56	4	8.5	14	63	14	0.0750	-24	
18	10	0.08	-	4.2	5.7	5.7	0	50	150	100	64	60	58	56	0	3.2	2.6	84	2.6	0.0150	45	
19	3	0.11	-	2.5	5.0	8.6	0	150	150	100	-	-	-	-	0	3.8	4.6	280	4.6	0.0200	-58	
19	4	0.10	-	2.0	5.0	7.7	0	100	300	350	-	-	-	-	0	5.7	3.5	170	3.5	0.0160	-38	
19	5	0.08	6.6	6.6	6.0	6.0	235	500	300	400	-	60	49	40	66	62	90	79	90	0.0280	-46	
19	6	0.07	3.8	3.7	3.7	4.7	496	900	222	100	-	60	49	40	6	7.2	32	54	32	0.0620	-60	
19	7	0.08	2.5	2.5	3.7	5.6	1,120	700	200	300	64	60	58	56	5.3	11	21	56	21	0.0730	-26	
19	8	0.07	3.8	3.7	8.6	4.9	1,420	400	500	300	64	60	58	56	9.5	21	24	56	24	0.0750	-60	
19	9	0.06	4.9	4.9	4.9	3.5	745	500	450	275	64	60	58	56	8.6	12	16	53	16	0.0780	-40	
19	10	0.05	0.7	0.7	1.6	1.6	125	100	175	100	59	61	60	59	0.0065	0.0065	0.0057	170	0.0057	0.0210	5	
20	3	0.06	-	-	2.8	2.8	0	0	195	100	-	-	-	-	0	0	4.9	0	4.9	0.0000	-30	
20	4	0.08	-	2.8	5.8	5.8	0	100	150	200	-	-	-	-	0	64	46	170	46	0.0120	-62	
20	5	0.08	6.3	6.2	8.5	5.8	35	100	400	300	-	60	49	40	54	16	13	140	13	0.0310	-44	
20	6	0.07	1.3	1.3	2.1	4.5	118	900	400	300	-	60	49	40	35	28	60	52	60	0.0420	-61	
20	7	0.08	1.5	1.5	1.6	5.2	715	800	600	200	-	60	49	40	42	46	140	46	140	0.0970	-29	
20	8	0.08	2.5	2.5	7.2	5.3	1,370	600	400	400	64	60	58	56	3.7	7.8	10	50	10	0.0830	-24	
20	9	0.06	2.5	2.5	8.2	4.0	1,090	600	450	300	64	60	58	56	2.1	3.6	5.3	48	5.3	0.1100	-32	
20	10	0.10	-	2.5	3.3	7.3	0	350	400	250	59	61	60	59	0	8.1	9.5	64	9.5	0.0360	40	
20	11	0.07	1.3	1.2	3.0	4.8	300	150	100	50	59	61	60	59	0.16	0.29	0.49	190	0.49	0.0190	104	
21	4	0.06	-	3.3	3.3	3.3	0	75	100	200	-	-	-	-	0	23	13	170	13	0.0110	4	
21	5	0.06	-	3.0	3.0	3.2	0	200	300	250	-	-	-	-	0	40	36	140	36	0.0390	-32	
21	6	0.08	3.0	3.0	5.9	5.9	468	400	350	300	-	60	49	40	7.3	8.4	12	86	12	0.0560	-60	
21	7	0.11	2.5	2.5	5.0	9.5	1,120	600	175	225	64	60	58	56	10	23	47	45	47	0.0800	-31	
21	8	0.08	2.5	2.5	7.2	6.1	1,740	225	500	275	59	61	60	59	20	54	51	66	51	0.0860	-23	
21	9	0.09	2.5	2.5	7.0	6.7	1,490	370	400	200	59	61	60	59	5.6	13	17	62	17	0.0480	-3	
21	10	0.09	2.5	2.5	2.0	7.6	2,080	265	535	200	59	61	60	59	3.6	10	11	60	11	0.0910	12	
21	11	0.05	-	2.5	4.6	2.6	0	100	400	160	59	61	60	59	0	9.2	8.2	96	8.2	0.0390	66	
22	4	0.06	-	3.3	3.3	3.3	0	50	100	200	-	-	-	-	0	32	16	200	16	0.0110	8	
22	5	0.06	-	5.4	5.4	3.0	0	200	250	300	-	-	-	-	0	3.1	2.5	98	2.5	0.0340	-23	
22	6	0.06	2.5	2.5	4.8	3.4	120	325	375	300	-	-	-	-	130	86	89	98	89	0.0670	-51	
22	7	0.11	5.0	5.0	7.5	9.5	715	600	200	200	59	61	60	59	17	27	56	59	56	0.0810	-31	
22	8	0.09	5.0	5.0	9.0	7.6	1,420	400	300	300	59	61	60	59	27	68	5	68	93	0.0690	-27	
22	9	0.09	5.0	5.0	10.1	7.8	1,850	350	352	300	59	61	60	59	22	68	200	68	200	0.3570	-21	
22	10	0.07	2.5	2.5	4.1	4.7	1,710	160	520	300	59	61	60	59	22	60	51	70	51	0.0680	43	
22	11	0.08	2.5	2.5	3.3	6.0	645	400	300	200	59	61	60	59	21	31	44	68	44	0.0550	8	
23	4	0.07	-	0.3	4.3	4.3	0	50	50	100	-	-	-	-	0	1.9	1.3	230	1.3	0.0091	14	
23	5	0.06	-	1.3	1.9	1.8	0	100	300	250	49	48	52	40	0	39	31	160	31	0.0190	-37	
23	6	0.07	-	2.5	10.7	4.8	0	400	300	300	49	48	52	40	0	93	120	96	120	0.0590	-52	
23	7	0.11	2.5	2.5	5.0	9.1	214	1,000	200	200	49	48	52	40	25	25	7.3	57	81	0.0850	-44	
23	8	0.10	2.5	2.5	3.1	7.7	1,020	700	350	350	59	61	60	59	28	45	89	45	89	0.0970	-37	
23	9	0.07	2.5	2.5	4.6	4.7	1,440	600	450	350	59	61	60	59	24	45	71	45	71	0.0890	-30	
23	10	0.07	2.5	2.5	3.6	4.9	1,280	950	450	350	59	61	60	59	25	43	88	43	88	0.1000	-25	
23	11	0.08	2.5	2.5	2.9	5.0	1,320	600	550	300	59	61	60	59	22	36	50	41	50	0.1100	-14	
24	4	0.08	-	-	2.5	6.2	0	0	50	81	49	48	52	40	0	0	1.9	0	1.9	0.0000	18	
24	5	0.07	1.3	1.2	3.7	3.9	40	50	260	200	49	48	52	40	68	19	14	74	14	0.0150	-26	
24	6	0.08	6.0	6.0	6.0	5.1	30	500	400	400	49	48	52	40	1.6	0.93	1.1	74	1.1	0.0410	-48	
24	7	0.09	2.5	2.5	5.3	6.9	212	800	500	400	59	61	60	59	13	10	15	37	15	0.0950	-63	
24	8	0.11	9.8	9.7	9.9	9.9	610	800	550	450	59	61	60	59	14	14	20	33	20	0.1100	-54	
24	9	0.07	2.5	2.5	4.2	4.7	1,120	800	550	450	53	64	58	52	27	36	72	36	72	0.1100	-74	
24	10	0.07	1.3	1.2	2.7	4.2	1,230	500	550	550	59	61	60	59	0.011	0.017	0.017	45	0.017	0.0930	-78	
24	11	0.08	2.5	2.5	4.9	5.3	1,100	500	500	350	53	64	58	52								

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK)(x 10 ⁻⁶ d ⁻¹)						Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)
			Layer				Layer				Layer				Predevelopment			Post- development				
			1	2	3	4	1	2	3	4	1	2	3	4	Between layers 1-2	2-3	3-4	Between layers 2-3	3-4	Layers 2-3		
27	5	0.08	-	4.3	4.3	4.3	0	100	200	100	49	48	52	40	0	8.2	8.6	220	8.6	0.0210	7	
27	6	0.07	1.3	1.3	1.2	4.0	380	345	325	300	49	48	52	40	62	65	75	99	75	0.0460	-26	
27	7	0.07	1.3	1.2	1.8	4.5	948	260	375	325	49	48	52	40	0.57	1.1	1	100	1	0.0440	-85	
27	8	0.07	2.5	2.5	5.0	4.7	1,320	480	250	250	49	48	52	40	13	30	48	92	48	0.0590	-100	
27	9	0.09	1.3	1.2	6.8	6.8	1,790	600	215	200	49	48	52	40	1.9	5.6	12	83	12	0.0690	-76	
27	10	0.12	1.3	1.3	6.2	6.2	1,710	725	175	100	49	48	52	40	3.4	9.2	31	76	31	0.0690	-75	
27	11	0.09	1.3	1.3	5.3	6.8	1,610	300	400	296	53	64	58	52	8.7	21	24	70	24	0.0580	-72	
27	12	0.06	2.5	2.5	5.7	3.6	1,080	100	350	350	49	48	52	40	17	44	31	140	31	0.0410	-73	
27	13	0.07	-	2.5	4.1	4.1	0	100	150	150	53	64	58	52	0	25	23	98	23	0.0230	-79	
28	5	0.05	0.3	0.2	0.5	0.7	10	325	50	25	49	48	52	40	0.83	0.74	3.7	180	3.7	0.0260	-45	
28	6	0.06	1.3	1.2	1.9	2.4	395	275	350	350	49	48	52	40	48	50	49	110	49	0.0270	-48	
28	7	0.07	1.3	1.3	2.6	4.5	900	300	350	350	49	48	52	40	21	38	39	100	39	0.0360	-66	
28	8	0.07	1.3	1.3	4.6	4.7	1,420	160	450	375	49	48	52	40	19	48	39	110	39	0.0440	-65	
28	9	0.07	1.3	1.3	5.0	4.9	1,600	800	100	100	49	48	52	40	5.8	15	73	76	73	0.0900	-74	
28	10	0.07	1.3	1.2	5.0	6.3	2,000	500	200	200	100	44	37	57	4.1	31	49	160	49	0.0660	-80	
28	11	0.07	1.3	1.2	5.0	7.0	1,490	375	325	300	-	64	56	62	30	71	81	73	81	0.0610	-82	
28	12	0.07	1.3	1.3	5.0	7.5	800	200	300	300	49	48	52	40	54	110	96	130	96	0.0460	-84	
28	13	0.07	-	2.5	4.3	4.3	0	300	200	200	-	64	56	62	0	14	18	100	18	0.0460	-95	
29	5	0.06	-	0.5	0.5	0.7	0	100	200	200	100	44	37	57	0	4.4	2.7	400	2.7	0.0200	32	
29	6	0.07	2.5	2.5	3.0	3.6	175	375	300	325	100	44	37	57	6.1	7.5	7	170	7	0.0190	-33	
29	7	0.06	1.3	1.3	3.7	3.1	1,050	250	300	350	100	44	37	57	13	69	49	210	49	0.0220	-70	
29	8	0.09	1.3	1.2	4.0	7.4	1,340	370	400	225	100	44	37	57	8.3	40	45	150	45	0.0820	-80	
29	9	0.08	1.3	1.2	2.5	6.0	1,780	600	223	200	100	44	37	57	2.4	14	25	130	25	0.0630	-71	
29	10	0.07	1.3	1.3	2.5	4.2	1,900	900	50	50	100	44	37	57	1.6	8.8	78	110	78	0.0860	-81	
29	11	0.10	2.5	2.5	3.0	8.2	1,600	700	150	150	-	64	56	62	7.3	17	51	58	51	0.0770	-82	
29	12	0.14	2.5	2.5	6.2	13.6	600	375	325	300	-	64	56	62	57	73	200	73	200	0.0650	-80	
29	13	0.09	-	1.2	4.5	4.5	0	50	150	150	-	64	56	62	0	73	48	130	48	0.0150	-80	
30	5	0.05	-	0.2	0.2	1.3	0	200	200	200	100	44	37	57	0	7.4	6.4	160	6.4	0.0260	119	
30	6	0.06	-	5.5	2.4	2.3	0	350	350	300	100	44	37	57	0	17	16	170	16	0.0120	18	
30	7	0.06	1.3	1.3	2.5	3.0	1,050	300	300	300	100	44	37	57	11	52	45	190	45	0.0067	-70	
30	8	0.08	2.5	2.5	6.9	5.7	1,550	360	390	300	100	44	37	57	7.9	48	42	170	42	0.0430	-70	
30	9	0.08	2.5	2.5	5.0	6.1	1,610	450	275	275	100	44	37	57	26	160	1200	160	1200	0.0620	-69	
30	10	0.10	2.5	2.5	5.0	7.6	1,600	600	200	200	100	44	37	57	9.7	54	96	140	96	0.0630	-80	
30	11	0.08	1.3	1.3	2.5	4.7	2,500	800	100	100	-	64	56	62	12	38	160	54	180	0.0800	-81	
30	12	0.08	2.5	2.5	4.1	5.5	1,200	450	300	250	-	64	56	62	26	51	72	68	72	0.0680	-100	
31	5	0.05	-	0.3	0.2	0.5	0	150	200	300	100	44	37	57	0	6.8	3.9	240	3.9	0.0230	130	
31	6	0.06	-	1.1	0.8	0.8	0	215	285	300	100	44	37	57	0	5.6	4	230	4	0.0056	-7	
31	7	0.07	1.3	1.3	2.7	2.9	1,080	250	200	300	100	44	37	57	5.8	37	26	250	26	0.0063	-60	
31	8	0.07	1.3	1.3	4.3	3.9	1,460	305	300	380	100	44	37	57	29	190	160	190	160	0.0270	-80	
31	9	0.07	1.3	1.2	3.8	5.2	1,620	225	350	375	100	44	37	57	20	170	0.17	220	110	0.0340	-110	
31	10	0.08	0.8	0.7	5.0	5.2	2,550	300	300	300	-	64	56	62	21	86	200	86	200	0.0370	-100	
31	11	0.14	1.3	1.2	6.2	11.7	2,600	420	300	180	-	64	56	62	20	71	280	71	280	0.0340	-100	
31	12	0.07	1.3	1.2	2.5	3.7	1,710	700	100	90	-	64	56	62	6.4	17	75	61	75	0.0890	-90	
32	5	0.05	-	0.7	0.6	0.7	0	210	120	100	100	44	37	57	0	4.5	6.1	260	6.1	0.0050	60	
32	7	0.07	3.5	3.5	3.9	3.9	245	300	300	300	100	44	37	57	15	23	20	190	20	0.0240	-60	
32	8	0.07	4.8	4.8	4.8	4.4	1,050	250	250	300	100	44	37	57	10	59	45	230	45	0.0250	-100	
32	9	0.06	3.8	3.7	3.8	3.7	1,780	200	300	300	100	44	37	57	5	47	0.26	240	33	0.0300	-120	
32	10	0.08	5.0	5.0	5.0	6.4	2,300	320	300	280	100	44	37	57	1.7	16	15	190	15	0.0440	-130	
32	11	0.13	3.8	3.7	3.7	11.8	3,200	200	400	200	-	64	56	62	16	77	78	87	78	0.0440	-110	
32	12	0.08	2.5	2.5	2.3	5.5	2,000	350	300	150	-	64	56	62	3.9	15	23	79	23	0.0530	-90	
33	6	0.08	-	4.9	4.9	4.9	0	100	100	90	100	44	37	57	0	13	12	580	12	0.0059	60	
33	7	0.09	-	3.8	6.0	6.9	0	700	250	250	100	44	37	57	0	79	140	120	140	0.0620	-32	
33	8	0.10	6.3	6.3	6.8	7.0	582	600	300	280	100	44	37	57	55	120	180	120	180	0.0730	-80	
33	9	0.09	5.0	5.0	5.0	7.1	1,390	650	300	250	100	44	37	57	3.7	15	24	120	24	0.0930	-64	
33	10	0.10	5.0	5.0	7.5	8.8	2,350	800	200	173	-	64	56	62	17	46	0.97	49	130	0.0780	-57	
33	11	0.12	3.8	3.7	4.9	10.1	2,500	500	493	232	-	64	56	62	14	38	54	52	54	0.1100	-80	
33	12																					

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK) ($\times 10^{-6} d^{-1}$)						Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)
															Predevelopment			Post- development				
															Between layers			Between layers				
			1	2	3	4	1	2	3	4	1	2	3	4	1-2	2-3	3-4	2-3	3-4	2-3	3-4	
37	5	0.20	-	1.3	1.3	1.3	0	50	100	100	-	-	-	-	0	1.4	1.1	460	1.1	0.0120	170	
37	6	0.05	0.1	0.1	2.5	2.4	25	300	200	100	-	-	-	-	5.7	3.7	6.1	140	6.1	0.0450	95	
37	7	0.06	1.3	1.2	3.3	3.3	320	500	200	260	-	-	-	-	7	8.2	13	98	13	0.0570	45	
37	8	0.09	5.0	5.0	6.2	6.5	1,120	450	300	250	-	-	-	-	6.7	14	19	92	19	0.0660	13	
37	9	0.14	7.5	7.5	11.2	13.2	1,780	700	150	149	-	-	-	-	6.2	18	52	81	52	0.0760	-8	
37	10	0.08	3.8	3.7	5.0	5.0	2,300	600	250	165	-	-	-	-	13	44	91	81	91	0.0760	-18	
37	11	0.09	3.8	3.7	4.8	6.7	1,590	575	480	219	-	-	56	67	29	56	130	55	130	0.0900	-19	
38	5	0.04	-	1.2	1.2	1.2	0	100	130	100	-	-	-	-	0	1.6	1.6	300	1.6	0.0180	160	
38	6	0.06	-	1.7	2.5	2.5	0	300	250	200	-	-	-	-	0	0.32	0.54	92	0.54	0.0740	-95	
38	7	0.10	6.3	6.3	7.3	7.3	385	600	300	300	-	-	-	-	3.8	4.2	6.3	77	6.3	0.0730	46	
38	8	0.08	5.0	5.0	5.8	5.8	1,150	700	320	200	-	-	-	-	12	22	44	68	44	0.0890	14	
38	9	0.06	2.5	2.5	3.7	2.0	1,900	900	200	143	-	-	-	-	25	63	250	63	250	0.0970	7	
38	10	0.10	2.5	2.5	3.0	6.6	2,140	800	200	234	-	-	-	-	2.8	8.2	1.8	69	19	0.0870	-13	
38	11	0.12	5.0	5.0	6.8	9.8	2,230	500	350	178	-	-	56	67	6.7	21	29	69	29	0.0710	-13	
38	12	0.06	-	2.9	2.9	2.9	0	50	100	200	-	-	56	67	0	58	35	58	35	0.0066	38	
39	5	0.14	-	12.5	13.5	13.5	0	140	160	100	-	-	-	-	0	3.5	4	230	4	0.0250	160	
39	6	0.08	4.5	4.5	5.4	5.4	150	200	410	300	-	-	-	-	24	14	12	110	12	0.0450	110	
39	7	0.09	5.0	5.0	6.5	6.5	935	250	370	300	-	-	-	-	29	55	51	110	51	0.0490	73	
39	8	0.10	6.3	6.2	7.5	7.5	1,620	450	310	200	-	-	-	-	2.7	7.5	11	91	11	0.0640	28	
39	9	0.11	3.8	3.7	6.2	8.5	2,210	600	250	104	-	-	-	-	7.6	25	61	81	61	0.0730	18	
39	10	0.11	5.0	5.0	7.5	8.1	2,390	550	250	202	-	-	-	-	7.7	28	1.7	86	50	0.0670	0	
39	11	0.12	7.5	7.5	9.5	9.8	1,910	600	440	243	-	-	56	67	25	57	210	57	210	0.0830	-8	
39	12	0.11	-	8.5	8.5	8.5	0	50	200	170	-	-	56	67	0	23	14	190	14	0.0110	41	
40	5	0.08	-	2.5	4.0	4.0	0	100	200	200	-	-	-	-	0	14	10	230	10	0.0250	207	
40	6	0.09	3.8	3.8	5.0	5.0	375	300	230	100	-	-	-	-	13	17	27	130	27	0.0520	124	
40	7	0.09	5.0	5.0	6.3	6.4	990	250	325	200	-	-	-	-	33	71	77	120	77	0.0440	81	
40	8	0.13	6.3	6.3	7.5	10.0	1,790	500	200	100	-	-	-	-	12	39	91	98	91	0.0570	47	
40	9	0.16	6.3	6.2	8.7	14.3	2,580	550	100	151	-	-	-	-	8.1	39	0.42	110	100	0.0540	25	
40	10	0.12	6.3	6.2	7.5	8.2	2,770	550	100	192	-	-	-	-	2.2	11	39	110	25	0.0520	9	
40	11	0.15	5.0	5.0	6.2	13.6	2,360	350	250	251	-	-	56	67	2.1	9	9.2	98	9.2	0.0460	-3	
40	12	0.09	-	3.8	5.8	5.8	0	100	200	80	-	-	56	67	0	17	17	190	17	0.0180	34	
41	5	0.07	-	3.5	3.5	3.5	0	50	100	100	-	-	-	-	0	6.5	4.9	460	4.9	0.0130	200	
41	6	0.08	-	2.5	4.0	4.5	0	450	300	100	-	-	-	-	0	13	25	92	25	0.0690	122	
41	7	0.08	3.8	3.7	4.5	4.5	890	400	280	100	-	-	-	-	21	39	70	100	70	0.0510	85	
41	8	0.09	3.8	3.7	5.0	5.3	1,820	400	290	95	-	-	-	-	6	19	0.69	100	35	0.0550	46	
41	9	0.10	6.3	6.3	7.5	7.8	2,530	400	250	159	-	-	-	-	1.8	8.3	32	110	13	0.0520	26	
41	10	0.10	5.0	5.0	6.3	7.5	2,940	300	200	185	-	-	56	67	0.097	0.6	1.1	120	0.67	0.0380	14	
41	11	0.10	6.3	6.2	7.0	7.4	2,240	350	250	235	-	-	56	67	4.3	18	19	98	19	0.0440	2	
41	12	0.08	3.0	3.0	5.0	5.6	487	350	200	248	-	-	56	67	1.3	2	2	110	2	0.0370	8	
41	13	0.07	-	2.5	3.8	5.0	0	50	100	100	-	-	56	67	0	10	6.8	380	6.8	0.0063	98	
42	5	0.06	-	3.2	3.2	3.2	0	50	150	100	-	-	-	-	0	5	4	170	4	0.0170	190	
42	6	0.06	-	2.5	3.3	3.3	0	305	600	100	-	-	-	-	0	53	69	76	69	0.0750	124	
42	7	0.07	3.8	3.7	3.3	3.3	581	500	512	46	-	-	-	-	51	55	3.2	68	99	0.0750	81	
42	8	0.09	5.0	5.0	10.0	5.9	1,480	340	200	141	-	-	-	-	7.4	16	1.5	66	50	0.0820	40	
42	9	0.10	5.0	5.0	6.3	7.5	2,240	500	420	181	-	-	-	-	25	75	2.7	75	120	0.0710	0	
42	10	0.14	5.0	5.0	5.0	13.4	2,560	450	400	221	-	-	56	67	8	27	32	69	32	0.0630	22	
42	11	0.14	6.3	6.2	7.5	12.4	1,940	450	396	255	-	-	56	67	2.3	6.2	7.1	69	7.1	0.0840	14	
42	12	0.11	7.5	7.5	9.1	9.1	16	500	355	219	-	-	56	67	6.9	4	5.2	69	5.2	0.0630	5	
43	5	0.16	-	15																		

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK)(x 10 ⁻⁶ d ⁻¹)						Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)	
			Layer				Layer				Layer				Predevelopment			Post- development					
			1	2	3	4	1	2	3	4	1	2	3	4	Between layers			Between layers			Layers		Layers
			1	2	3	4	1	2	3	4	1	2	3	4	1-2	2-3	3-4	2-3	3-4	2-3	2-3		
46	5	0.06	-	2.5	3.0	3.0	0	300	460	200	-	70	50	62	0	21	27	79	27	0.0640	185		
46	6	0.09	5.0	5.0	6.3	6.9	711	1,100	203	127	-	70	50	62	9	12	57	40	57	0.1130	110		
46	7	0.10	6.3	6.2	6.5	7.6	1,580	900	460	132	-	-	62	66	22	38	0.55	38	170	0.1300	53		
46	8	0.11	7.5	7.5	8.0	9.3	1,970	700	600	263	-	-	62	66	21	39	140	39	140	0.1100	36		
46	9	0.10	2.5	2.5	1.9	8.1	2,170	900	265	299	-	-	56	67	2.4	6	10	130	10	0.1100	90		
46	10	0.13	6.3	3.1	3.5	11.6	2,540	600	500	375	-	-	56	67	9.6	26	28	880	28	0.0540	65		
46	11	0.09	6.3	2.7	4.5	6.0	1,630	600	598	295	-	-	56	67	1.5	2.5	3	53	3	0.0510	-70		
46	12	0.06	-	2.8	2.7	3.8	0	775	600	1	-	-	56	67	0	0.68	1.5	86	1.5	0.1400	-155		
47	4	0.08	-	6.3	6.3	6.3	0	100	127	145	-	70	50	62	0	22	19	260	19	0.0300	245		
47	5	0.08	3.8	3.7	4.4	4.4	18	600	300	270	-	70	50	62	20	15	27	61	27	0.0760	182		
47	6	0.10	7.5	7.5	8.3	8.3	890	1,000	350	250	-	70	50	62	29	37	99	39	99	0.1100	122		
47	7	0.13	6.3	6.2	5.8	11.6	1,640	1,000	510	230	-	70	50	62	23	36	220	36	220	0.1300	86		
47	8	0.12	7.5	7.5	10.0	10.2	2,190	1,100	415	325	-	70	50	62	19	35	110	35	110	0.1500	63		
47	9	0.14	7.5	7.5	4.9	12.6	2,300	1,100	500	342	-	-	56	67	19	40	64	980	64	0.0870	110		
47	10	0.10	3.8	1.9	2.5	7.1	2,280	1,100	659	255	-	-	56	67	2.1	3.9	6.6	37	6.6	0.1500	-55		
47	11	0.10	8.8	4.4	5.9	7.7	1,620	1,050	903	245	-	-	56	67	1.3	1.7	2.7	720	2.7	0.1500	-155		
47	12	0.18	-	3.5	5.3	17.9	0	920	935	187	58	59	62	65	0	0.69	1.1	460	1.1	0.0770	-195		
48	4	0.10	-	7.6	7.6	7.6	0	100	200	190	-	70	50	62	0	13	9.8	200	9.8	0.0370	166		
48	5	0.10	6.3	6.2	7.7	7.7	245	900	400	245	-	70	50	62	9.1	8.3	20	42	20	0.1200	147		
48	6	0.11	6.3	6.2	7.5	8.6	1,260	900	400	220	-	70	50	62	27	41	100	42	100	0.1000	149		
48	7	0.11	5.0	5.0	6.2	8.9	2,400	950	300	265	-	70	50	62	16	36	94	42	94	0.0870	110		
48	8	0.11	5.0	5.0	6.3	9.6	3,010	800	389	364	-	70	50	62	19	52	93	130	93	0.0660	130		
48	9	0.16	8.8	4.3	4.9	15.3	3,740	800	307	433	-	-	56	67	0.33	1.3	1.6	54	1.6	0.0400	80		
48	10	0.10	7.5	3.7	4.4	7.7	3,330	600	630	337	58	59	62	65	1.2	3.8	4.7	42	4.7	0.0970	-85		
48	11	0.09	8.8	4.4	5.6	6.0	2,180	700	957	245	58	59	62	65	1.9	3.1	4.2	990	4.2	0.1700	-220		
48	12	0.09	2.9	2.6	1.3	5.6	358	700	730	80	58	59	62	65	2	1.4	2.4	600	2.4	0.1100	-250		
49	4	0.11	-	9.6	9.6	9.6	0	700	300	200	-	62	61	50	0	46	200	46	200	0.1100	223		
49	5	0.13	7.5	7.5	11.0	10.9	489	1,100	125	200	-	70	50	62	34	41	190	41	190	0.0930	182		
49	6	0.14	7.5	7.5	10.0	13.0	1,680	1,100	145	200	-	62	61	50	19	37	220	37	220	0.1100	150		
49	7	0.11	6.3	6.2	7.5	9.1	3,060	1,130	225	300	-	62	61	50	4	11	32	33	32	0.1100	110		
49	8	0.11	5.0	5.0	5.0	8.8	3,660	1,240	125	442	-	62	61	50	8.3	25	70	34	70	0.1100	125		
49	9	0.10	3.8	1.9	2.1	7.1	3,550	700	920	187	-	62	61	50	0.82	1.8	2.8	36	2.8	0.1100	60		
49	10	0.10	6.3	3.1	3.2	7.6	2,840	700	997	180	58	59	62	65	0.92	1.8	2.6	33	2.6	0.0770	-35		
49	11	0.08	7.5	3.6	5.2	5.6	2,570	800	915	255	58	59	62	65	1.8	3.4	4.8	540	4.8	0.1800	-220		
50	3	0.06	-	-	3.0	3.0	0	0	100	100	-	62	61	50	0	0	90	0	90	0.0000	309		
50	4	0.10	6.3	6.2	7.1	7.1	74	750	126	200	-	62	61	50	10	9.2	28	52	28	0.0930	213		
50	5	0.14	10.0	10.0	12.1	12.1	667	1,200	233	275	-	62	61	50	23	28	89	32	89	0.1200	175		
50	6	0.11	6.3	6.2	7.5	8.7	2,200	1,200	250	328	-	62	61	50	14	29	83	32	83	0.1400	150		
50	7	0.09	5.0	5.0	6.2	7.5	3,320	900	585	415	-	62	61	50	9.6	23	38	31	38	0.1400	33		
50	8	0.06	5.0	5.0	6.3	7.1	3,870	900	472	515	-	62	61	50	29	86	310	86	310	0.1200	20		
50	9	0.09	5.0	1.8	2.6	6.0	3,130	600	898	237	-	62	61	50	1.1	2.1	3.3	33	3.3	0.0900	30		
50	10	0.08	7.5	3.4	3.7	5.2	3,790	700	1,050	145	58	59	62	65	1.1	2.6	3.7	800	3.7	0.1500	-135		
50	11	0.10	5.0	2.2	2.6	7.2	1,750	1,500	860	440	58	59	62	65	0.83	1.2	2	450	2	0.1200	-195		
51	2	0.06	-	-	1.4	1.4	0	0	75	75	-	62	61	50	0	0	15	0	15	0.0000	370		
51	3	0.09	-	6.3	6.3	6.3	0	200	100	74	-	62	61	50	0	97	180	150	180	0.0340	273		
51	4	0.12	-	7.5	8.8	9.9	0	1,500	135	200	-	62	61	50	0	6.8							

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK) ($\times 10^{-6} \text{ d}^{-1}$)								Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)
			Layer				Layer				Layer				Predevelopment				Post- development					
			1	2	3	4	1	2	3	4	1	2	3	4	Between layers			Between layers			Layers 2-3	Layers 2-3		
															1-2	2-3	3-4	2-3	3-4					
54	2	0.06	-	3.6	3.6	3.6	0	100	100	100	-	62	61	50	0	81	90	150	90	0.0170	226			
54	3	0.08	-	5.0	6.3	6.3	0	700	220	330	-	62	61	50	0	8.5	16	27	16	0.0760	240			
54	4	0.14	11.3	11.2	12.5	13.2	676	1,350	360	290	-	62	61	50	9.3	10	30	27	30	0.1800	203			
54	5	0.13	7.5	7.5	10.0	11.4	2,800	1,520	150	325	-	62	61	50	15	27	140	27	140	0.0740	188			
54	6	0.14	6.3	6.3	7.4	12.8	2,480	1,350	400	350	-	62	61	50	12	22	58	26	58	0.1300	146			
54	7	0.11	5.0	5.0	6.7	8.4	3,200	1,100	600	400	-	62	61	50	6.4	14	26	27	26	0.1500	126			
54	8	0.12	7.5	7.5	8.7	10.1	3,010	800	800	515	-	62	61	50	4.1	8.4	11	29	11	0.0450	70			
54	9	0.08	6.3	6.3	8.3	3.8	1,200	700	912	460	58	59	62	65	2.2	2.5	2.7	760	2.7	0.1000	-60			
54	10	0.09	6.3	2.8	3.3	6.1	965	700	1,060	295	58	59	62	65	3.6	3.2	4.1	1100	4.1	0.1300	-125			
54	11	0.12	9.2	4.1	4.1	9.2	945	700	995	280	69	48	23	47	2.9	5	7.8	150	7.8	0.1200	-115			
54	12	0.12	9.8	4.4	3.8	9.8	252	500	958	270	69	48	23	47	11	9.6	13	190	13	0.0870	45			
54	13	0.10	-	-	6.9	6.7	0	0	50	50	69	48	23	47	0	0	25	0	25	0.0000	320			
55	2	0.06	-	-	2.9	2.9	0	0	160	100	-	62	61	50	0	0	900	0	900	0.0000	250			
55	3	0.08	-	4.6	4.7	4.7	0	922	766	305	-	62	61	50	0	26	44	27	44	0.1800	225			
55	4	0.12	6.3	6.3	8.7	10.4	2,200	1,250	470	275	-	62	61	50	10	18	46	27	46	0.1700	184			
55	5	0.10	6.3	6.3	6.5	7.0	2,180	1,250	460	290	-	62	61	50	2.6	4.6	11	170	11	0.1600	100			
55	6	0.11	3.8	3.7	4.1	8.8	2,730	1,200	500	350	74	50	42	57	2	6.6	0.17	170	13	0.1300	130			
55	7	0.12	6.3	6.2	7.5	10.0	2,890	800	775	475	74	50	42	57	4	14	0.036	57	17	0.1000	140			
55	8	0.09	5.0	5.0	5.5	5.8	1,560	700	768	532	74	50	42	57	1.9	4.2	29	61	4.5	0.0940	45			
55	9	0.10	5.0	5.0	5.8	8.2	522	800	1,120	250	58	59	62	65	3.2	2.1	2.9	29	2.9	0.1500	-55			
55	10	0.09	6.3	2.8	3.1	4.6	910	900	1,330	225	58	59	62	65	1.8	1.4	2	1400	2	0.1700	-155			
55	11	0.11	-	3.5	3.5	7.7	0	1,370	1,240	290	58	59	62	65	0	0.75	1.2	920	1.2	0.2500	-95			
55	12	0.11	-	3.6	3.2	8.4	0	700	1,130	110	69	48	23	47	0	14	27	1700	27	0.1700	147			
56	2	0.06	-	-	3.1	3.1	0	0	100	150	-	60	66	63	0	0	900	0	900	0.0000	165			
56	3	0.08	5.4	5.4	5.4	5.4	18	400	600	200	-	62	61	50	110	46	460	46	210	0.0970	205			
56	4	0.12	5.0	5.0	5.6	9.9	775	800	800	200	-	60	66	63	30	26	180	26	180	0.1700	150			
56	5	0.10	7.5	7.5	10.4	6.6	1,380	1,150	450	300	-	60	66	63	20	29	58	52	58	0.1300	104			
56	6	0.10	5.0	5.0	6.3	7.7	1,790	1,200	360	360	-	60	66	63	27	46	3.9	130	97	0.1100	140			
56	7	0.13	6.3	6.3	6.4	11.7	1,740	700	700	516	74	50	42	57	9.4	24	5.3	130	26	0.0830	60			
56	8	0.12	10.0	10.0	10.5	9.6	919	850	696	555	74	50	42	57	3.1	4.3	47	57	5.7	0.0940	-20			
56	9	0.04	8.8	7.9	11.0	1.6	735	850	900	630	58	59	62	65	1.8	1.6	1.7	26	1.7	0.1100	-45			
56	10	0.09	6.3	2.8	1.3	4.6	885	700	1,270	360	58	59	62	65	0.71	0.55	0.65	560	0.65	0.0860	-30			
56	12	0.08	3.8	3.4	4.5	5.8	4,520	1,000	500	100	69	48	23	47	0.33	2	7.3	130	7.3	0.1400	153			
57	2	0.13	-	9.8	9.8	9.8	0	100	100	100	-	60	66	63	0	140	900	140	900	0.0170	268			
57	3	0.11	7.5	7.5	8.9	8.9	40	1,000	200	100	-	60	66	63	57	48	180	86	180	0.1100	240			
57	4	0.11	6.3	6.2	8.7	8.4	1,620	1,000	481	284	-	60	66	63	1.2	1.9	3.5	29	3.5	0.1100	162			
57	5	0.13	7.5	7.5	8.7	11.2	2,270	900	763	337	-	60	66	63	54	86	0.75	86	260	0.1800	150			
57	6	0.13	8.5	8.5	8.6	11.4	1,950	700	900	400	-	60	66	63	31	42	0.052	130	51	0.1100	110			
57	7	0.15	10.0	10.0	13.4	13.7	1,080	700	758	542	74	50	42	57	36	62	180	62	180	0.1100	85			
57	8	0.06	8.8	7.9	8.1	3.7	882	700	740	560	74	50	42	57	0.13	0.19	0.2	62	0.2	0.0790	-70			
57	9	0.02	-	18.4	20.4	20.7	0	600	700	700	74	50	42	57	0	0.17	0.15	69	0.15	0.0880	-117			
57	10	0.05	8.8	4.0	4.9	2.8	1,120	600	650	650	74	50	42	57	0.0022	0.0043	0.0036	72	0.0036	0.1100	-70			
57	12	0.06	1.3	1.1	2.2	2.4	3,100	500	300	440	69	48	23	47	0.14	1.1	1.2	240	1.2	0.0800	155			
58	3	0.08	5.0	5.0	5.0	5.6	30	700	400	200	-	60	66	63	69	44	77	520	77	0.0850	150			
58	4	0.12	6.3	6.2	8.8	9.5	1,300	1,400	350	250	-	60	66	63	45	62	170	86	170	0.1700	180			
58	5	0.13	6.3	6.2	7.5	11.7	2,990	1,400	525	295	-	60												

APPENDIX B - Aquifer Properties Used in Simulations--Continued

Col- umn	Row num	Spe- cific yield	Hydraulic conductivity (ft/d)				Aquifer thickness (ft)				Percentage of fine-grained sediment				Leakance (TK)(x 10 ⁻⁶ d ⁻¹)						Inelas- tic storage co- effi- cient	1961 criti- cal head (ft)	
			Layer				Layer				Layer				Predevelopment			Post- development					
			1	2	3	4	1	2	3	4	1	2	3	4	Between layers			Between layers			Layers		
			1	2	3	4	1	2	3	4	1	2	3	4	1-2	2-3	3-4	2-3	3-4	2-3	3-4		
61	3	0.07	-	3.4	3.4	3.4	0	200	200	200	52	42	50	62	0	10	8.5	220	8.5	0.0330	170		
61	4	0.07	4.0	4.0	4.0	4.0	217	1,000	800	200	52	42	50	62	59	38	60	42	60	0.1500	234		
61	5	0.09	5.0	5.0	6.7	6.7	2,140	1,000	1,000	250	52	42	50	62	22	36	0.14	69	51	0.1800	150		
61	6	0.07	2.5	2.5	3.7	3.2	2,240	1,600	500	290	52	42	50	62	17	35	1.7	86	74	0.1400	125		
61	7	0.06	2.5	2.5	2.5	1.9	82	1,200	800	396	52	42	50	62	4.7	2.9	4	130	4	0.1700	69		
61	8	0.09	7.5	6.0	12.2	6.1	225	1,200	700	330	52	42	50	62	1.6	1.2	1.8	170	1.8	0.0540	60		
61	9	0.09	7.5	6.3	11.2	6.9	682	1,000	655	345	-	48	53	55	1.9	1.9	2.9	39	2.9	0.0510	66		
61	10	0.12	1.3	1.1	0.4	9.7	1,240	700	500	398	-	-	-	48	2.9	4.8	6.5	58	6.5	0.0810	-20		
61	11	0.06	-	4.5	5.2	5.7	0	300	195	475	-	-	-	48	0	0.067	0.052	140	0.052	0.0380	60		
61	12	0.06	-	0.3	1.1	1.9	0	590	400	450	-	-	-	48	0	5.4	6.4	86	6.4	0.0960	228		
61	13	0.06	-	2.5	2.3	2.5	0	50	50	50	-	-	-	48	0	5.2	5.4	690	5.4	0.0081	394		
62	4	0.06	-	2.4	2.4	2.4	0	900	600	350	52	42	50	62	0	1.1	1.5	51	1.5	0.1000	200		
62	5	0.06	5.0	5.0	5.4	5.4	1,760	1,000	700	300	52	42	50	62	14	24	34	45	34	0.1600	143		
62	6	0.08	3.8	3.7	3.8	3.8	1,940	900	800	300	52	42	50	62	25	44	97	44	97	0.0820	100		
62	7	0.10	7.5	7.5	8.9	8.1	588	1,000	700	320	52	42	50	62	21	20	28	45	28	0.1400	93		
62	8	0.07	5.0	5.0	5.6	4.7	540	1,000	750	275	-	48	53	55	43	37	69	37	69	0.1300	65		
62	9	0.10	7.5	6.7	8.9	6.9	994	1,200	495	298	-	48	53	55	4.8	4.8	0.49	960	9.5	0.0620	33		
62	10	0.09	6.3	5.6	5.3	6.3	752	800	1,000	197	-	48	53	55	7.3	6.2	0.61	36	8.8	0.1100	-40		
62	11	0.04	-	2.3	2.3	1.4	0	1,000	775	325	-	-	-	48	0	0.011	0.019	39	0.019	0.1600	30		
62	12	0.06	-	2.1	2.1	2.3	0	100	350	350	-	-	-	48	0	3.5	2.3	150	2.3	0.0420	230		
62	13	0.05	-	2.5	2.2	2.5	0	25	100	100	-	-	-	48	0	2.8	1.8	550	1.8	0.0100	419		
63	4	0.08	-	4.2	4.2	4.2	0	500	500	355	52	42	50	62	0	2	1.9	75	1.9	0.1000	100		
63	5	0.08	-	4.2	4.2	4.2	0	1,600	1,000	350	52	42	50	62	0	6.1	11	27	11	0.2600	139		
63	6	0.04	5.0	5.0	6.4	6.4	910	1,400	1,000	300	-	48	53	55	29	27	120	27	120	0.2600	120		
63	7	0.08	3.8	3.7	3.5	4.2	1,220	1,200	1,000	235	-	48	53	55	14	15	25	29	25	0.2100	130		
63	8	0.10	5.0	5.0	5.4	6.1	367	1,300	725	275	-	48	53	55	48	37	59	38	59	0.1200	70		
63	9	0.14	8.8	7.9	10.2	11.7	710	800	805	355	-	48	53	55	29	26	2.7	1300	3.4	0.1400	-60		
63	10	0.10	6.3	5.6	6.5	7.1	925	700	800	348	-	48	53	55	2.5	2.6	5.3	43	3.2	0.0830	-15		
63	11	0.09	-	1.6	1.6	4.2	0	1,000	670	395	-	48	53	55	0	39	60	39	60	0.2200	174		
63	12	0.08	-	2.3	2.2	2.5	0	125	200	325	-	-	-	48	0	8.7	5	230	5.5	0.0300	170		
64	4	0.09	-	5.4	5.4	5.4	0	100	100	200	-	48	53	55	0	14	8.6	320	8.6	0.0093	280		
64	5	0.07	-	3.1	3.1	3.1	0	2,000	1,120	375	-	48	53	55	0	3.2	6.3	21	6.3	0.2900	135		
64	6	0.06	2.5	2.5	2.4	2.5	2,040	1,000	300	350	-	48	53	55	29	47	69	86	69	0.1900	115		
64	7	0.11	6.3	6.2	7.5	8.7	2,260	1,000	1,000	79	-	48	53	55	18	28	38	32	38	0.1900	129		
64	8	0.10	6.3	6.2	7.5	7.5	685	1,100	800	265	-	48	53	55	24	22	34	36	34	0.1300	14		
64	9	0.12	9.5	9.5	9.5	9.5	490	1,100	660	340	-	48	53	55	23	18	900E-6	1400	29	0.1100	-15		
64	10	0.11	6.4	6.4	6.4	8.2	445	1,000	1,000	320	-	48	53	55	40	28	40	32	40	0.1200	55		
64	11	0.10	9.9	9.9	9.9	6.3	125	1,300	1,300	357	-	-	-	48	3.9	2.1	3.4	27	3.4	0.1600	115		
64	12	0.08	-	5.0	5.0	5.0	0	500	500	350	-	-	-	48	0	3.7	4.4	69	4.4	0.0900	180		
65	5	0.07	1.3	1.3	1.3	2.5	100	900	250	300	-	48	53	55	1.4	1.2	2.3	58	2.3	0.0860	185		
65	6	0.10	5.0	5.0	6.4	6.4	1,980	800	450	350	-	48	53	55	0.55	1.2	1.8	52	1.8	0.1100	80		
65	7	0.08	5.0	5.0	5.0	5.3	3,280	700	600	300	-	48	53	55	6.5	20	27	290	27	0.1000	80		
65	8	0.09	6.1	6.1	6.1	6.1	2,740	600	700	300	-	48	53	55	46	120	140	250	140	0.0800	70		
65	9	0.13	8.8	8.7	11.5	11.5	687	1,000	350	350	-	48	53	55	9	11	20	49	20	0.0760	43		
65	10	0.11	7.5	7.5	8.4	8.0	428	1,000	975	347	-	-	-	48	46	33	50	230	50	0.1300	92		
65	11	0.12	-	0.5	0.5	8.4	0	1,300	1,280	455	-	-	-	48	0	5.7	8.6						