

(200)
R290
no. 85-559

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY




WATER USE ON THE SNAKE RIVER PLAIN,

IDAHO AND EASTERN OREGON

IDAHO AND EASTERN OREGON

Open-File Report 85-559



A contribution of the
Regional Aquifer-System Analysis Program

A contribution of the
Regional Aquifer-System Analysis Program

Open-file report
(Geological Survey
(U.S.))



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

WATER USE ON THE SNAKE RIVER PLAIN,
IDAHO AND EASTERN OREGON

By S. A. Goodell

Open-File Report 85-559

A contribution of the

Regional Aquifer-System Analysis Program

Boise, Idaho

1986



UNITED STATES DEPARTMENT OF THE INTERIOR

DONALD PAUL HODEL, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

TER USE ON THE SNAKE RIVER PLAIN

AND EASTERN OREGON

S. A. Goodell

en-File Report 82-559

Contribution of the

For additional information
write to:

Idaho Office Chief
U.S. Geological Survey, WRD
230 Collins Road
Boise, ID 83702
(208) 334-1750

Copies of this report can
be purchased from:

U.S. Geological Survey
Western Distribution Branch
Open-File Services Section
Box 25425, Federal Center
Denver, CO 80225
(303) 236-7476

Boise, Idaho

1982

FOREWORD

The RASA (Regional Aquifer-Systems Analysis) program began in 1978 after a congressional mandate to develop quantitative appraisals of the major ground-water systems in the United States. The RASA program represents a systematic effort to study a number of the most important aquifer systems which, in aggregate, underlie much of the Nation and which represent important components of its total water supply. In general, the boundaries of these studies are identified by the hydrologic extent of each system and, accordingly, transcend the political subdivisions to which investigations often have been arbitrarily limited in the past. The broad objectives for each study are to assemble geologic, hydrologic, and geochemical information, to analyze and develop an understanding of the system, and to develop predictive capabilities that will contribute to effective management of the system. Use of computer simulation is an important element of the RASA studies, both to develop an understanding of the natural, undisturbed hydrologic system, and of any changes brought about by man's activities, as well as to provide a means of predicting the regional effects of future pumping or other stresses.

The final interpretive results of the RASA program are presented in a series of U.S. Geological Survey Professional Papers that describe the geology, hydrology, and geochemistry of each regional aquifer system. Each study within the RASA program is assigned a Professional Paper number and, where the volume of interpretive material warrants, separate topical chapters that consider the principal elements of the investigation may be published. The series of RASA interpretive reports begin with Professional Paper 1400 and, thereafter, will continue in numerical sequence as the interpretive products of subsequent studies become available.

CONTENTS

	Page
Abstract.....	1
Well-numbering system.....	2
Introduction.....	2
Purpose and scope.....	2
Previous investigations.....	4
Acknowledgments.....	4
Description of the study area.....	5
Physical setting.....	5
Climate.....	7
Economic setting.....	12
Irrigated agriculture.....	16
History of irrigation.....	19
Methods of estimating irrigation water use.....	25
Pumped withdrawals of surface and ground water for irrigation.....	25
Pumpage calculations.....	27
Accuracy of estimated pumpage.....	31
The constant, K.....	32
Total head.....	32
Gravity withdrawals of surface water for irrigation.....	35
Crop consumptive irrigation requirement.....	35
Surface-water irrigation, 1980.....	37
Ground-water irrigation, 1980.....	42
Hydrologic effects of irrigation	56
Other offstream water uses.....	65
Industrial.....	65
Aquaculture.....	68
Nonindustrial public supply.....	69
Rural.....	72
Idaho National Engineering Laboratory.....	75
Instream water uses.....	75
Hydroelectric power generation.....	75
Minimum instream flows.....	77
Evapotranspiration from water bodies and undeveloped lands.....	80
Total water withdrawn and consumptive water use in 1980.....	82
Water-use trends, 1945 to 1980.....	82
Summary.....	87
References cited.....	89

ILLUSTRATIONS

Page

Figure 1.	Diagram showing well-numbering system.....	3
2-10.	Maps showing:	
2.	Location of the study area.....	6
3.	Gaging stations and geographic features.....	8
4.	Irrigated acreage, 1980.....	11
5.	Mean annual precipitation in the Snake River basin.....	14
6.	Locations of weather stations.....	15
7.	Irrigated acreage, 1899.....	21
8.	Irrigated acreage, 1929.....	23
9.	Irrigated acreage, 1945.....	24
10.	Irrigated acreage, 1966.....	26
11-14.	Graphs showing:	
11.	Relation between power consumed and volume of water pumped times total head.....	29
12.	Estimated well drawdowns.....	30
13.	Efficiencies of sample pumping stations.....	33
14.	Accuracy of estimated pumping lifts....	36
15.	Map showing locations of major canals.....	40
16.	Graph showing altitude of the Snake River and adjacent land surface.....	41
17.	Map showing estimated ground-water pumpage, 1980.....	46
18.	Graph showing well completion by rock type..	48
19.	Graph showing discharge from irrigation wells.....	50
20-22.	Maps showing:	
20.	Generalized depth to water.....	51
21.	Locations of Critical Ground-Water Areas.....	55
22.	Estimated crop consumptive irrigation requirement for ground-water-irrigated areas.....	57
23-25.	Graphs showing:	
23.	Water-level rises in three wells, 1900-60.....	60
24.	Average annual ground-water discharge from the north side of the Snake River between Milner and King Hill...	62
25.	Declining water levels in well 8S-24E-31DAC1 in Minidoka County.....	63
26-29.	Maps showing:	
26.	Industrial withdrawals, 1980.....	66
27.	Locations of fish farms.....	71

ILLUSTRATIONS--Continued

	Page
Figure 28. Public- and rural-supply withdrawals, 1980.....	74
29. Locations of hydroelectric power-plants.....	78
30. Graph showing trends in withdrawals for offstream uses, 1950-80.....	84

TABLES

Table 1. Land uses, 1980.....	10
2. Mean monthly and annual precipitation and mean annual air temperature recorded at selected weather stations, 1941-70.....	13
3. Acreage of major crops, 1980.....	17
4. Average rates of consumptive water use for crops recorded at selected weather stations.....	18
5. Errors in pumpage estimates owing to errors in estimates of total head at two hypothetical wells.....	34
6. Average crop consumptive irrigation requirements recorded at selected weather stations.....	38
7. Irrigation diversions from the Snake River and major tributaries by gaged reach, 1980.....	43
8. Characteristics of irrigation wells.....	47
9. Upstream irrigated area and streamflow depletions for the Snake River at King Hill and Weiser, 1870 to 1940.....	58
10. Industrial water use by county, 1980.....	67
11. Aquaculture water use by county, 1980.....	70
12. Nonindustrial public-supply water use and population served by county, 1980.....	73
13. Rural domestic and livestock water use by county, 1980.....	76
14. Water use for hydropower generation, 1980...	79
15. Summary of offstream water withdrawals and consumptive use, 1980.....	83
16. Estimated water use in Idaho, 1945-80.....	85

CONVERSION FACTORS

<u>Multiply</u>	<u>By</u>	<u>To obtain</u>
acre	4,047	square meter
acre-foot (acre-ft)	1,233	cubic meter
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second
foot (ft)	0.3048	meter
foot poundal (ft-lb)	0.0042	joule
gallon (gal)	3.785	liter
gallon per minute (gal/min)	0.06309	liter per second
horsepower (hp)	745.7	watt
inch (in.)	25.40	millimeter
kilowatt-hour (kWh)	3,600,000	joule
megawatt-hour (MWh)	3,600,000,000	joule
mile (mi)	1.609	kilometer
pound, avoirdupois (lb)	453.6	gram
pound per square inch (psi)	70.31	gram per square centimeter
square mile (mi ²)	2.590	square kilometer

Temperature in °C (degrees Celsius) can be converted to °F (degrees Fahrenheit) as follows:

$$^{\circ}\text{F} = (1.8) (^{\circ}\text{C}) + 32$$

Industries, including aquaculture, withdrew an estimated 1.97 million acre-feet of water. Withdrawals for other offstream uses, including public and rural supplies, totaled 132,000 acre-feet. Hydroelectric power generation is an economically important instream use of water. In 1980, about 52 million acre-feet of surface water were used to generate 2.6 million megawatt-hours of electricity. Native vegetation evapotranspired an estimated 3.7 million acre-feet, and 900,000 acre-feet evaporated from bare ground and open water.

WATER USE ON THE SNAKE RIVER PLAIN, IDAHO AND EASTERN OREGON

By

S. A. Goodell

ABSTRACT

Amounts of water withdrawn and consumptively used for irrigation and other uses on the Snake River Plain were estimated to help determine hydrologic effects of ground- and surface-water use. Irrigation is the largest offstream use of water on the plain. Surface-water irrigation began in the 1840's and increased rapidly through the early 1900's. Use of ground water for irrigation accelerated after World War II. In 1980, about 3.1 million acres were irrigated: 1.0 million acres were irrigated with about 2.3 million acre-feet of ground water; 2.0 million acres were irrigated with about 12.7 million acre-feet of surface water; 0.1 million acres were irrigated with combined surface and ground water. Historical changes in aquifer storage and spring discharge are closely related to changes in irrigation practices.

Industries, including aquaculture, withdrew an estimated 1.97 million acre-feet of water. Withdrawals for other offstream uses, including public and rural supplies, totaled 132,000 acre-feet. Hydroelectric power generation is an economically important instream use of water. In 1980, about 52 million acre-feet of surface water were used to generate 2.6 million megawatt-hours of electricity. Native vegetation evapotranspired an estimated 3.7 million acre-feet, and 900,000 acre-feet evaporated from bare ground and open water.

WELL-NUMBERING SYSTEM

The well-numbering system (fig. 1) used by the U.S. Geological Survey in Idaho indicates the location of wells within the official rectangular subdivision of the public lands, with reference to the Boise base line and meridian. The first two segments of the number designate the township and range. The third segment gives the section number; three letters, which indicate the $\frac{1}{4}$ section (160-acre tract), $\frac{1}{4}$ - $\frac{1}{4}$ section (40-acre tract), and $\frac{1}{4}$ - $\frac{1}{4}$ - $\frac{1}{4}$ section (10-acre tract); and the serial number of the well within the tract. Quarter sections are lettered A, B, C, and D in counterclockwise order from the northeast quarter of each section (fig. 1). Within quarter sections, 40-acre and 10-acre tracts are lettered in the same manner. For example, well 8S-24E-31DAC1 is in the SW $\frac{1}{4}$ NE $\frac{1}{4}$ SE $\frac{1}{4}$, sec. 31, T. 8 S., R. 24 E., and is the first well inventoried in that tract.

INTRODUCTION

Historical hydrologic data indicate that man's use of water, especially for irrigation, has significantly altered the natural water regimen of the Snake River Plain. However, the effects of water-use practices on the hydrologic system are poorly understood. To assess these effects and to insure continued availability of good quality water, managers need detailed regional water-use data. Water-use data also are needed as input to ground-water flow models.

Water use on the Snake River Plain is diverse and extensive, making direct measurement of even the most important uses impractical. Consequently, withdrawals for most water uses must be estimated. There is a particular need for estimates of ground- and surface-water withdrawals for irrigation, the largest water use.

Purpose and Scope

The purposes of the present study were to: (1) Summarize the amounts and distribution of ground- and surface-water use on the Snake River Plain in 1980, (2) relate historical development of irrigation that led to present water-use patterns, and (3) describe the effects of water use on the hydrologic system.

The scope of this study included measurement of discharge and rate of power use at 79 irrigation pumping stations on the plain. Pump station data and annual power

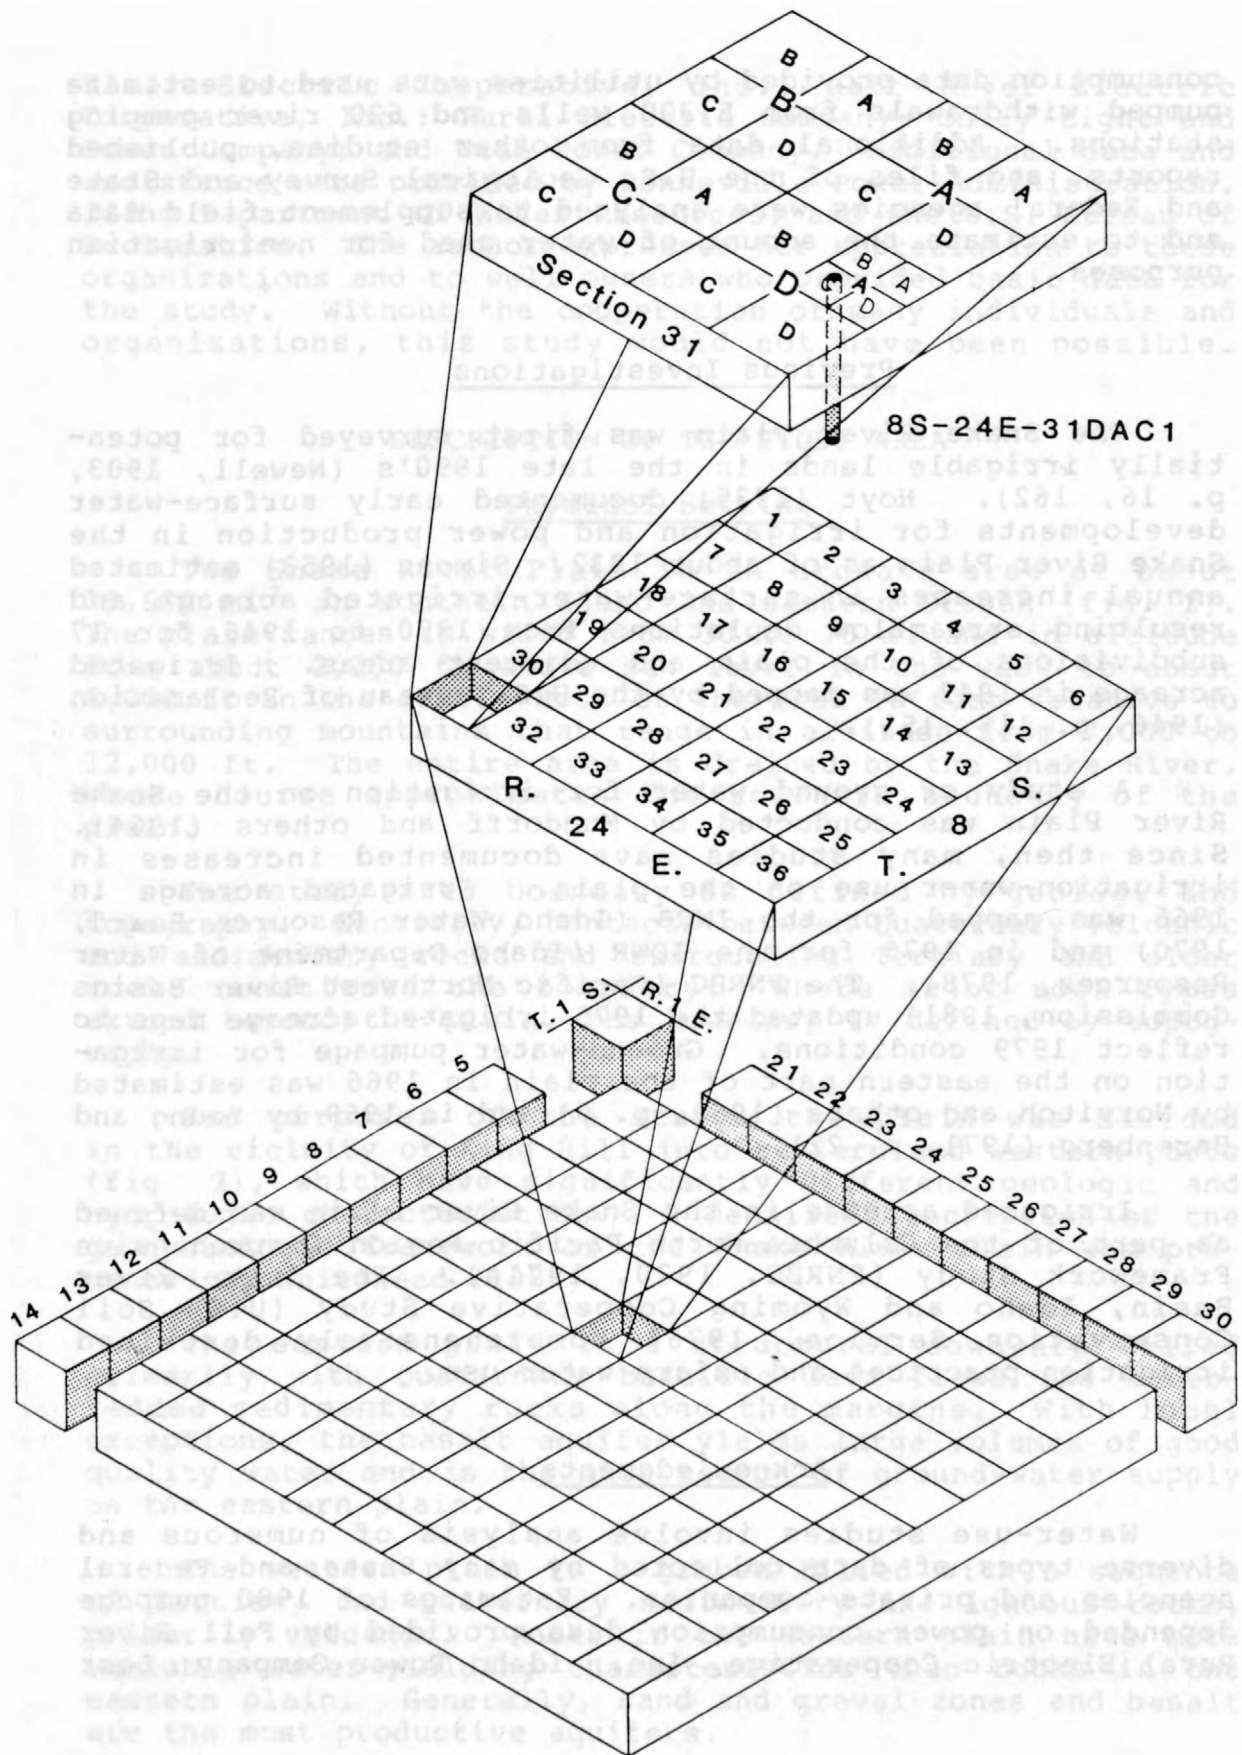


Figure 1.--Well-numbering system.

consumption data provided by utilities were used to estimate pumped withdrawals from 5,300 wells and 620 river pumping stations. Additional data from other studies, published reports, and files of the U.S. Geological Survey and State and Federal agencies were analyzed to supplement field data and to estimate the amount of water used for nonirrigation purposes.

Previous Investigations

The Snake River Plain was first surveyed for potentially irrigable lands in the late 1890's (Newell, 1903, p. 16, 162). Hoyt (1935) documented early surface-water developments for irrigation and power production in the Snake River Plain as of about 1932. Simons (1953) estimated annual increases in surface-water-irrigated acreage and resulting streamflow depletions from 1890 to 1946 for 17 subdivisions of the plain and adjacent areas. Irrigated acreage in 1945 was mapped by the U.S. Bureau of Reclamation (1946, p. 115, 151).

A study of ground water for irrigation on the Snake River Plain was conducted by Mundorff and others (1964). Since then, many studies have documented increases in irrigation-water use on the plain. Irrigated acreage in 1966 was mapped for the IWRB (Idaho Water Resource Board, 1970) and in 1975 for the IDWR (Idaho Department of Water Resources, 1978). The PNRBC (Pacific Northwest River Basins Commission, 1981) updated the 1975 irrigated acreage maps to reflect 1979 conditions. Ground-water pumpage for irrigation on the eastern part of the plain in 1966 was estimated by Norvitch and others (1969, p. 9) and in 1969 by Young and Harenberg (1971, p. 22).

Irrigated acreage in the Snake River Plain was defined as part of the Columbia-North Pacific Region Comprehensive Framework Study (PNRBC, 1970, 1971a). The Snake River Basin, Idaho and Wyoming Cooperative Study (U.S. Soil Conservation Service, 1976) comprehensively described irrigation practices and onfarm water use.

Acknowledgments

Water-use studies involve analysis of numerous and diverse types of data collected by many State and Federal agencies and private companies. Estimates of 1980 pumpage depended on power consumption data provided by Fall River Rural Electric Cooperative, Inc.; Idaho Power Company; Lost

River Electric Cooperative, Inc.; Raft River Electric Cooperative, Inc.; Rural Electric Company; Unity Light and Power Company; and Utah Power Company. Additional data and assistance were provided by Bonneville Power Administration, Idaho Department of Water Resources, and the U.S. Bureau of Reclamation. The author expresses her appreciation to these organizations and to well owners who provided basic data for the study. Without the cooperation of many individuals and organizations, this study would not have been possible.

DESCRIPTION OF THE STUDY AREA

Physical Setting

The Snake River Plain is an arcuate area of about 15,600 mi² in southern Idaho and eastern Oregon (fig. 2). The plain ranges in width from 30 to 75 mi and in altitude from about 2,100 ft above sea level in the west to about 6,000 ft in the east. Most of the area is flat relative to surrounding mountains that range in altitude from 7,000 to 12,000 ft. The entire area is drained by the Snake River, whose course approximates the southern boundary of the plain.

The study area boundary is defined by geology and topography. Generally, contacts between Quaternary volcanic and sedimentary rocks and surrounding Tertiary and older rocks constitute the boundary. Where major rock types extend beyond the plain, the boundary is defined by topography.

For purposes of the study, the plain was divided in the vicinity of King Hill into eastern and western parts (fig. 2), which have significantly different geologic and hydrologic characteristics. A detailed description of the geohydrologic framework of the Snake River Plain was presented by Whitehead (1984).

The eastern plain is a structural downwarp filled primarily with Quaternary basaltic lava flows and interbedded sedimentary rocks along the margins. With local exceptions, the basalt aquifer yields large volumes of good quality water and is the main source of ground-water supply on the eastern plain.

The western plain is a graben filled with a sequence of Tertiary and Quaternary sedimentary and igneous rocks, primarily volcanic. Rocks in the western plain have more variable water-yielding characteristics than rocks in the eastern plain. Generally, sand and gravel zones and basalt are the most productive aquifers.

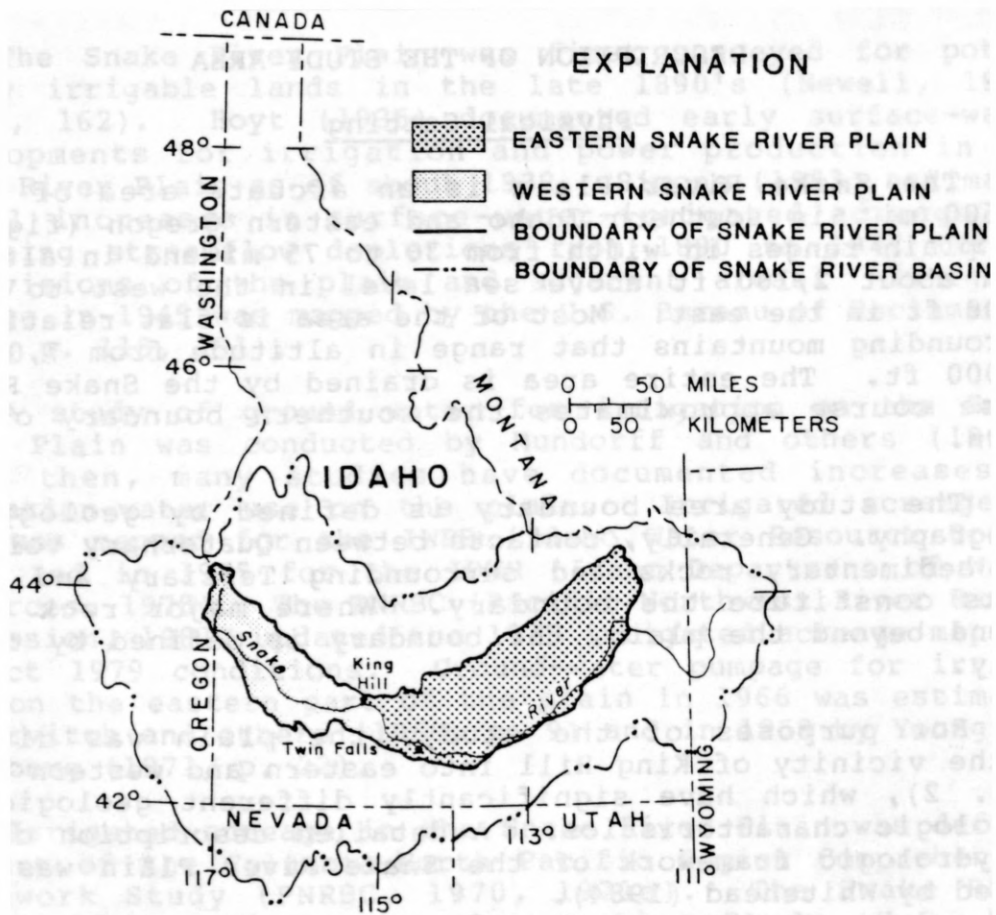


Figure 2.--Location of the study area.

Ground-water systems underlying both the eastern and western plain are recharged by deep percolation of excess irrigation water, leakage from canals, seepage from streams flowing onto and over the plain, underflow from tributary basins and highlands bordering the plain, and direct precipitation over the plain. Major components of ground-water discharge are spring flow to the Snake River, seepage to rivers, underflow, ground-water pumpage, and evapotranspiration. Springs discharging to the Snake River between Twin Falls and King Hill account for about half of the 8 million acre-ft of annual ground-water discharge in the eastern plain. Annual discharge in the western plain is about 2 million acre-ft. Detailed ground-water and basin budgets for the Snake River Plain were presented by Kjelstrom (1984).

Both the eastern and western plain are drained by the Snake River and its tributaries. The Snake River originates in western Wyoming, enters the plain about 18 mi northeast of Idaho Falls (fig. 3), and flows generally westward to Milner in a shallow but well-defined channel. Included in that reach is American Falls Reservoir, the largest instream storage in Idaho. For more than 200 mi downstream from Milner, the river is entrenched as much as 700 ft below the general altitude of the plain in alternating canyons and broad valleys. On the far western plain, the altitude of the plain approaches that of the river channel until the river is only slightly entrenched near Payette. North of Weiser, the Snake River leaves the plain and enters a steep canyon several hundred feet deep.

Major Snake River tributaries are shown in figure 3. Except for Big and Little Wood Rivers, nearly all discharge from tributary streams north of the eastern plain seeps into the aquifer system.

Irrigated agriculture and other land uses on the Snake River Plain in 1980 were mapped from digital Landsat data (Lindholm and Goodell, 1984). Figure 4 shows irrigated acreage and table 1 describes the land-use classes. Of the 9.8 million acres on the plain, about 5.2 million acres, or 53 percent, are rangeland and 3.1 million acres are irrigated agriculture. Another 1.0 million acres are barren. Most of the barren area is exposed lava flows with little or no soil development.

Climate

The climate of the Snake River Plain is semiarid. Precipitation is sparse; winters are cold and summers are hot. Only a few places receive sufficient precipitation for nonirrigated farming.

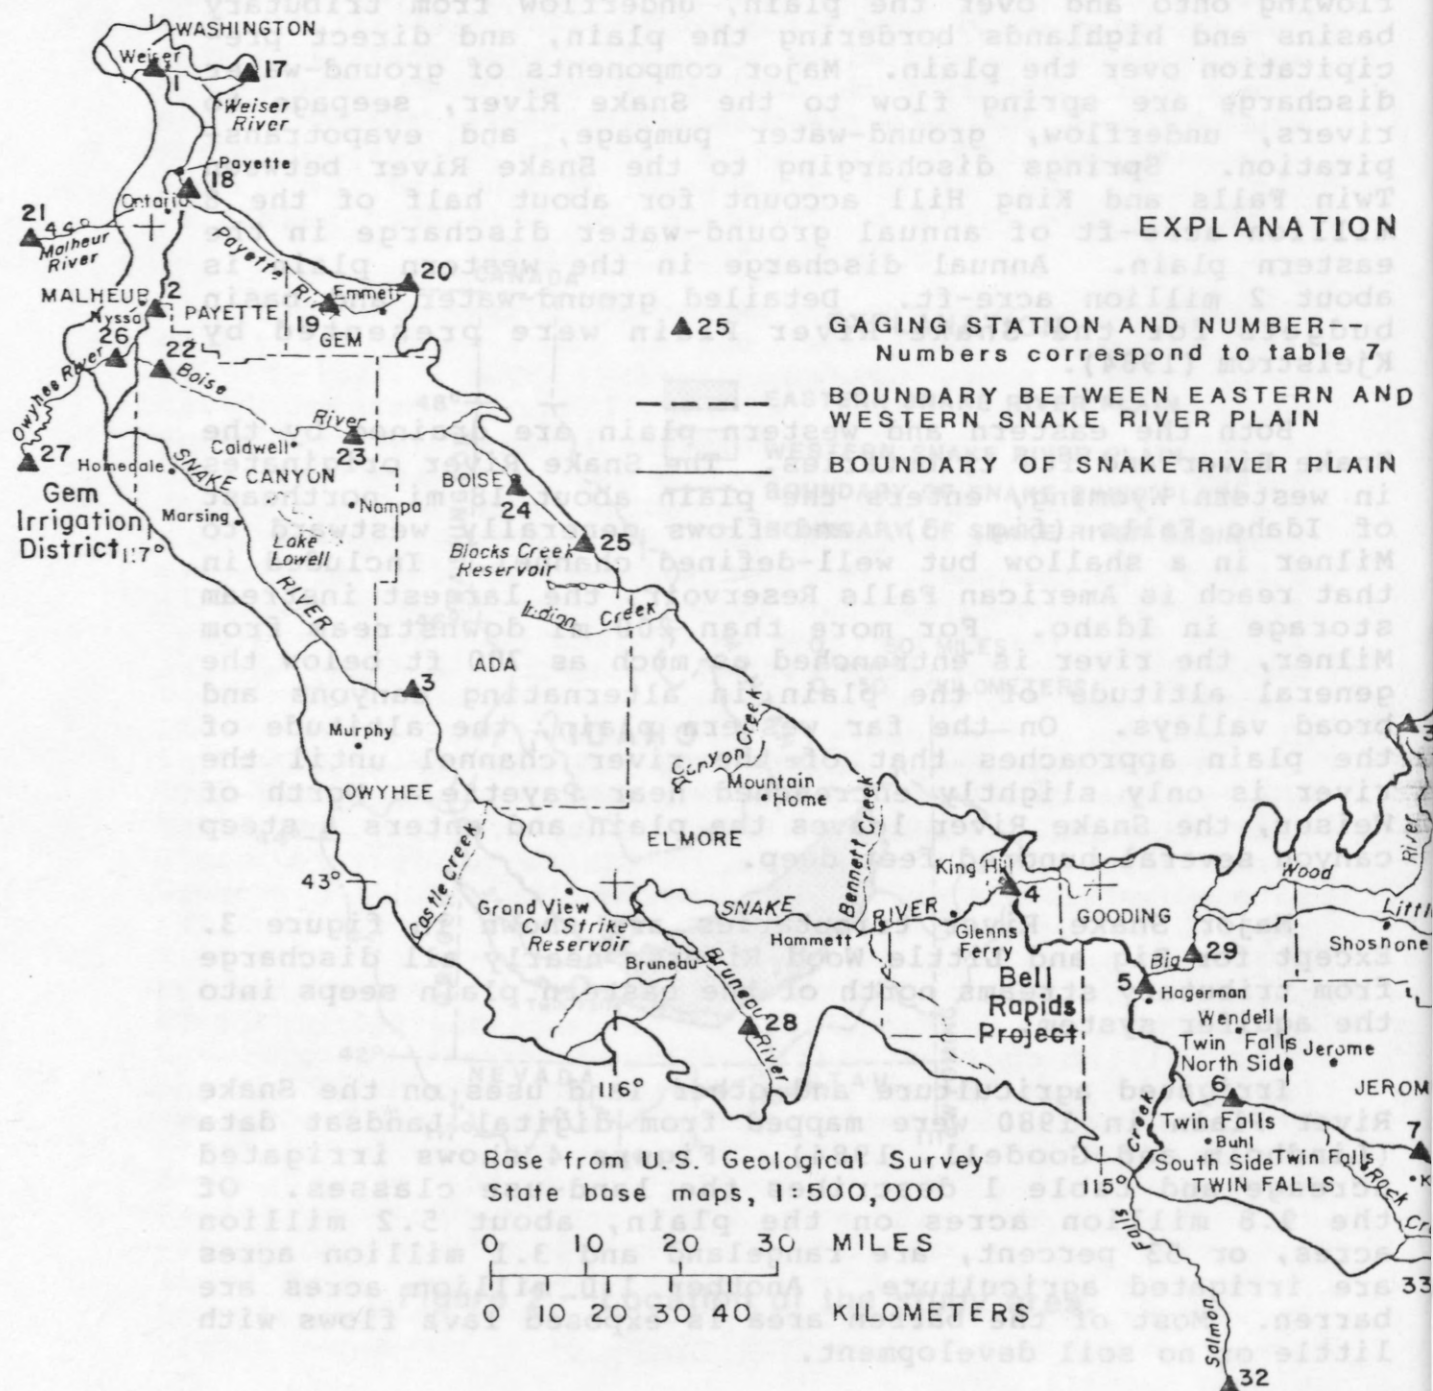


Figure 3.--Gaging station and geographic features.



Table 1.—Land uses, 1980

Land use or land-cover class	Description	Acres	Percent of total area
Barren	Lava flows, basalt, burns, bare soil, and rock; less than one-third of area has vegetation or other cover	1,021,000	10.4
Urban	Cities, towns, and villages; transportation, power and communication facilities; commercial and industrial complexes	101,000	1.0
Rangeland	Grasslands, sage, upland shrubs, and mixed shrub-sage-grass, including areas seeded to introduced or domestic forage species	5,223,000	53.5
Water	Lake, reservoir, river, stream, and canal surfaces and water shores	107,000	1.1
Wetland	Marshes, mudflats, swamps, and wet meadows dominated by aquatic or hydrophytic vegetation; forested or non-forested	36,000	.4
Forest	Deciduous, coniferous, and mixed forest land with at least 10 percent tree crown areal density	28,000	.3
Dry land agriculture	Nonirrigated cropland, pasture, orchards, and nurseries; confined feeding operations; and agriculture-associated farmsteads and roads	118,000	1.2
Irrigated agriculture	Irrigated cropland, pasture, orchards, and nurseries; associated farmsteads, roads, canals, and ditches; classified by source of irrigation water:		
	Ground water	986,000	10.1
	Surface water	2,029,000	20.8
	Combined surface and ground water	117,000	1.2
Totals		9,766,000	100.0

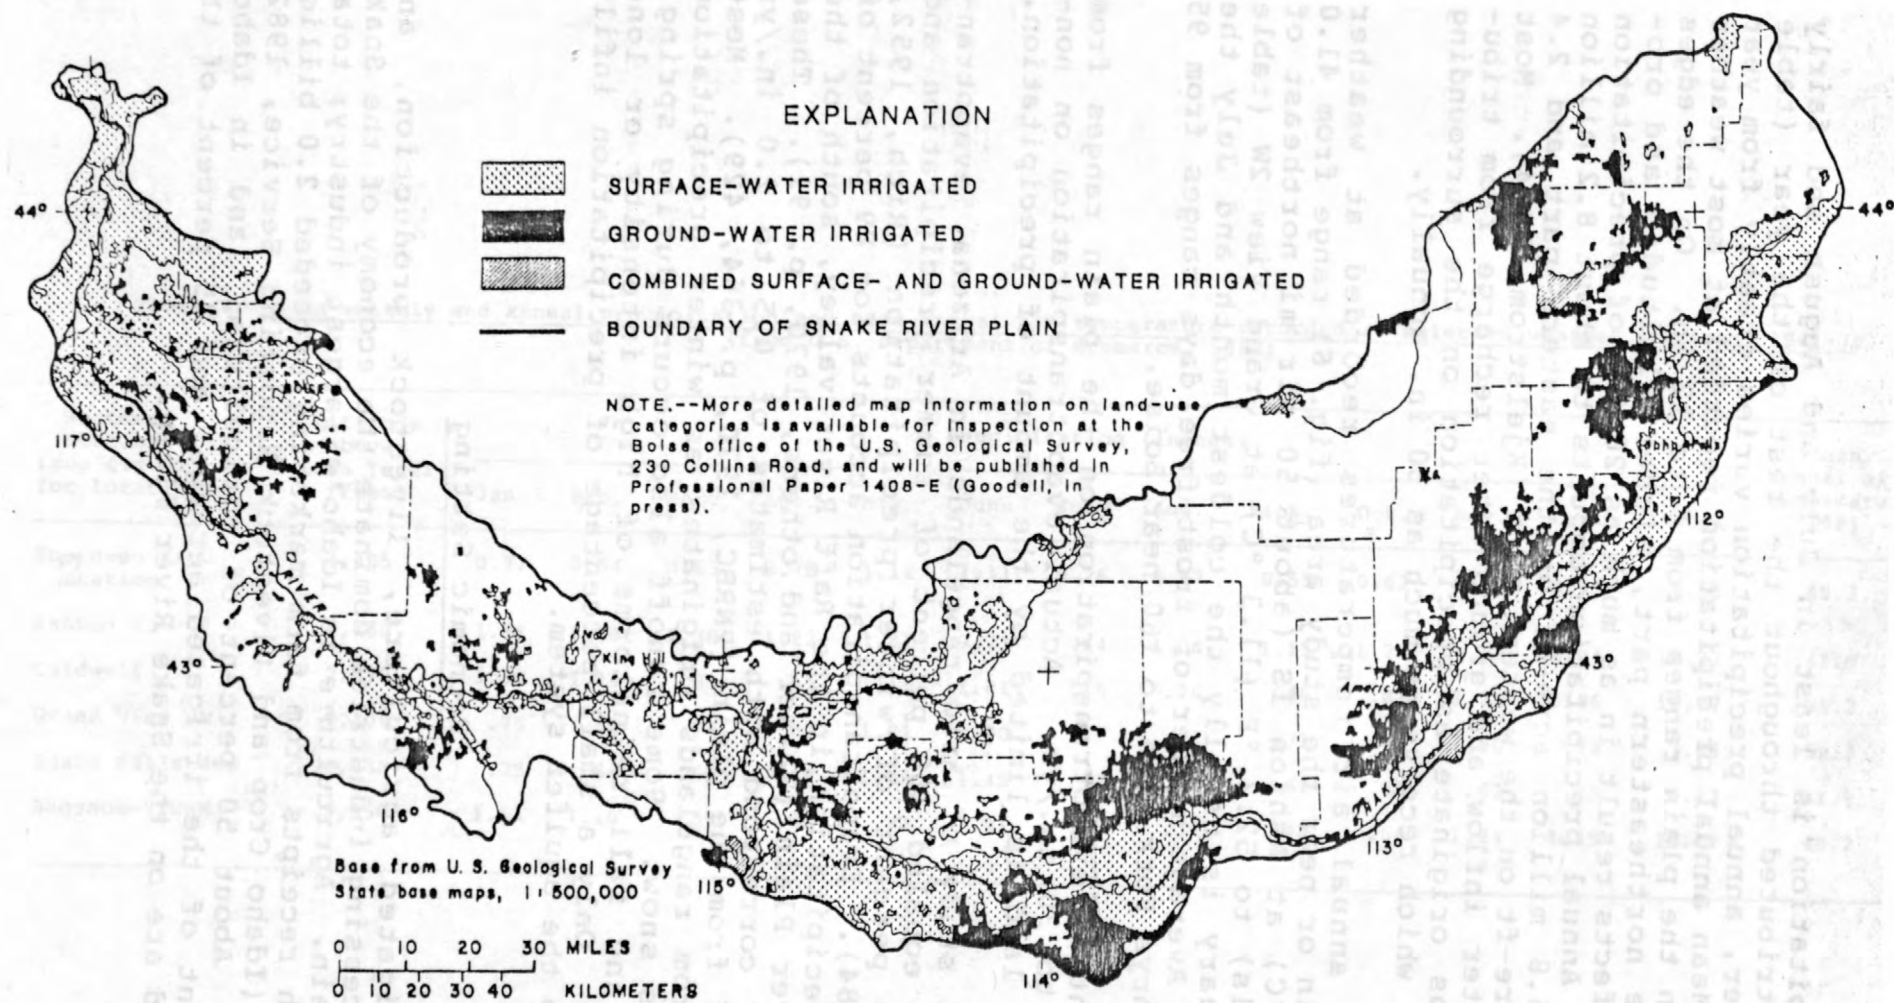


Figure 4.--Irrigated acreage, 1980.

Precipitation is least in July and August and fairly evenly distributed throughout the rest of the year (table 2). However, annual precipitation varies greatly from year to year. Mean annual precipitation recorded at most weather stations on the plain ranges from 6 to 12 in. On the edges and in the northeastern part, higher altitudes and orographic effects result in as much as 20 in. of precipitation (fig. 5). Annual precipitation amounts to about 8.2 million acre-ft; 5.8 million acre-ft on the eastern part and 2.4 million acre-ft on the western part (Kjelstrom, 1984). Most surface-water inflow and ground-water recharge from tributary basins originate as precipitation on the surrounding mountains, which receive as much as 60 in. annually.

Mean annual air temperatures recorded at weather stations in or near the study area (fig. 6) range from 41.0 °F (5.0 °C) at Ashton 1S (about 50 air mi northeast of Idaho Falls) to 52.3 °F (11.3 °C) at Grand View 2W (table 2). January is usually the coldest month and July the warmest. Average number of frost-free days ranges from 95 in the Henrys Fork area to 160 near Boise.

Potential evapotranspiration on the plain ranges from about 19 to 30 in./yr. Actual evapotranspiration on non-irrigated land is limited by the amount of precipitation.

In a study of arid rangelands in Arizona, evapotranspiration equaled 100 percent of summer precipitation and 80 to 90 percent of winter precipitation (Rich, 1952, p. 983, 984). Evapotranspiration accounts for 89 percent of annual precipitation in the Raft River valley, south of the Snake River Plain (Walker and others, 1970, p. 91). These estimates correspond with estimates of 0.5 to 2.0 in./yr of runoff from the plain (PNRBC, 1970, p. 364, 429). Most runoff from rangelands originates as winter precipitation stored as snow. Some runoff also occurs during spring, summer, and fall rainstorms of high intensity or long duration. Only a small percentage of precipitation infiltrates to the aquifer system.

Economic Setting

Irrigated agriculture, livestock production, and food-processing industries dominate the economy of the Snake River Plain. Agriculture is Idaho's largest industry; total 1980 cash receipts from farm marketing exceeded 2.0 billion dollars (Idaho Crop and Livestock Reporting Service, 1982, p. 14). About 50 percent of agricultural land in Idaho, 85 percent of the irrigated acreage, and 25 percent of the rangeland are on the Snake River Plain.

Table 2.--Mean monthly and annual precipitation and mean annual air temperature recorded at selected weather stations, 1941-70
(from U.S. Department of Commerce, 1980)

Weather station (see fig. 5 for location)	Altitude above sea level (feet)	Precipitation (inches)													Mean annual air temperature (°F)
		Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.	Annual	
Aberdeen Exp. Station	4,405	0.77	0.54	0.63	0.75	1.12	1.11	0.26	0.47	0.55	0.62	0.72	0.91	8.61	45.3
Ashton 1S	5,260	1.85	1.80	1.30	1.22	1.87	2.21	.64	1.04	1.15	1.29	1.86	2.04	18.27	41.0
Caldwell	2,370	1.38	1.14	.89	.91	1.12	1.01	.15	.26	.46	.81	1.28	1.36	10.77	51.2
Grand View 2W	2,400	.75	.56	.74	.63	1.01	1.00	.11	.21	.31	.42	.80	.72	7.26	52.3
Idaho Falls 46W	4,938	.75	.64	.50	.68	1.28	1.45	.32	.66	.62	.45	.62	.75	8.72	41.9
Shoshone 1WNW	3,950	1.54	1.10	.89	.67	.93	.91	.15	.31	.48	.64	1.24	1.55	10.41	48.2

EXPLANATION

MEAN ANNUAL PRECIPITATION, IN INCHES



≤10



11 to 20



21 to 40



41 to 60




>60



BOUNDARY OF SNAKE RIVER PLAIN



BOUNDARY OF SNAKE RIVER
BASIN

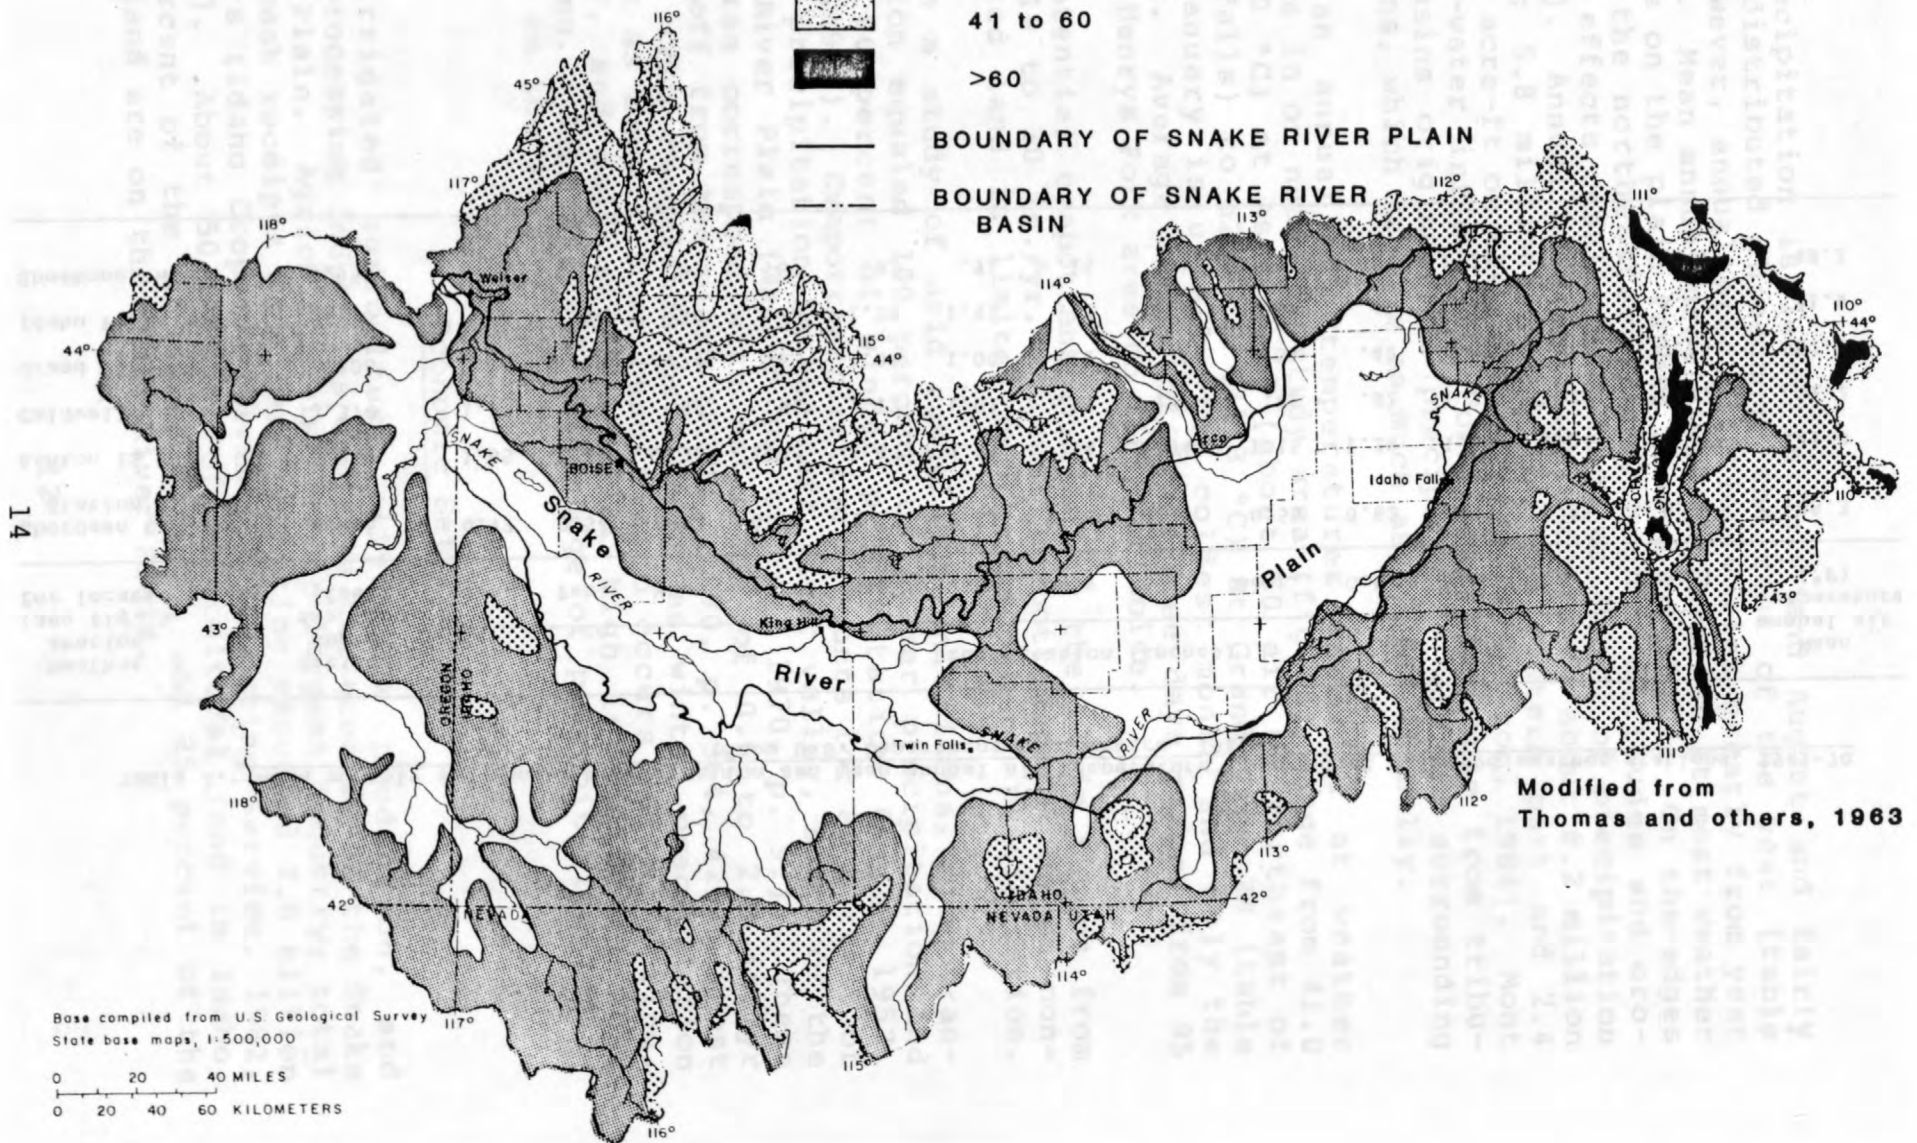

Modified from
Thomas and others, 1963

Base compiled from U.S. Geological Survey
State base maps, 1:500,000

0 20 40 MILES
0 20 40 60 KILOMETERS

EXPLANATION

WEATHER STATIONS AND THEIR USE IN THIS REPORT

- C, CLIMATIC DATA (TABLE 2)
 CU, CONSUMPTIVE USE (TABLE 4)
 CIR, CONSUMPTIVE IRRIGATION
 REQUIREMENT (TABLE 6)

BOUNDARY OF SNAKE RIVER PLAIN

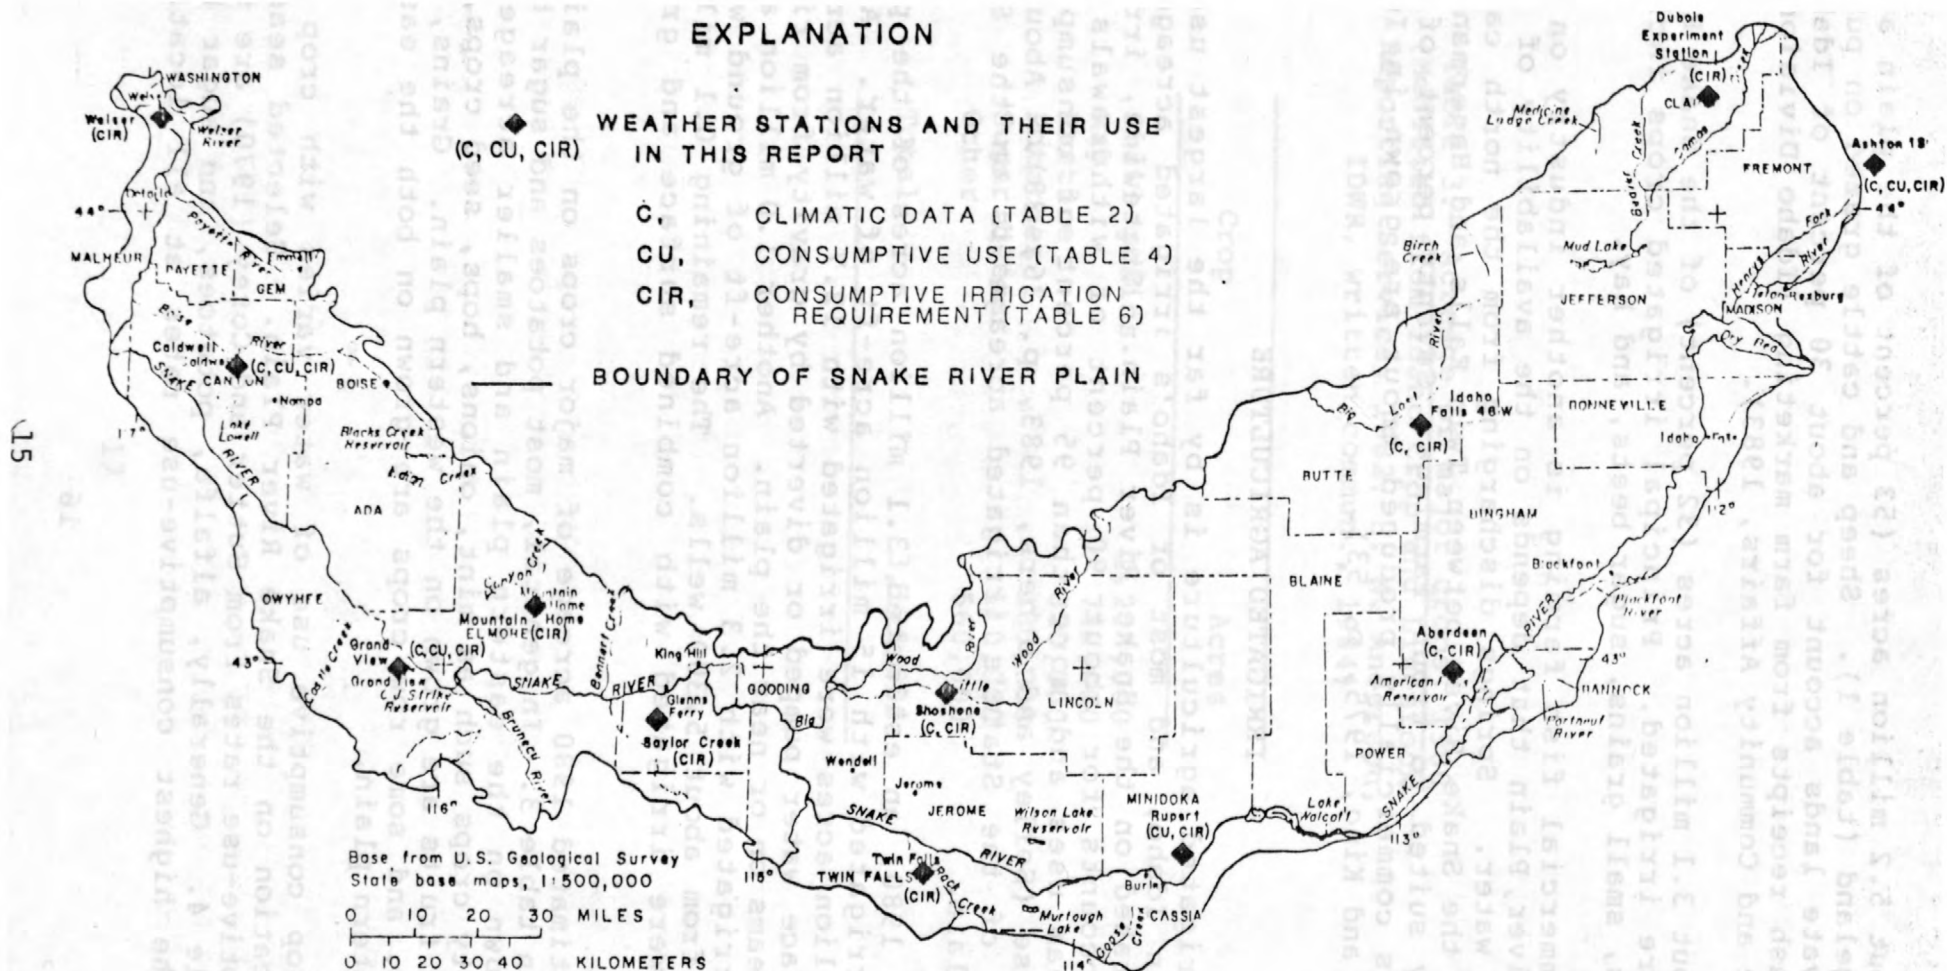


Figure 6.--Locations of weather stations.

About 5.2 million acres (53 percent of the plain area) are rangeland (table 1). Sheep and cattle grazed on public and private lands account for about 30 percent of Idaho's total cash receipts from farm marketing (Idaho Division of Economic and Community Affairs, 1983).

About 3.1 million acres (32 percent) of the Snake River Plain are irrigated. Principal irrigated crops include potatoes, small grains, sugar beets, and hay.

Commercial fish farming is another industry on the Snake River Plain that depends on the availability of good quality water. Springs discharging from the north canyon wall of the Snake River between Twin Falls and Hagerman are uniquely suited to trout farming. Seventy percent of the Nation's commercially produced trout are grown in Idaho (Klontz and King, 1975, p. 53).

IRRIGATED AGRICULTURE

Irrigated agriculture is by far the largest use of water in Idaho, and most of Idaho's irrigated acreage is concentrated on the Snake River Plain. Statewide, irrigation accounts for about 90 percent of withdrawals for offstream uses and more than 95 percent of consumptive water use (Solley and others, 1983, p. 36, 38). About 85 percent of the State's irrigated acreage is on the Snake River Plain.

In 1980, an estimated 3.1 million acres of the plain were irrigated with 15 million acre-ft of water. About 2.0 million acres were irrigated with 12.7 million acre-ft of surface water pumped or diverted by gravity from rivers and streams on or near the plain. Another 1.0 million acres were irrigated with 2.3 million acre-ft of ground water pumped from about 5,300 wells. The remaining 0.1 million acres were irrigated with combined surface and ground water.

Estimated 1980 acreage of major crops on the plain is shown in table 3. In general, most potatoes and sugar beets are grown on the eastern plain and smaller acreages of specialty crops such as mint, onions, hops, seed crops, and orchard fruits are grown on the western plain. Grains, hay, pasture, and some row crops are grown on both the eastern and western plain.

Crop consumptive use of water varies with crop type and location on the Snake River Plain. Selected seasonal consumptive-use rates from Sutter and Corey (1970) are shown in table 4. Generally, alfalfa, potatoes, and sugar beets have the highest consumptive-use rates at all locations.

Table 3.--Acreage of major crops, 1980
(Modified from Idaho Crop and Livestock
Reporting Service, 1982; H. N. Anderson,
IDWR, written commun., 1984)

Crop	Acres
Small grains	1,208,000
Hay	749,000
Pasture	320,000
Potatoes	185,000
Sugar beets	110,000
Other	560,000
Total	3,132,000

gravity distribution is the most common on the plain. The U.S. Soil Conserv. (p. 56-57) estimated about 65 percent are served by gravity systems and 35 percent by pumped systems. Since the 1960's, total area irrigated has increased, particularly in the Snake River basin. This is due, in part, to the unsuitability for gravity irrigation. All costs associated with pumping water in water-distribution systems more economical.

History of Irrigation

Irrigation has been practiced on the Snake River flood plain for about 140 years. The first reported irrigation was in lands adjacent to the Boise River (1874, p. 31). By 1884, most easily irrigated lands adjacent to the Boise River flood plain were in production. In expanding irrigation beyond the flood plain, the first major irrigation project was the Boise River project (1884, p. 31).

Table 4.--Average rates of consumptive water use for crops,
recorded at selected weather stations
(Modified from Sutter and Corey, 1970)

[Consumptive-use rates in inches; ----, no data available]

Crop	Weather station			
	Caldwell	Grand View	Rupert	Ashton 1S
Spring grain	16.7	18.7	15.2	15.3
Winter grain	21.8	23.0	20.6	17.5
Alfalfa	29.0	34.1	27.4	18.3
Pasture	23.8	26.8	22.3	15.8
Potatoes	25.9	29.1	23.8	17.4
Sugar beets	27.8	31.3	26.1	17.8
Dry beans	18.6	20.3	17.6	----
Corn silage	21.1	24.8	20.0	14.0
Small vegetables	12.8	14.8	12.0	----

Row crops such as corn, small vegetables, and beans use less water. The highest consumptive-use rates for all crops are in the hot, dry central and western parts of the plain. At Grand View, alfalfa uses an average of 34 in. of water annually. The northeastern edge of the plain is generally cooler and more moist, and evapotranspiration rates are lower. Near Ashton, alfalfa uses an average of only 18 in. of water annually.

Crop-irrigation requirements (seasonal evapotranspiration less precipitation available to plants) also depend on crop type and location on the plain. Irrigation requirements vary from year to year, depending on temperatures and amount and seasonal distribution of precipitation. Winter, spring, and fall precipitation will reduce irrigation-water withdrawals if adequate soil moisture delays the start of irrigation in the spring or hastens its end in the fall. Scant precipitation during summer months has less effect on irrigation-water withdrawals.

The amount of water applied to crops generally exceeds irrigation-water requirements because of onfarm losses. Water evaporates from exposed water surfaces in gravity-distribution systems. Runoff and seepage occur when more water is applied than can be evapotranspired or absorbed and retained by the soil. Water also seeps from unlined ditches. The U.S. Soil Conservation Service (1977, p. 25) estimated that about 40 percent of water diverted for irrigation in the Snake River basin is lost to evaporation, runoff, and seepage.

Gravity distribution is the most common irrigation method on the plain. The U.S. Soil Conservation Service (1977, p. 66-67) estimated about 65 percent of irrigated area is served by gravity systems and 35 percent by sprinkler systems. Since the 1960's, total area irrigated with sprinklers has increased, particularly in ground-water-irrigated areas. This is due, in part, to development of lands unsuitable for gravity irrigation. Also, increasing energy costs associated with pumping water have made efficient water-distribution systems more economical.

History of Irrigation

Irrigation has been practiced on the Snake River Plain for about 140 years. The first reported irrigation was in 1843 on lands adjacent to the Boise River (Caldwell and Wells, 1974, p. 31). By 1864, most easily irrigable lands on the Boise River flood plain were in production. Local interest in expanding irrigation beyond the flood plain was

stimulated by a rapidly increasing population. Several private companies constructed small canal systems that brought water to higher grounds. Development of remaining irrigable lands required major engineering projects--projects too expensive for small, local enterprises.

Irrigation on the eastern plain began in about 1880 and followed the same development sequence as in the Boise River valley. Irrigation along the Snake River above Blackfoot (mainly on the Rigby Fan) and along the Henrys Fork and Teton Rivers was concentrated initially on lands adjacent to the rivers or within reach of short canals.

In the 1880's, favorable legislation by Congress encouraged reclamation of desert lands throughout the arid Western States. Resulting development brought irrigated acreage on the Snake River Plain to about 550,000 acres by 1899 (fig. 7), an increase of more than 100 percent over the preceding 10 years (Newell, 1903, p. 161).

With effective use of provisions of the Carey Act of 1894 and the Reclamation Act of 1902, irrigated acreage expanded rapidly in the early 1900's. Federal legislation facilitated the transfer of public lands to individuals for private reclamation and provided financing for large-scale reclamation projects. The new Federal involvement provided coordination and funding for construction of dams, reservoirs, and canals, which, in turn, stimulated expansion of irrigated acreage.

The Twin Falls Project in the south-central part of the plain was one of the largest projects developed under the Carey Act. Beginning in 1905, Snake River water was diverted at Milner Dam and conveyed about 40 mi to irrigate lands north and south of the river. Within 10 years, more than 300,000 acres were irrigated in the Twin Falls Project.

The Boise and Minidoka Projects were developed under the Reclamation Act. The Boise Project was approved in 1906, after which storage facilities were added, canals completed, and the first water delivered in 1907. Irrigated acreage increased steadily and, with the completion of Arrowrock Reservoir (about 15 air mi east of Boise) in 1915, expanded beyond the Boise River valley. The Minidoka Project was authorized in 1904 and, starting in 1907, delivered irrigation water to about 120,000 acres on the north and south sides of the Snake River.

Water rights for most unregulated flow in the Snake River were decreed by 1908 and, in low water years, supplies were inadequate. Supply was augmented by federally financed

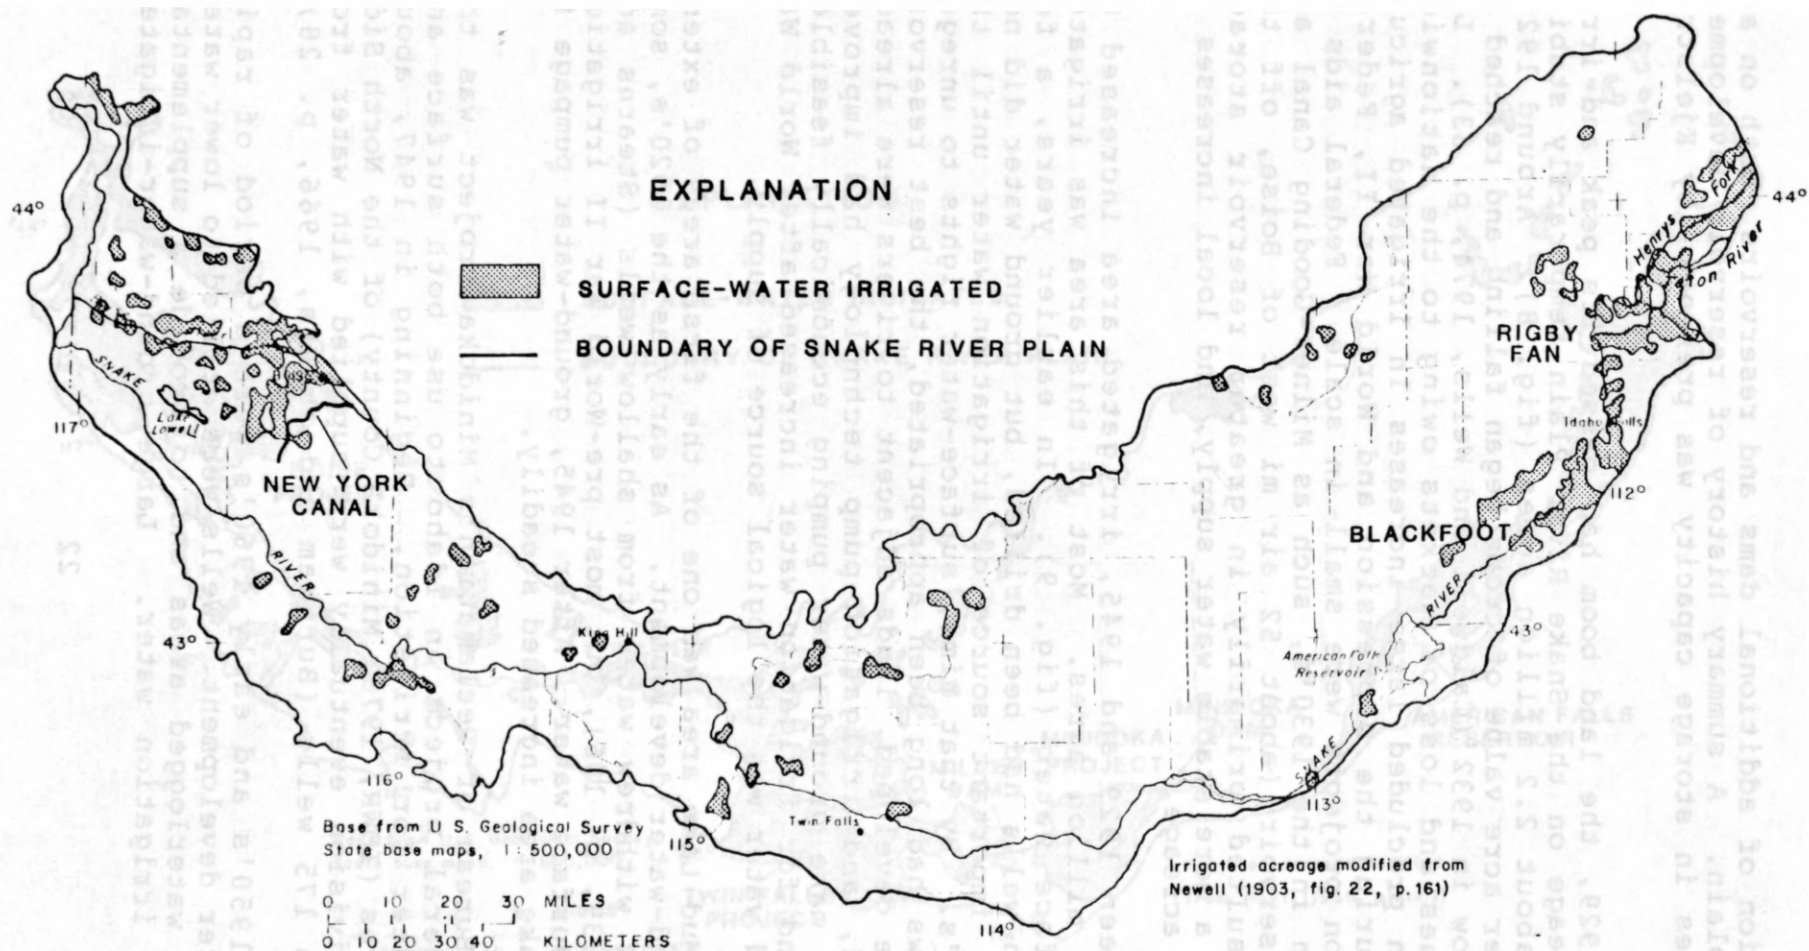


Figure 7.--Irrigated acreage, 1899.

construction of additional dams and reservoirs, both on and off the plain. A summary history of reservoir development and changes in storage capacity was presented by Kjelstrom (1984).

By 1929, the land boom had passed its peak and irrigated acreage on the Snake River Plain temporarily stabilized at about 2.2 million acres (fig. 8). Around 1920, average per acre value of crops began falling and reached an extreme low in 1932 (Caldwell and Wells, 1974, p. 63). Low crop values and loss of markets owing to the nationwide depression precluded large increases in irrigated agriculture. During the Depression and World War II, Federal reclamation projects were small in scale. Federal aids to irrigation in the 1930's, such as Milner-Gooding Canal and Owyhee Reservoir (about 52 air mi west of Boise, off the map), resulted primarily in greater reservoir storage capacity, a more stable water supply, and local increases in irrigated acreage.

Between 1929 and 1945, irrigated area increased to about 2.5 million acres. Most of this area was irrigated with surface water (fig. 9). In earlier years, a few irrigation wells had been drilled, but ground water did not become an important source of irrigation water until the late 1940's. By that time, surface-water rights to unregulated flows had long been appropriated, the best reservoir sites were developed, lands adjacent to rivers were already irrigated, and irrigation-pump technology had improved enough to make ground-water pumping economically feasible. When demand for irrigation water increased after World War II, ground water was the logical source of supply.


The Mud Lake area was one of the first areas of extensive ground-water development. As early as the 1920's, some irrigators withdrew water from shallow wells (Stearns and others, 1939, p. 106), but most pre-World War II irrigation was with surface water. After 1945, ground-water pumpage in the Mud Lake area increased steadily.

The Bureau of Reclamation's Minidoka Project was the first Federal project in Idaho to use both surface and ground water for irrigation. Beginning in 1947, about 65,000 acres (IDWR, 1978, Minidoka County) of the North Side Pumping Division eventually were supplied with water from more than 175 wells (Burnham and others, 1966, p. 28).

The 1950's and early 1960's were a period of rapid ground-water development. Wells were drilled to lower water levels in waterlogged areas and to provide a supplemental supply of irrigation water. Large ground-water-irrigated



Figure 8.--Irrigated acreage, 1929.

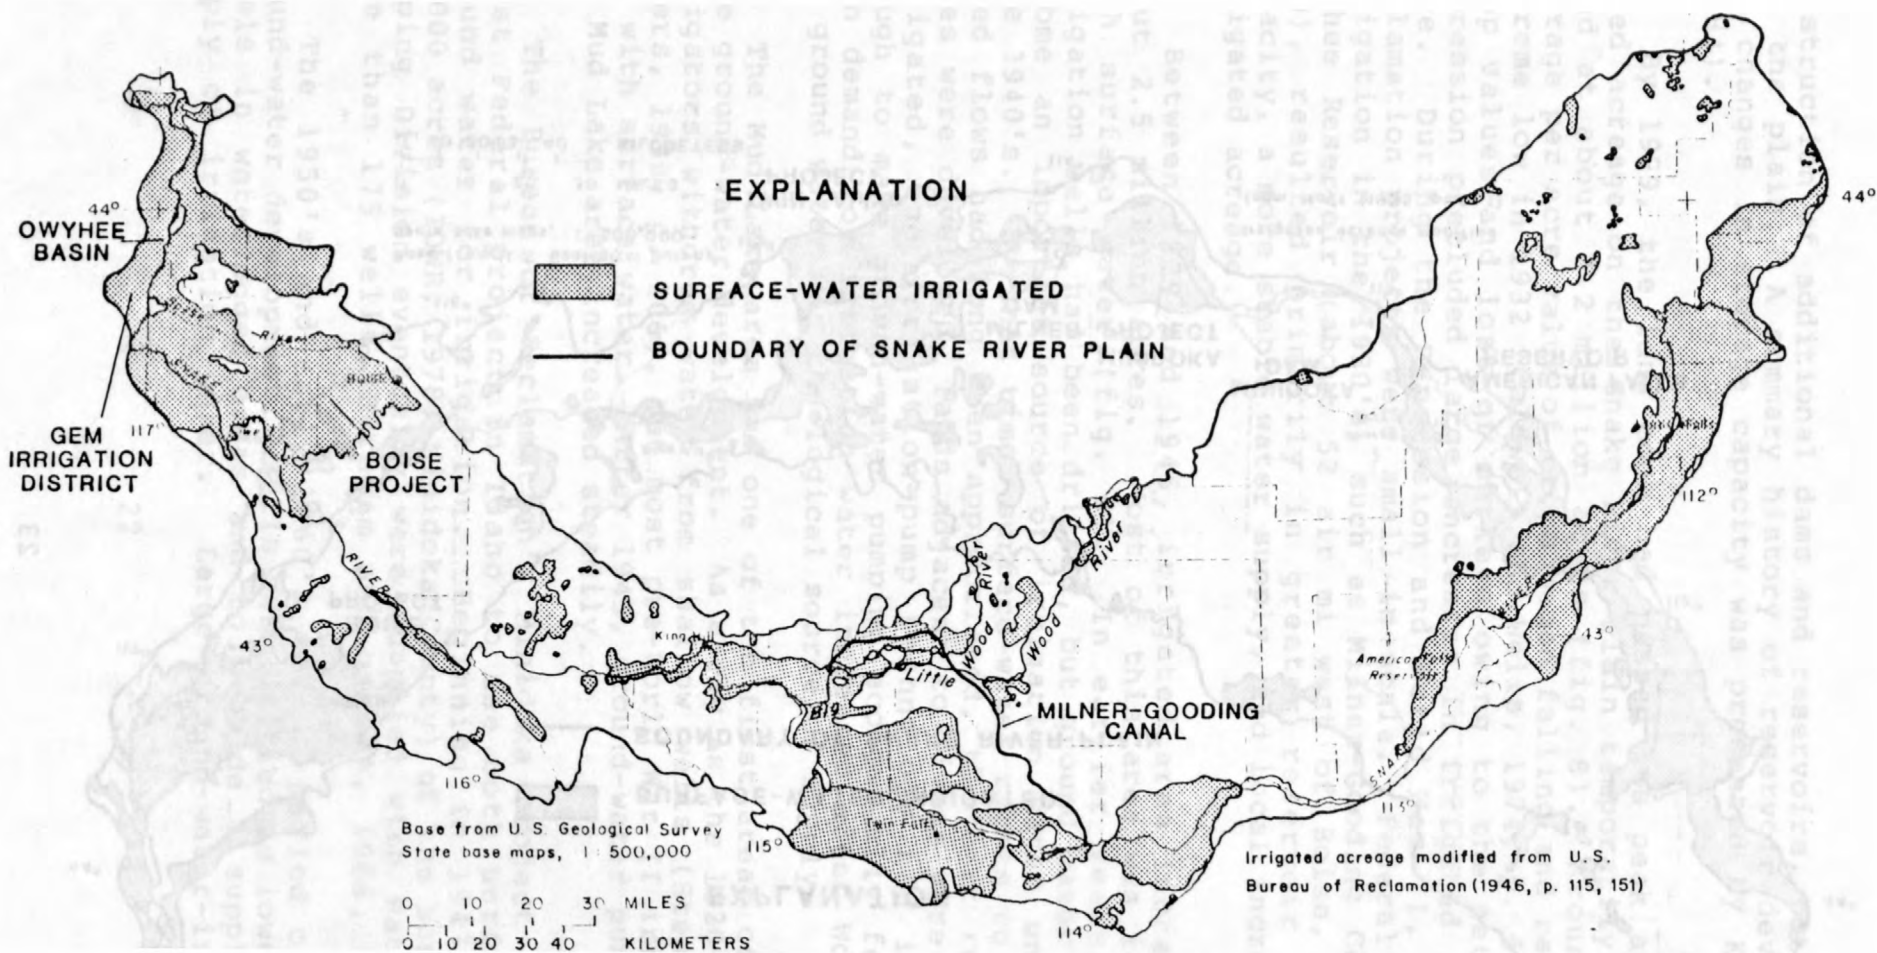

tracts were developed near Osgood, north of American Falls Reservoir, and in Cassia County. By 1966, about 700,000 acres on the Snake River Plain were irrigated with ground water and about 2.5 million acres were irrigated with surface water (fig. 10).

Since the 1960's, annual increases in irrigated acreage on the Snake River Plain have declined, and total irrigated area has stabilized at about 3 million acres. However, irrigation practices have continued to change, and irrigation with ground water and with surface water pumped from deeply entrenched river reaches has increased.

Ground water has been developed to irrigate new areas near Mud Lake and in Cassia County. In other places, inadequate surface-water supplies have been supplemented with ground-water pumpage (conjunctive use). A study by Bigelow and others (1984) indicates that the extent of conjunctive-use areas may be underestimated.

High-lift pumping from deeply entrenched reaches of the Snake River is a recent development; early surface-water diversions were by gravity. From 1965 to 1975, the volume of water pumped from the Snake River increased about eight-fold (Bigelow and others, 1984). By 1980, pumped withdrawals accounted for about 90 percent of diversions from the Snake River below Milner.

Increasing power rates in the 1970's made more efficient use of water an economic necessity. Accordingly, use of center pivot and other types of sprinkler distribution systems increased.

Methods of Estimating Irrigation Water Use

To best describe water use for irrigation on the Snake River Plain, withdrawals and consumptive use were estimated for both surface and ground water. Surface water is withdrawn by pumps and gravity diversions. Pumped withdrawals from surface and ground water were estimated from data on power consumed by irrigation pumps. Most gravity diversions were measured by State or irrigation district personnel. Consumptive use was estimated from data on irrigated acreage and crop evapotranspiration rates.

Pumped Withdrawals of Surface and Ground Water for Irrigation

Pumped withdrawals of ground and surface water on the Snake River Plain are seldom metered, and it is impractical to do so for 5,300 wells and 620 river pumping stations.

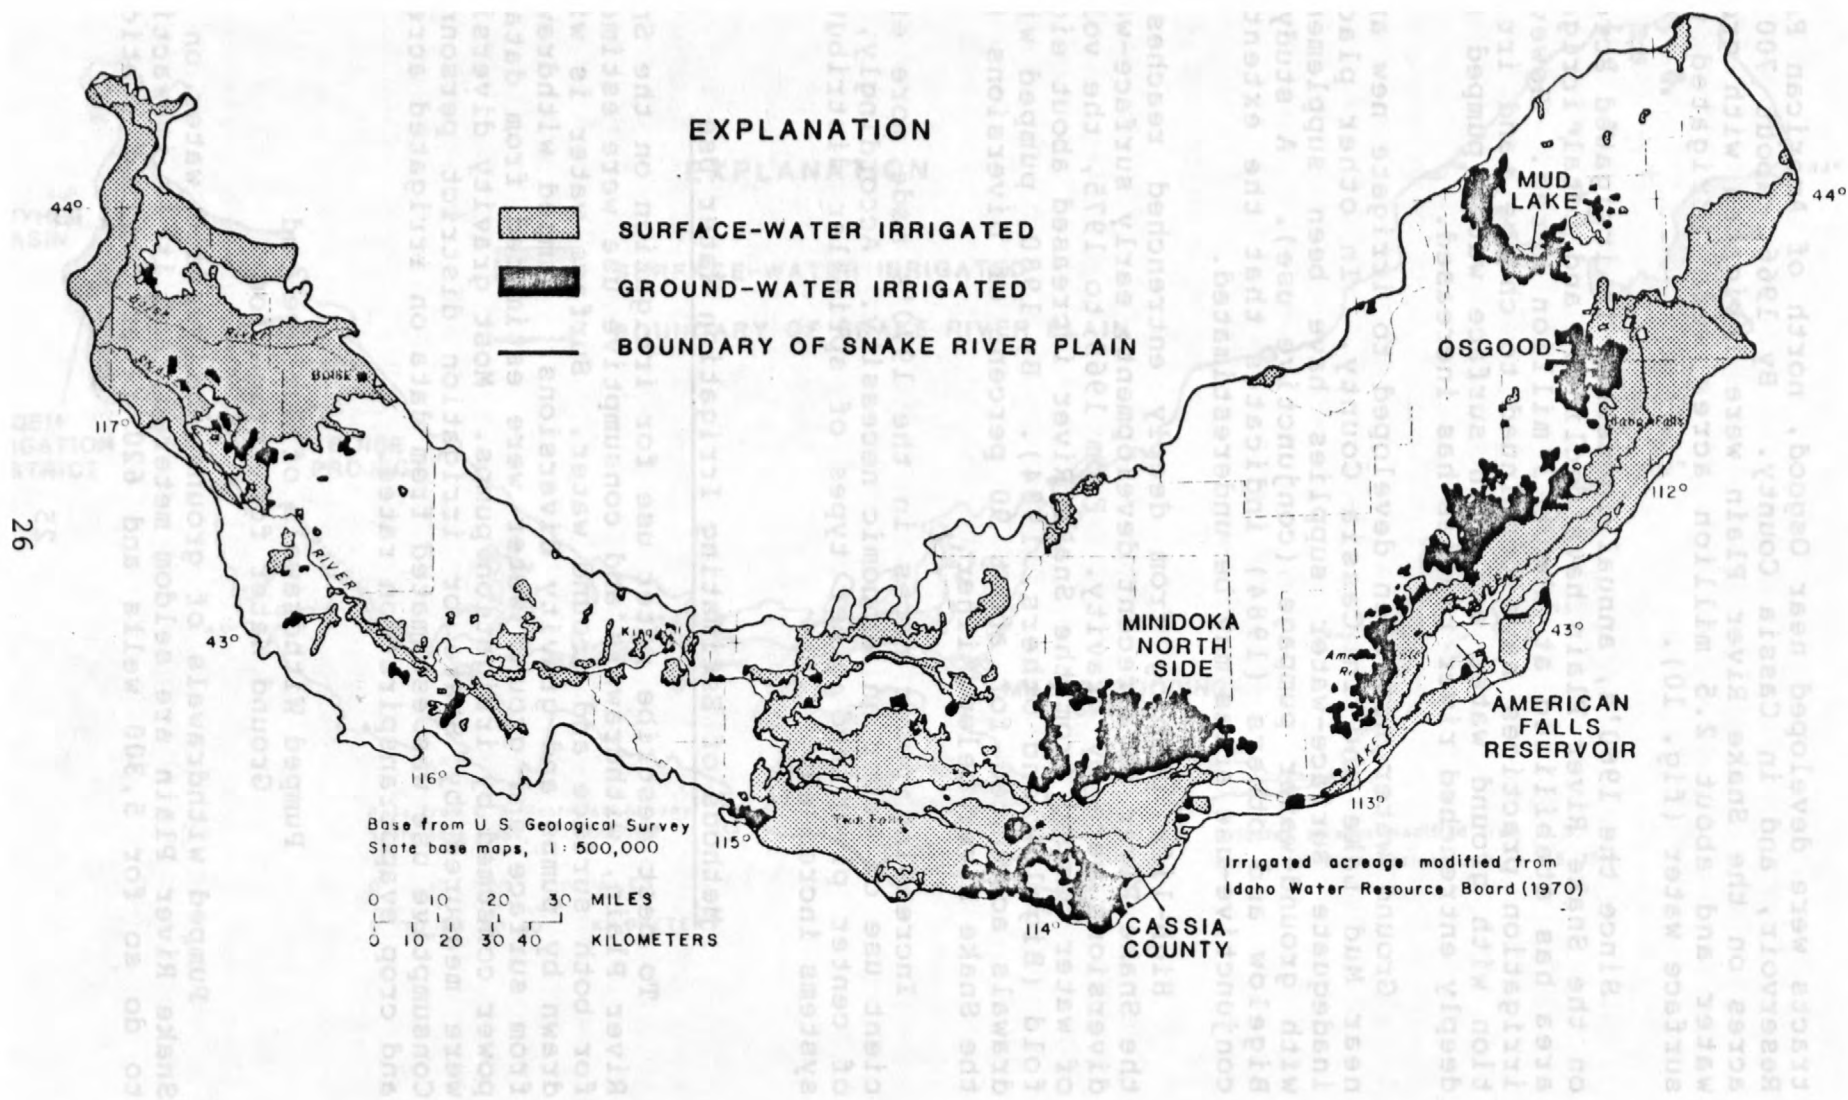


Figure 10 --Irrigated acreage, 1966

Pumpage was estimated from electrical power consumption data because nearly all pumps on the Snake River Plain are electrically powered, the method is efficient for a large number of sites, and power data were available from utility companies. Young and Harenberg (1971, p. 11) determined that fewer than 1 percent of the irrigation wells on the eastern plain were equipped with nonelectric pumps. Field observation confirmed that there are few nonelectric irrigation pumps on the eastern and western plain.

Power consumed by a pump to lift and deliver water is related to total head (head from lift and from pressurized distribution systems) and quantity of water pumped. Expressed mathematically:

$$\text{kWh} = (\text{TH})(\text{Q})(\text{K}) \quad (1)$$

where

kWh = total power consumed in a year, in kilowatt-hours;

TH = total head, in feet, which, in turn, equals pumping lift (the distance from land surface to pumping water level), H_L , plus the pressure head associated with the irrigation distribution system, H_p ;

Q = total volume of water pumped in a year, in acre-feet; and,

K = number of kilowatt-hours required to lift 1 acre-ft of water 1 ft, in kilowatt-hours per acre-foot-foot.

The annual volume of pumpage from individual pumping stations can be calculated by the following equation:

$$Q = (\text{kWh}) / [(K)(\text{TH})] \quad (2)$$

Pumpage Calculations

Using equation (2), 1980 pumpage was calculated for each electrically powered irrigation well and river pumping station on the plain. Data on power consumed in 1980 by each pump were supplied by utility companies. The value of K was estimated statistically on the basis of field test data. Total head for each pump (H_L plus H_p) was estimated from water-level data and type of distribution system.

Withdrawals from wells were summed over areas of 15 minutes latitude by 15 minutes longitude that correspond to U.S. Geological Survey 1:62,500 topographic maps. Withdrawals by river pumps on the Snake River and its major tributaries were summed between U.S. Geological Survey gaging stations.

The value of K was estimated from 79 field tests. Volume discharged (acre-feet), power consumed (kilowatt-hours), and total head (feet) were measured during short tests (20-30 minutes) at 72 wells and 7 river pumps to determine site-specific values of K. Test values of K are shown in figure 11. A representative value of K, subsequently used as a constant in pumpage calculations, was estimated by linear regression of the data (fig. 11). The estimated value of K is the slope of the regression line. On the basis of sample data shown in figure 11, K equals 1.69; that is, 1.69 kWh were used to lift 1 acre-ft of water 1 ft high.

Total head was estimated for each well and river pump by summing estimates of pumping lift and pressure head. Pumping lift for wells includes static lift and pumping drawdown. Static lift is the difference between altitude of land surface at the point of discharge and altitude of prepumping water level. Land-surface altitudes were interpolated from topographic maps, and prepumping water levels were interpolated from the March 1980 water-table map (Lindholm and others, 1983).

A pumping drawdown of 56 ft was added to estimated static lift for all wells on the western plain and 6 ft for all wells on the eastern plain. Drawdowns are medians from data reported by well drillers for wells yielding more than 300 gal/min (fig. 12). Medians rather than means were used to dampen the effects of a few reported extremely high drawdowns.

Differences in drawdown estimates for the eastern and western plain are due largely to differences in aquifer transmissivity. Most wells on the eastern plain are completed in high water-yielding basaltic rocks, whereas most wells on the western plain are completed in relatively low water-yielding sedimentary rocks.

Pumping lift for river pumps is the difference between altitude of land surface at the point of discharge and altitude of river stage. Locations of river pumps were verified in the field, then plotted on topographic maps to determine land-surface and river-stage altitudes.

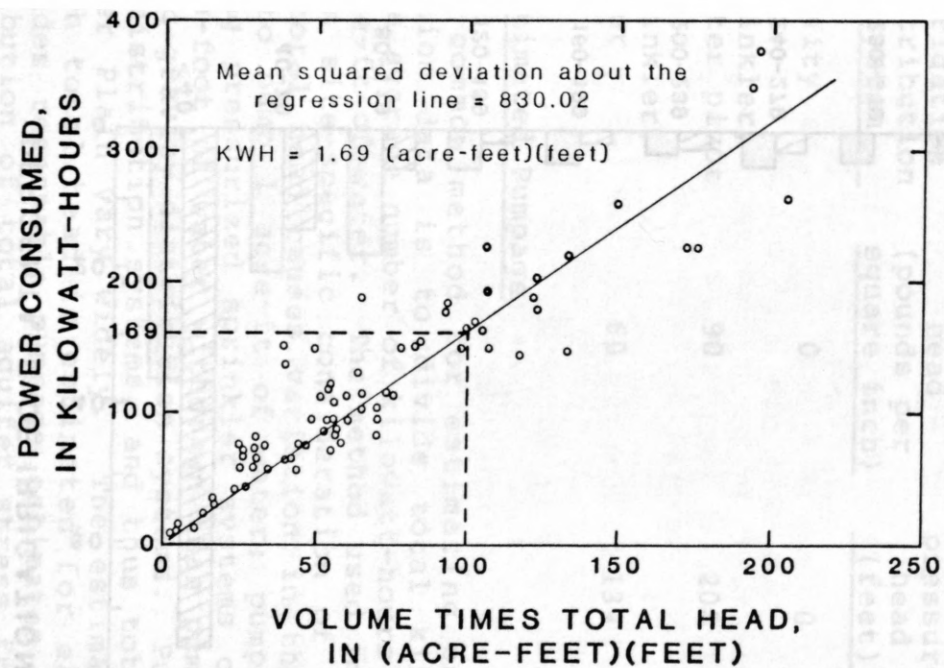


Figure 11.--Relation between power consumed and volume of water pumped times the total head.

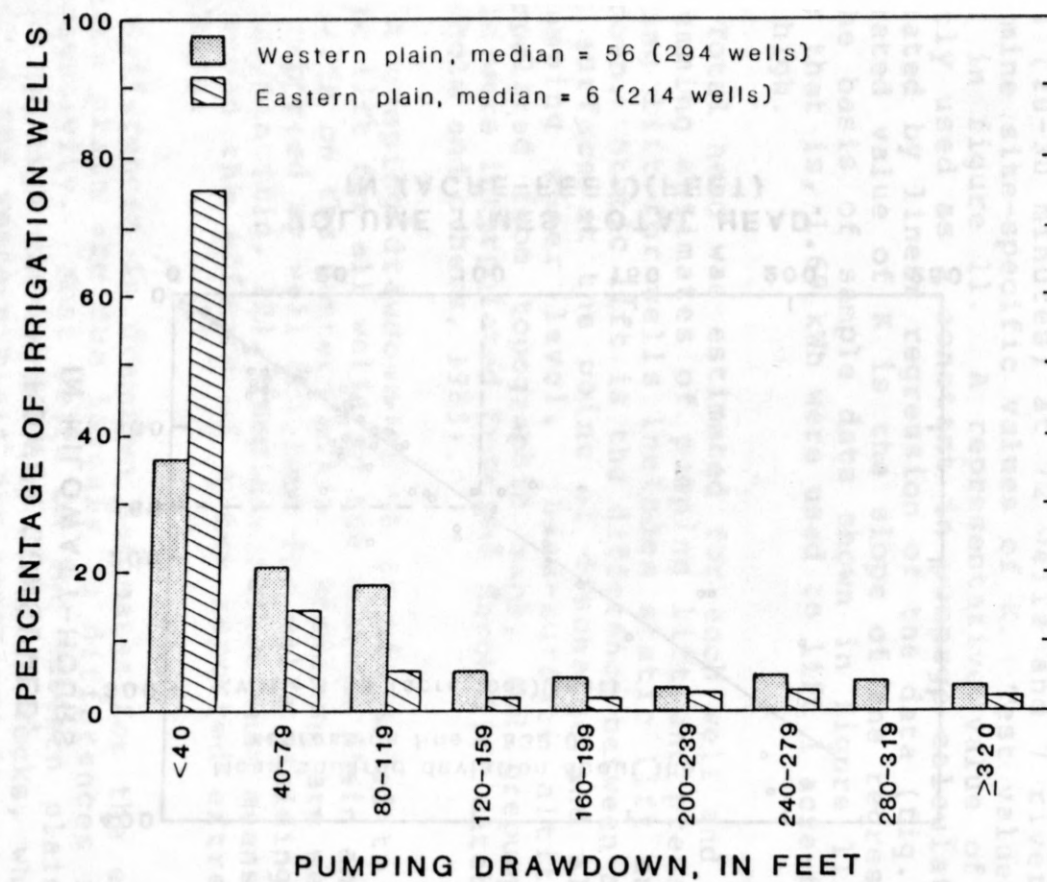


Figure 12.--Estimated well drawdowns.

Pressure head (H_p) at wells and river pumps was estimated on the basis of type of distribution system as reported by utilities. Types of distribution systems supplied by river pumps were verified in the field.

Heads for center pivot and other sprinkler systems are averages of pressure estimates reported in a survey of companies that sell and install irrigation systems in the study area. The estimates are shown in the following table.

<u>Irrigation distribution system</u>	<u>Estimated pressure head (pounds per square inch)</u>	<u>Estimated pressure head (feet)</u>
Gravity	0	0
Sprinkler, center pivot	90	208
Sprinkler, other	60	139

Accuracy of Estimated Pumpage

The most common method for estimating pumpage from power consumption data is to divide total kilowatt-hours consumed by the average number of kilowatt-hours required to withdraw 1 acre-ft of water. The method used in this study differs in its site-specific consideration of total head. Variation in total head causes variation in the amount of power needed to pump 1 acre-ft of water; pumps with high lifts supplying pressurized sprinkler systems consume more power per acre-foot of water withdrawn than pumps with low lifts supplying gravity distribution systems. Pumping lifts and types of distribution systems, and thus total head, on the Snake River Plain vary widely. The estimation method used, in which total head is estimated for each pumping station, provides reasonable pumpage estimates and permits spatial distribution of total aquifer stress from pumping.

Tests of the accuracy of pumpage estimates indicate the estimated pumpages are reasonably reliable. However, because this approach has not been used broadly, it is important that the accuracy of pumpage estimates be evaluated. Errors introduced by the study method are difficult to quantify, but a general discussion of potential errors and their effects will aid interpretation of the accuracy of the estimates. Most errors are introduced in the estimation of K and total head.

The Constant, K.--In pumpage calculations, K is treated as a constant, whereas in the population of pumping stations, K is variable owing to differences in pump efficiencies. At 100 percent efficiency, K equals 1.02 kWh/acre-ft because:

$$1 \text{ acre-ft of water per foot of lift} = 325,850 \text{ gal/acre-ft} \times 8.34 \text{ lbs/gal} \times 1 \text{ foot of lift}$$

$$= 2,717,589 \text{ ft-lbs/acre-ft}$$

$$1 \text{ kWh} = 2,655,240 \text{ ft-lbs/hr}$$

$$1.02 \text{ kWh/acre-ft} = \frac{2,717,589 \text{ ft-lbs/acre-ft}}{2,655,240 \text{ ft-lbs/kWh}}$$

Actual values of K are much higher owing to inefficiencies of irrigation pumps. The representative K value of 1.69 obtained from sample data implies an average pump efficiency of 60 percent ($1.02 \div 1.69 \times 100$).

Measured efficiencies of the 79 pumping stations sampled ranged from 28 to 90 percent. About three-fourths were between 45 and 75 percent, and half were between 50 and 70 percent (fig. 13). Treating K, and thereby efficiency, as constant in pumpage calculations introduces error into pumpage estimates for individual plants. However if errors are randomly distributed, summing estimates for all pumping plants in an area (15 minutes longitude x 15 minutes latitude) or river reach reduces the errors by cancellation.

Total Head.--Pumpage estimates calculated by the study method are sensitive to errors in the value of total head, particularly if total head is low. Table 5 shows pumping conditions at two hypothetical wells, one with low total head and one with high total head, and the errors in pumpage estimates that result from errors in estimated total head.

Note that: (1) Error in pumpage is inversely proportional to error in total head, (2) underestimation of total head causes greater error than overestimation, and (3) the effect of an error in estimated head is much greater when total head is small. Thus, pumpage estimates are more likely to be inaccurate where prepumping water levels are near land surface and drawdowns are small. Because total head is composed of pumping lift and irrigation system pressure head, errors in either component will cause errors in pumpage estimates.

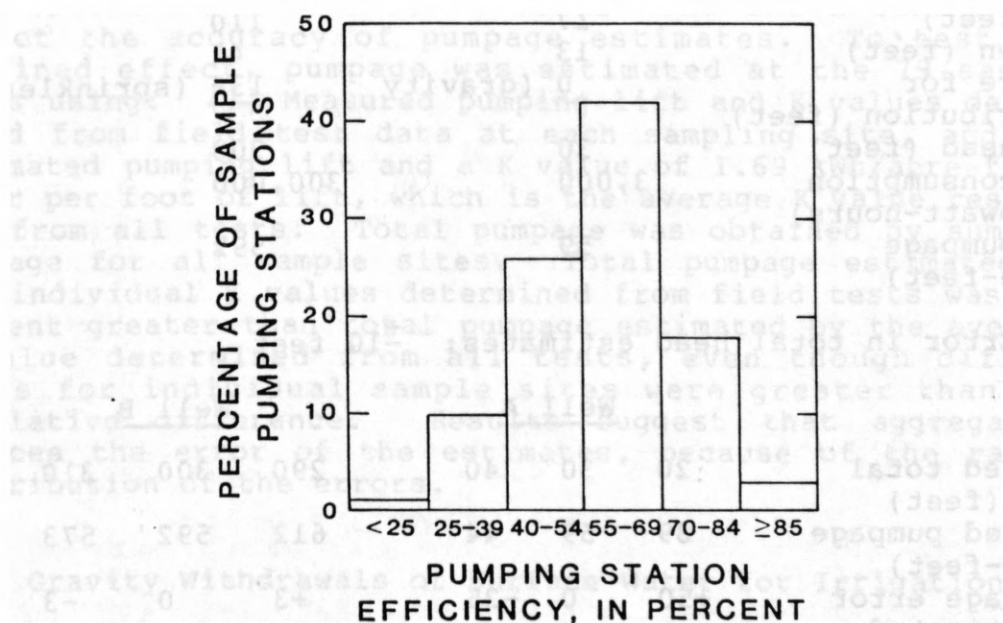


Figure 13.--Efficiencies of sample pumping stations.

Crop Consumptive Irrigation Requirement

Crop consumptive use (CU) is the depth of water evap-
 ired by a healthy, well-watered crop and evapor-

Table 5.--Errors in pumpage estimates owing to errors in estimates of total head at two hypothetical wells

Pumping conditions						
	<u>Well A</u>			<u>Well B</u>		
Lift (feet)	17			110		
Drawdown (feet)	13			41		
Pressure for distribution (feet)	<u>0</u> (gravity)			<u>139</u> (sprinkler)		
Total head (feet)	30			300		
Power consumption (kilowatt-hours)	3,000			300,000		
Total pumpage (acre-feet)	59			592		
Error in total head estimates: ± 10 feet						
	<u>Well A</u>			<u>Well B</u>		
Estimated total head (feet)	20	30	40	290	300	310
Estimated pumpage (acre-feet)	89	59	44	612	592	573
Percentage error in estimated pumpage	+50	0	-25	+3	0	-3

To assess accuracy of estimated lifts used in pumpage calculations during the study, measured pumping lifts were compared to estimated lifts at 72 sample sites (7 of the 79 sites were not used because of imprecise lift measurements). The relation between estimated and measured lifts is shown in figure 14. A correlation coefficient of 0.89 for the linear regression between estimated and measured values indicates that estimated lifts are reasonable approximations of actual lifts within the confidence of the data.

Pressure head estimates for each type of distribution system are reasonably accurate considering errors in pumping lift. Type of distribution system reported by utilities agreed with the type of system observed at 90 percent of the sample sites.

Errors in estimates of total head and K combine to affect the accuracy of pumpage estimates. To test the combined effect, pumpage was estimated at the 79 sample sites using: (1) Measured pumping lift and K values determined from field test data at each sampling site, and (2) estimated pumping lift and a K value of 1.69 kWh/acre-ft of water per foot of lift, which is the average K value resulting from all tests. Total pumpage was obtained by summing pumpage for all sample sites. Total pumpage estimated by the individual K values determined from field tests was 1.3 percent greater than total pumpage estimated by the average K value determined from all tests, even though differences for individual sample sites were greater than the cumulative difference. Results suggest that aggregation reduces the error of the estimates, because of the random distribution of the errors.

Gravity Withdrawals of Surface Water for Irrigation

Most surface-water withdrawals for irrigation on the Snake River Plain are gravity diversions. Diversions from the Snake River and many tributaries are measured by watermasters serving irrigation districts and are reported annually. Gravity withdrawals in 1980 from the Snake River above Milner Dam and the Henrys Fork, Teton, Falls, Big Wood, Little Wood, Blackfoot, Boise, and Owyhee Rivers were obtained from watermaster reports. Gravity withdrawals from the Snake River below Milner Dam and from most other rivers were estimated from previous miscellaneous measurements.

Crop Consumptive Irrigation Requirement

Crop consumptive use (CU) is the depth of water evapotranspired by a healthy, well-watered crop and evaporated

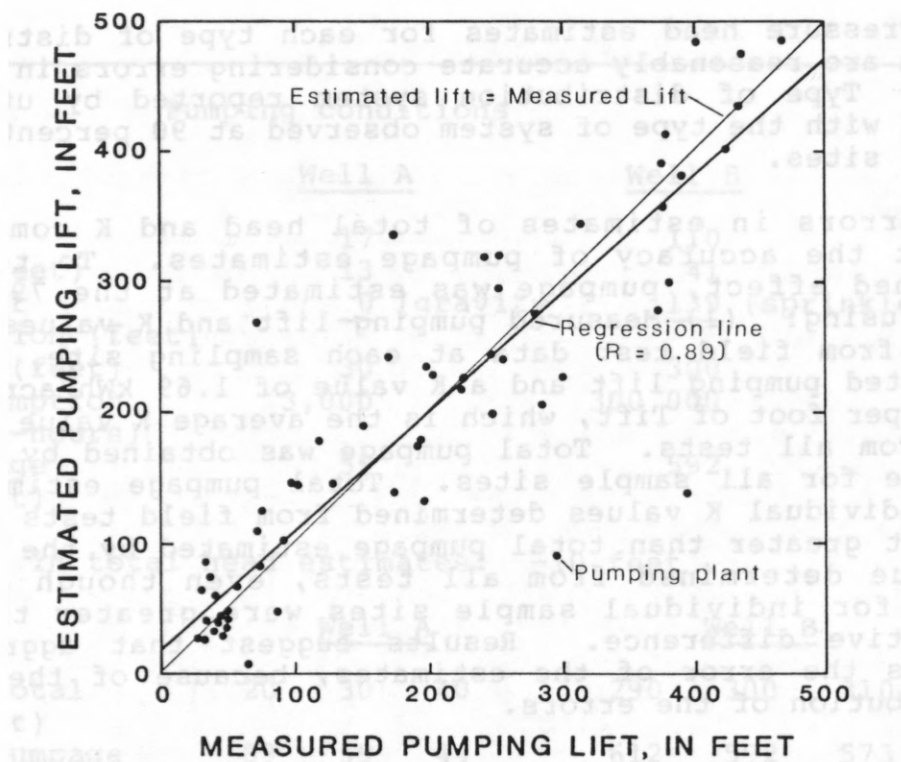


Figure 14.--Accuracy of estimated pumping lifts.

from the soil during the growing season. Crop consumptive irrigation requirement (CIR) is that part of CU needs not satisfied by precipitation and thus supplied by irrigation. The required volume of irrigation water can be estimated by multiplying CIR times acres irrigated. The volume of irrigation water applied on the Snake River Plain was estimated for each 15-minute block using the following equation:

$$TV = (CIR \times IA)/12 \quad (3)$$

where

TV = total volume of irrigation water applied annually to crops in a block, in acre-feet per year;
 CIR = average crop consumptive irrigation requirement, in inches per year; and
 IA = total irrigated area in a block, in acres.

Average values for CIR were assigned to each 15-minute block based on crop-related CIR values determined by Sutter and Corey (1970). Sutter and Corey (1970) divided Idaho into 42 areas of similar climate and calculated CIR for crops commonly grown in each climatic area. The Snake River Plain partially or wholly comprises 17 of Sutter and Corey's climatic areas. If a 15-minute block fell into more than one climatic area, the CIR value assigned was that for the largest climatic area in the block. The CIR assigned to each block is the average of all crop-related CIR's calculated for the climatic area. Values for CIR range from 22.9 in./yr near Grand View to 11.6 in./yr near Ashton (table 6).

Acreage irrigated with ground water and combined surface and ground water in each block were digitized from a map of 1979 irrigated acreage. In areas supplied by combined surface and ground water, an unknown part of CIR is from surface water. To account for the part of CIR supplied by surface water only, half of the acreage irrigated with combined surface and ground water was assumed to be supplied by ground water.

Surface-Water Irrigation, 1980

Until the 1960's, almost all surface water used for irrigation was diverted by gravity. Beginning in about 1960, pumping from surface-water sources became more common. By 1980, two-thirds of the irrigated area on the Snake River Plain was supplied by surface water, mostly by gravity diversions. An estimated 11.8 million acre-ft were diverted

Table 6.--Average crop consumptive irrigation requirements recorded at selected weather stations
(Modified from Sutter and Corey, 1970)

Weather station	Crop consumptive irrigation requirement (inches per year)
Aberdeen	15.6
Ashton 1S	11.6
Caldwell	19.6
Dubois Experiment Station	14.9
Grand View 2W	22.9
Idaho Falls 46W	15.1
Mountain Home	20.5
Rupert	18.7
Saylor Creek	21.5
Shoshone 1WNW	18.0
Twin Falls	17.8
Weiser	20.0

by gravity and conveyed by 2,700 mi of canals and laterals. Locations of major canals on the plain are shown in figure 15. About 6.9 million acre-ft were diverted from the Snake River and 4.9 million acre-ft from major tributaries. An additional 940,000 acre-ft were withdrawn by river pumps: 808,000 acre-ft from the Snake River and 132,000 acre-ft from tributaries. More than 9 million acre-ft of instream reservoir capacity makes water available during low-flow months.

Gravity diversions are concentrated on the eastern part of the plain and in the Boise and Payette River basins where rivers are not deeply entrenched. In the central part of the plain (Milner to Murphy) where rivers are deeply entrenched, irrigation water is either lifted by river pumps or diverted into large canals at higher river altitudes some miles upstream.

Figure 16 shows altitude of the Snake River with respect to land surface. More than 98 percent of gravity diversions from the Snake River are located above Milner, where river altitude is within 100 ft of the adjacent land surface. Only 2 percent of total irrigation withdrawals in the Heise to Milner reach are pumped. Most pumping stations are small (less than 500 hp) and supply water to lands close to the river.

Below Milner, 90 percent of irrigation withdrawals from the Snake River are pumped. From Milner to Hagerman (about 70 mi), the river is entrenched in a sharply incised canyon, and almost all withdrawals are by large pumps that supply water to lands close to the canyon rim. Large pumping stations typically have several pumps that feed one or more penstocks that discharge into a canal system on the canyon rim. The largest pumping station has 15 pumps powered by motors totaling 21,000 hp.

Surface-water-irrigated lands in the Twin Falls and Minidoka Project areas, as much as 20 mi from the Snake River, are supplied by canals that divert water above Milner. In 1980, 2.9 million acre-ft were diverted to five canals at Milner and Minidoka Dams to irrigate these lands.

From Hagerman to near Homedale (about 160 mi), the river is entrenched several hundred feet, but the canyon bottom is several miles wide in some places. Water is withdrawn along this reach by large, high-lift pumps that supply water to tracts on the canyon rim and by smaller pumps that supply water to canyon bottom lands.

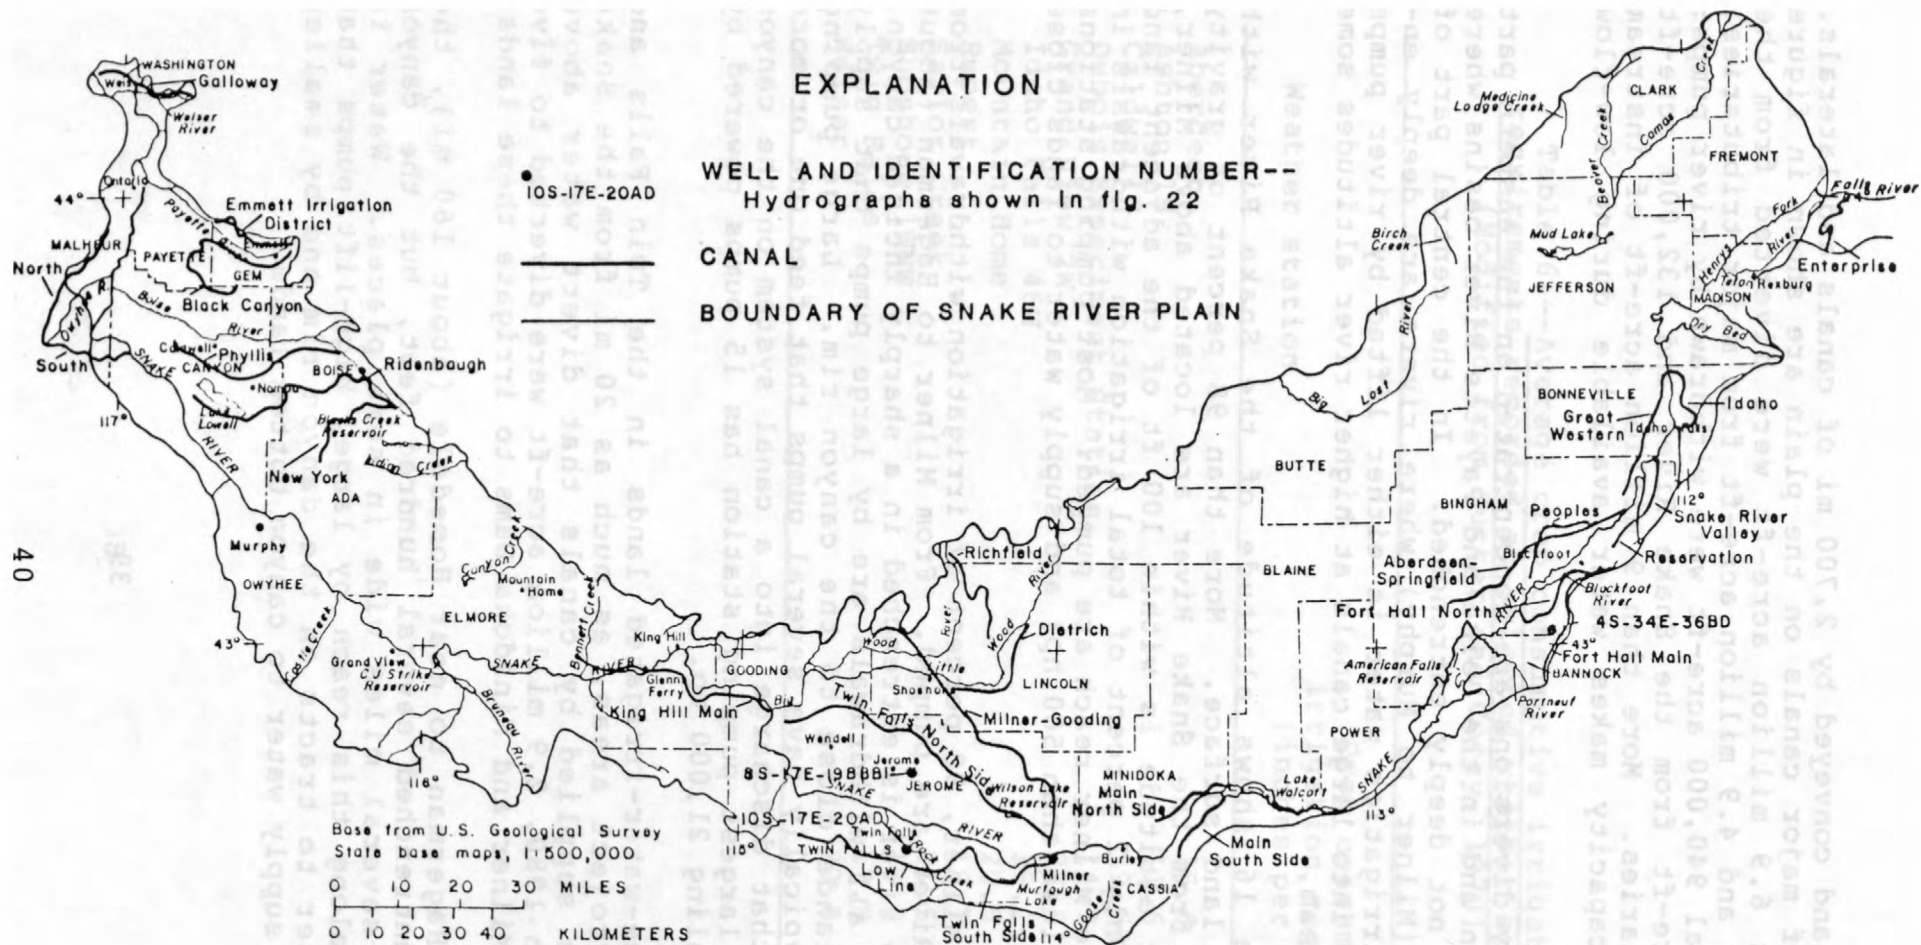


Figure 15.--Locations of major canals.

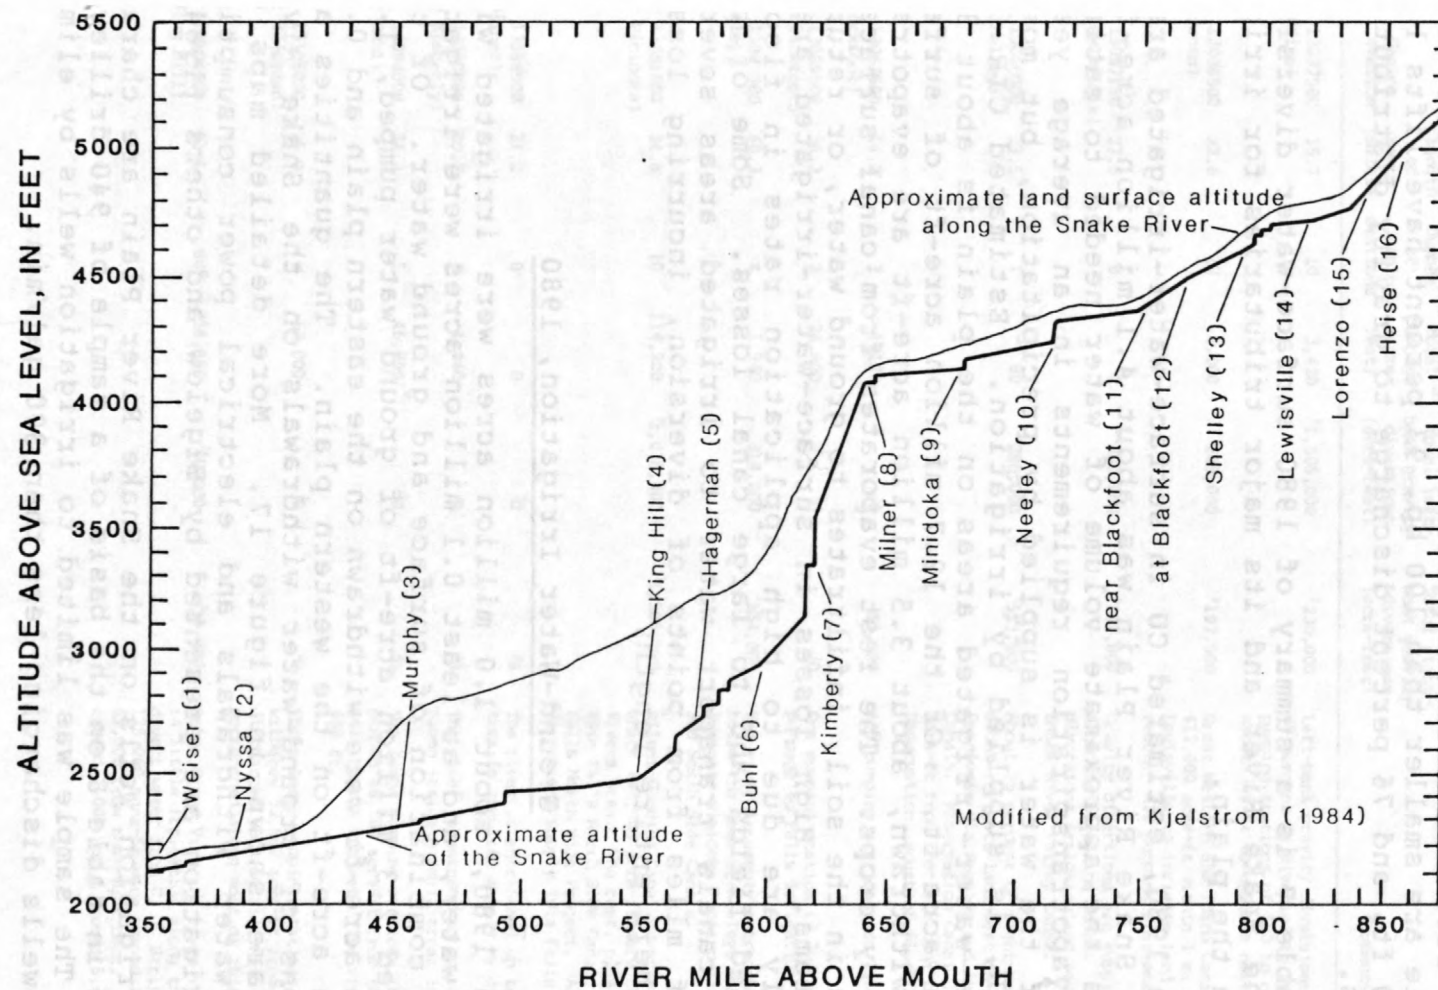


Figure 16.--Altitude of the Snake River and adjacent land surface.
(Names and numbers refer to gaging stations, see figure 3 for station locations and table 7 for U.S. Geological Survey station numbers.)

Below Homedale, the Snake River is entrenched from 10 to 50 ft, and all irrigation water is pumped. Typical pumping stations in this reach irrigate small tracts close to the river. About 94 percent of pumping stations below Homedale are smaller than 100 hp, 93 percent have lifts less than 50 ft, and 76 percent discharge to gravity distribution systems.

Table 7 is a summary of 1980 surface-water diversions from the Snake River and its major tributaries for irrigation on the plain.

In 1980, estimated CU in surface-water-irrigated areas on the Snake River Plain was about 4.1 million acre-ft. This is the approximate volume of water needed to satisfy crop evapotranspiration requirements in an average year. Part of the water is supplied by precipitation, but most, the CIR, is supplied by irrigation. Estimated CIR for surface-water-irrigated areas on the plain is about 3.5 million acre-ft. Of the 12.7 million acre-ft of surface water withdrawn, about 3.5 million acre-ft are evapotranspired by crops. The rest evaporates from canal surfaces, remains in the soil, infiltrates to ground water, or returns to streams. High losses in surface-water-irrigated areas probably are due to high application rates in flood-irrigated fields and to large canal losses. Some of the larger canals transport water to irrigated areas several tens of miles from points of diversion, incurring losses along their entire length.

Ground-Water Irrigation, 1980

In 1980, about 1.0 million acres were irrigated with ground water, and at least 0.1 million acres were irrigated with a combination of surface and ground water. Of the estimated 2.3 million acre-ft of ground water pumped, 1.93 million acre-ft were withdrawn on the eastern plain and 0.36 million acre-ft on the western plain. The quantities and locations of ground-water withdrawals on the Snake River Plain are shown in figure 17. More detailed maps of ground-water withdrawals and electrical power consumption for irrigation are presented by Bigelow and others (1984).

Irrigation wells on the Snake River Plain are characterized in table 8 on the basis of a sample of 940 drillers' logs. The sample was limited to irrigation wells by eliminating wells discharging less than 300 gal/min.

Most irrigation wells on the Snake River Plain are completed in basaltic and sedimentary rocks; a few are completed in rhyolite (fig. 18). On the eastern plain, most

Table 7.—Irrigation diversions from the Snake River and major tributaries by gaged reach, 1980
(Map numbers and geographic features are shown in fig. 3; canals are shown in fig. 15)

Map number	Gaging station	Length of reach (miles)	Number of pumping stations	Total pumpage (acre-feet)	Total left-bank gravity diversions (acre-feet)	Total right-bank gravity diversions (acre-feet)	Comments
16 (near Heise)	13037500	15.7	10	3,420	¹ 1,505,000	¹ 230,000	Left-bank gravity diversions irrigate Rigby Fan; 80 percent is diverted to Dry Bed Creek. Seven pumping stations of 500 hp or more lift water about 700 ft to uplands north of the river.
15 (at Lorenzo)	13038500	22.6	12	4,000	¹ 289,000	¹ 197,000	Great Western and Idaho Canals diverted about 412,000 acre-ft within 1 mi of the gage near Lewisville to irrigate land downstream from this reach. All pumping stations are 100 hp or less.
14 (near Lewisville)	13057150	27.5	0	0	¹ 201,000	¹ 101,000	Gravity diversions are supplemented with water from the preceding reach. Left-bank gravity diversions irrigate land south of Shelley via Snake River Valley Canal.
13 (near Shelley)	13060000	23.5	1	80	¹ 280,000	¹ 553,000	About 75 percent of right-bank gravity diversions irrigate land west of American Falls Reservoir via Peoples and Aberdeen-Springfield Canals. Reservation Canal diverted 117,500 acre-ft from the left bank to Fort Hall Indian Reservation, south of Blackfoot River.
12 (at Blackfoot)	13062500	14.2	3	1,120	¹ 0	¹ 63,900	All pumping stations are less than 100 hp.
11 (near Blackfoot)	13069500	36.3	2	24,800	¹ 0	¹ 0	One pumping station (3,700 hp) diverted most pumpage to Falls Irrigation District, southeast
10 (at Neeley)	13077000	40.3	4	1,940	¹ 318,000	¹ 384,000	The river is deeply entrenched for about 8 mi below the gage at Neeley. All gravity diversions irrigate Minidoka Project lands via Main North Side and South Side Canals.
9 (near Minidoka)	13081500	34.8	10	114,900	¹ 1,078,000	¹ 1,586,000	Milner-Gooding Canal diverted 893,000 acre-ft, of which 447,000 acre-ft were delivered to the Wood Rivers area. The rest, plus 692,000 acre-ft from Twin Falls North Side Canal, was supplied to Twin Falls North Side Project. All left-bank gravity diversions supply Twin Falls South Side Project.
8 (at Milner)	13088000	21.2	0	0	² 0	² 0	The river is entrenched up to 400 ft; irrigated area is supplied mainly by diversions at Milner.
7 (near Kimberly)	13090000	20.7	3	1,440	² 0	² 0	The river is entrenched up to 500 ft. Pumped diversions irrigate small areas in the canyon bottom.
6 (near Buhl)	13094000	24.3	5	46,900	² 0	² 0	Two large pumping stations (more than 10,000 hp) pumped 46,500 acre-ft from the left bank to irrigate Bell Rapids Project. The river is entrenched up to 600 ft.
5 (near Hagerman)	13135000	25.9	6	53,000	² 0	² 0	Three large pumping stations (more than 1,000 hp) withdrew 52,600 acre-ft from the left bank and discharged to King Hill Main Canal. The river is entrenched along most of this reach.
4 (at King Hill)	13154500	93.1	88	256,800	² 40,000	² 30,000	Below Grand View the river is entrenched and there is little irrigation along this reach. Three canals divert water from C. J. Strike Reservoir. About 175,000 acre-ft were pumped from the left bank and 82,000 from the right bank. Twenty pumping stations exceed 1,000 hp; 4 exceed 5,000 hp.

Table 7.--Irrigation diversions from the Snake River and major tributaries by gaged reach, 1980--Continued

Stream	Map number	Gaging station	Length of reach (miles)	Number of pumping stations	Total pumpage (acre-feet)	Total left-bank gravity diversions (acre-feet)	Total right-bank gravity diversions (acre-feet)	Comments
	3	13172500 (near Murphy)	68.3	116	176,800	² 0	² 0	Above Marsing, irrigated land is along the steep canyon rim and in the canyon bottoms. Below Marsing irrigated land is rolling lowlands along the river. About 124,000 acre-ft were pumped from the left bank and 50,000 from the right bank. About 2,800 acre-ft were pumped to irrigate islands. Six pumping stations exceed 1,000 hp; 3 exceed 5,000 hp.
	2	13213100 (at Nyssa)	33.9	153	112,800	² 0	² 0	Many pumps supply water to small tracts near the river. About half of pumpage is withdrawn by pumps less than 100 hp. About 79,000 acre-ft were pumped from the left bank, 22,000 from the right bank, and 12,000 to irrigate islands. Three pumping stations exceed 1,000 hp; 1 exceeds 5,000 hp.
	1	13269000 (at Weiser)	11.3	32	10,100	² 0	² 0	All pumps are less than 300 hp and about 75 percent are less than 100 hp. About 5,000 acre-ft were pumped from the left bank and 5,100 from the right bank.
Falls River	41	13047500	19.0	16	1,400	¹ 94,000	¹ 28,000	Enterprise Canal diverted 21,500 acre-ft from the left bank to irrigate land south of the Teton River
	40	13049500 (near Chester)	.8	0	0	¹ 0	¹ 0	
Teton River	39	13055000 (near St. Anthony)	22.0	5	5,100	¹ 86,000	¹ 69,000	
Henrys Fork	38	13046023 (near Ashton)	12.3	1	500	¹ 99,000	¹ 135,000	Most right-bank diversions irrigate Egin Bench. About 28,000 acre-ft were transferred from the left bank to the Teton River.
	37	13050500 (at St. Anthony)	32.4	3	250	¹ 245,000	¹ 84,000	Right-bank diversions irrigate Egin Bench.
Blackfoot River	36	13066000 (near Shelley)	26.6	8	2,620	¹ 211,000	¹ 15,000	Left-bank diversions irrigate Fort Hall Indian Reservation; 90 percent was diverted to Fort Hall Main and North Canals.
	35	13068500 (near Blackfoot)	3.4	0	0	¹ 0	¹ 0	
Portneuf River	34	13075500 (at Pocatello)	16.8	2	31,400	¹ 0	¹ 0	
Rock Creek	33	13092000 (near Rock Creek)	31.3	8	4,700	³ 4,500	² 500	All pumping stations are smaller than 250 hp.
Salmon Falls Creek	32	13106500 (near Rogerson)	46.0	7	37,960	² 0	² 0	Pumps are within 15 mi of the mouth where the river is entrenched up to 400 ft. Pumping stations are as large as 1,400 hp.
Little Wood River	31	13148500 (near Carey)	75.5	6	5,170	⁶ 8,000	² 8,000	Diversions are supplemented with Snake River water from Milner-Gooding Canal. About 56,700 acre-ft were diverted into Dietrich Canal.

Table 7.--Irrigation diversions from the Snake River and major tributaries by gaged reach, 1980--Continued


Stream	Map number	Gaging station	Length of reach (miles)	Number of pumping stations	Total pumpage (acre-feet)	Total left-bank gravity diversions (acre-feet)	Total right-bank gravity diversions (acre-feet)	Comments
Big Wood River	30	13142500 (near Richfield)	59.8	3	2,590	⁴ 212,000	⁴ 53,000	Diversions are supplemented with Snake River water from Milner-Gooding Canal.
	29	13152500 (near Gooding)	7.2	0	0	⁴ 3,200	⁴ 2,900	
Bruneau River	28	13168500 (near Hot Spring)	22.0	0	0	² 13,000	² 7,000	
Owyhee River	27	13183000 (below Owyhee Dam)	24.2	12	1,890	² 67,000	² 468,000	North and South Canals diverted 468,000 acre-ft from Owyhee Reservoir immediately above the gage. South Canal delivers water to Gem Irrigation District. Left-bank gravity diversions, supplemented with water from North Canal, irrigate land north to Weiser. All pumping stations are less than 100 hp.
	26	13184000 (at Owyhee)	3.1	13	2,690	² 0	² 0	All pumping stations are less than 100 hp.
Boise River	25	13202000 (near Boise)	10.8	0	0	⁵ 987,000	⁵ 14,000	New York and Ridenbaugh Canals diverted 984,000 acre-ft to irrigate land between the Boise and Snake Rivers.
	24	13205500 (at Boise)	23.7	2	1,220	⁵ 220,000	⁵ 179,000	Phyllis Canal diverted 133,000 acre-ft to land between the Boise and Snake Rivers.
	23	13210050 (near Middleton)	25.3	13	3,960	⁵ 185,000	⁵ 120,000	All pumping stations are 150 hp or less.
	22	13213000 (near Parma)	3.8	12	2,940	⁵ 0	⁵ 0	All pumping stations are less than 100 hp.
Valheur River	21	13233300 (near Vale)	19.8	27	15,100	⁶ 0	⁷ 37,000	Most pumping stations are small; 26 are less than 100 hp.
Payette River	20	13249500 (near Emmett)	13.4	4	800	³ 574,000	³ 113,000	Black Canyon and Emmett Irrigation District Canals divert water immediately above the gage. Some water from Black Canyon Canal is transferred to the Boise River basin.
	19	13250000 (near Letha)	20.9	12	7,750	³ 129,000	³ 103,000	
	18	13251000 (near Payette)	4.1	5	660	³ 0	³ 0	
Weiser River	17	13266000 (near Weiser)	14.9	16	5,640	³ 20,000	³ 65,000	Galloway Canal diverted about 58,000 acre-ft to irrigate land north and west of Weiser. All pumping stations are less than 250 hp.

Notes indicate source of gravity diversion data:

- IDWR (1980b)
- L. C. Kjelstrom (U.S. Geological Survey, written commun., 1983)
- Estimated from miscellaneous measurements
- IDWR (1980c)
- IDWR (1980a)
- P. W. Elfering (Oregon Department of Water Resources, oral commun., 1984)
- P. P. Scales (provisional data, Oregon Department of Water Resources, oral commun., 1984)


EXPLANATION

PUMPAGE, IN ACRE-FEET PER SQUARE MILE--Each complete block represents an area of 15 minutes latitude by 15 minutes longitude



No pumpage
<50
50 to 99
100 to 499
≥500

TOTAL VOLUME PUMPED, IN THOUSANDS OF ACRE-FEET--Example: Pumpage for irrigation in 1980 was between 100 and 499 acre-feet per square mile. The total was 54,000 acre-feet



BOUNDARY OF SNAKE RIVER PLAIN

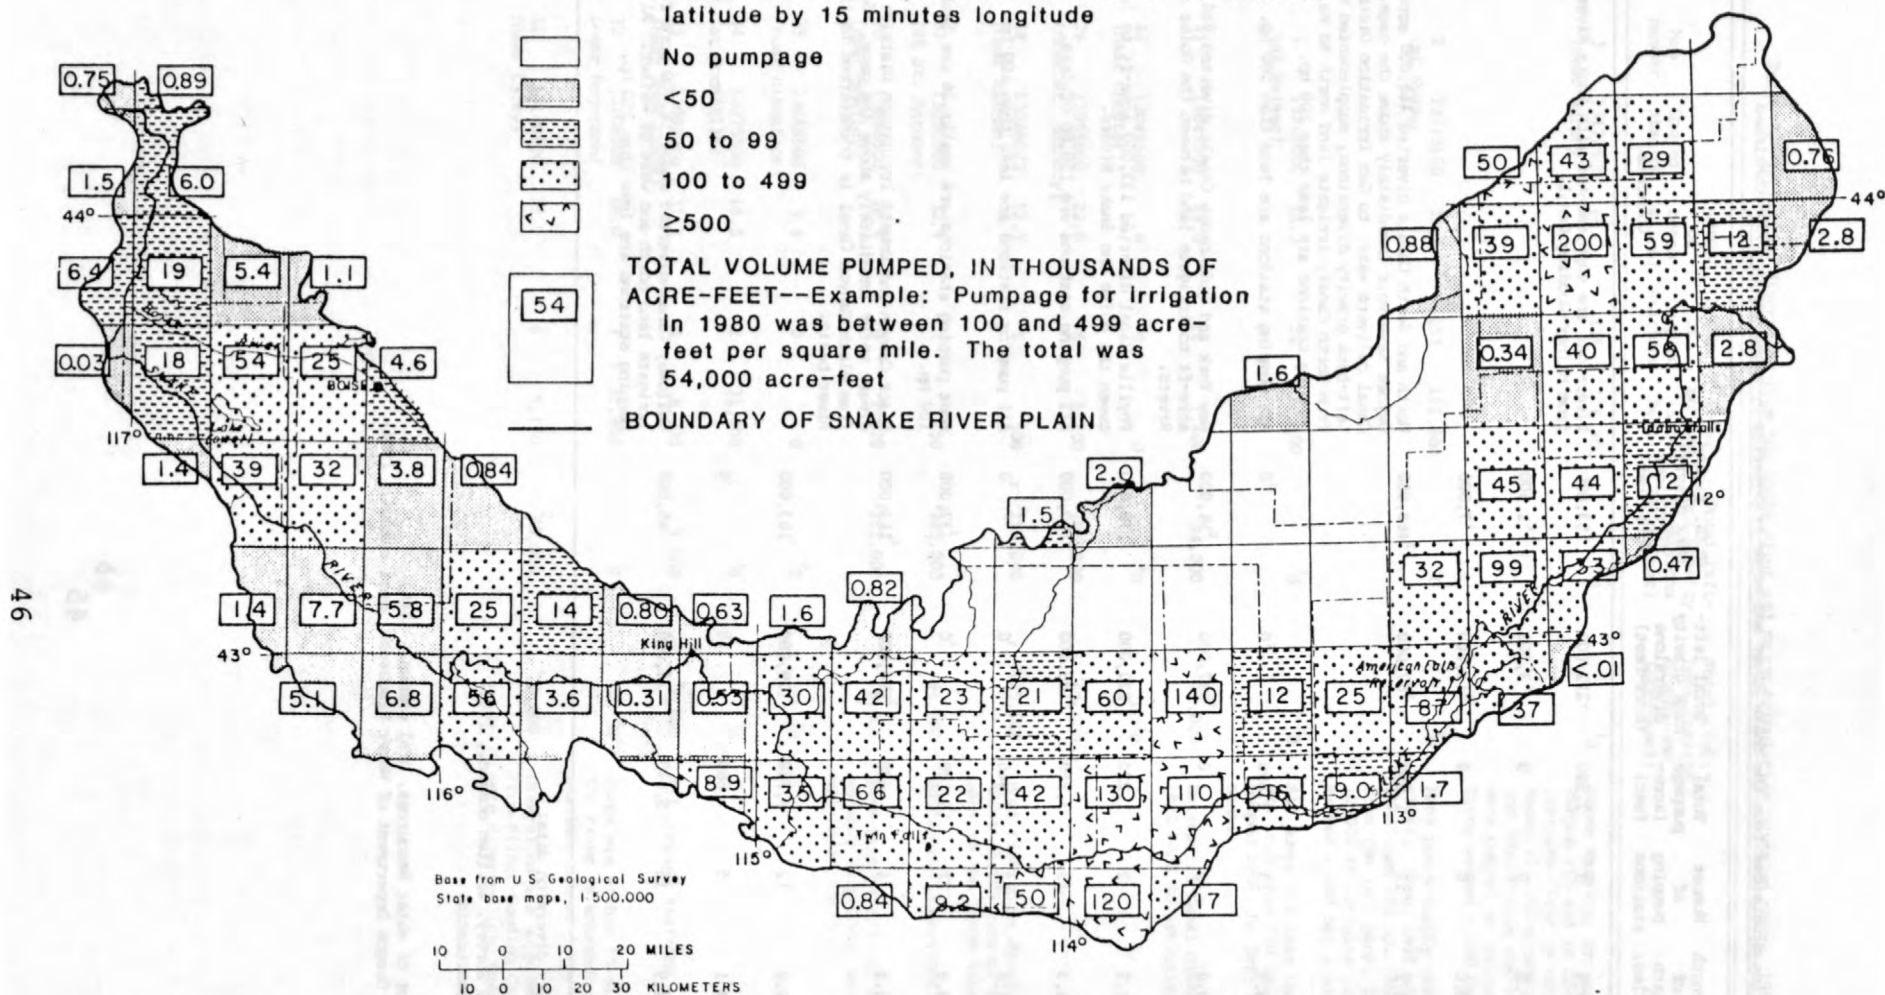


Figure 17.--Estimated ground-water pumpage, 1980.

Table 8.--Characteristics of irrigation wells

Characteristics	Eastern plain		Western plain	
Lithology of producing zone	Basalt	Sediment	Basalt	Sediment
Number of wells in sample	336	60	120	424
Well finish	Open hole	Cased and screened or perforated	Open hole	Cased and screened or perforated
Percentage of wells yielding at least 1,500 gallons per minute	66	64	78	32
Maximum reported yield, in gallons per minute	7,240	3,000	5,000	3,850
Percentage of wells with drawdowns less than 20 feet	68	45	20	22

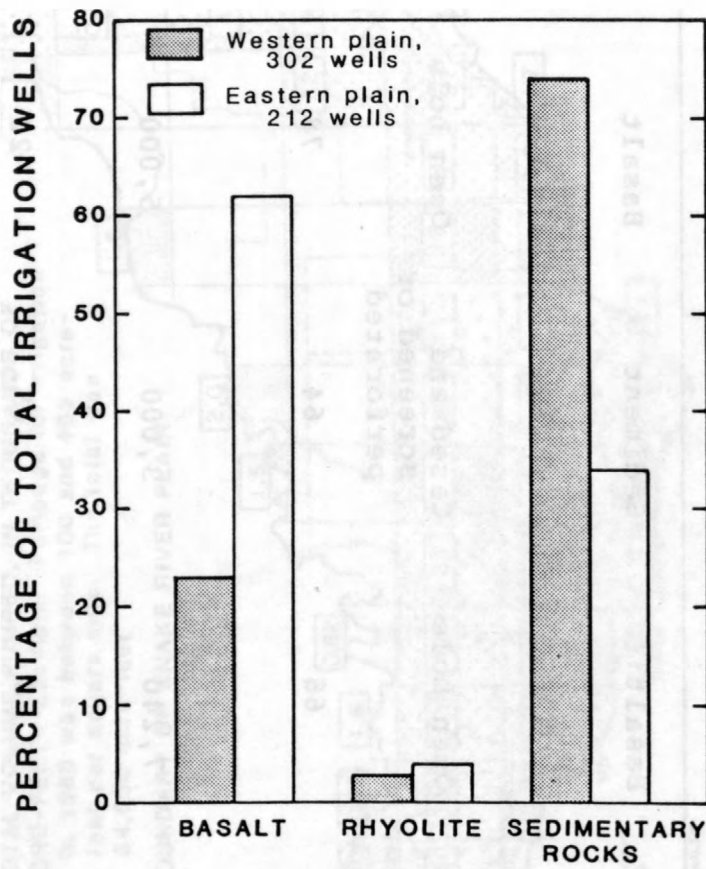


Figure 18.--Well completion by rock type.

water is from fractured zones between successive basalt flows. Sedimentary rocks are principal aquifers along the periphery of the eastern plain, east of American Falls Reservoir, and in the Big Lost River, Portneuf River, and Camas Creek basins (fig. 3). On the western plain, most irrigation wells are completed in unconsolidated sedimentary rocks, especially in the Boise River valley. Basalts are principal aquifers in the Mountain Home area.

Typically, wells on the eastern plain have larger yields (fig. 19) and lower drawdowns than wells on the western plain, owing to the copious water-producing properties of basalt. About 66 percent of wells on the eastern plain yield more than 1,500 gal/min and median pumping drawdown is 6 ft, whereas on the western plain, 42 percent of wells yield more than 1,500 gal/min and median pumping drawdown is 56 ft.

Well depths range from less than 100 ft to more than 2,000 ft. Most wells on the Snake River Plain are located where depth to water is less than 300 ft. Generally, water is closest to land surface along the Snake River and its tributaries and in areas with a history of surface-water irrigation (fig. 20). Excess irrigation water has caused historic rises in ground-water levels in most surface-water-irrigated areas.

The horsepower of pumps and types of irrigation distribution systems on the plain were determined from data supplied by power companies or were observed in the field. Ninety-six percent of wells are equipped with pumps totaling less than 500 hp and 39 percent less than 100 hp. Most pumps less than 100 hp have low lifts and supply gravity distribution systems.

Types of distribution systems supplied by wells in 1980 were: 29 percent gravity, 13 percent center pivot sprinkler, and 58 percent other types of sprinkler. Gravity systems are more common on the western plain, and center pivot systems are more common on the eastern plain. An area irrigated by sprinklers typically uses less water per acre than if irrigated by gravity distribution. Thus, in recent years, as pumping costs increased, the percentage of wells supplying sprinkler systems increased.

Estimated pumping lifts (static lift plus pumping drawdown) were less than 200 ft in 65 percent of irrigation wells on the plain and less than 300 ft in 85 percent of the wells. In a few areas where ground-water levels are declining, pumping lifts are approaching 500 ft.

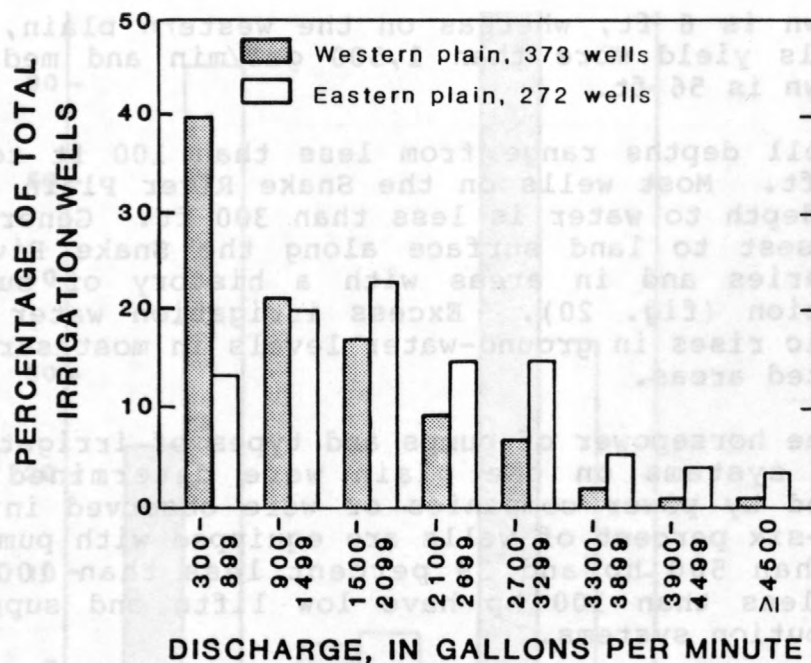


Figure 19.--Discharge from irrigation wells.

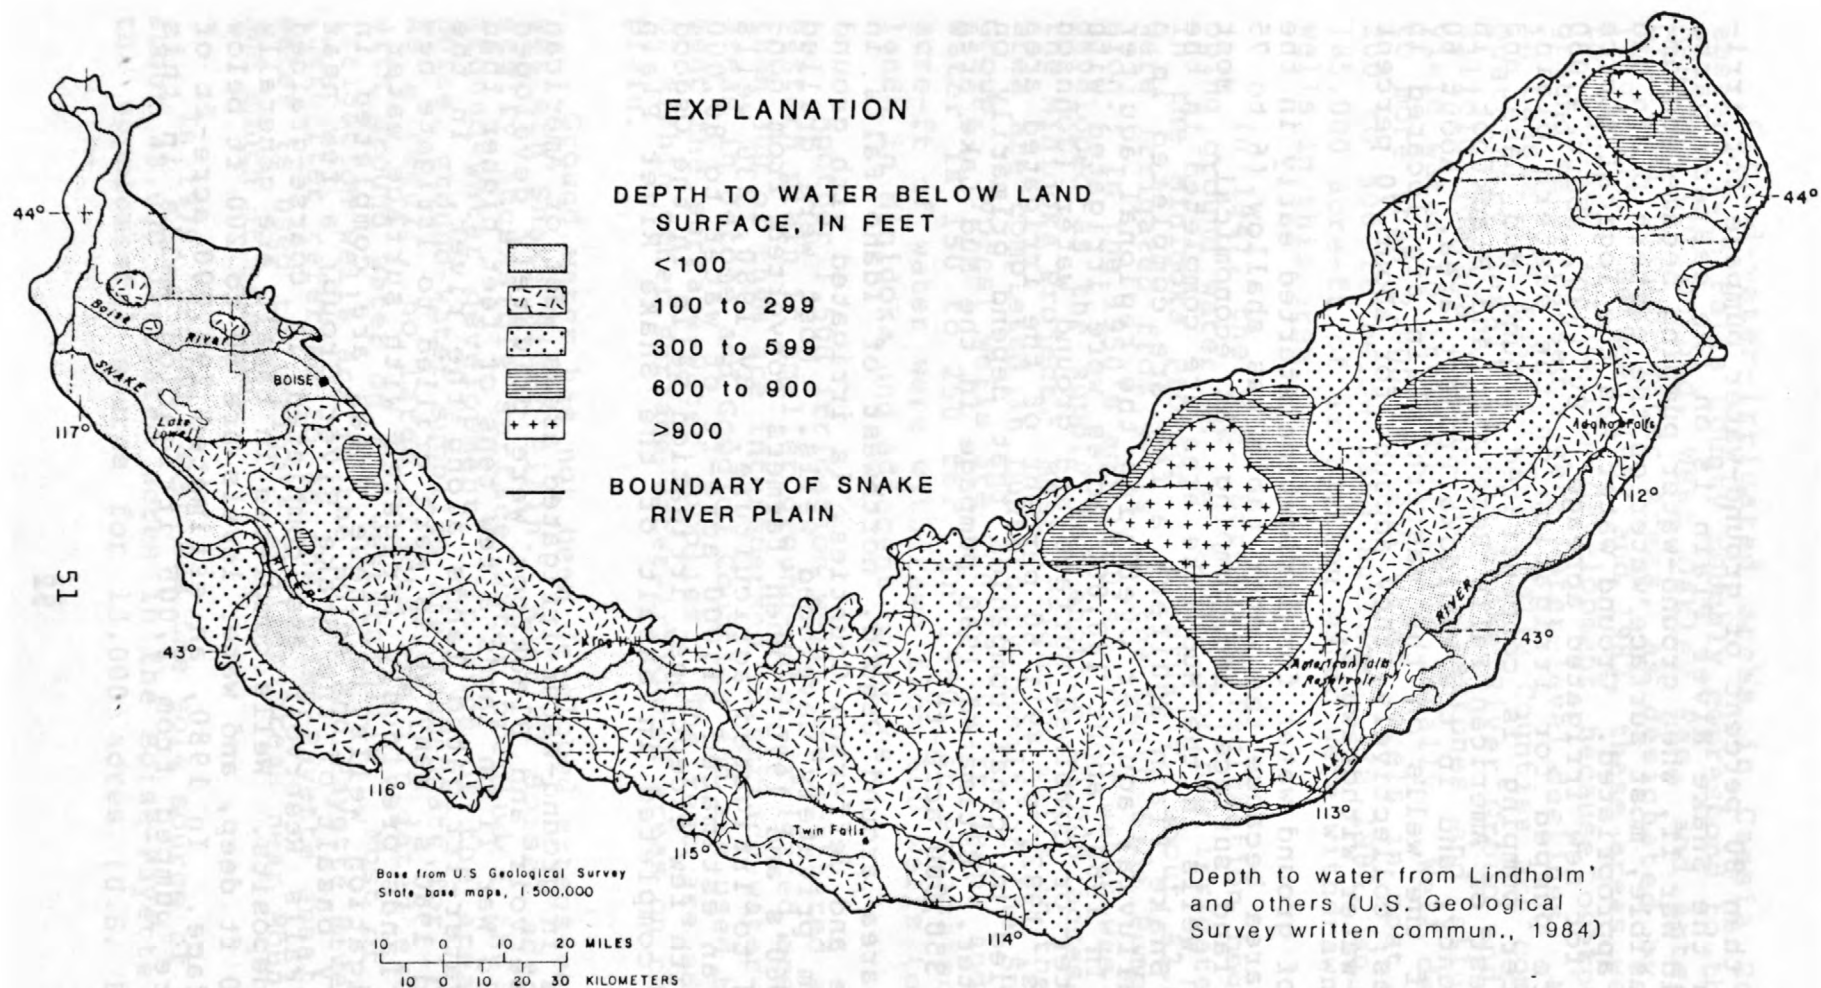


Figure 20.--Generalized depth to water.

More than 80 percent of ground-water pumpage for irrigation on the Snake River Plain is on the eastern part. After World War II, when ground-water pumping became economically feasible, most surface water on the eastern plain had long been appropriated. Ground water was the logical source of supply for new irrigated acreage. By 1980, about 4,030 wells were pumped for irrigation on the eastern plain. Ground-water pumping is concentrated around Mud Lake and Osgood, west of American Falls Reservoir and Blackfoot, in Cassia County, and in the Minidoka Project area. About 60 percent of the wells on the eastern plain are located in these areas; collectively, they account for about 70 percent of ground-water withdrawals.

Use of ground water for irrigation started early in the Mud Lake area because the water table was shallow (6 to 75 ft below land surface) and pumping was economical. Most irrigation wells in the Mud Lake area are completed in the regional Snake Plain aquifer; a few are completed in a shallow alluvial aquifer overlying the regional aquifer system. In 1980, about 140,000 acres were irrigated with ground water or combined surface and ground water (Johnson and others, 1982, p. 49); 60 percent of the irrigated area was supplied by canal companies that depend primarily on ground water. Estimated 1980 pumpage in the Mud Lake area was about 350,000 acre-ft.

The area around Osgood, northwest of Idaho Falls in Bonneville and Jefferson Counties, is irrigated with ground water from privately developed wells. Most were drilled in the 1960's and 1970's when farmers converted from non-irrigated to irrigated agriculture. By 1980, 230 wells supplied an estimated 91,000 acre-ft of water to 80,000 acres. With few exceptions, irrigation wells in the Osgood area are completed in basalt of the Snake River Plain aquifer.

Wells in ground-water-irrigated areas west of American Falls Reservoir and Blackfoot were privately developed after World War II on lands a few tens of feet higher than surface-water-irrigated lands along the river. In the 1950's and 1960's, many wells were drilled to irrigate new land and lands previously irrigated with surface water. Most irrigation wells in these areas are completed in Quaternary basalt of the Snake River Group; a few near American Falls Reservoir are completed in coarse-grained alluvial deposits. Wells completed in basalt are generally 200 to 300 ft deep, and water levels are 50 to 200 ft below land surface. In 1980, an estimated 290,000 acre-ft of water were pumped from 1,005 irrigation wells in this area.

Ground-water-irrigated areas in Cassia County and eastern Twin Falls County roughly correspond to the Oakley-Kenyon, Cottonwood, West Oakley Fan, and Artesian City Critical Ground-Water Areas, as designated by the IDWR (fig. 21). Between 1967 and 1982, these areas were closed to further irrigation development because overpumping of ground water caused severe water-level declines. Most wells in Cassia and eastern Twin Falls Counties are completed in Quaternary basalt of the Snake River Group and Tertiary silicic Idavada Volcanics. Limestones and alluvium also yield water to irrigation wells locally. Well depths vary to more than 2,000 ft, and water levels in most wells are 200 to 500 ft below land surface. In 1980, an estimated 185,000 acre-ft of irrigation water were withdrawn from 384 wells in this area.

In 1947, the U.S. Bureau of Reclamation began developing ground water as the supply for new irrigated acreage in the Minidoka Project. Eventually, about 62,000 acres were irrigated from wells in the North Side Pumping Division. In the 1950's and 1960's, ground water was privately developed as the supply for another 60,000 acres north of the Minidoka Project. Most irrigation wells in the Minidoka area are completed in Quaternary basalt of the Snake River Group. Typical wells are 200 to 300 ft deep, and depth to water is 150 to 250 ft. In 1980, an estimated 390,000 acre-ft of water were withdrawn from 500 wells to irrigate lands in Minidoka and adjacent counties.

Another 1,500 irrigation wells are scattered across the eastern plain in smaller ground-water-irrigated areas. More than 300 of them are interspersed in surface-water-irrigated areas in Jerome and Gooding Counties and are used to supplement the surface-water supplies. The rest are adjacent to or within other surface-water-irrigated areas on the eastern plain.

Ground water has not been developed extensively on the western Snake River Plain. West of Boise, adequate and easily accessible surface water precluded the need for ground-water development. In much of the area east of Boise, ground-water supplies are inadequate for irrigation. As a result, no large tracts are irrigated exclusively with ground water on the western plain. Most of the 1,280 irrigation wells are in the Boise and Payette River valleys (hereafter referred to as the Boise-Payette area). Ground water is used to irrigate smaller areas near Mountain Home and south of Bruneau.

In 1979, ground water was the sole source of water for about 48,000 irrigated acres in the Boise-Payette area and the supplemental source for 13,000 acres (U.S. Bureau of

Reclamation, 1980). Many wells are in areas classified as surface-water irrigated on the 1979 map (Bigelow and others, 1984); some drain waterlogged areas. Some water from drain wells is used to irrigate lands that otherwise would be irrigated with surface water.

The regional aquifer system in the Boise-Payette area is complex. The area is underlain by Tertiary and Quaternary sedimentary rocks intercalated with basalt. Sands and gravels and some basalt are the principal aquifers. Quaternary terrace gravels and alluvium are locally important water sources. Well depths range from 20 to more than 1,500 ft and depth to water is generally less than 100 ft. In 1980, an estimated 190,000 acre-ft of irrigation water were withdrawn from about 800 wells in the Boise-Payette area.

Most irrigation wells northwest and south of Mountain Home were drilled in the 1960's. Excessive ground-water pumping caused water-level declines of as much as 20 ft in 9 years (Young, 1977, p. 2). In 1981, the IDWR designated the area around Cinder Cone Butte a Critical Ground-Water Area (fig. 21) and closed it to further development.

Wells near Mountain Home penetrate local perched aquifers and the regional aquifer. Depths to water range from 50 to 500 ft below land surface. Wells penetrating the regional aquifer are completed mostly in Quaternary basalt of the Bruneau Formation, and water levels are 200 to 500 ft below land surface (Young, 1977, p. 10). Water levels are shallower in wells completed in perched aquifers near Mountain Home. In 1980, an estimated 38,000 acre-ft of water were withdrawn from 88 wells for irrigation around Mountain Home.

Ground-water irrigation south of the Snake River on the western plain is concentrated south of Bruneau. Wells in this area generally range from 700 to 2,100 ft deep and are completed in Tertiary silicic volcanics and the Banbury Basalt. Some irrigation water from the Banbury Basalt is thermal (30 °-83 °C) and is under artesian pressure (Young and Whitehead, 1975, p. 31). In 1980, an estimated 54,000 acre-ft of irrigation water were withdrawn from 61 wells.

The Boise-Payette, Mountain Home, and Bruneau areas account for about 75 percent of the wells and 80 percent of ground-water pumpage for irrigation on the western Snake River Plain. Water from the remaining wells irrigate smaller tracts that are mostly adjacent to surface-water-irrigated areas. About 25,000 acres on the western plain are irrigated with both surface and ground water.

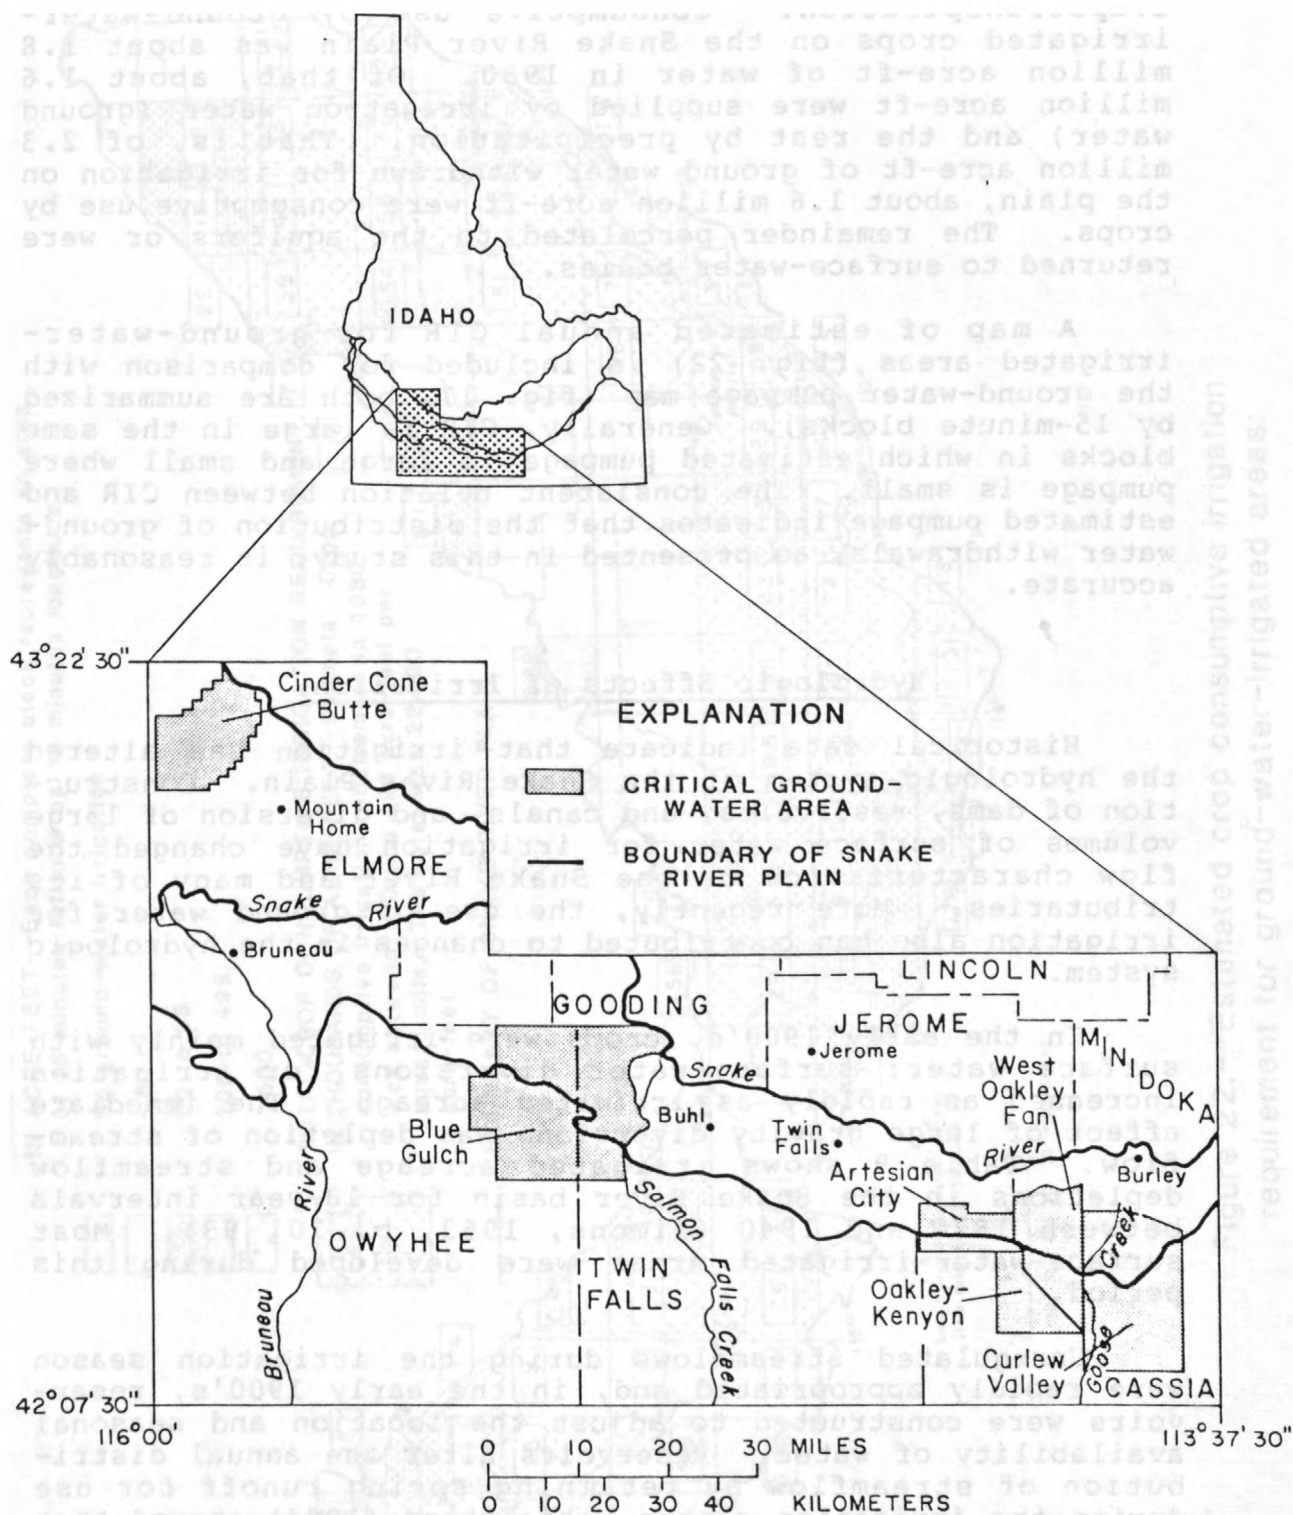


Figure 21.--Locations of Critical Ground-Water Areas.

Data from Sutter and Corey (1970) were used to estimate evapotranspiration. Consumptive use by ground-water-irrigated crops on the Snake River Plain was about 1.8 million acre-ft of water in 1980. Of that, about 1.6 million acre-ft were supplied by irrigation water (ground water) and the rest by precipitation. That is, of 2.3 million acre-ft of ground water withdrawn for irrigation on the plain, about 1.6 million acre-ft were consumptive use by crops. The remainder percolated to the aquifers or were returned to surface-water bodies.

A map of estimated annual CIR for ground-water-irrigated areas (fig. 22) is included for comparison with the ground-water pumpage map (fig. 17, both are summarized by 15-minute blocks). Generally, CIR is large in the same blocks in which estimated pumpage is large and small where pumpage is small. The consistent relation between CIR and estimated pumpage indicates that the distribution of ground-water withdrawals, as presented in this study, is reasonably accurate.

Hydrologic Effects of Irrigation

Historical data indicate that irrigation has altered the hydrologic system of the Snake River Plain. Construction of dams, reservoirs, and canals, and diversion of large volumes of surface water for irrigation have changed the flow characteristics of the Snake River and many of its tributaries. More recently, the use of ground water for irrigation also has contributed to changes in the hydrologic system.

In the early 1900's, crops were irrigated mainly with surface water; surface-water diversions for irrigation increased as rapidly as irrigated acreage. The immediate effect of large gravity diversions was depletion of streamflow. Table 9 shows irrigated acreage and streamflow depletions in the Snake River basin for 10-year intervals between 1870 and 1940 (Simons, 1953, p. 70, 93). Most surface-water-irrigated areas were developed during this period.

Unregulated streamflows during the irrigation season were rapidly appropriated and, in the early 1900's, reservoirs were constructed to adjust the location and seasonal availability of water. Reservoirs alter the annual distribution of streamflow by retaining spring runoff for use during the irrigation season. Kjelstrom (1984) showed that high flows of May and June declined as surface-water regulation increased. More than 9 million acre-ft of spring runoff are retained in storage reservoirs and are available for release during low-flow months.

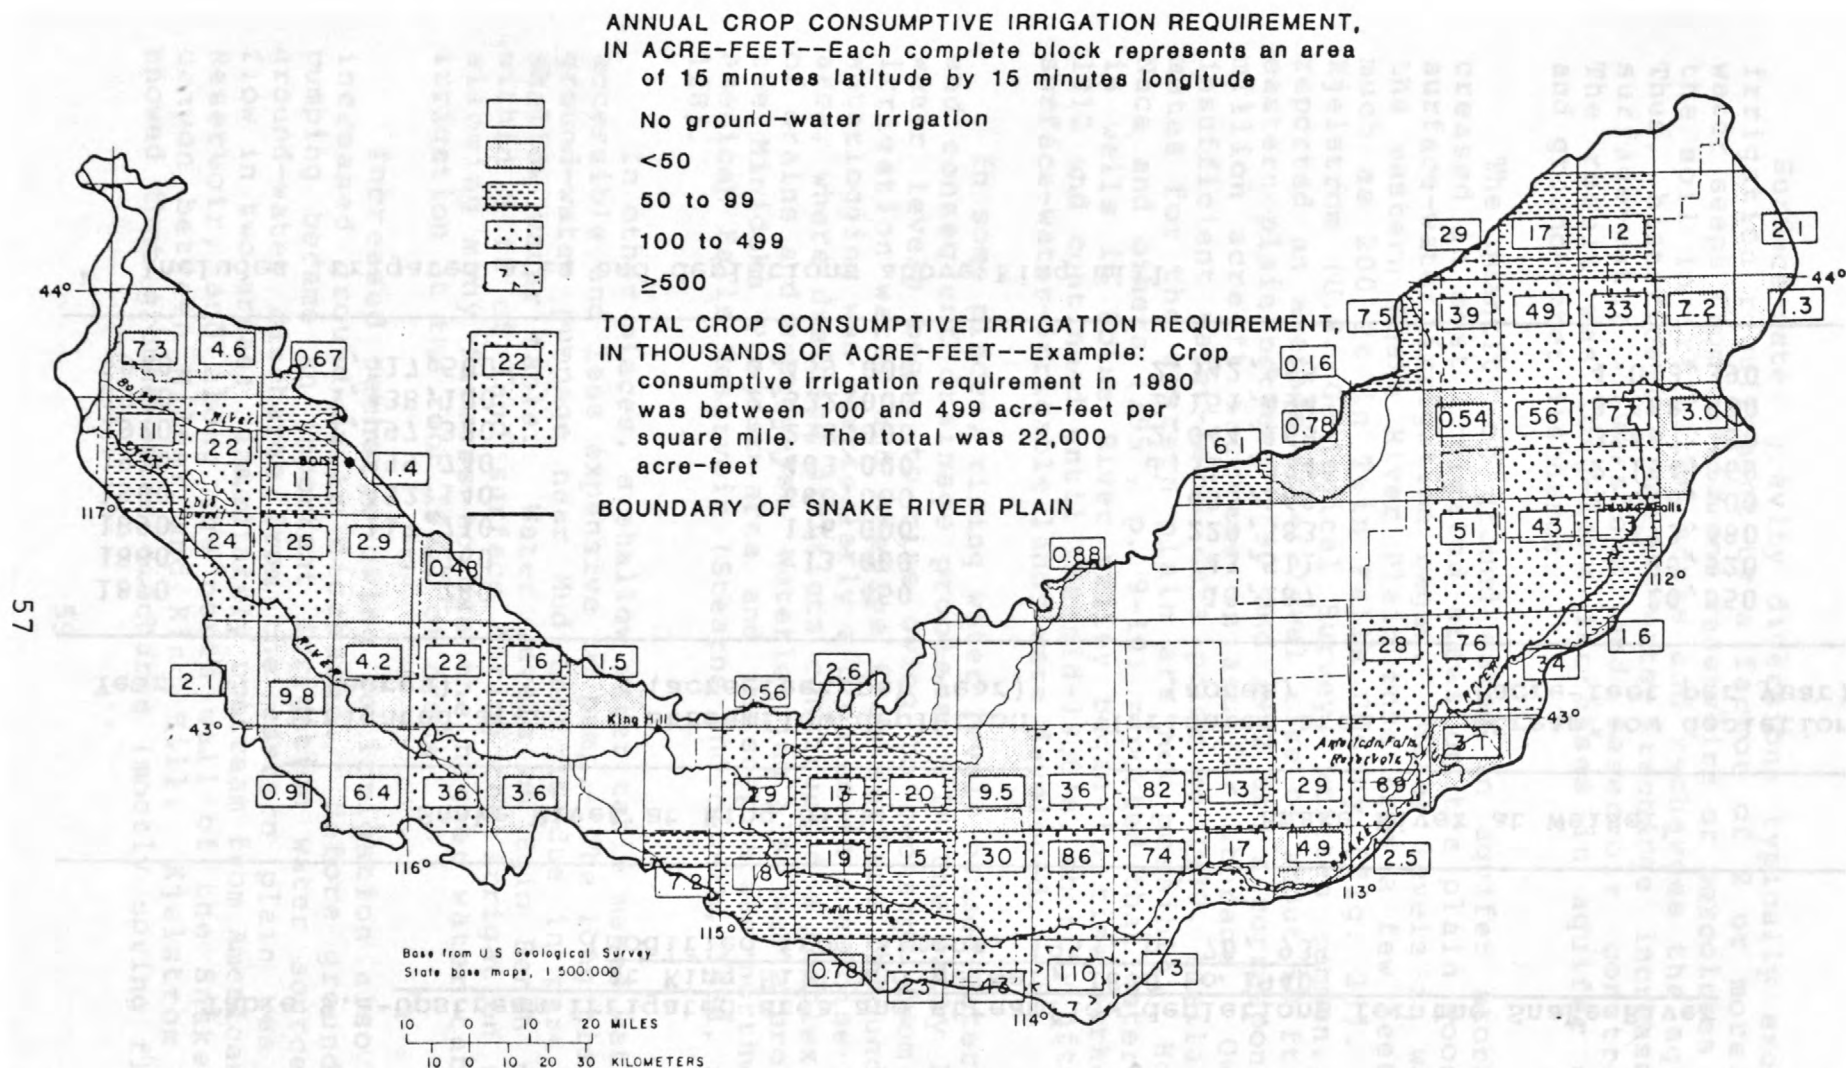


Figure 22.--Estimated crop consumptive irrigation requirement for ground-water-irrigated areas.

Table 9.--Upstream irrigated area and streamflow depletions for the Snake River
at King Hill and Weiser, 1870 to 1940
(Modified from Simons, 1953, p. 70, 93)

Year	Snake River at King Hill		Snake River at Weiser ¹	
	Irrigated area (acres)	Streamflow depletion (acre-feet per year)	Irrigated area (acres)	Streamflow depletion (acre-feet per year)
1870	280	450	10,287	20,650
1880	7,760	13,000	43,511	80,520
1890	117,710	176,000	229,383	373,480
1900	432,140	660,000	635,169	1,028,500
1910	899,740	1,403,000	1,312,724	2,184,060
1920	1,397,320	2,258,000	2,044,168	3,497,780
1930	1,438,100	2,322,000	2,151,494	3,668,530
1940	1,517,500	2,459,000	2,342,955	4,013,390

¹ Includes irrigated area and depletions above King Hill.

Surface-water gravity diversions typically exceed the irrigation requirement by a factor of 2 or more. Some water seeps from canals and reservoirs or percolates through the soil in irrigated areas and recharges the aquifers. Thus, historically, ground-water recharge increased with surface-water diversions and reservoir construction. The result was long-term increases in aquifer storage and ground-water discharge.

The quantity of ground water in aquifer storage increased in most irrigated areas on the plain soon after surface-water irrigation began. Water levels in wells on the eastern Snake River Plain rose from a few feet to as much as 200 ft in Twin Falls County (fig. 23). L. C. Kjelstrom (U.S. Geological Survey, written commun., 1984) reported an average water-level rise of about 50 ft on the eastern plain between 1890 and 1952 and a corresponding 24 million acre-ft increase in aquifer storage. Owing to insufficient water-level data prior to 1930, similar estimates for the western plain are not possible. However, Nace and others (1957, p. 9-10) reported that water levels in wells in Boise River valley began to rise markedly in 1912 and continued until the mid-1930's, shortly after most surface-water-irrigable lands were developed.

In some places, rising water levels caused waterlogging and consequent drainage problems. In the early 1900's, water levels began to rise owing to recharge from excess irrigation water and seepage from surface impoundments. Waterlogging was particularly a problem in the Boise-Payette area, where drainage districts constructed a complex system of drains and wasteways. Waterlogging also was a problem in the Minidoka Project area and in seep areas northwest of American Falls Reservoir (Stearns and others, 1938, p. 119, 128).

In other places, a shallow water table makes water more accessible and less expensive to pump. The long history of ground-water pumpage near Mud Lake is due in part to the shallow water table. Water levels on Egin Bench rise to within 5 ft of land surface during the irrigation season, allowing many farmers to use the higher water table for irrigation at the root level of crops.

Increased recharge owing to irrigation also caused increased ground-water discharge. Before ground-water pumping became an important irrigation water source, most ground-water discharge from the eastern plain was spring flow in two areas: immediately upstream from American Falls Reservoir, and along the north wall of the Snake River canyon between Milner and King Hill. Kjelstrom (1984) showed that ground-water discharge (mostly spring flow) to

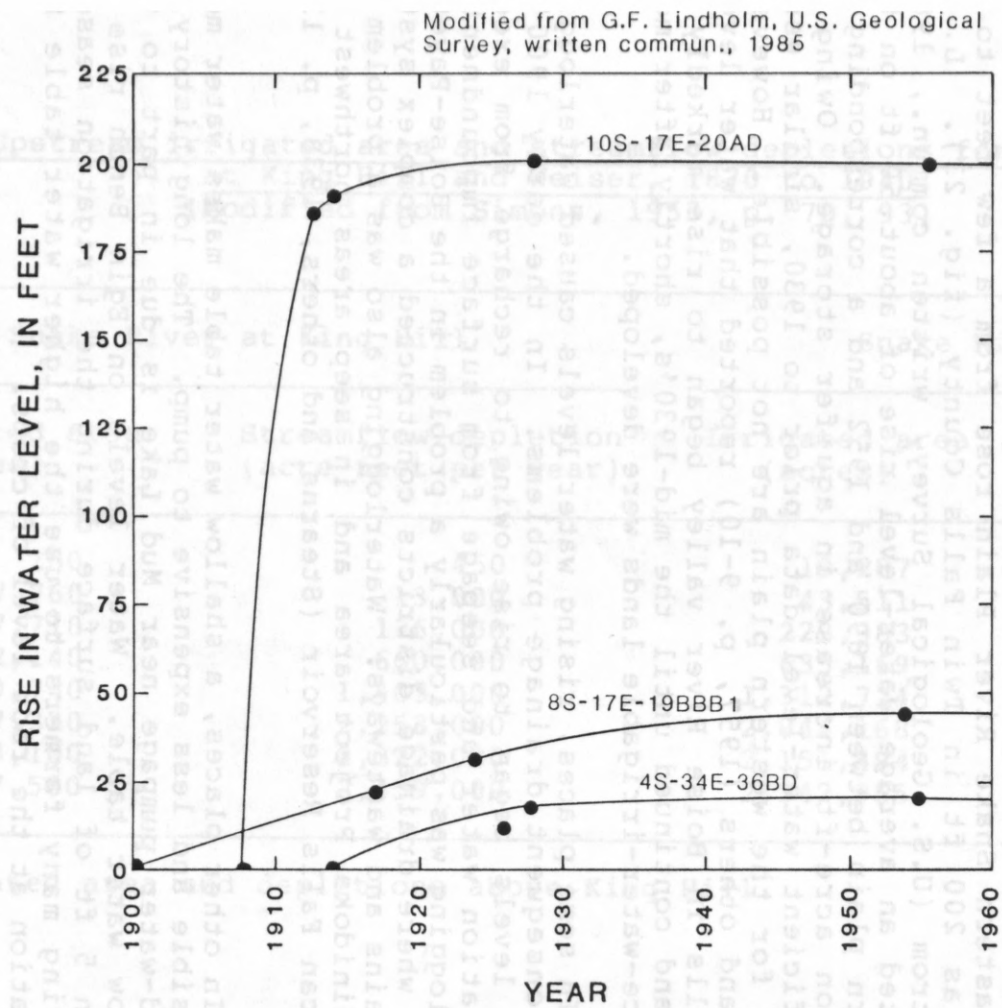


Figure 23.--Water-level rises in three wells, 1900-1960.
(Well locations shown in fig. 15)

the Snake River from Milner to King Hill increased from 4,200 ft³/s in 1905 to 6,800 ft³/s in 1951 (fig. 24). Most of the increase was due to increased recharge from surface-water irrigation immediately north and east of the springs. Data on spring flow in the American Falls Reservoir area since 1912 do not show a similar trend. These springs drain a narrow strip of land along the Snake River that was mostly put under surface-water irrigation prior to 1912. The hydrologic system in this area probably reached equilibrium during the 1900's before discharge measurements were made.

After World War II, several factors combined to reduce net ground-water recharge from irrigation. The largest factor was annual increases in ground-water pumpage after about 1950. At the same time, irrigators converted to more efficient distribution systems that reduced the amount of water applied to fields. Also, lining of irrigation canals reduced conveyance losses. As a result, net ground-water recharge decreased and water levels in wells and spring flow declined.

Water levels have declined in wells across most of the eastern plain, on the Mountain Home plateau, and in scattered localities on the rest of the western plain. Water-level declines range from a few to several tens of feet and, locally, in heavily pumped areas near the margins of the plain, water-level declines are as much as several hundred feet. Figure 25 is the hydrograph of a well in Minidoka County that shows long-term water-level declines. The downward trend was temporarily reversed from the early 1960's to the early 1970's by fluctuations owing to climatic variations, but the overall 15-ft decline from 1950 to 1982 is clear. In Critical Ground-Water Areas, the IDWR has determined that withdrawals have exceeded recharge and water levels have declined to unacceptable levels.

Ground-water discharge to the Snake River from Milner to King Hill decreased by about 600 ft³/s between 1951 and 1980 (fig. 24). Decreases are due largely to increased consumptive use in new ground-water-irrigated areas immediately north and east of the springs (L. C. Kjelstrom, U.S. Geological Survey, written commun., 1984).

On the eastern plain, declining water levels and spring flow suggest that ground-water pumpage since 1950 has reduced both aquifer storage and ground-water discharge. On the western plain, the effects of new ground-water pumpage are more difficult to assess. In the Mountain Home area, pumping has caused marked and continuous water-level declines. In the Boise-Payette area, water levels are declining in some wells and rising in others, probably because of varying stresses on different parts of the aquifers.

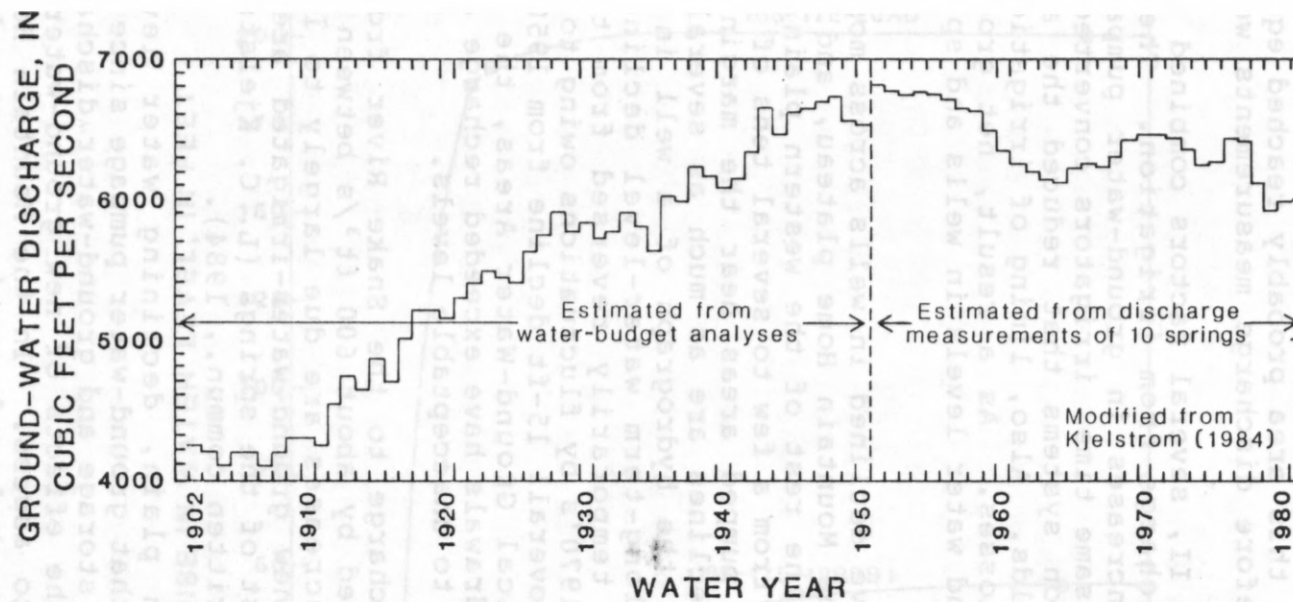


Figure 24.--Average annual ground-water discharge from the north side of the Snake River between Milner and King Hill. (At least 80 percent of discharge is from springs)

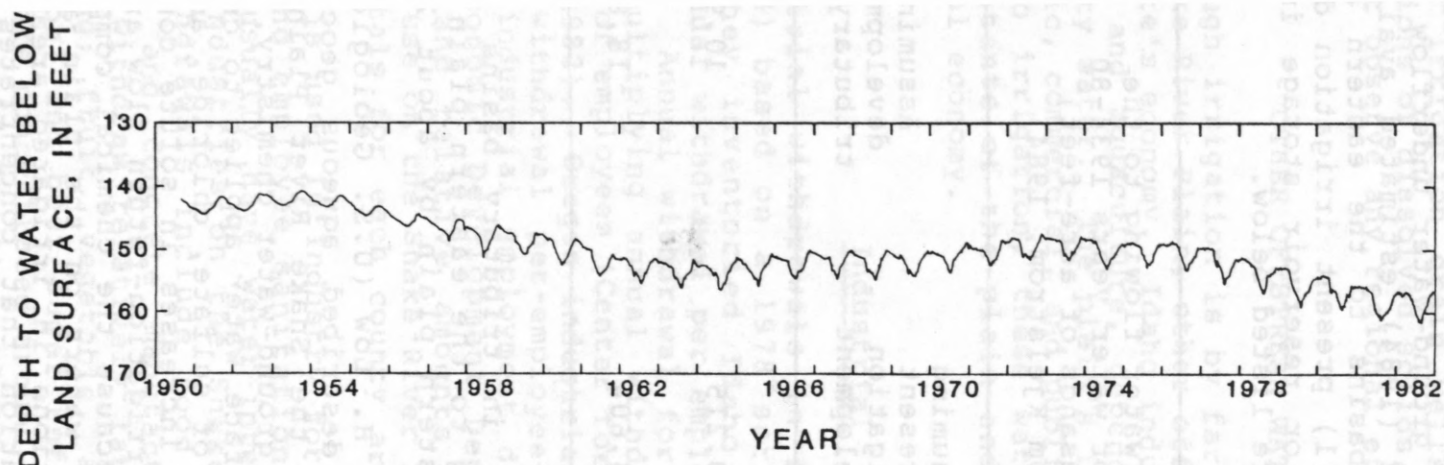


Figure 25.--Declining water levels in well 8S-24E-31DAC1, in Minidoka County.

In some tributary basins, agricultural development and consequent crop evapotranspiration of surface and ground water have reduced available water flowing to the plain. Most water available to the Snake River Plain originates as surface-water inflow and ground-water underflow from tributary basins. Kjelstrom (1984) estimated available water flowing from tributary basins to the eastern and western plain on the basis of (1) present irrigation development, and (2) no development or reservoir storage in tributary basins. His estimates are listed below.

Annual water flowing to the plain for water years 1934-80 (thousands of acre-feet) (from Kjelstrom, 1984)		
	Assuming present irrigation development	Assuming no development in tributary basins
Eastern Snake River Plain	10,215	10,972
Western Snake River Plain	14,604	18,890

Agricultural development in tributary basins has reduced available water flowing to the eastern plain by about 7 percent and to the western plain by about 23 percent.

W. W. Wood and W. H. Low (U.S. Geological Survey, written commun., 1984) described aqueous geochemistry of ground water underlying the Snake River Plain, including effects of irrigation on ground-water chemistry. Generally, recharge from excess surface water applied to crops results in higher concentrations of sulfate, chloride, and sodium in ground water. However, increases in solute concentrations owing to recharge from irrigation-return flow are generally smaller than expected because the chemical compositions of most surface and ground waters on the plain are similar. Higher solute concentrations in irrigated areas result in part from evapotranspiration that concentrates solutes in the recharge water.

Norvitch and others (1969, p. 26) also noted higher concentrations of total dissolved solids, as well as sulfate, chloride, and sodium in ground water underlying

irrigated areas. Dissolved solids in ground water averaged less than 250 mg/L (milligrams per liter) under nonirrigated areas and more than 250 mg/L under irrigated areas. Seitz and others (1977, p. 32) observed some local chemical effects of irrigation drain wells, particularly increased concentrations of dissolved solids, nutrients, and bacteria, but did not observe any regional effects.

OTHER OFFSTREAM WATER USES

Although irrigation is by far the largest use of water on the Snake River Plain, other offstream uses are important to the State's economy. Idaho industries, particularly food processing and aquaculture, depend on the ample supply of good quality water. The plain's inhabitants also use water for domestic, commercial, and public purposes. Though small relative to irrigation, these water uses are essential to the inhabitants of the plain and to the State's largely agricultural economy.

Industrial

Industrial withdrawals in Idaho were estimated by IDWR (1983) based on a 1978 survey of industrial water users. They inventoried Idaho industries to estimate average annual withdrawal per employee for each industry in the State. Annual withdrawal for each industry was estimated by multiplying annual withdrawal per employee times the number of employees (Center for Business Development and Research, 1982). Oregon industrial water use was estimated using the withdrawal per-employee-use rates determined in Idaho and industrial employment data estimated for Oregon (Oregon Economic Development Department, 1983, p. 73). Locations and relative amounts of water withdrawn for industrial use on the Snake River Plain are shown in figure 26, and totals for each county are presented in table 10.

Water is used in industry for manufacturing processes, cooling, and employee sanitation. Industries with high water use usually have water-intensive manufacturing processes. Industries on the Snake River Plain with high annual withdrawals include food processing and lumber, fertilizer, and concrete manufacturing. Food-processing industries withdraw relatively large volumes of water for meat packing; fruit, vegetable, and fish preparation and preservation; and beet sugar refining. Food-processing industries are concentrated around Idaho Falls, Burley, Twin Falls, Boise, and Payette. Large quantities of water are used by the phosphate-processing industry near Pocatello and by the lumber industry in Emmett.

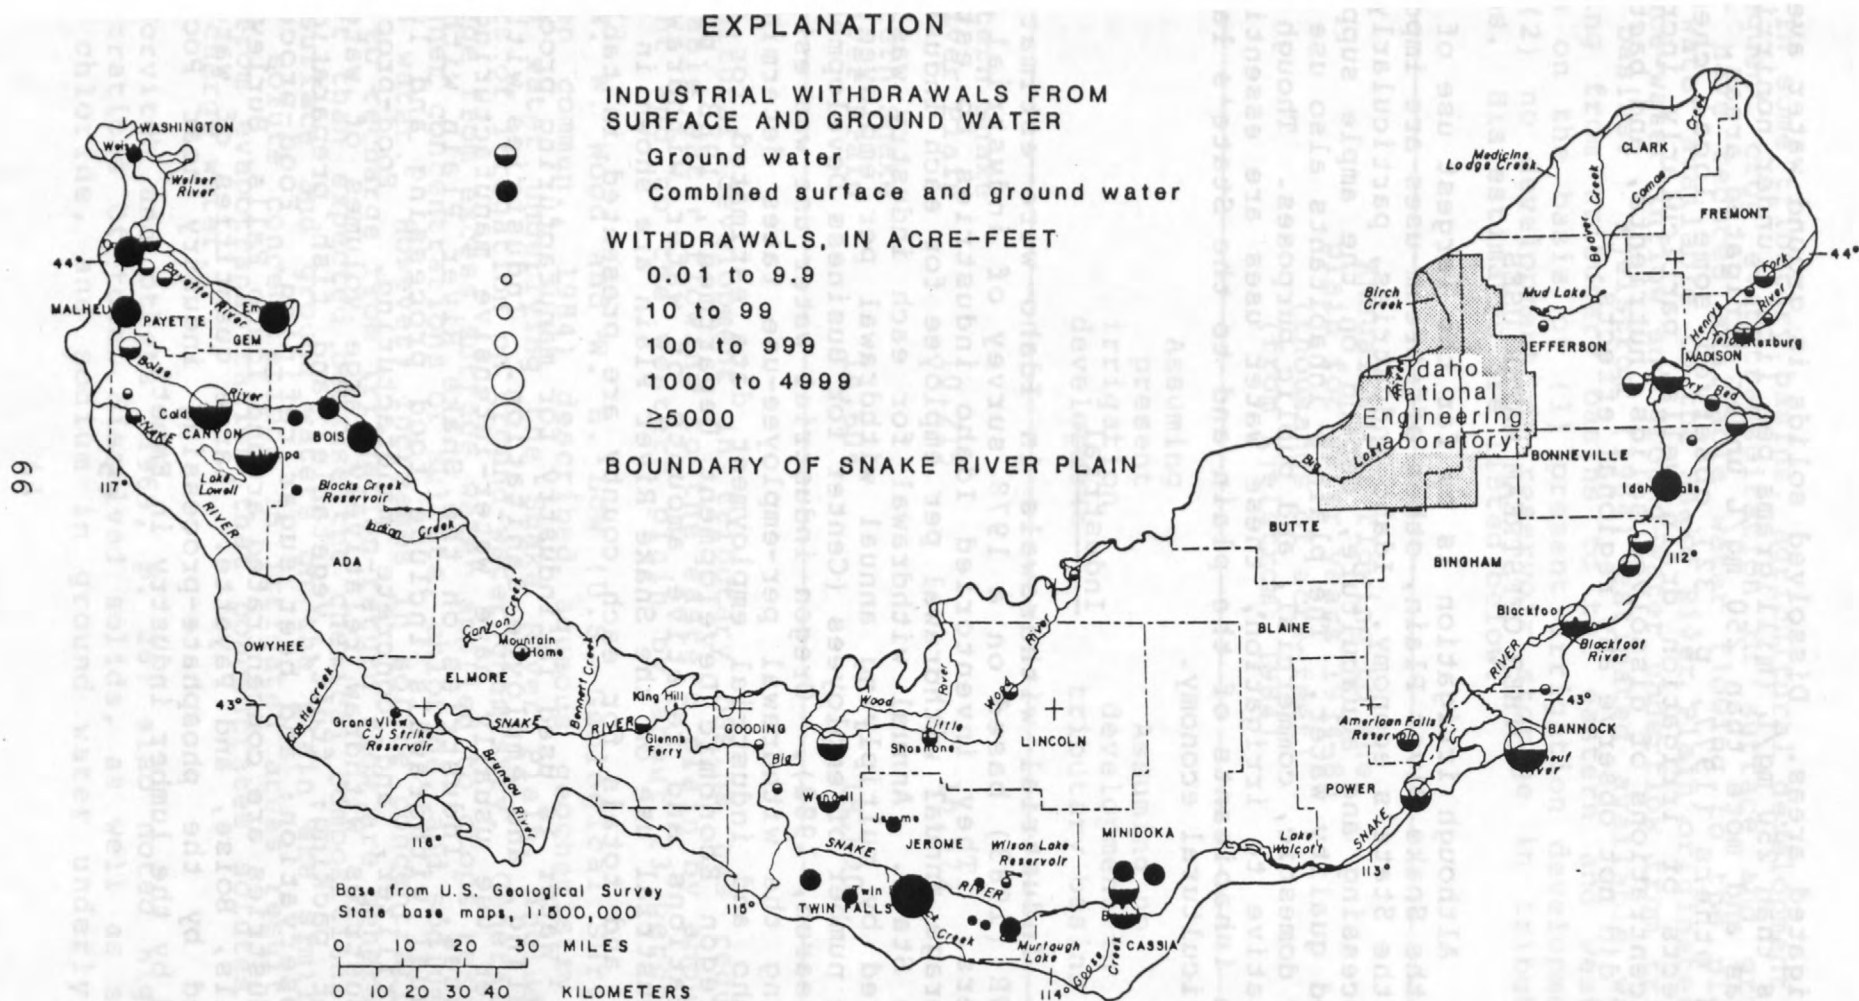


Figure 26.--Industrial withdrawals, 1980.

Table 10.--Industrial water use by county, 1980
[<, less than]

County	Sources of supplies			
	Total withdrawals (acre-feet)	Ground water (acre-feet)	Surface water (acre-feet)	Public-supply systems ¹ (acre-feet)
Ada	2,800	700	1,500	600
Bannock	10,600	10,500	0	100
Bingham	5,050	5,000	0	50
Blaine	<10	<5	0	<5
Bonneville	2,530	20	10	2,500
Butte	0	0	0	0
Canyon	14,970	14,900	0	70
Cassia	4,440	4,400	0	40
Clark	0	0	0	0
Elmore	40	0	0	40
Fremont	800	800	0	0
Gem	4,000	100	3,900	0
Gooding	1,790	1,700	0	90
Jefferson	2,000	2,000	0	<5
Jerome	100	40	40	20
Lincoln	80	0	0	80
Madison	400	200	0	200
Malheur, Oreg.	4,000	1,400	1,000	1,600
Minidoka	3,400	2,800	<5	600
Owyhee	30	0	0	30
Payette	550	50	0	500
Power	2,800	2,800	0	<5
Twin Falls	10,900	5,100	900	4,900
Washington	30	<5	20	10
Totals	71,310	52,510	7,370	11,430

¹ See table 12 for source of public-supply water.

Withdrawals for food processing have a distinct seasonal pattern (PNRBC, 1971b, p. 84). Water use for sugar refining and potato processing is highest from September through March. Water use for canning and freezing of fruits and vegetables peaks from July through October. Water use for milk- and meat-processing industries is relatively constant throughout the year.

Industrial water withdrawals on the Snake River Plain were about 71,300 acre-ft in 1980. About 52,500 acre-ft were ground water, 7,400 acre-ft were surface water, and 11,400 acre-ft were from public water supplies. Ground water is the source of at least 95 percent of the public water supplies in cities with industrial water users (Association of Idaho Cities, 1980). According to Solley and others (1983, p. 22), consumptive use of industrial withdrawals in Idaho was about 8 percent. Thus, consumptive use of industrial withdrawals on the Snake River Plain was estimated to be 5,700 acre-ft. In 1971, water used by industries in Idaho was recycled an average of two times before disposal (IWRB, 1972, p. 78).

Aquaculture

Aquaculture, the practice of raising fish and shellfish in managed habitats, is one of Idaho's largest industrial water uses. At least 90 percent of Idaho's commercial fish farms are located in the Snake River canyon between Twin Falls and Hagerman, a major discharge area for the Snake River Plain aquifer. The water quality of hundreds of springs emerging from the northeastern canyon wall is exceptionally well suited to cold-water fish farming. Idaho produces 90 percent of processed rainbow trout in the United States (Klontz and King, 1975, p. 53). In addition to rainbow trout, Idaho commercially produces channel catfish, coho salmon, and cutthroat trout. Other types of aquaculture include egg production, fish processing, fee-fishing, feed manufacturing, and live-hauling of fish for stocking in other States.

Water withdrawals for commercial aquaculture were estimated from data on the sizes of food-fish farms in Idaho (Klontz and King, 1975). Volume of fish-rearing space was multiplied by the number of water replacements per year for each fish farm. Klontz and King (1975) reported minimum and maximum replacement times for each farm, so the midpoint was used to calculate number of replacements per year.

Withdrawals for Federal- and State-operated fish farms were estimated from average flow rates provided by managing agencies (Idaho Department of Fish and Game, 1980; D. S. Bruhn, U.S. Fish and Wildlife Service, oral commun., 1984).

In 1980, commercial fish farms on the Snake River Plain withdrew about 1.7 million acre-ft of water. Four gamefish hatcheries operated by the Idaho Department of Fish and Game and one operated by the U.S. Fish and Wildlife Service withdrew about 200,000 acre-ft. Estimated withdrawals by county for aquaculture are shown in table 11, and locations of fish farms are shown in figure 27. Except for about 100,000 acre-ft withdrawn from wells and streams, water for aquaculture is from springs. Consumptive use in fish farm operations is negligible; some losses are due to evaporation from exposed water surfaces in ponds and raceways. Assuming each of the 33 fish farms on the plain has 10 acres of ponds and raceways, and annual evaporation from open water is 36 in./yr, total consumptive use by fish farms would equal 990 acre-ft/yr. Few, if any, fish farms have 10 acres of open water and most have much less, so consumptive use by aquaculture on the Snake River Plain probably amounts to less than 1,000 acre-ft/yr.

Nonindustrial Public Supply

Nonindustrial public supply refers to water withdrawn by public and private water suppliers and delivered for domestic, public, and commercial uses. Domestic uses include drinking, food preparation, washing, and lawn and garden watering. Public uses include schools, fire departments, and municipal parks. Most commercial establishments use public supplies also.

Nonindustrial public-supply withdrawals in Idaho were estimated using the equation:

$$Q = [(P) (231 \text{ gal/d}) (0.00112015)] - I \quad (4)$$

where

Q = volume withdrawn for nonindustrial public supply, in acre-feet;

P = population served by public supplies; and

I = public-supply withdrawals for industrial use, in acre-feet.

Data on population served by public supplies and public supply withdrawals for industrial use were provided by IDWR.

Figure 27. Locations of fish farms.

Table 11.--Aquaculture water use by county, 1980

County	Number of fish farms	Withdrawals (acre-feet per year)
Ada	1	2,000
Bannock	2	56,000
Bingham	2	183,000
Gooding	16	1,370,000
Jerome	2	152,000
Power	1	12,000
Twin Falls	9	131,000
Totals	33	1,906,000

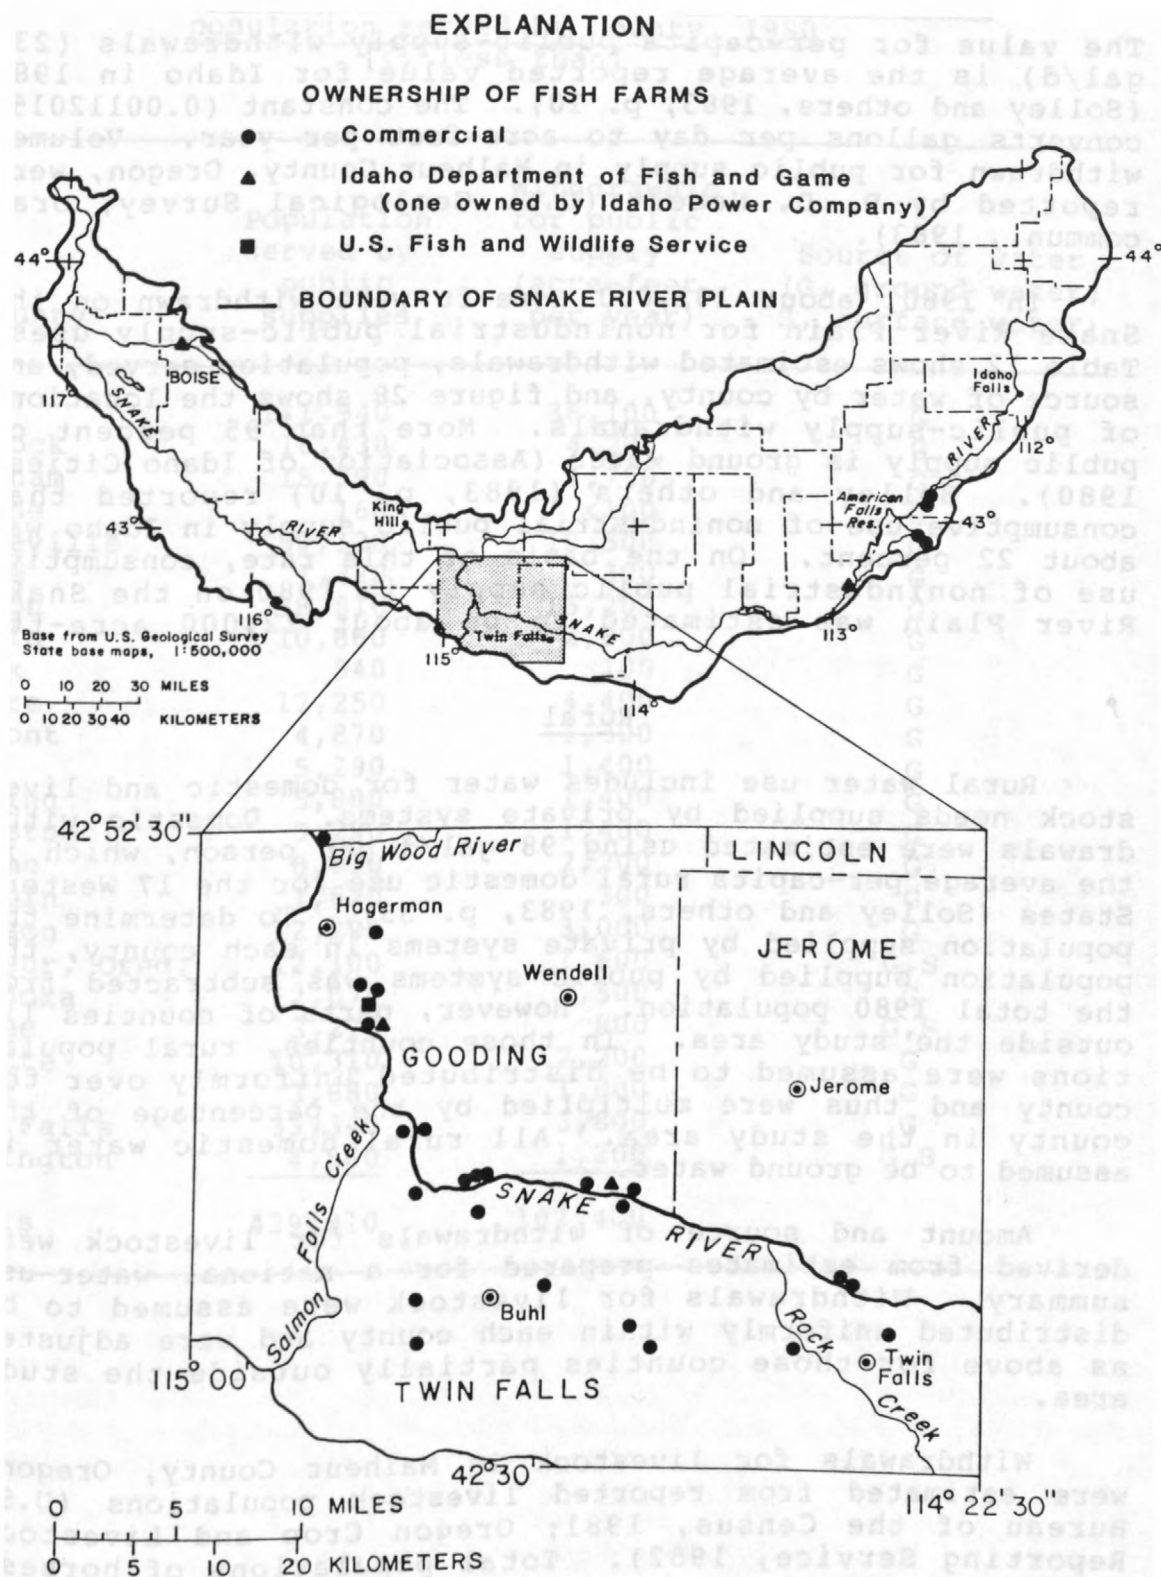


Figure 27.--Locations of fish farms.

The value for per-capita public-supply withdrawals (231 gal/d) is the average reported value for Idaho in 1980 (Solley and others, 1983, p. 10). The constant (0.00112015) converts gallons per day to acre-feet per year. Volumes withdrawn for public supply in Malheur County, Oregon, were reported by D. D. Nebert (U.S. Geological Survey, oral commun., 1983).

In 1980, about 102,000 acre-ft were withdrawn on the Snake River Plain for nonindustrial public-supply uses. Table 12 shows estimated withdrawals, population served, and source of water by county, and figure 28 shows the locations of public-supply withdrawals. More than 95 percent of public supply is ground water (Association of Idaho Cities, 1980). Solley and others (1983, p. 10) reported that consumptive use of nonindustrial public supply in Idaho was about 22 percent. On the basis of this rate, consumptive use of nonindustrial public supply in 1980 on the Snake River Plain was estimated to be about 22,000 acre-ft.

Rural

Rural water use includes water for domestic and livestock needs supplied by private systems. Domestic withdrawals were estimated using 98 gal/d per person, which is the average per-capita rural domestic use for the 17 Western States (Solley and others, 1983, p. 33). To determine the population supplied by private systems in each county, the population supplied by public systems was subtracted from the total 1980 population. However, parts of counties lie outside the study area. In those counties, rural populations were assumed to be distributed uniformly over the county and thus were multiplied by the percentage of the county in the study area. All rural domestic water is assumed to be ground water.

Amount and source of withdrawals for livestock were derived from estimates prepared for a national water-use summary. Withdrawals for livestock were assumed to be distributed uniformly within each county and were adjusted as above for those counties partially outside the study area.

Withdrawals for livestock in Malheur County, Oregon, were estimated from reported livestock populations (U.S. Bureau of the Census, 1981; Oregon Crop and Livestock Reporting Service, 1982). Total populations of horses, cattle, sheep, pigs, chickens, and goats were multiplied


Table 12.--Nonindustrial public-supply water use and
population served by county, 1980
[<, less than]

County	Population served by public supplies	Withdrawals for public supply (acre-feet per year)	Source of water (G, ground water; S, surface water)
Ada	141,940	36,100	G
Bannock	16,430	4,200	G
Bingham	18,790	4,700	G
Blaine	160	<100	G
Bonneville	50,120	10,500	G
Butte	1,320	300	G
Canyon	58,810	15,200	G
Cassia	10,860	2,800	G
Clark	540	100	G
Elmore	17,250	4,400	G
Fremont	4,870	1,300	G
Gem	5,290	1,400	G
Gooding	5,880	1,400	G
Jefferson	5,280	1,400	G
Jerome	8,630	2,200	G
Lincoln	1,620	300	G
Madison	12,290	3,000	G
Malheur, Oreg.	12,100	1,600	G,S
Minidoka	12,070	2,500	G
Owyhee	3,270	800	G,S
Payette	10,310	2,200	G
Power	3,880	1,000	G
Twin Falls	33,340	3,800	G
Washington	4,860	1,200	G,S
Totals	439,910	102,400	

EXPLANATION

COUNTY WITHDRAWALS FOR PUBLIC AND RURAL SUPPLIES

WITHDRAWALS, IN ACRE-FEET

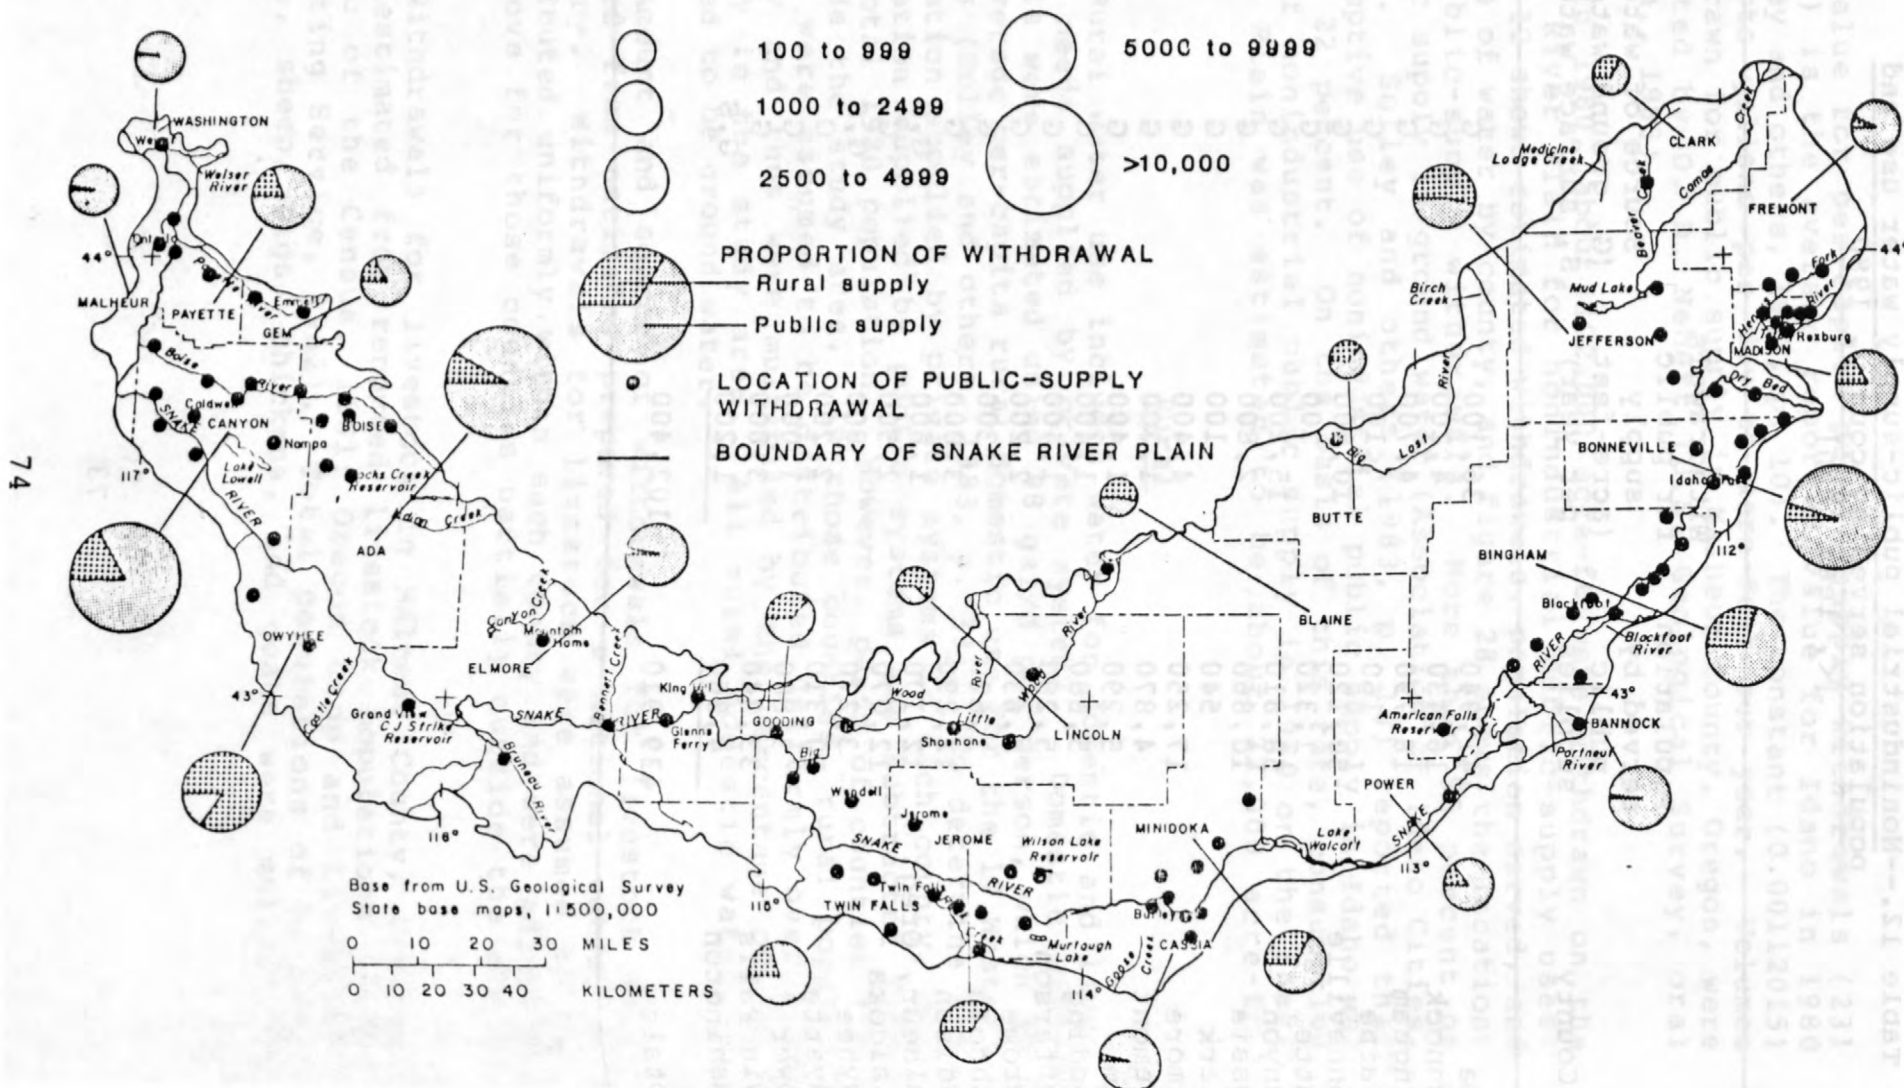

by their daily per-capita use as reported by Murray (1968, p. 4) and by the percentage of Malheur County included in the study area. Withdrawals were assumed to be equally from surface and ground water.

Amounts of rural domestic and livestock withdrawals are presented by county in table 13 and locations are shown in figure 28. In 1980, an estimated 23,000 acre-ft were withdrawn from surface and ground water for rural uses. About 13,000 acre-ft were used for domestic purposes and 10,000 acre-ft for livestock. In previous water-use estimates, the U.S. Geological Survey (Solley and others, 1983, p. 14) reported that consumptive use was about 24 percent of domestic withdrawals and 86 percent of livestock withdrawals. On the basis of these rates, consumptive use of rural domestic and livestock withdrawals was estimated to be about 11,800 acre-ft.

Idaho National Engineering Laboratory

The INEL (Idaho National Engineering Laboratory) site (fig. 26), which consists of about 900 mi² of the eastern plain, was established in 1949 by the Atomic Energy Commission (later reorganized as the Department of Energy) to build, operate, and test nuclear reactors. Ground water is withdrawn onsite for cooling and processing uses. Lewis and Jensen (1984) reported that ground-water withdrawals at INEL averaged about 7,400 acre-ft/yr from 1979 to 1981. About 90 percent was withdrawn in Butte County and 10 percent in Bingham and Jefferson Counties. Consumptive use was fifty-three percent, or 3,900 acre-ft. The rest was returned to the aquifer via injection and drain wells, and leaching ponds.

INSTREAM WATER USES

Instream water uses do not involve either withdrawals or significant consumptive use of water. However, when perfected as senior water rights, they limit the availability of water for other uses by requiring continuous minimum flows at specific locations. Instream water uses include hydroelectric power generation, minimum flows for fish habitat preservation, and recreation.

Hydroelectric Power Generation

Since the early 1900's, availability of inexpensive hydroelectric power has been important to Idaho's economic development. With an abundance of free-flowing water, Idaho

Table 13.--Rural domestic and livestock water use
by county, 1980

County	Rural population in study area	Rural domestic withdrawals (acre-feet)	Livestock withdrawals (acre-feet)	
			Surface water	Ground water
Ada	26,800	2,900	300	700
Bannock	500	60	20	10
Bingham	11,700	1,300	600	300
Blaine	800	90	100	40
Bonneville	3,500	400	100	50
Butte	900	100	80	80
Canyon	25,000	2,700	600	1,400
Cassia	1,000	100	70	100
Clark	100	10	50	30
Elmore	1,300	100	100	30
Fremont	400	40	70	50
Gem	1,400	200	20	90
Gooding	4,000	400	400	400
Jefferson	8,700	1,000	500	200
Jerome	6,200	700	400	300
Lincoln	1,700	200	200	300
Madison	4,200	500	100	60
Malheur, Oreg.	300	30	30	30
Minidoka	7,600	800	600	400
Owyhee	900	100	100	100
Payette	2,800	300	200	70
Power	900	100	80	80
Twin Falls	6,200	700	400	200
Washington	200	20	30	10
Totals	117,100	12,850	5,150	5,030

has relied almost exclusively on hydroelectric power. About half of the State's hydroelectric power facilities are within the study area on the Snake River and its tributaries (fig. 29).

An estimated 52 million acre-ft of water were used in 1980 to generate 2.6 million mWh of electricity on the Snake River Plain. This is about 30 percent of the total hydropower generation in Idaho. About 39.4 million acre-ft of water were used on the eastern plain and 12.3 million on the western plain.

Water use for hydropower generation was estimated by IDWR from power generation data provided by the Federal Energy Regulatory Commission. Data on water use and power produced in 1980 are shown by county in table 14. Virtually none of this water was consumptively used; after passing through a power generation plant, the water was available for downstream use. The small amount of water evaporated from reservoirs associated with hydropower generation is accounted for as evaporation from open water.

Continued instream flows are necessary to generate electricity at current levels. During early development of Idaho's water resources, abundant supplies precluded competition between power generation and other water uses. As development proceeded, competition for water use increased. When flows are low, consumptive water use upstream from a power generating facility reduces the amount of water available for power generation.

Small hydropower generation is a new element in Idaho's total power production complex. Most economical large dam sites in Idaho are already developed. Small-scale power generation is encouraged by a 1978 Federal law requiring major utilities to buy power from small generators. Since 1980, more than 150 small hydropower plants have been proposed but few have been approved. Future small hydropower plants will commit an unknown amount of Idaho's water to instream use at generating sites.

Minimum Instream Flows

Idaho law provides that the IWRB may hold a water right for minimum instream flows for recreation, preservation of fish habitat, and other beneficial uses. Instream flows held as water rights by IWRB are subordinate to senior rights; however, they are constraints on future upstream uses.

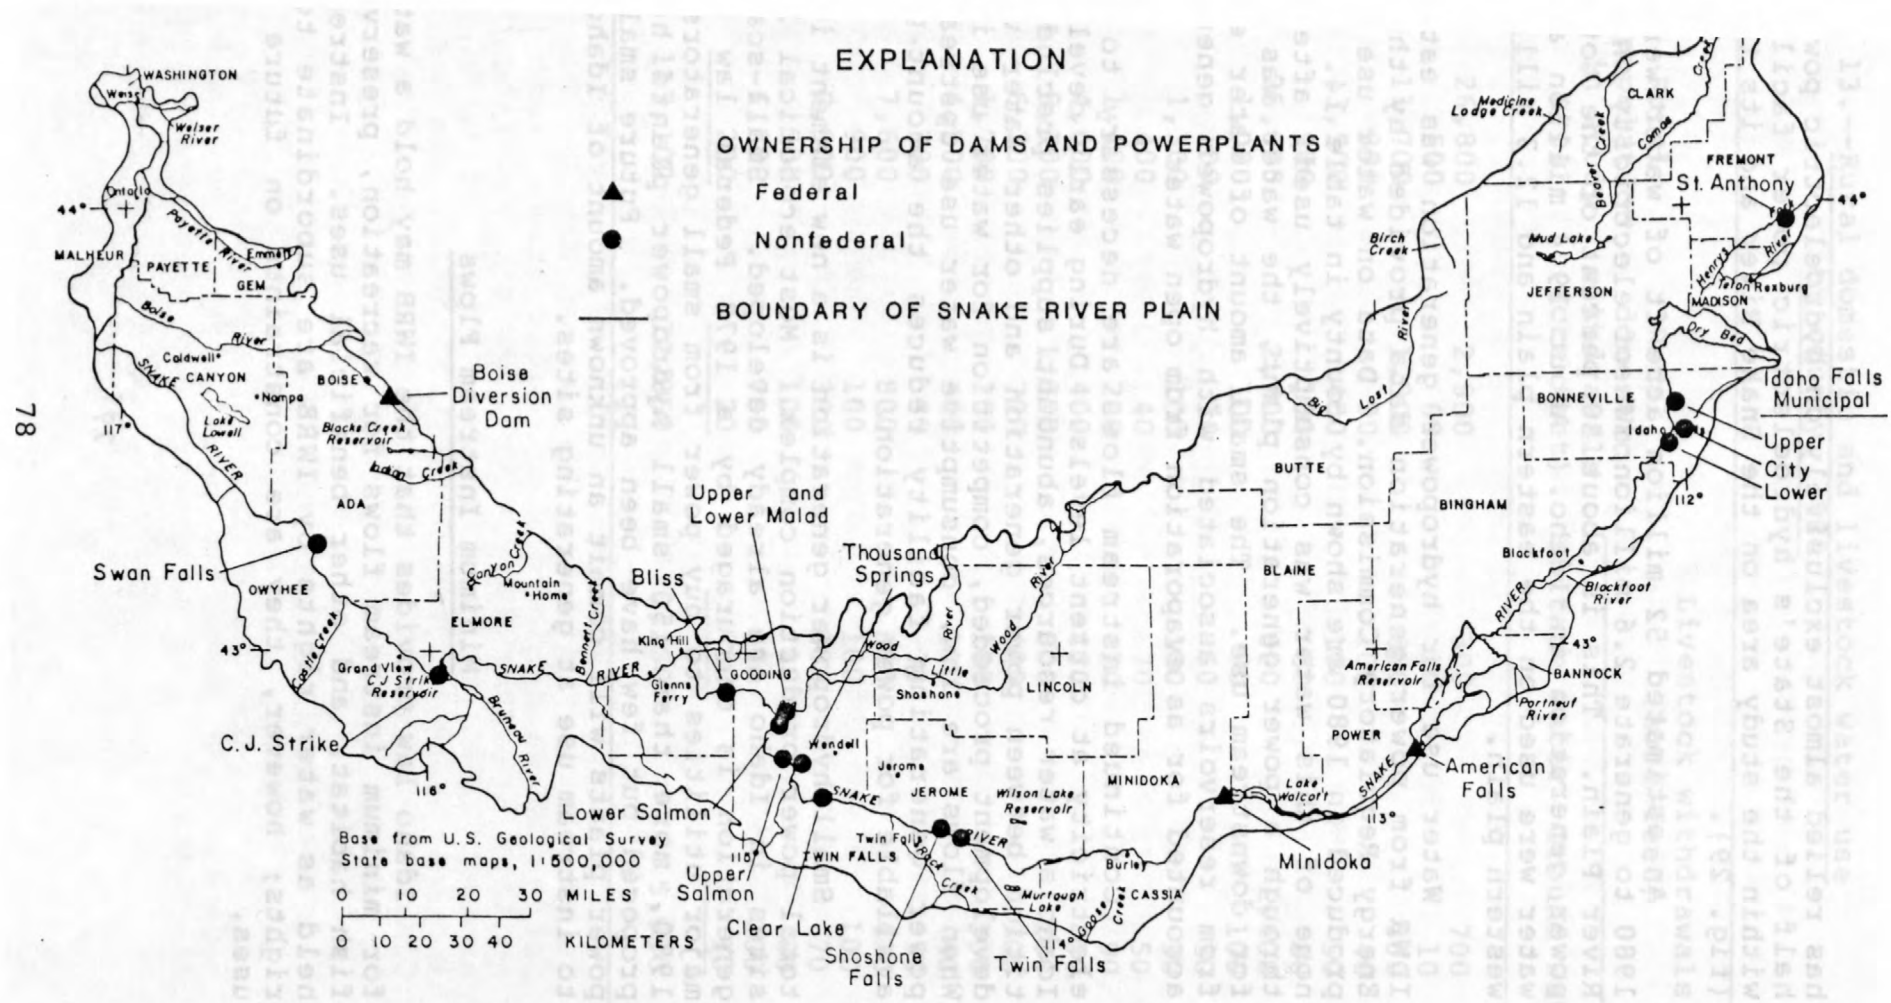


Figure 29.--Locations of hydroelectric powerplants.

Table 14.--Water use for hydropower generation, 1980

County	Hydropower facility	Power generated (thousands of kilowatt-hours)	Water used (thousands of acre-feet)
Ada	Boise Diversion Dam	6,880	739
	Swan Falls	86,182	5,108
		93,062	5,847
Bonneville	Idaho Falls City Plant ¹	47,012	2,460
	Idaho Falls Lower Plant ¹	60,049	3,292
	Idaho Falls Upper Plant ¹	54,462	2,986
		161,523	8,738
Elmore	C. J. Strike	501,702	6,452
Fremont	St. Anthony	2,522	247
Gooding	Bliss	410,565	7,247
	Clear Lake	18,142	314
	Lower Malad	120,930	863
	Upper Malad	65,768	594
	Lower Salmon	282,923	5,164
	Thousand Springs	62,226	414
		960,554	14,596
Jerome	Shoshone Falls	95,172	538
Minidoka	Minidoka	82,964	2,159
Power	American Falls	379,382	5,455
Twin Falls	Twin Falls	64,966	504
	Upper Salmon	280,475	7,169
		345,441	7,673
Totals		2,622,322	51,705

¹ Plants were under construction in 1980 and operated only part of the year. Data are for 1982-83.

As of 1980, 10 IWRB minimum streamflow applications for rivers and springs on the plain were approved or under consideration. These applications accounted for a total of 441 ft³/s in six springs and four rivers. Two minimum streamflows in the Snake River have been established by the legislature: 3,300 ft³/s at the gaging station near Murphy and 4,750 ft³/s at the gaging station near Weiser.

EVAPOTRANSPIRATION FROM WATER BODIES AND UNDEVELOPED LANDS

About 6.4 million acres of the Snake River Plain are undeveloped land or water bodies; more than 5.2 million acres are rangeland dominated by native shrubs and grasses. Barren areas that are mostly lava flows with little or no soil cover account for about 1.0 million acres. The remainder is forests, wetlands, and water. Evapotranspiration from these areas accounts for about 48 percent of total consumptive water use on the plain and thus is an important part of the total water budget.

Evaporation on the plain, estimated from standard Class A land pans, ranges from 40 to 55 in./yr, 80 percent of which occurs from May through October. Evaporation from open water is generally about 70 percent of land-pan evaporation. Nace and others (1957, p. 41) estimated 33 in./yr evaporation from Lake Lowell on the western plain. In a study of the 17 Western States, Meyers (1962, p. 93) estimated 34 in. average annual evaporation from open-water bodies in the Snake River basin. Measurements of pan evaporation in and near Mud Lake indicated annual evaporation rates of 37-38 in. (Stearns and others, 1939, p. 92).

On the basis of an average open-water evaporation rate of 36 in./yr from an estimated 107,000 acres of water, about 320,000 acre-ft are evaporated annually from water bodies on the Snake River Plain. Actual evaporation probably exceeds this estimate because the area covered by water, which was determined from digital Landsat data, probably was underestimated. Landsat sensors distinguish reflectance spectra with a spatial resolution of about 1 acre; reflectance data from smaller areas, including canals and streams, are averaged with surrounding information and are thus indistinguishable. Of the many streams and 2,700 mi of canals and laterals conveying water from the Snake River (U.S. Soil Conservation Service, 1977, p. 7), few are large enough to be distinguished by Landsat sensors.

Evaporation rates from barren areas on the plain are largely unknown. Owing to hot, dry climate, potential evaporation exceeds precipitation by a factor of 2 or more, so the upper limit of actual evaporation is annual precipitation. However, only part of precipitation is evaporated.

Most barren areas on the plain are highly permeable lava flows. Compared to the rest of the plain, it is likely that some of the precipitation infiltrates to aquifers. S. P. Garabedian (U.S. Geological Survey, written commun., 1983) estimated recharge rates of 2-3 in./yr on barren areas compared with 0.5-1 in./yr on rangelands.

Prior estimates of the amounts of precipitation that infiltrate and evaporate were based on few actual data. Measurement of evaporation was beyond the scope of this study. Most barren lands receive less than 12 in./yr of precipitation. Assuming an average of 10 in. of precipitation, 70 percent of which evaporates annually, 600,000 acre-ft/yr of water are evaporated from more than 1.0 million acres of barren area.

More than 50 percent of the Snake River Plain is rangeland. Estimated evapotranspiration from rangeland equals about 75 percent of evapotranspiration by crops and thus is a major consumptive use of water on the plain. Evapotranspiration rates on rangelands depend on the predominant vegetation.

Range plants can be divided into two classes, depending on their relation to the water table and consequent evapotranspiration rates. Xerophytes grow above the water table and are capable of surviving on small, irregular amounts of water supplied by precipitation. Sagebrush (Artemisia tridentata) and native grasses are the most common xerophytes on the plain. Phreatophytes have roots deep enough to obtain water largely from capillary zones above the saturated zone. Having a continuous supply of water, they transpire significantly more water than xerophytes. Phreatophytes common along water courses include willow (Salix) and cottonwood (Populus). Greasewood (Sarcobatus vermiculatus) and saltgrass (Distichlis stricta) are common on alkali sites; rabbitbrush (Chrysothamnus nauseosus), squirreltail (Hordeum), and wild rye (Elymus) grow in sandy soils where the water table is shallow.

Evapotranspiration by xerophytes may be one of the largest, but least studied, consumptive uses of water on the Snake River Plain. Potential evapotranspiration on the plain ranges from 20 to 30 in./yr (PNRBC, 1970, p. 351, 421). Actual evapotranspiration is limited by scant precipitation to about 6-12 in./yr. Assuming average evapotranspiration by xerophytes is 8 in./yr, then the evapotranspiration of xerophytes is probably about 3.3 million acre-ft/yr.

Although phreatophyte acreage on the Snake River Plain is small, total water use by phreatophytes is disproportionately large because of high evapotranspiration rates. Nace and others (1957, p. 48) used an estimated 48 in./yr to calculate phreatophyte evapotranspiration in the Boise River valley. Mower and Nace (1957, p. 21) estimated phreatophyte evapotranspiration rates in southern Idaho to be from 24 to 52 in./yr, depending on plant species. Cottonwoods and willows evapotranspire 36 to 52 in./yr, whereas greasewood, rabbitbrush, and saltgrass evapotranspire 24 to 26 in./yr. Other investigators estimated greasewood and saltgrass evapotranspiration in the Western States to be from 17 to 28 in./yr (Meinzer, 1927, p. 20; White, 1932, p. 99-100; Robinson, 1958, p. 58, 69).

Area covered by phreatophytic vegetation was estimated from county vegetation maps prepared by the Idaho Department of Fish and Game (1983). An estimated 200,000 acres of phreatophytes include 36,000 acres identified from Landsat data as wetlands. If phreatophytes on the Snake River Plain evapotranspire 24 in./yr, they consume about 400,000 acre-ft of water annually.

TOTAL WATER WITHDRAWN AND CONSUMPTIVE WATER USE IN 1980

Table 15 summarizes 1980 estimated withdrawals and consumptive use for offstream uses and for evaporation and transpiration from undeveloped lands and water for the Snake River Plain. Irrigation accounts for 88 percent of withdrawals and 99 percent of offstream consumptive use. Aquaculture accounts for 11 percent of withdrawals. Evaporation from open water and bare ground, and evapotranspiration by native vegetation equals about 90 percent of the consumptive use by irrigated crops.

WATER-USE TRENDS, 1945 TO 1980

Since 1945, the U.S. Geological Survey has estimated water use in each State every 5 years and published these estimates in a series of Circulars. The first report estimated ground-water withdrawals, and subsequent reports estimated both surface- and ground-water withdrawals. Statewide water-use trends since 1945 can be inferred from these published estimates. Withdrawals on the Snake River Plain probably followed the same trends. Withdrawals for offstream uses are shown in figure 30, and estimated withdrawals and consumptive use for offstream and instream uses are summarized in table 16. These data should be used only to infer long-term trends because estimation methods

Table 15.--Summary of offstream water withdrawals and consumptive use, 1980

Offstream use	Withdrawals (acre-feet)	Consumptive use (acre-feet)
Irrigation		
Surface water	12,700,000	3,500,000
Ground water	2,300,000	1,600,000
Industrial	71,300	5,700
Aquaculture	1,906,000	1,000
Nonindustrial public supply	102,400	22,000
Rural	23,000	11,800
Idaho National Engineering Laboratory (INEL)	7,400	3,900
Totals	17,110,100	5,144,400
<u>Other consumptive uses</u>		
Evaporation from open water		320,000
Evaporation from bare ground		600,000
Evapotranspiration by native vegetation		3,700,000
Total		4,620,000

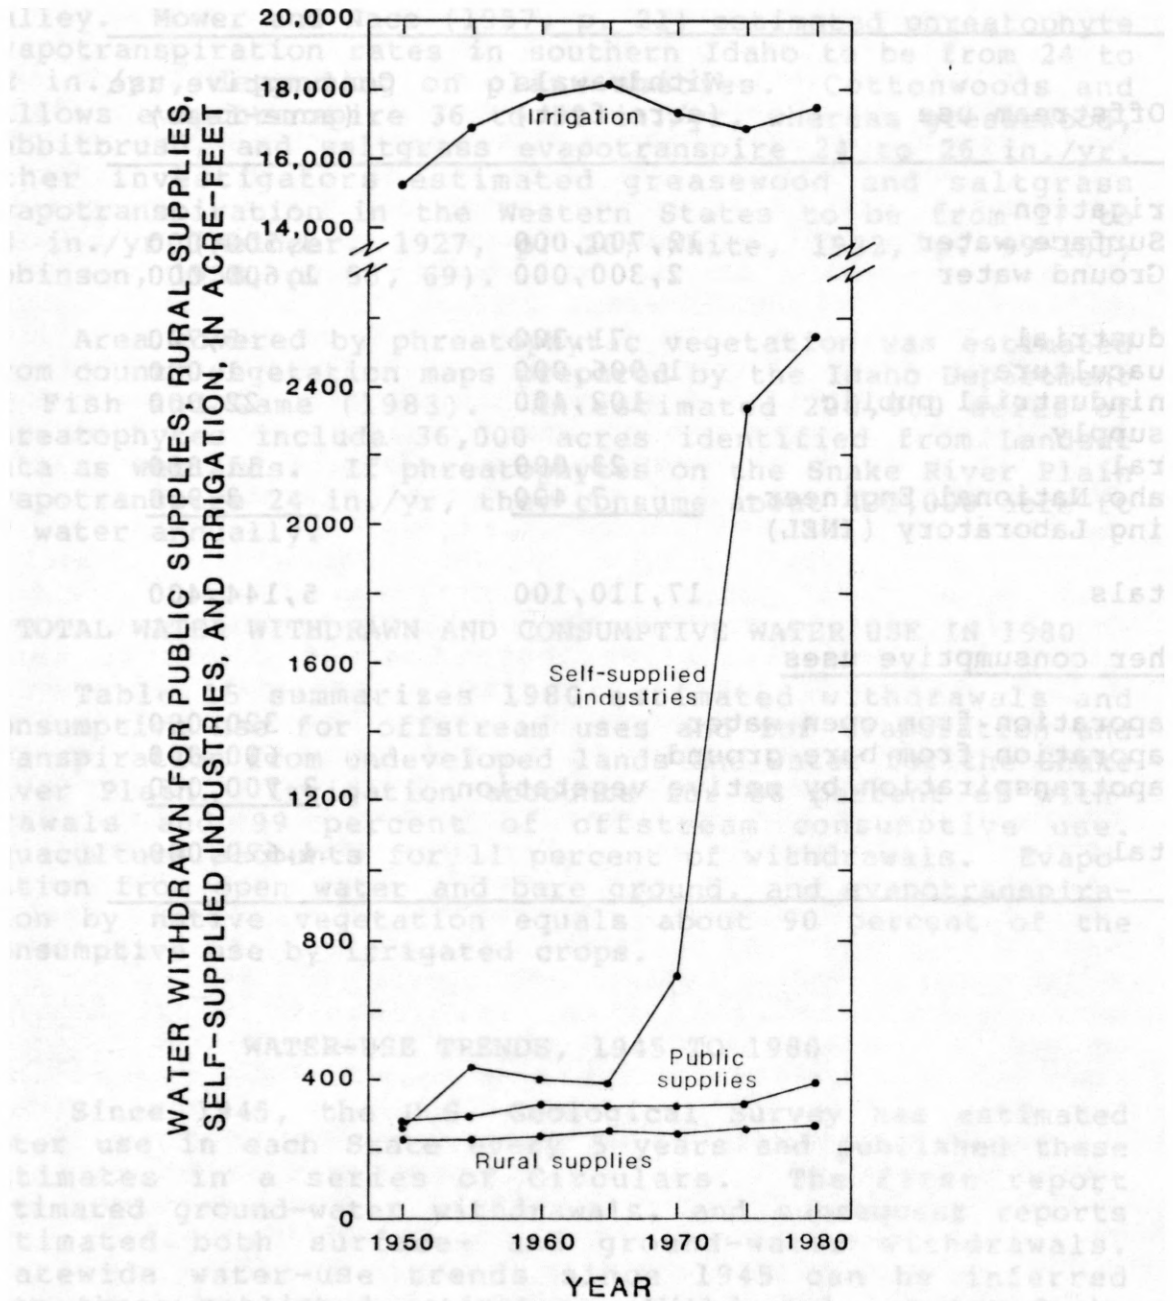


Figure 30.--Trends in withdrawals for offstream uses, 1950-80.

Table 16.--Estimated water use in Idaho, 1945-80
[—, data not available; values in thousands of acre-feet per year]

Year	Irrigation				Public supplies			Rural supplies			Self-supplied industries			Total offstream uses				Hydropower generation	
	Withdrawals				Withdrawals			Withdrawals			Withdrawals			Withdrawals				Instream use	National rank
	Ground water	Surface water	National rank	Consumptive use	Ground water	Surface water	Consumptive use	Ground water	Surface water	Consumptive use	Ground water	Surface water	Consumptive use	Ground water	Surface water	Total	National rank		
¹ 1945	140	—	2	—	28	—	—	22	—	—	11	—	—	200	—	—	—	—	—
² 1950	350	15,000	2	—	56	28	—	22	11	—	56	17	—	480	15,200	15,700	3	34,000	15
³ 1955	1,200	15,700	2	—	63	34	—	17	11	—	130	100	—	1,400	15,800	17,200	3	68,300	8
⁴ 1960	2,800	15,000	2	5,000	100	31	21	32	13	27	100	100	40	3,000	15,100	18,100	3	134,400	6
⁵ 1965	3,100	15,000	2	5,100	100	26	8	32	13	26	100	87	13	3,300	15,100	18,400	5	97,000	9
⁶ 1970	2,300	15,000	2	5,200	110	17	32	36	16	28	380	120	18	2,800	15,100	17,900	7	94,000	8
⁷ 1975	3,900	13,000	2	5,300	120	11	38	52	7	29	2,100	130	170	6,200	13,100	19,300	6	100,000	7
⁸ 1980	4,500	13,000	2	6,300	170	18	57	59	17	33	2,400	130	200	7,100	13,200	20,300	5	85,000	10

¹ Guyton (1950)

² MacKichan (1951)

³ MacKichan (1957)

⁴ MacKichan and Kammerer (1961)

⁵ Murray (1968)

⁶ Murray (1972)

⁷ Murray and Reeves (1977)

⁸ Solley and others (1983)

and accuracy of data changed over the years. For example, many more municipal water-supply systems were metered in 1980 than in 1950. Also, in some years, springs were classified as surface water and, in other years, as ground water. However, even with these differences, long-term trends can be discerned.

Generally, long-term increases are evident in both instream and offstream uses. Irrigation has been by far the largest offstream use statewide; withdrawals for irrigation are 10 times greater than combined withdrawals for public and rural supplies and self-supplied industries. Surface-water withdrawals for irrigation have composed a declining but large part of total withdrawals. Since 1950, ground-water withdrawals for irrigation increased tenfold, whereas surface-water withdrawals declined slightly. In 1980, surface water withdrawn for irrigation accounted for 64 percent of total withdrawals, compared with more than 95 percent in 1950. The decline of surface-water withdrawals probably is due to several dry years from 1977 to 1981 when streamflows were reduced and to declining water application rates as irrigators converted from gravity distribution systems to sprinklers.

Since 1950, rural- and public-supply withdrawals increased steadily as population increased. Estimated surface-water withdrawals for public supplies increased until 1955 and then began to decline. Part of the decline can be explained: (1) A few cities changed their source of public supply from surface water to ground water, and (2) data improved as meters were installed on public water-supply systems. Twin Falls is an example of a change in water source. In 1955, the city of Twin Falls obtained its public water supply from Low Line Canal, which conveys water from the Snake River at Milner Dam. Wells were added to the public water-supply system in 1957 and 1962 and, in 1969 spring water completely replaced the water formerly withdrawn from Low Line Canal (Newton Everett, City of Twin Falls, oral commun., 1984).

The large increase in ground-water withdrawals for self-supplied industries between 1965 and 1980 has two causes: (1) Beginning in 1970, aquaculture was included in the self-supplied industries category; prior to 1970, aquaculture was excluded from water-use estimates; and (2) between 1970 and 1972, the aquaculture industry in Idaho increased about fourfold (Klontz and King, 1975, p. 56).

Instream use of water for hydropower generation has increased along with offstream uses. The large volume of water used in 1975 and the apparently small volume used in 1980 probably are due to climatic fluctuations and, thus,

the quantity of streamflows available. In 1974 and 1975, Idaho received above-normal precipitation and streamflows increased. Conversely, precipitation was below normal between 1977 and 1981. The high water-use estimate for power generation in 1960 cannot be readily explained by climatic conditions and may be in error.

SUMMARY

Irrigation has long been the largest consumptive use of water on the Snake River Plain. Surface-water diversions for irrigation on the plain began in the 1840's in the Boise River valley. With the stimulus of Federal aid authorized by the Desert Land Act, Carey Act, and Reclamation Act, irrigated area increased rapidly in the early 1900's. By 1929, 2.2 million acres were irrigated. Ground water became an important source of irrigation water after World War II.

In 1980, about 3.1 million acres on the Snake River Plain were irrigated. An estimated 2.3 million acre-ft of ground water were withdrawn from about 5,300 wells to irrigate 1.0 million acres. Another 12.7 million acre-ft of water were pumped or gravity diverted from the Snake River and its major tributaries to irrigate 2.0 million acres. Gravity diversions accounted for 11.8 million acre-ft and 940,000 acre-ft were withdrawn by river pumps. Combined surface and ground water irrigated 0.1 million acres.

Historical changes in aquifer storage and ground-water discharge are closely related to changes in irrigation water use. From the late 1800's to about 1950, most crops were irrigated with surface water. Surface-water irrigation diversions typically have exceeded crop-irrigation requirements by a factor of 2 or more, and much of the excess water has become ground-water recharge. From 1890 to 1952, additional recharge caused an average water-level rise of 50 ft in wells on the eastern plain and a corresponding 24 million acre-ft increase in aquifer storage. During the same period, ground-water discharge from the eastern plain to the Snake River between Milner and King Hill increased from 4,200 to 6,800 ft³/s. Water-level rises also were reported on the western plain between 1912 and the mid-1930's.

Since the early 1950's, net ground-water recharge from irrigation declined as a result of increased ground-water pumpage and more efficient use of water. In the 1960's and 1970's, many farms converted from gravity to sprinkler distribution systems. During the same period, water levels

declined a few to tens of feet across the plain and more than 100 feet in local areas. Ground-water discharge between Milner and King Hill declined 600 ft³/s from 1951 to 1980.

The aquaculture industry uses large amounts of spring water, very little of which is consumptively used. In 1980, an estimated 1.9 million acre-ft, mostly ground water, were withdrawn for commercial and public fish farms. Excluding aquaculture, industries on the Snake River Plain withdrew about 70,000 acre-ft, 90 percent from ground water and 10 percent from surface water.

Other withdrawals for offstream uses totaled about 132,000 acre-ft; 102,000 were withdrawn for nonindustrial public supplies, 23,000 for rural supplies, and 7,000 for use at Idaho National Engineering Laboratory of the U.S. Department of Energy. An estimated 38,000 acre-ft of these withdrawals were consumptively used.

By far the largest instream use of water in the Snake River Plain is for hydroelectric power generation. In 1980, an estimated 52 million acre-ft of surface water passed through hydropower facilities on the plain, generating 2.6 million mWh of electricity. Although none of the water is consumptively used, water rights for hydropower generation and other instream uses partially control availability of water for other uses.

An estimated 48 percent of consumptive water use on the plain is evapotranspiration from rangelands and wetlands and evaporation from open water and bare ground. More than half of the Snake River Plain is undeveloped rangeland; xerophytic and phreatophytic vegetation evapotranspires an estimated 3.7 million acre-ft/yr. Another 900,000 acre-ft/yr evaporate from bare ground and open water.

REFERENCES CITED

- Association of Idaho Cities, 1980, Municipal water use survey: Unpublished data on file in Boise, Idaho, office of U.S. Geological Survey.
- Bigelow, B. B., Goodell, S. A., and Newton, G. D., 1984, Water withdrawn for irrigation in 1980 on the Snake River Plain, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 84-434, scale 1:1,000,000, 2 sheets.
- Burnham, W. L., Crosthwaite, E. G., Norvitch, R. F., Waite, H. A., and Walker, E. H., 1966, Summary of ground-water conditions in Idaho, 1966: Idaho Department of Reclamation, Water Information Bulletin no. 1, 60 p.
- Caldwell, H. H., and Wells, Merle, 1974, Boise post-audit study, economic and ecological history support study: Moscow, Idaho Water Resources Research Institute, 180 p.
- Center for Business Development and Research, 1982, Manufacturing directory of Idaho: Moscow, University of Idaho, 167 p.
- Goodell, S. A., (in press), Water use on the Snake River Plain, Idaho and Eastern Oregon: U.S. Geological Survey Professional Paper 1408-E.
- Guyton, W. F., 1950, Estimated use of ground water in the United States, 1945: U.S. Geological Survey Open-File Report, 5 p.
- Hoyt, W. G., 1935, Water utilization in the Snake River basin: U.S. Geological Survey Water-Supply Paper 657, 379 p.
- Idaho Crop and Livestock Reporting Service, 1982, Idaho agricultural statistics: Boise, 72 p.
- Idaho Department of Fish and Game, 1980, Annual hatchery reports, Volume 1: Boise, Fisheries Division Publications.
- _____, 1983, County vegetation maps: Unpublished data on file in Boise, Idaho, office.
- Idaho Department of Water Resources, 1978, Water-related land use - 1975: Idaho Department of Water Resources, scale 1:126,720, 16 county map sheets.
- _____, 1980a, Report on canal deliveries from Boise River and different features affecting these deliveries for the irrigation season of 1980: Boise, Annual Report, 13 p.

- 1980b, Snake River and tributaries above Milner, Idaho: Idaho Falls, Idaho, Annual Report, Water District 1, 72 p.
- 1980c, Water distribution and hydrometric work in Water District #37, Big Wood River and Water District #37-M, Silver Creek and Little Wood River: Shoshone, Idaho, Annual Report, 149 p.
- 1983, Industrial water use: Unpublished data on file in Boise, Idaho, office.
- Idaho Division of Economic and Community Affairs, 1983, Idaho facts: Boise, pamphlet.
- Idaho Water Resource Board, 1970, Irrigated and potentially irrigable lands in Idaho: U.S. Geological Survey, scale 1:650,000.
- 1972, Interim State water plan: Boise, 265 p.
- Johnson, G. S., Brockway, C. E., and Luttrell, S. P., 1982, Application of a numerical ground-water flow model to the Mud Lake area in southeastern Idaho: Moscow, University of Idaho, unpublished thesis, 58 p.
- Kjelstrom, L. C., 1984, Flow characteristics of the Snake River and water budget for the Snake River Plain, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 84-052, scale 1:1,000,000, 2 sheets.
- Klontz, G. W., and King, J. G., 1975, Aquaculture in Idaho and nationwide: Boise, Idaho Department of Water Resources, 174 p.
- Lewis, B. D., and Jensen, R. G., 1984, Hydrologic conditions at the Idaho National Engineering Laboratory, Idaho, 1979-1981 update: U.S. Geological Survey Hydrologic Investigations Atlas HA-674, 4 sheets (in press).
- Lindholm, G. F., 1981, Plan of study for the regional aquifer-system analysis of the Snake River Plain, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 81-689, 21 p.
- Lindholm, G. F., Garabedian, S. P., Newton, G. D., and Whitehead, R. L., 1983, Configuration of the water table, March 1980, in the Snake River Plain regional aquifer system, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 82-1022, scale 1:500,000.

- Lindholm, G. F., and Goodell, S. A., 1984, Irrigated acreage and other land uses on the Snake River Plain, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 84-452, scale 1:500,000.
- MacKichan, K. A., 1951, Estimated use of water in the United States, 1950: U.S. Geological Survey Circular 115, 13 p.
- , 1957, Estimated use of water in the United States, 1955: U.S. Geological Survey Circular 398, 18 p.
- MacKichan, K. A., and Kammerer, J. C., 1961, Estimated use of water in the United States, 1960: U.S. Geological Survey Circular 456, 26 p.
- Meinzer, O. E., 1927, Plants as indicators of ground water: U.S. Geological Survey Water-Supply Paper 577, 95 p.
- Meyers, J. S., 1962, Evaporation from the 17 Western States: U.S. Geological Survey Professional Paper 272-D, 100 p.
- Mower, R. W., and Nace, R. L., 1957, Water consumption by water-loving plants in the Malad Valley, Oneida County, Idaho: U.S. Geological Survey Water-Supply Paper 1412, 33 p.
- Mundorff, M. J., Crosthwaite, E. G., and Kilburn, Chabot, 1964, Ground water for irrigation in the Snake River basin in Idaho: U.S. Geological Survey Water-Supply Paper 1654, 224 p.
- Murray, C. K., 1968, Estimated use of water in the United States, 1965: U.S. Geological Survey Circular 556, 53 p.
- , 1972, Estimated use of water in the United States in 1970: U.S. Geological Survey Circular 676, 37 p.
- Murray, C. K., and Reeves, E. B., 1977, Estimated use of water in the United States in 1975: U.S. Geological Survey Circular 765, 39 p.
- Nace, R. L., West, S. W., and Mower, R. W., 1957, Feasibility of ground-water features of the alternate plan for the Mountain Home Project, Idaho: U.S. Geological Survey Water-Supply Paper 1376, 121 p.
- Newell, F. H., 1903, First annual report of the Reclamation Service: Washington, U.S. Geological Survey, 317 p.

- Norvitch, R. F., Thomas, C. A., and Madison, R. J., 1969, Artificial recharge to the Snake Plain aquifer; an evaluation of potential and effect: Idaho Department of Reclamation, Water Information Bulletin no. 12, 59 p.
- Oregon Crop and Livestock Reporting Service, 1982, Oregon agricultural statistics: Portland, Oreg., 60 p.
- Oregon Economic Development Department, 1983, Directory of Oregon manufacturers, 1982-1983: Salem, Oreg., p. 73.
- Pacific Northwest River Basins Commission, 1970, Columbia-North Pacific region comprehensive framework study of water and related lands, Appendix V, v. 1 and 2, Water resources: Vancouver, Wash., 2033 p.
- _____, 1971a, Columbia-North Pacific region comprehensive framework study of water and related lands, Appendix IX, Irrigation: Vancouver, Wash., 343 p.
- _____, 1971b, Columbia-North Pacific region comprehensive framework study of water and related lands, Appendix XI, Municipal and industrial water supply: Vancouver, Wash., 257 p.
- _____, 1981, Irrigated lands in the Pacific Northwest, 1980: Vancouver, Wash., 33 p.
- Rich, L. R., 1952, Forest and range vegetation in Transactions of the American Society of Civil Engineers, no. 117: p. 974-987.
- Robinson, T. W., 1958, Phreatophytes: U.S. Geological Survey Water-Supply Paper 1423, 84 p.
- Seitz, H. R., LaSala, A. M., and Moreland, J. A., 1977, Effects of drain wells on the ground-water quality of the western Snake Plain aquifer, Idaho: U.S. Geological Survey Open-File Report 76-673, 34 p.
- Simons, W. D., 1953, Irrigation and streamflow depletion in Columbia River Basin above The Dalles, Oregon: U.S. Geological Survey Water-Supply Paper 1220, 126 p.
- Solley, W. B., Chase, E. B., and Mann, W. B. IV, 1983, Estimated use of water in the United States in 1980: U.S. Geological Survey Circular 1001, 56 p.

- Stearns, H. T., Bryan, L. L., and Crandall, Lynn, 1939, Geology and water resources of the Mud Lake region, Idaho: U.S. Geological Survey Water-Supply Paper 818, 125 p.
- Stearns, H. T., Crandall, Lynn, and Steward, W. G., 1938, Geology and ground-water resources of the Snake River Plain in southeastern Idaho: U.S. Geological Survey Water-Supply Paper 774, 268 p.
- Sutter, R. J., and Corey, G. L., 1970, Consumptive irrigation requirements for crops in Idaho: Moscow, University of Idaho, Bulletin 516, 97 p.
- U.S. Bureau of the Census, 1981, 1978 census of agriculture-Idaho: State and county data: v. 1, pt. 12, 442 p.
- U.S. Bureau of Reclamation, 1946, Development of water and other resources present and potential of the Columbia River basin: Washington, 540 p.
- _____, 1980, Irrigated acreage in Idaho in 1979: Unpublished maps compiled for the Pacific Northwest River Basins Commission, on file in Boise, Idaho, office.
- U.S. Department of Commerce, 1980, Climatological data, Idaho: National Oceanic and Atmospheric Administration, Annual summary, v. 83, no. 13, 13 p.
- U.S. Soil Conservation Service, 1976, Snake River basin, Idaho and Wyoming cooperative study - land resource data: Boise, 77 p.
- _____, 1977, Snake River basin, Idaho and Wyoming cooperative study - irrigation water distribution and use: Boise, 69 p.
- Walker, E. H., Dutcher, L. C., Decker, S. O., and Dyer, K. L., 1970, The Raft River basin, Idaho-Utah, as of 1966--A reappraisal of the water resources and effects of ground-water development: U.S. Geological Survey Open-File Report, 116 p.
- White, W. N., 1932, A method of estimating ground-water supplies based on discharge by plants and evaporation from soils: U.S. Geological Survey Water-Supply Paper 659-A, p. 1-106.
- Whitehead, R. L., 1984, Geohydrologic framework of the Snake River Plain, Idaho and eastern Oregon: U.S. Geological Survey Open-File Report 84-051, scale 1:1,000,000, 3 sheets.

USGS LIBRARY-RESTON



3 1818 00063229 7

1971. Ground-water
level, southeastern
ministration, Wash.

Geothermal map
of thermal waters
west Idaho
for information