


(200)
R290
no. 86-321



SIMULATION OF RAINFALL-RUNOFF RESPONSE IN SMALL COAL-MINED
AND IN UNDISTURBED WATERSHEDS IN WEST VIRGINIA

Open-File Report 86-321



Prepared in cooperation with the
U.S. BUREAU OF LAND MANAGEMENT

Open-file report
(Geological Survey
(U.S.))

SIMULATION OF RAINFALL-RUNOFF RESPONSE IN SMALL COAL-MINED
AND IN UNDISTURBED WATERSHEDS IN WEST VIRGINIA

by Celso Puente and John T. Atkins

Open-File Report 86-321

Prepared in cooperation with the
U.S. BUREAU OF LAND MANAGEMENT

UNITED STATES DEPARTMENT OF THE INTERIOR

DONALD PAUL HODEL, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

For additional information
write to:

District Chief
U.S. Geological Survey, WRD
603 Morris Street
Charleston, West Virginia 25301

Copies of this report can be
purchased from:

U.S. Geological Survey, WRD
Books and Open-File Reports
Box 25425, Federal Center, Bldg. 41
Denver, Colorado 80225

(Telephone: (303) 236-7476)

CONTENTS

	Page
Abstract.....	1
Introduction.....	3
Background.....	3
Purpose and scope.....	3
Description of study area.....	5
Environmental setting.....	5
Physiography and topography.....	5
Geology.....	5
Climate.....	8
Soils.....	8
Land use.....	10
Effects of coal mining on the hydrologic system.....	17
Drawdy Creek.....	19
Brier Creek.....	23
Simulation of rainfall-runoff response in coal-mined and in undisturbed watersheds.....	24
Description of model.....	24
Model characteristics.....	24
Data requirements.....	26
Model calibration and verification.....	29
Model simulations.....	31
Historic conditions.....	31
Streamflow.....	31
Water Budget.....	46
Hypothetical conditions.....	50
Streamflow.....	51
Water budget.....	51
Summary and conclusions.....	58
References cited.....	61
Appendix A.--Precipitation-runoff model parameters and variables...	63

ILLUSTRATIONS

		Page
Figure	1. Map showing areas of study and extent of mineable coal in West Virginia.....	4
	2. Generalized geologic map.....	7
	3. Map showing distribution of mean annual precipitation (1941-70) and monthly precipitation and temperature for selected sites (1931-73).....	9
	4. Map showing physical features in Horsecamp Run basin.....	12
	5. Map showing physical features in Gilmer Run basin.....	13
	6. Map showing physical features in Collison Creek basin....	14
	7. Map showing coal-mined areas in Drawdy Creek basin.....	15
	8. Map showing coal-mined areas in Brier Creek basin.....	16
	9. Schematic diagram showing relation between dip of coal, location and condition of abandoned underground mines, and movement of water.....	18
	10. Hydrographs showing basin peakflow response to storms of November 1979.....	20
	11. Map showing base-flow yield in Drawdy Creek basin, February 1983.....	21
	12. Map showing base-flow yield in Brier Creek basin, March 1983.....	22
	13. Schematic diagram of the watershed model.....	25
	14. Flow chart of the digital watershed model.....	27
15-19.	Hydrograph showing observed and simulated daily mean streamflow at:	
	15. Horsecamp Run at Harman, October 1971 - September 1972.....	32
	16. Gilmer Run near Marlinton, October 1971 - September 1972.....	33
	17. Collison Creek near Nallen, October 1971 - September 1972.....	34
	18. Drawdy Creek near Peytona, October 1969 - September 1970.....	35
	19. Brier Creek at Fanrock, October 1971 - September 1972.....	36
20.	Hydrographs showing observed and simulated monthly mean discharge at study basins, 1969-76.....	39
21-25.	Graph showing duration curves of daily mean discharge at:	
	21. Horsecamp Run at Harman, 1972-76.....	41
	22. Gilmer Run near Marlinton, 1971-74.....	42
	23. Collison Run near Nallen, 1972-76.....	43
	24. Drawdy Creek near Peytona 1970-74.....	44
	25. Brier Creek at Fanrock, 1971-73.....	45

ILLUSTRATIONS--Continued

		Page
Figure	26. Schematic diagrams showing approximate percentages of simulated water-budget components for mined and unmined basins, October 1, 1971 to September 30, 1973.....	47
	27. Graph showing duration curves of daily mean stream-flow simulated under various mining conditions at Drawdy Creek near Peytona, 1970-74.....	52
	28. Graph showing duration curves of daily mean stream-flow simulated under various mining conditions at Brier Creek at Fanrock, 1971-73.....	53
	29. Seasonal distribution of components of average total monthly runoff simulated at Drawdy Creek near Peytona, 1970-74.....	56
	30. Seasonal distribution of components of average total monthly runoff simulated at Brier Creek at Fanrock, 1971-73.....	57

TABLES

	Page
Table 1. Small-basin gaging stations.....	6
2. Summary of major land uses.....	11
3. Summary of selected characteristics of the hydrologic- response units used in the model.....	28
4. Summary of annual precipitation, observed and simulated annual runoff, and associated error for the period of simulated record.....	38
5. Summary of observed and simulated monthly and annual runoff during calibration and verification period of record for study basins.....	40
6. Summary of simulated water budget for study basins.....	49
7. Simulated water budgets for Drawdy and Brier Creek basins under various mining conditions.....	54

CONVERSION FACTORS

Inch-pound units of measurement in this report may be converted to metric (International System) units by using the following factors:

<u>Multiply inch-pound unit</u>	<u>By</u>	<u>To obtain metric unit</u>
<u>Length</u>		
inch (in.)	25.4	millimeter (mm)
	2.54	centimeter (cm)
foot (ft)	0.3048	meter (m)
mile (mi)	1.609	kilometer (km)
foot per mile (ft/mi)	0.1894	meter per kilometer (m/km)
<u>Area</u>		
square mile (mi ²)	2.59	square kilometer (km ²)
acre	0.4047	hectare (ha)
<u>Flow</u>		
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second (m ³ /s)
cubic foot per second per square mile [(ft ³ /s)/mi ²]	0.01093	cubic meter per second per square kilometer [(m ³ /s)/km ²]
<u>Rate</u>		
inch per hour (in/hr)	25.4	millimeter per hour (mm/hr)
inch per day (in/d)	25.4	millimeter per day (mm/d)
<u>Temperature</u>		
degree Fahrenheit (°F)	°C = 5/9 (°F - 32)	degree Celsius (°C)

SIMULATION OF RAINFALL-RUNOFF RESPONSE IN SMALL COAL-MINED
AND IN UNDISTURBED WATERSHEDS IN WEST VIRGINIA

By Celso Puente and John T. Atkins

ABSTRACT

Meteorologic and hydrologic data from five small watersheds in the coal areas of West Virginia were used to calibrate and test the U.S. Geological Survey Precipitation-Runoff Modeling System for simulating streamflow under various climatic and land-use conditions. Three of the basins--Horsecamp Run, Gilmer Run, and Collison Creek--are primarily forested and relatively undisturbed. The remaining basins--Drawdy and Brier Creeks--are extensively mined, both surface and underground above stream drainage level.

Low-flow measurements at numerous synoptic sites in the mined basins indicate that coal mining has substantially altered the hydrologic system of each basin. The effects of mining on streamflow that were identified are (1) reduced base flow in stream segments underlain by underground mines, (2) increased base flow in streams that are downdip and stratigraphically below the elevation of the mined coal beds, and (3) interbasin transfer of ground water through underground mines. These changes probably reflect increased permeability of surface rocks caused by subsidence fracture associated with collapsed underground mines in the basin. Such fractures would increase downward percolation of precipitation, surface and subsurface flow, and ground-water flow to deeper rocks or to underground mine workings.

Model simulations of the water budgets for the unmined basins during 1972-73 water years indicate that total annual runoff averaged 60 percent of the average annual precipitation; annual evapotranspiration losses averaged 40 percent. Of the total annual runoff, approximately 91 percent was surface and subsurface runoff, and 9 percent was ground-water discharge. Changes in storage in the soil zone and in the subsurface and ground-water reservoirs in the basins were negligible.

In contrast, water-budget simulations for the mined basins indicate significant differences in annual recharge and in total annual runoff. Model simulations of the water budget for Drawdy Creek basin indicate that total annual runoff during 1972-73 averaged only 43 percent of average annual precipitation--the lowest of all study basins; annual evapotranspiration losses averaged 49 percent; and interbasin transfer of ground-water losses averaged about 8 percent. Of the total annual runoff, approximately 74 percent was surface and subsurface flow, and 26 percent was ground-water discharge. The low total annual runoff at Drawdy Creek probably reflects increased recharge of precipitation and surface and subsurface flow losses to ground water. Most of the increase in ground-water storage is, in turn, lost to a ground-water sink--namely, interbasin transfer of ground water by gravity drainage and (or) mine pumpage from underground mines that extend to adjacent basins.

Hypothetical mining situations were posed for model analysis to determine the effects of increased mining on streamflow in the mined basins. Results of model simulations show that streamflow characteristics, the water budget, and the seasonal distribution of streamflow would be significantly modified in response to an increase in mining in the basins. Simulations indicate that (1) total annual runoff in the basins would be reduced because of increased surface- and subsurface-flow losses and increased recharge of precipitation to ground water (these losses would tend to reduce medium to high flows mainly during winter and spring when losses would be greatest); (2) extreme high flows in response to intense rainstorms would be negligibly affected, regardless of the magnitude of mining in the basins; (3) ground-water discharge also would decrease during winter and spring, but the amount and duration of low flows during the summer and fall would substantially increase in response to increased ground-water storage in rocks and in underground mines; and (4) the increase in ground-water storage in the basins would be depleted mostly by increased losses to a ground-water sink.

INTRODUCTION

Background

Maximum development of coal as a source of energy will require the mining of extensive Federal reserves in the coal areas of Appalachia. In anticipation of this mining, an assessment of the effect of underground and surface coal mining on the hydrology of mined and adjacent unmined basins is needed to aid Federal managers in preparing environmental-impact statements and in monitoring mining and reclamation activities. These assessments include the definition of streamflow regimes; flood peaks and volumes; low flows; soil-water relations; ground-water flow (including recharge and discharge); and water-balance relations for basins before, during, and after mining.

Unfortunately, much of the data needed to define the hydrology of mined and unmined basins in most of the coal areas of Appalachia are short-term and (or) very sparse. Long-term streamflow records are available at selected gaging stations; however, the information is site specific and has unknown transferability to nearby ungaged areas.

Hydrologic models are analytical tools that can provide a means for (1) describing the hydrologic system of small watersheds, (2) extending streamflow records at short-term gaging stations, and (3) transferring hydrologic characteristics from gaged areas to ungaged areas. In 1981, the U.S. Geological Survey, in cooperation with the U.S. Bureau of Land Management, began a study to test the application of the U.S. Geological Survey's Precipitation-Runoff Modeling System for simulating streamflow in small watersheds (mined and unmined) in the coal areas of West Virginia.

Purpose and Scope

The objectives of the study were to (1) calibrate and verify the U.S. Geological Survey's Precipitation-Runoff Modeling system for simulating streamflow under various climatic and land-use conditions, and (2) to apply the model under various hypothetical mining conditions to predict possible hydrologic consequences on streamflow. This is only the first step in providing a technique to the U.S. Bureau of Land Management for describing the hydrology of ungaged areas and a means for predicting the effects of coal mining on the hydrologic system of basins in the coal areas of West Virginia.

Model testing at five study basins--three unmined and two mined--shown in figure 1 was based on 3 to 5 years of climatic and hydrologic data collected during 1969-75 as part of a previous hydrologic investigation by Runner (1980). To determine the effects of coal mining on the quantity and distribution of streamflow in the mined basins, streamflow data at numerous synoptic sites were collected during medium to high base flow conditions in February and March 1983. This report describes (1) the results of measured low flow in the mined study basins, (2) the calibration and verification of the precipitation-runoff model, and (3) the possible consequences of various hypothetical coal-mining scenarios on streamflow and basin storage.

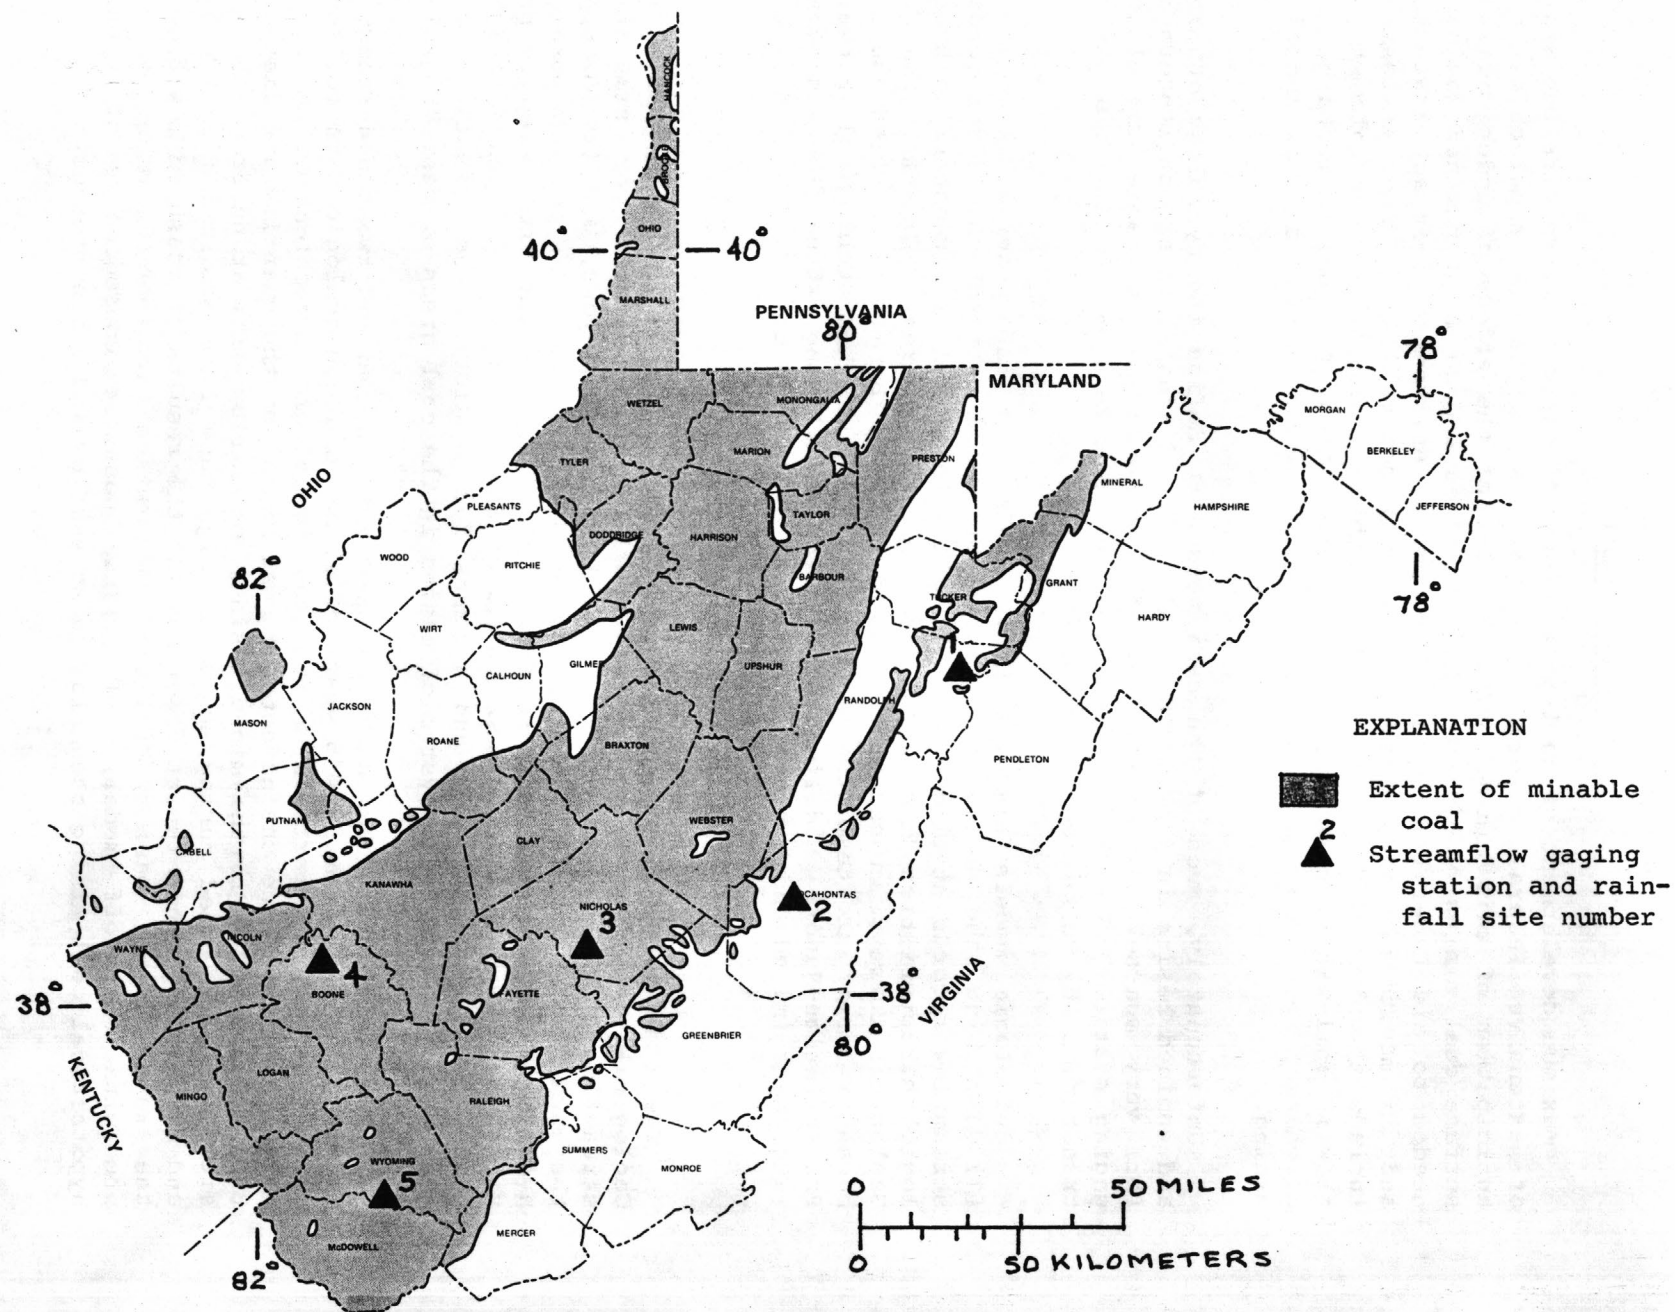


Figure 1. --Areas of study and extent of minable coal in West Virginia. Modified from Dugolinsky and Behling, 1978.

DESCRIPTION OF STUDY AREA

Environmental Setting

Five small basins with drainage areas ranging from 1.80 to 7.75 square miles in the coal areas of West Virginia (fig. 1), were selected for study. The study sites have similar topographic, geologic, and hydrologic settings, but different land-use characteristics. Three of the basins are relatively undisturbed, and two have been surface mined and deep mined at elevations above the basin's major stream. Site and station numbers, name, location, drainage area, and period of record used for each study basin are listed in table 1.

Physiography and Topography

The basins lie in the Kanawha section of the Appalachian Plateau physiographic province as defined by Fenneman and Johnson (1946). The topography is mountainous and is characterized by deep, steep-sided valleys and narrow winding ridges.

The elevation of the five gaging stations ranges from 770 feet above sea level at Drawdy Creek (site 4) in the southwestern part of the State to 3,120 feet at Gilmer Run (site 2) in the east-central part of the State (fig. 1). Local relief ranges from 500 feet in Collison Creek basin (site 3) to 2,200 feet in Horsecamp Run basin (site 1).

Mean basin land slopes are gentlest (15 percent) in Collison Creek basin and greatest (27 percent) in Horsecamp Run. Main channel slopes range from 55 ft/mi in Drawdy Creek to 275 ft/mi in Gilmer Run.

Geology

Strata underlying the coal areas of the State (fig. 2) generally dip to the northwest and strike to the northeast, so that progressively older formations are exposed in the east. The regional dip and strike are modified locally by faults and gentle folds. Most of the study basins display outcrop patterns of nearly horizontal strata in which the younger rocks underlie the uplands and the older rocks underlie the stream valleys.

Drawdy Creek basin is underlain by rocks of the Kanawha Formation; and Collison and Brier Creek basins (sites 3 and 5) are underlain by the New River Formation, which underlies the Kanawha Formation. These formations comprise the Pottsville sequence of Pennsylvanian age and are composed primarily of cyclic sequences of shale, siltstone, and sandstone, with interbeds of coal and underclays. Most of the coal in the State is found in this sequence of sedimentary rock.

Gilmer Run basin is underlain by rocks of the Mauch Chunk Formation of Mississippian age. The rocks also contain cyclic sequences of shale and sandstone, with few stringers of thin limestone, and thin lenticular coal seams of minor economic importance.

Table 1.--Small-basin gaging stations

Site number	USGS station number	Station name	Location	Drainage area (mi ²)	Period of record
1	03063600	Horsecamp Run at Harman, W. Va.	Lat 38°54'51", long 79°30'32", Randolph County, on right bank 1.0 mile south- east of Harman. Elevation of gage is 2,511 ft above sea level.	6.57	1972-76
2	03193830	Gilmer Run near Marlinton, W. Va.	Lat 38°19'12", long 80°05'52", Pocahontas County, on left bank 8.0 ft upstream from culvert on Forest Service Road 251 and 6.8 miles north of Marlinton. Elevation of gage is 3,120 ft above sea level.	1.80	1971-74
3	03189650	Collison Creek near Nallen, W. Va.	Lat 38°10'35", long 80°52'07", Nicholas County, on right bank upstream from culvert on U.S. Highway 19, 80 ft upstream from unnamed tributary, 4.5 miles north of Nallen. Elevation of gage is 1,830 ft above sea level.	2.78	1972-76
4	03198450	Drawdy Creek near Peytona, W. Va.	Lat 38°07'31", long 81°41'33", Boone County, on right bank 75 ft upstream from bridge entrance to Drawdy Cemetery, 1.0 mile southwest of Peytona. Elevation of gage is 770 ft above sea level.	7.75	1970-74
5	03202480	Brier Creek at Fanrock, W. Va.	Lat 37°38'50", long 81°39'16", Wyoming County, on right bank on secondary State Route 14, 0.3 mile south of Fanrock, and 0.3 mile upstream from mouth. Elevation of gage is 1,220 ft above sea level.	7.20	1971-73

Horsecamp Run basin is underlain primarily by the Mauch Chunk Formation. Older rocks of Mississippian age that consist of hard sandstone with some shale and limestone are exposed in the stream valleys. Coal-bearing rocks of the Pottsville Formation crop out in less than 10 percent of the basin and cap the highest ridges along the eastern basin boundary.

Thin deposits of sand and gravel are found along the main stem of most streams in all the study basins. The source materials for these deposits comes from upland slopes in the basins.

Climate

The basins have a continental climate characterized by moderately severe winters and warm to mild summers. Mean annual precipitation ranges from 64 inches in the higher elevations near Webster Springs to 40 inches in the lower elevations in the western and southern parts of the State (fig. 3).

Prevailing westerly winds and elevation differences cause marked variations in precipitation and temperature between sites in the higher mountainous areas in the east (sites 1, 2, and 3) and those in hilly plateau lands in the west and south (sites 4 and 5). Regionally, moist air that flows up the western slopes of the mountains is cooled and condenses to precipitation; precipitation generally increases in the higher elevation areas of the State. A well-defined rain shadow is present east of the high elevations, because much of the moisture precipitates before the air reaches the eastern flank of the mountains.

Precipitation is somewhat evenly distributed throughout the year, although most occurs in the summer and the least in the fall. The annual rainfall distributions at selected sites are shown in figure 3.

Annual snowfall varies widely among the study basins. Basins in the higher mountainous areas (sites 1, 2, and 3) may receive 5 to 7 times more snowfall than basins in the lower elevations (sites 4 and 5). At Charleston, snowfall averages about 24 inches annually, whereas near Webster Springs, snowfall averages about 200 inches annually. Most snowfalls are followed by warm periods; wide-scale spring melt of an accumulated snowfall rarely occurs.

The mean annual temperature ranges from about 56°F in the hilly plateau lands to about 48°F in the higher mountainous areas. The minimum, mean, and maximum monthly temperatures at selected sites are shown in figure 3.

Soils

The soils in Horsecamp Run, Gilmer Run, and Collison Creek basins are classified predominantly as shallow to moderately deep siltloam and stony siltloam soils. The soils are moderate to well drained, moderate to rapidly moderate in permeability (0.6 to 6.0 inches per hour) and low to moderate in available moisture capacity (0.06 to 0.12 inches per inch). Depth to bedrock ranges from 10 to 40 inches.


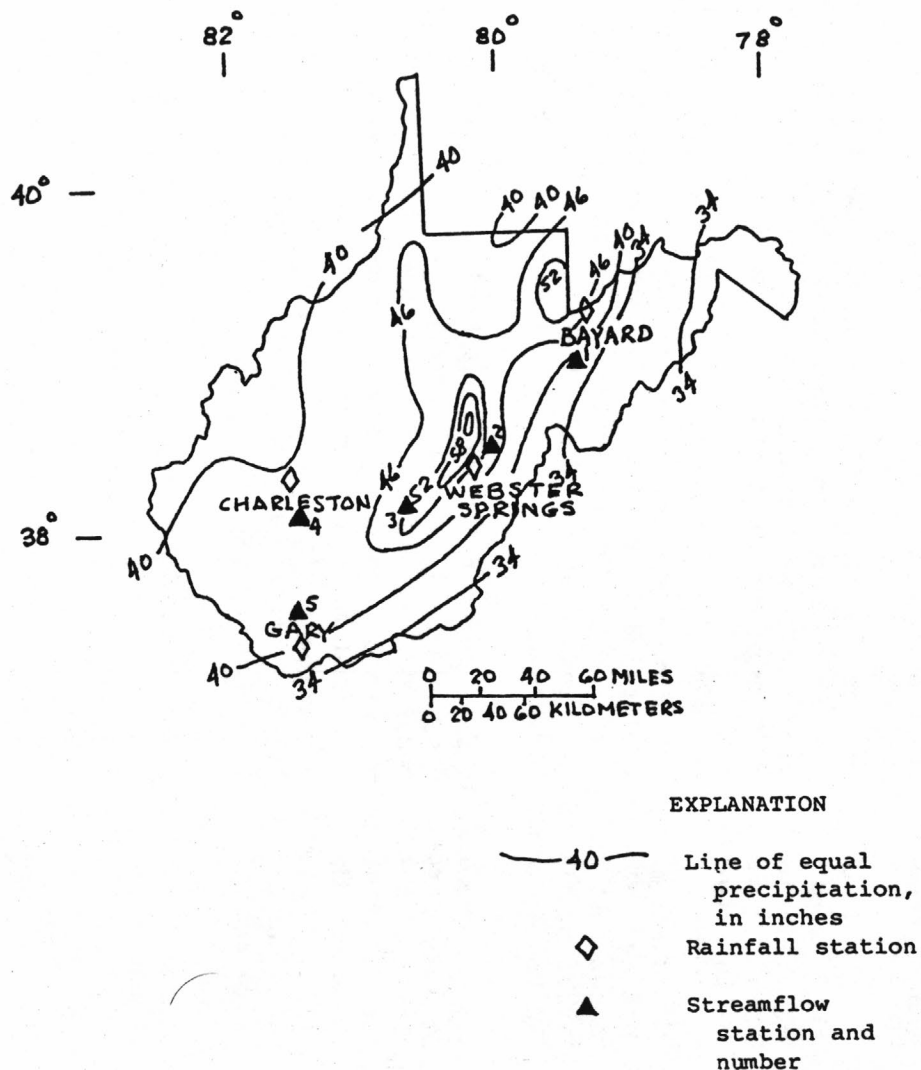


Figure 3.--Distribution of mean annual precipitation (1941-70) and monthly precipitation and temperature for selected sites (1931-73). Data from National Oceanic and Atmospheric Administration, 1973.

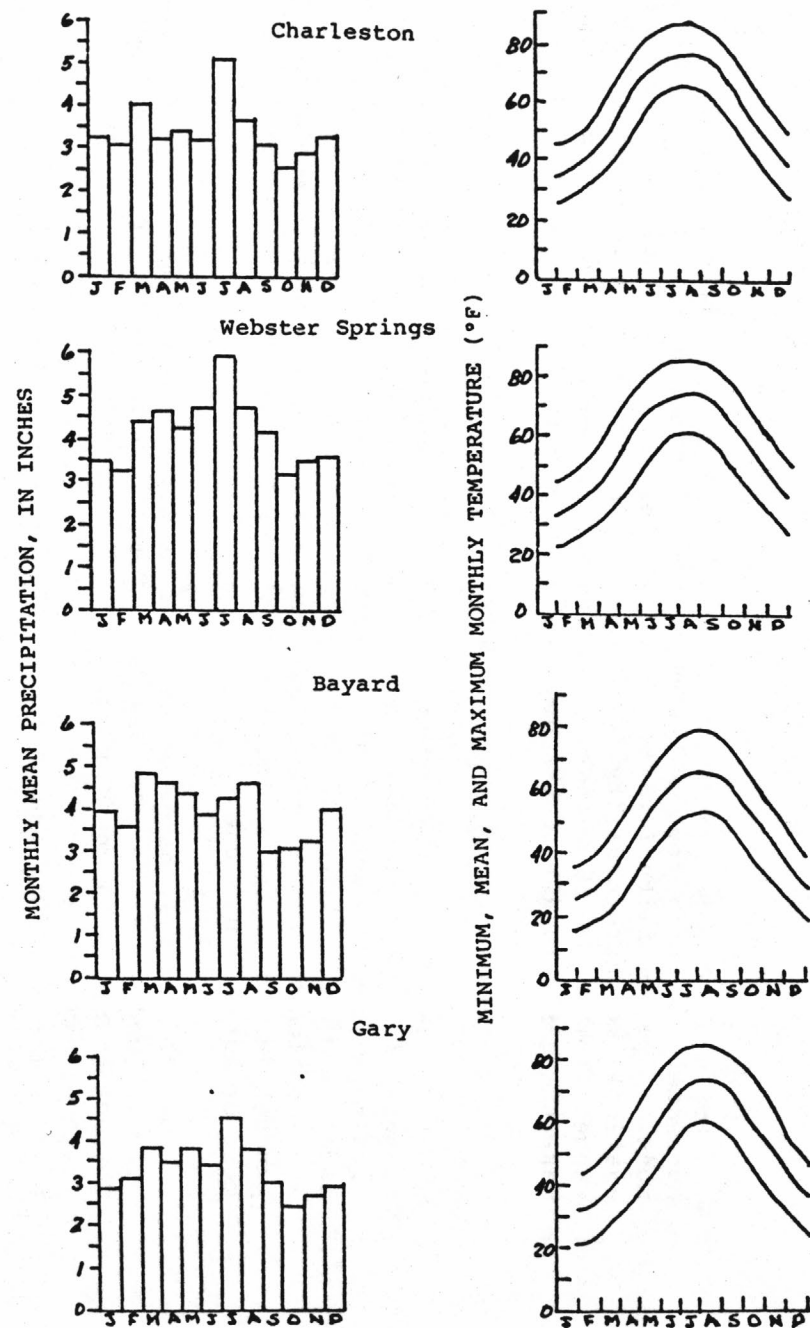

Modified from Ehlke and others, 1982. Data from National Oceanic and Atmospheric Administration, 1977.

Soils in Drawdy and Brier Creek basins are classified predominantly as moderately deep to deep siltloam soils. The soils are well drained, have moderate permeability (0.6 to 2.0 inches per hour), and have moderate to high available moisture capacity (0.12 to 0.18 inches per inch). Depth to bedrock ranges from 40 to 60 inches. The slopes, permeability, and depth to bedrock make the soils in all of the basins well suited for woodlands.

Land Use

A land-use inventory based on 7 1/2 minute U.S. Geological Survey topographic quadrangle maps (photo revised in 1976) and unpublished coal-mine-area maps from the West Virginia Geological and Economic Survey indicate that land use in the study basins is heavily influenced by mountainous topography and location of mineral resources. Average overland slopes commonly exceed 20 percent in the basins and make much of the land unsuitable for urban development or agricultural use.

On the average, hardwood and conifer forests constitute about 70 percent of the land cover in the basins. Forest cover ranges from 46 percent in Horsecamp Run basin to 90 percent in Brier Creek basin (table 2). Physical features and land use in the study basins are shown in figures 4, 5, 6, 7, and 8. A summary of land use in the study basins is given in table 2.

Agricultural uses, which include cropland, grasslands, and pasture, range from less than 6 percent of the land in Drawdy and Brier Creek basins (figs. 7 and 8, respectively) to about 50 percent in Horsecamp Run (fig. 4).

Because of the steep terrain and generally narrow hilltops, most people in the basins live in urban areas along the narrow valley floors. Urban areas, which include residential, commercial, and industrial areas, range from less than 1 percent in Gilmer Run (fig. 5) basin to 4 percent in Collison Creek basin (fig. 6).

Coal mining is the major land-use activity in Drawdy and Brier Creek basins. The mining consists of active and inactive surface and underground mines and is typical of mining activities in most small basins in the coal areas of the State. The location of mined areas and the progression of mining in Drawdy and Brier Creek basins are shown in figures 7 and 8.

Approximately 9 percent of Drawdy Creek basin has been contour strip mined and 26 percent deep mined above the elevation of the basin's major streams. The No. 2 Gas, Cedar Grove, and No. 5 Block coal seams, which range from 3.0 to 6.0 feet in thickness, are the principal beds of coal mined in the basin. Some of the underground mines and surface mines were active prior to 1970 (fig. 7). The underground mines in the southern part of the basin, however, were active during the study period. Some surface mines in the basin also were active during the study period.

Table 2.--Summary of major land uses

[Units in square miles; units in parentheses are percentage of total basin drainage area.]

Basin	Forest cover	Agriculture or pasture	Urbanized land	Surface mines	Underground mine
Horsecamp Run	3.05 (46)	3.49 (53)	0.03 (1)	0	0
Gilmer Run	1.02 (56)	.77 (43)	.01 (1)	0	0
Collison Creek	2.13 (77)	.61 (22)	.04 (1)	0	0
Drawdy Creek	6.44 (83)	.30 (4)	.31 (4)	.70 (9)	2.00 (26)
Brier Creek	6.50 (90)	.45 (6)	.12 (2)	.13 (2)	1.44 (20)

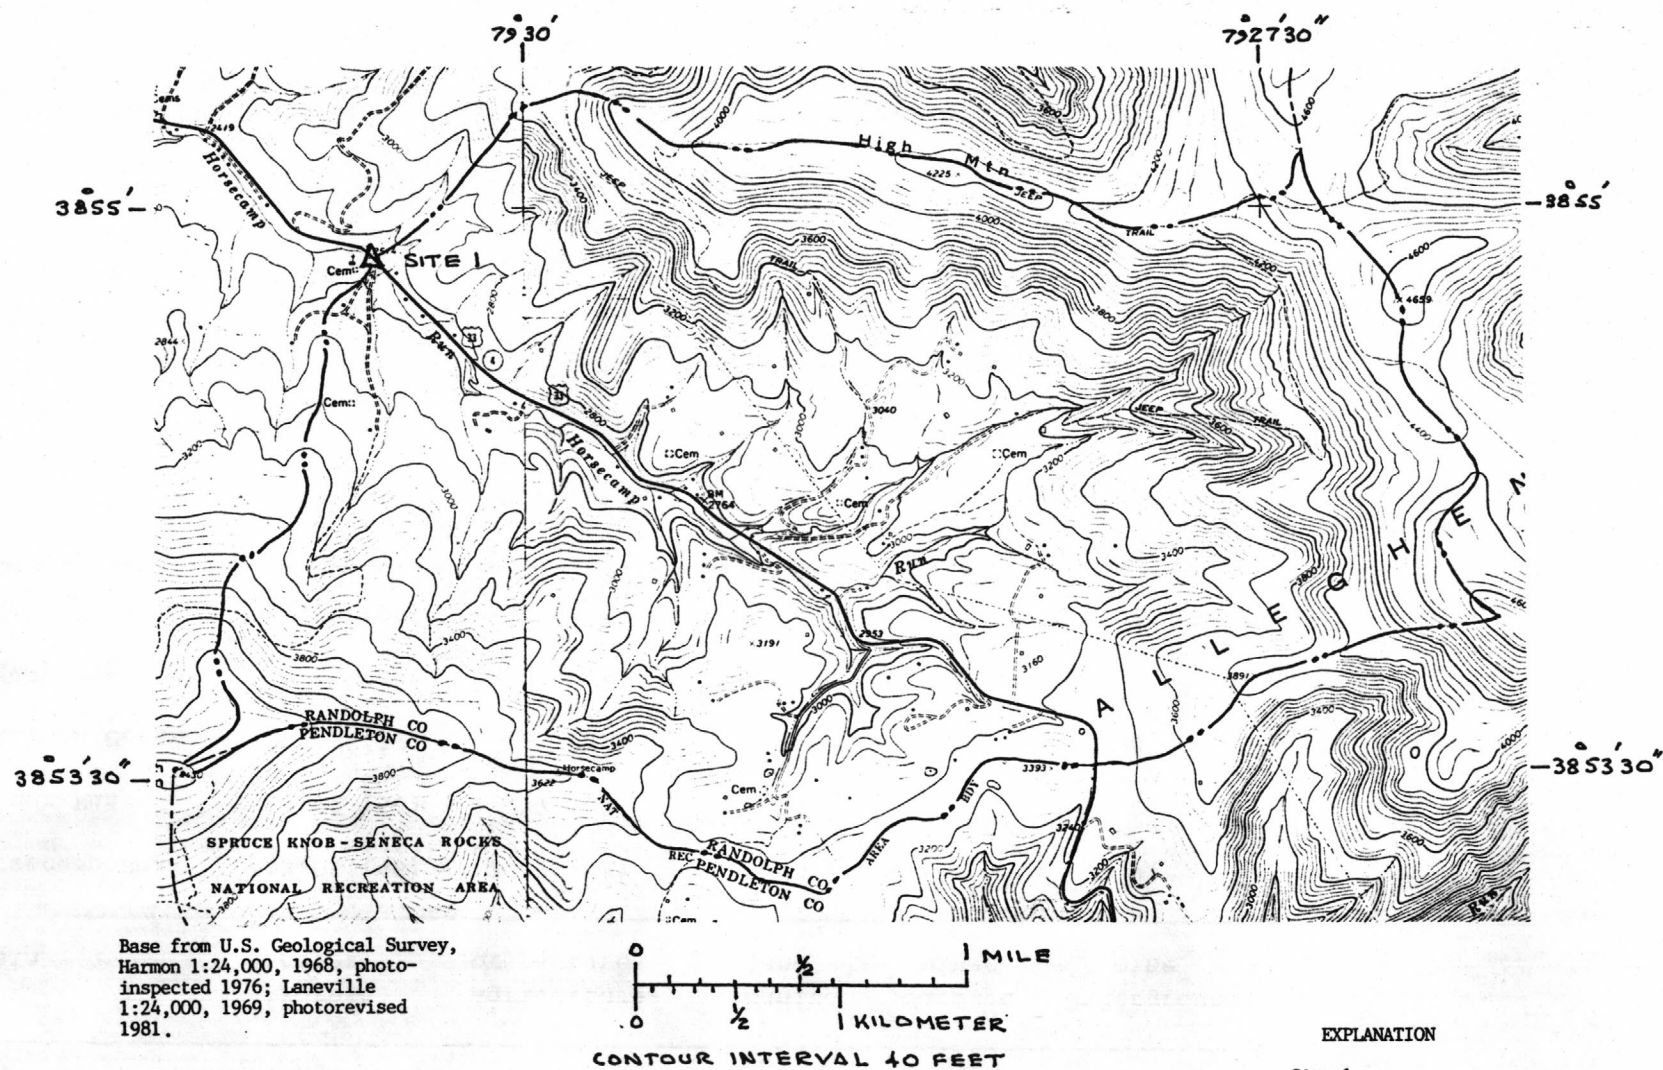


Figure 4.--Physical features in Horsecamp Run basin.

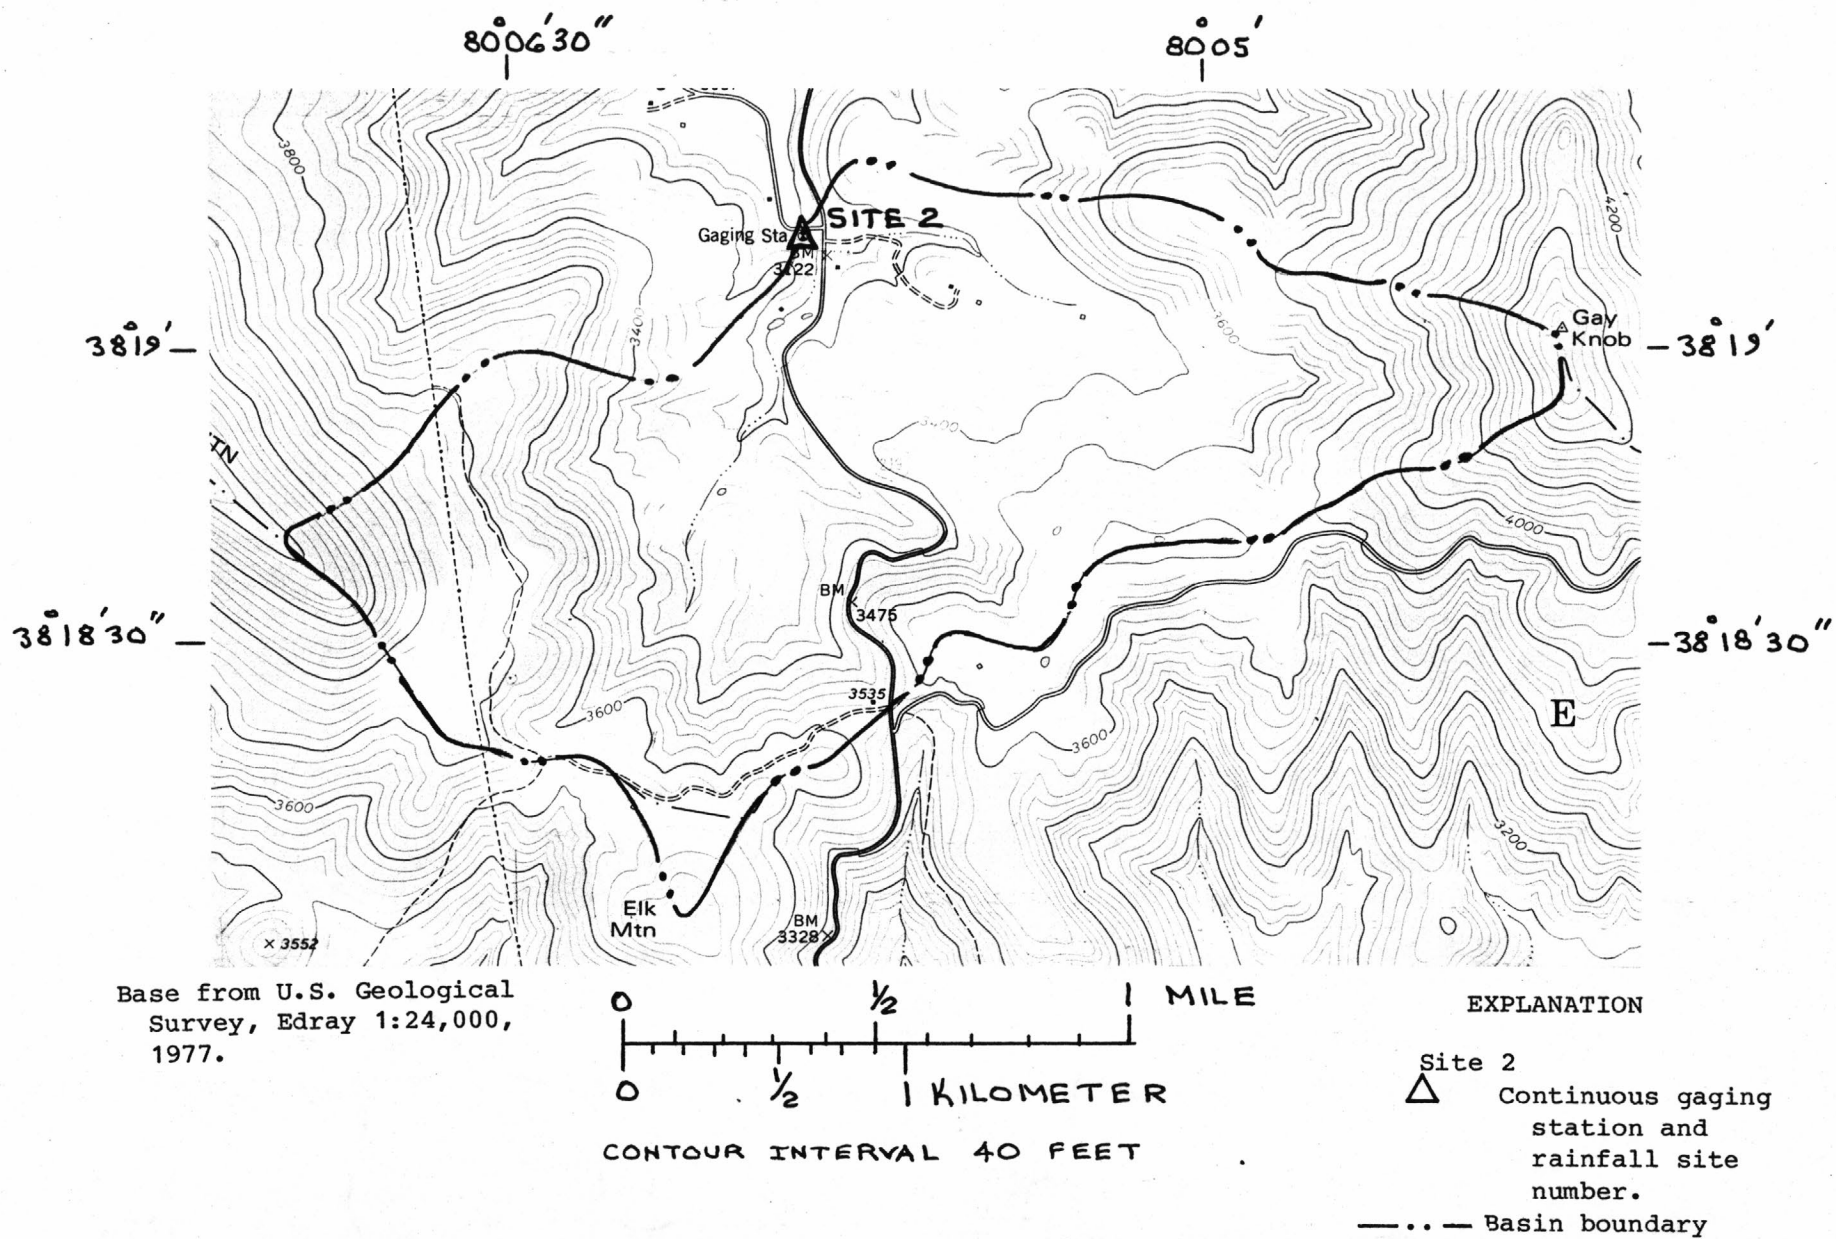


Figure 5.--Physical features in Gilmer Run basin.

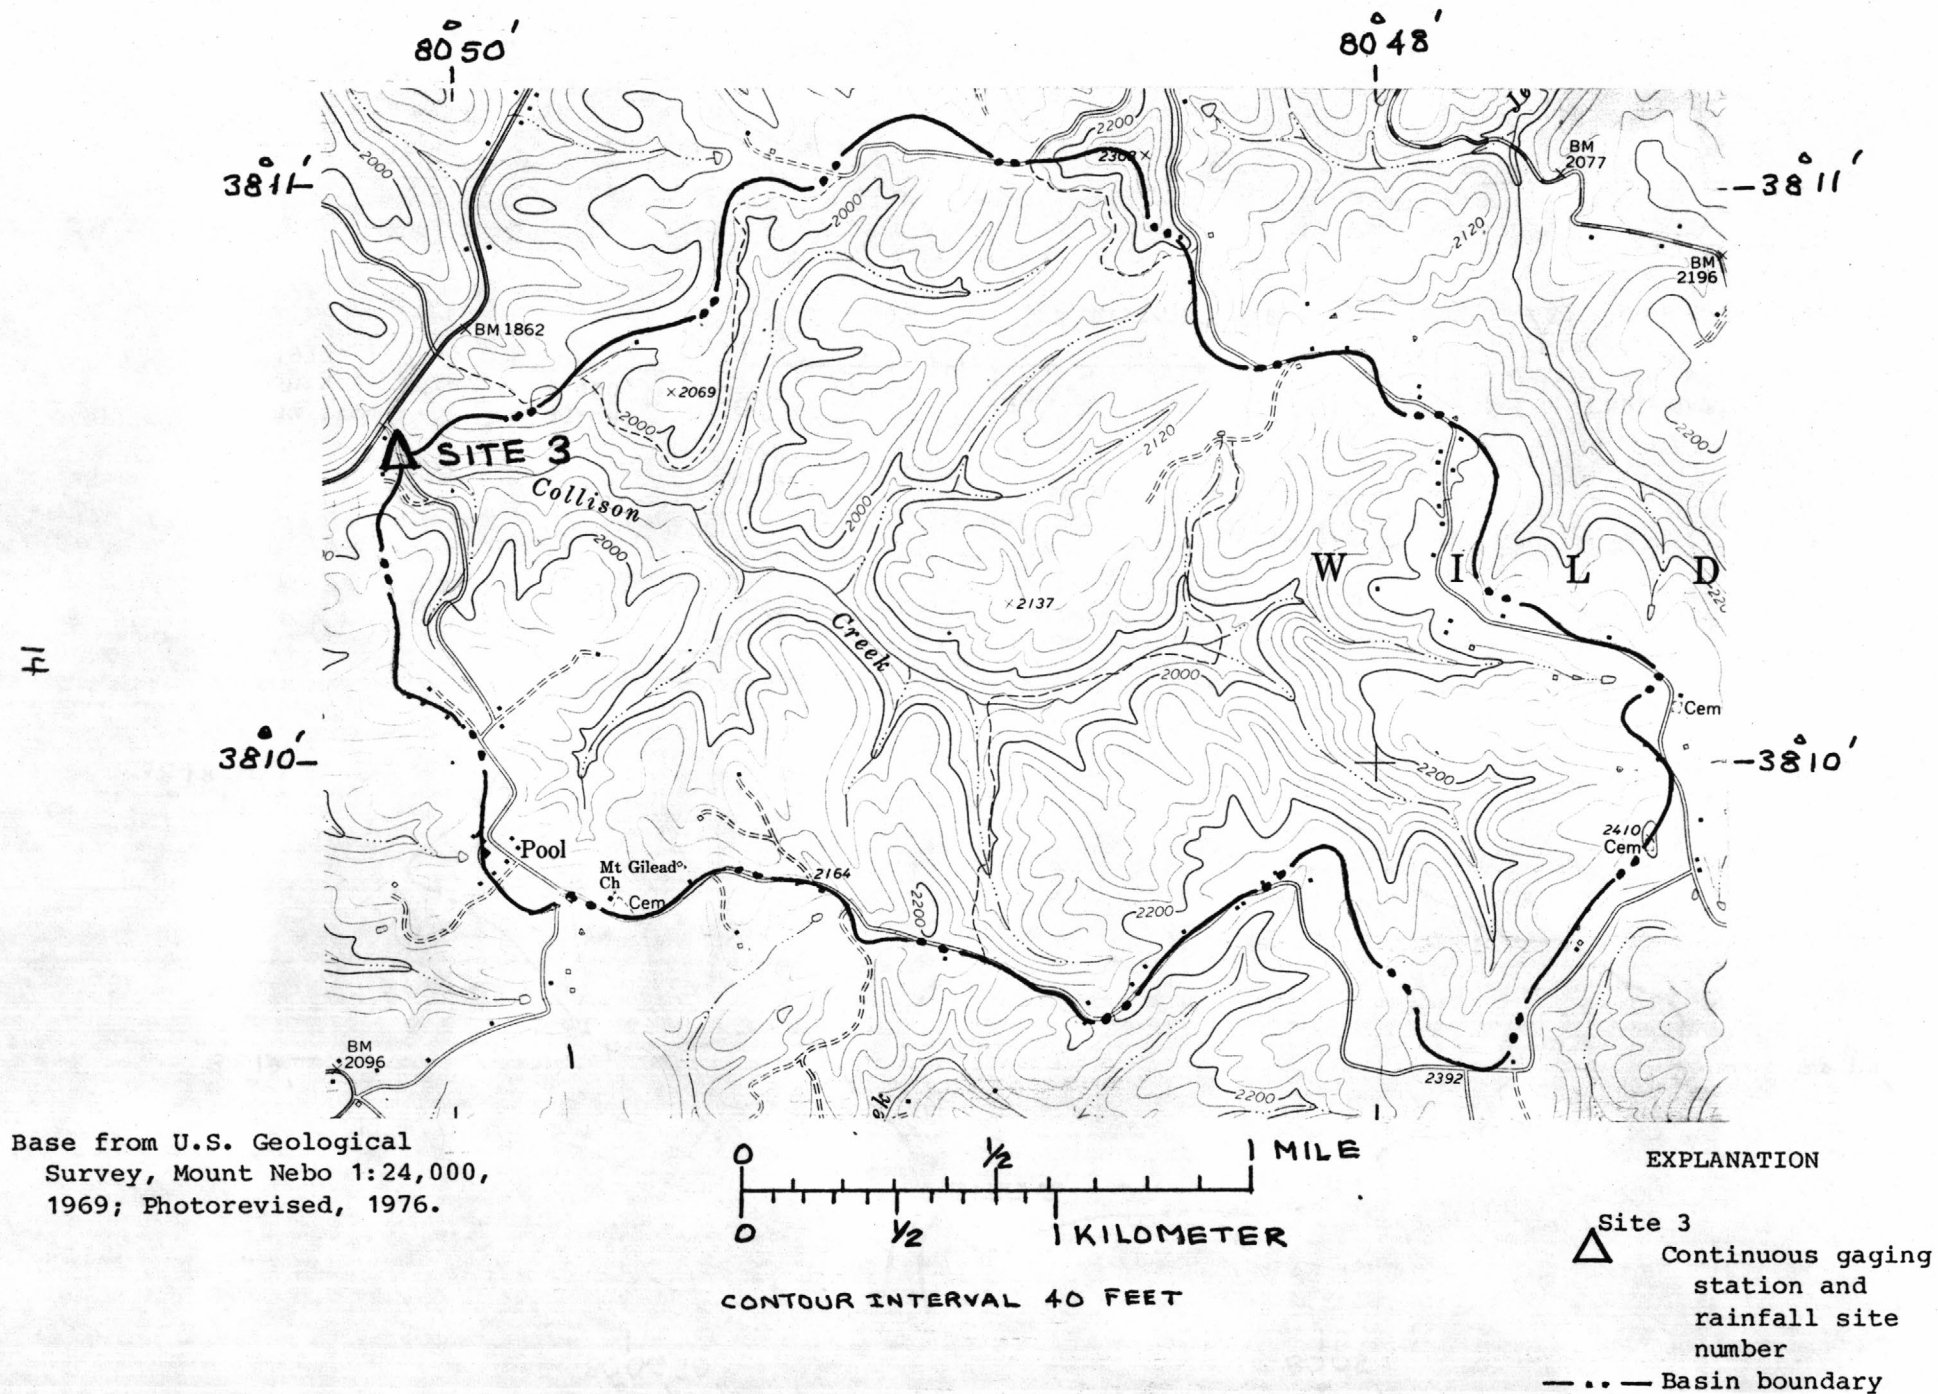


Figure 6.--Physical features in Collison Creek basin.

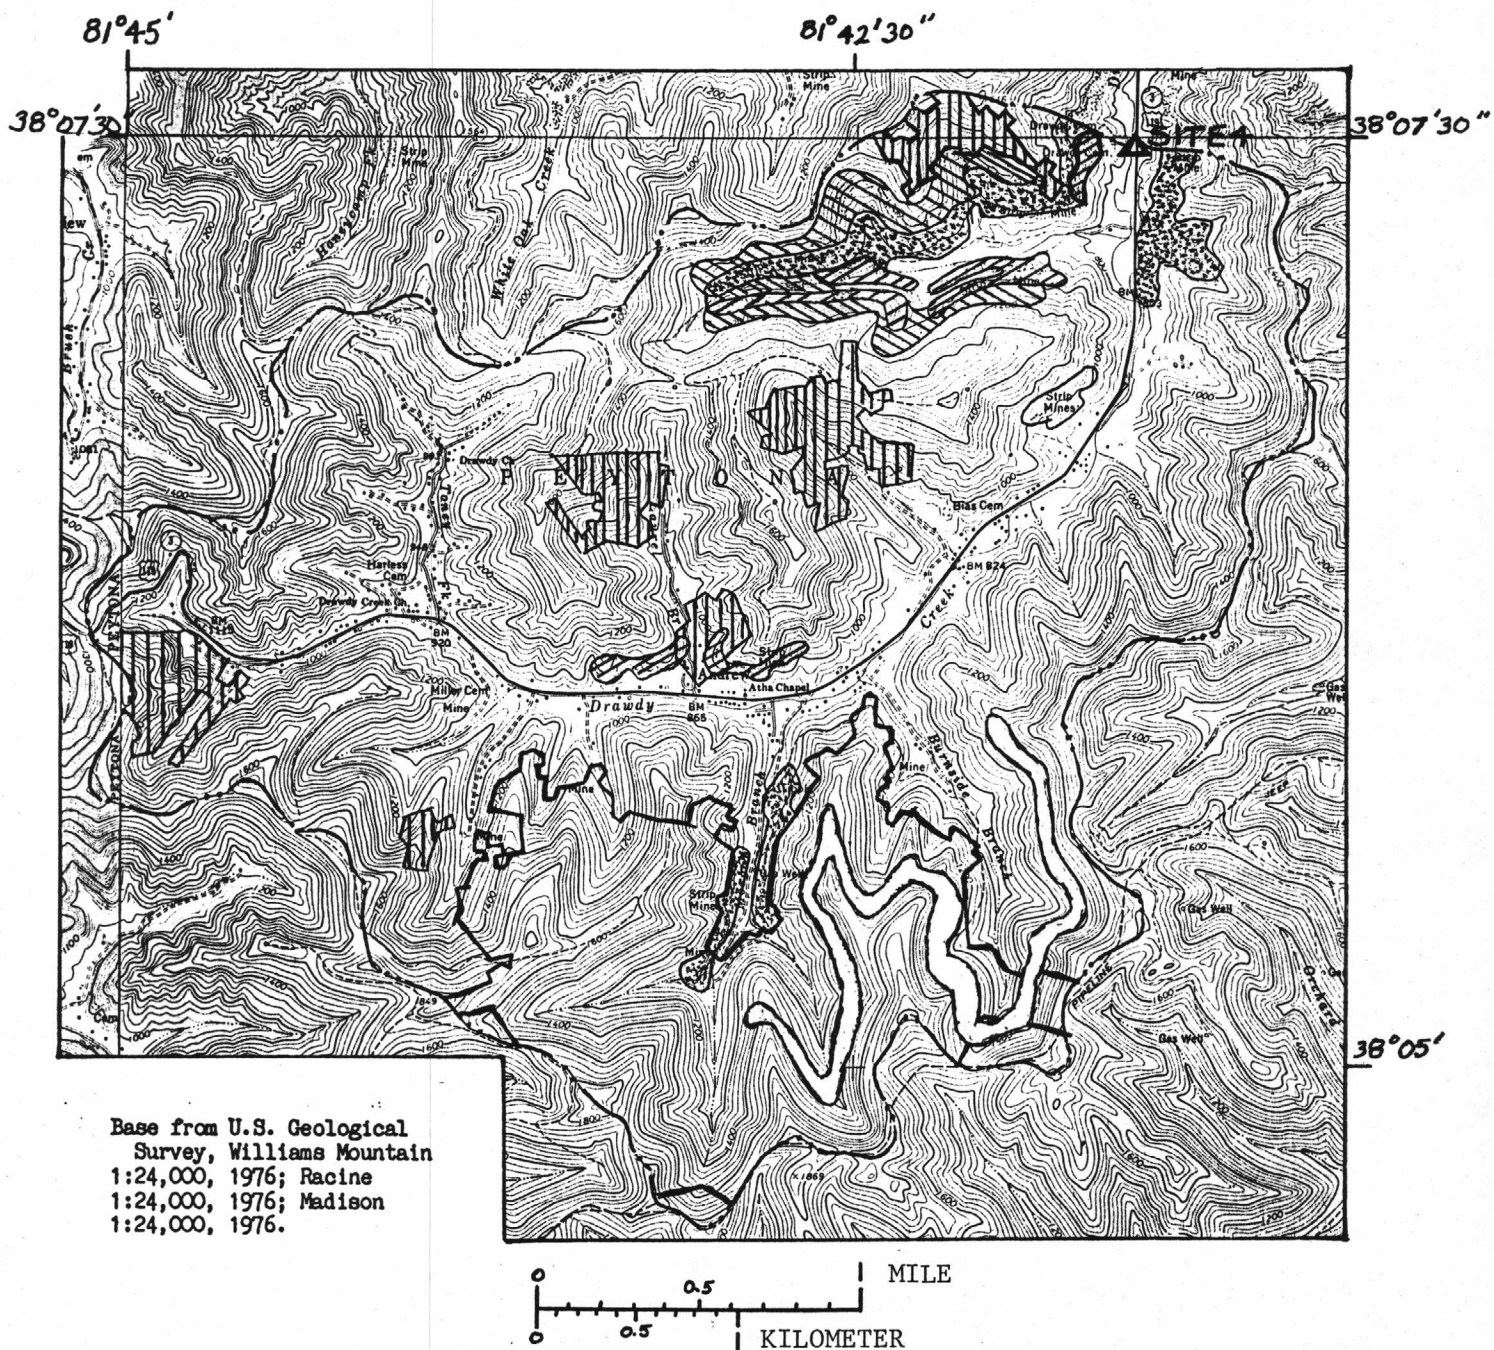


Figure 7.-- Coal-mined areas in Drawdy Creek basin.

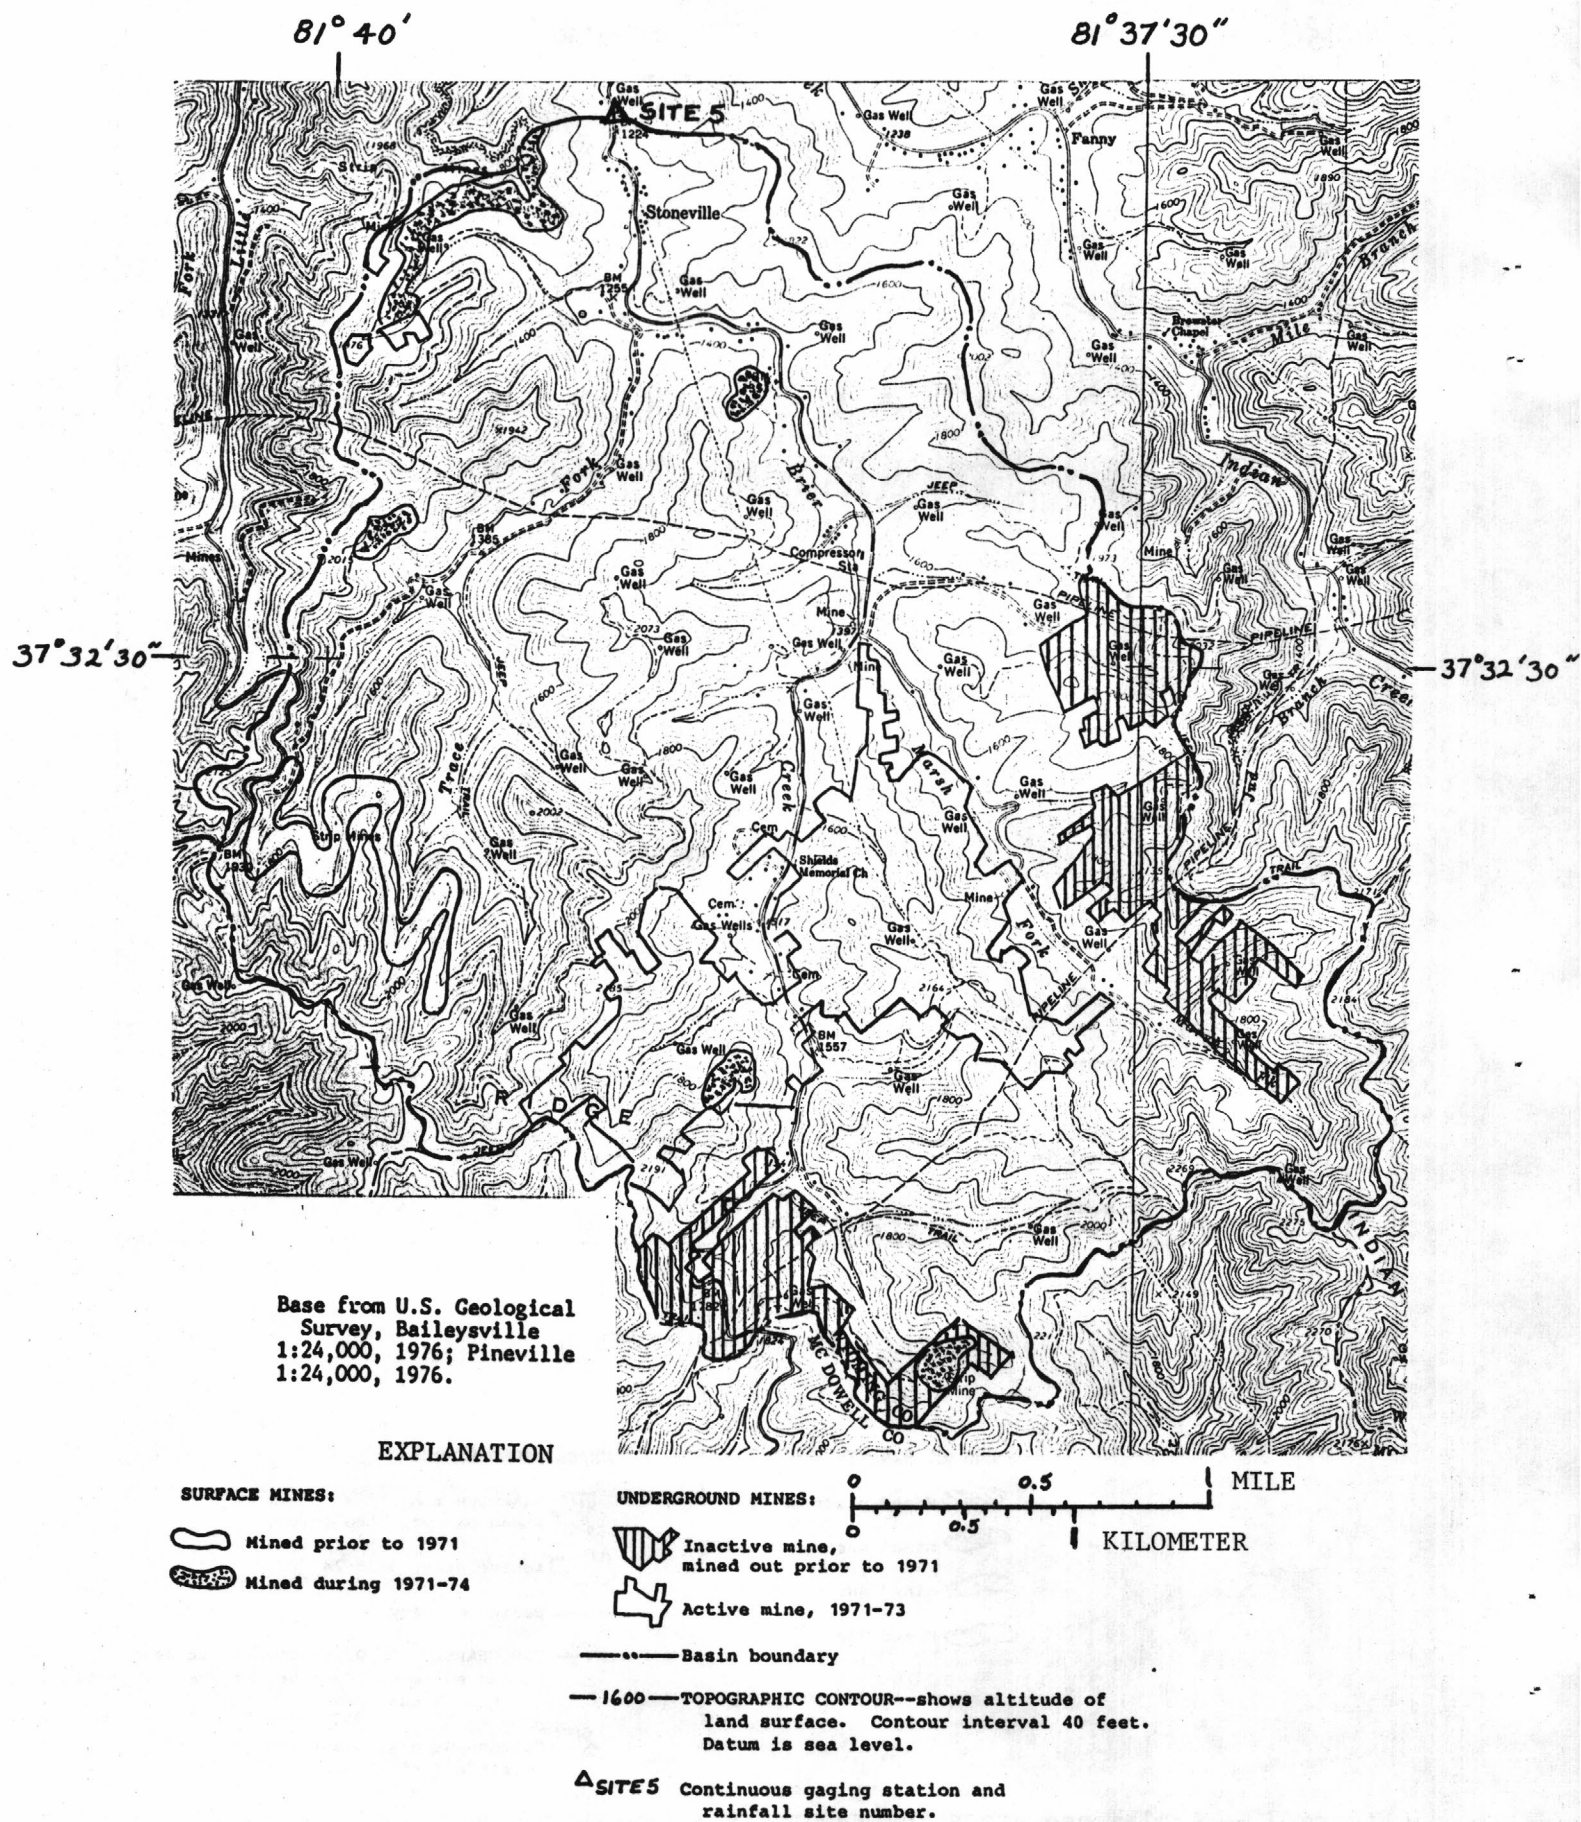


Figure 8.--Coal-mined areas in Brier Creek basin.

About 2 percent of Brier Creek basin has been contour strip mined and 20 percent deep mined above the elevation of the basin's major streams (fig. 8). The Sewell and Red Ash coal seams, which range from 2.5 to 4.0 feet in thickness, are the principal seams mined in the basin. Surface mining in Brier Creek basin was smaller in scale and more dispersed than in Drawdy Creek basin. Underground mines near the center of the basin were actively mined during the study period, whereas those along the southern and eastern boundaries of the basin were mined out and abandoned prior to 1971.

Effects of Coal Mining on the Hydrologic System

Surface and underground coal mining significantly affects the water resources of an area. Some of these effects include flooding, diversion of drainage, and low-flow augmentation. Depending on the methods of mining, the topography of the mined areas, and mine-reclamation measures, surface mining may or may not promote flooding. For example, the clearing of land during contour surface mining may increase the amount of surface runoff and, thus, the potential for flooding. However, contour surface mines also may intercept surface runoff and alter ground-water recharge patterns.

The strip benches or terraces of contour mines usually slope inward toward the strip high wall (fig. 9) and drain water to low areas along the wall, where the water may be ponded or conducted to an outlet from the terrace instead of running off directly to adjacent streams (Ward and Wilmoth, 1968). The ponding may temporarily impede surface runoff and, thus, increase the opportunity for ground-water recharge (fig. 9). In many cases, the precipitation collected on the graded strip terraces may flow into abandoned, partly-filled underground-mine openings or auger holes on the hillsides, or may be diverted along the terraces into adjacent basins. Additionally, the placement of spoil materials along the terrace may create spoil aquifers that can store large volumes of water. The water in the spoil or in ponds on the strip terraces may be a source of recharge to the ground-water system and a source of base flow to nearby streams. In some cases, the overall effect of contour surface mining may be to reduce peakflows and to increase base flows in the basin (Hobba, 1981; Borchers and others, in press).

Underground mines may affect rates of ground-water recharge and alter the flow path of ground water. Mine-roof collapse in underground mines commonly causes the overlying rocks to settle and fracture (fig. 9). This settling may cause subsidence and the vertical propagation of extensive fractures to the land surface. The fractures increase rock permeability and permit greater percolation of precipitation (recharge) to the ground-water reservoir; they also promote drainage of ground water downward to the mines where the water may move laterally to streams by gravity drainage or by active mine pumpage (Hobba, 1981). The presence of surface-subsided areas with open fractures over deep-mined parts of Drawdy Creek basin was reported by local residents.

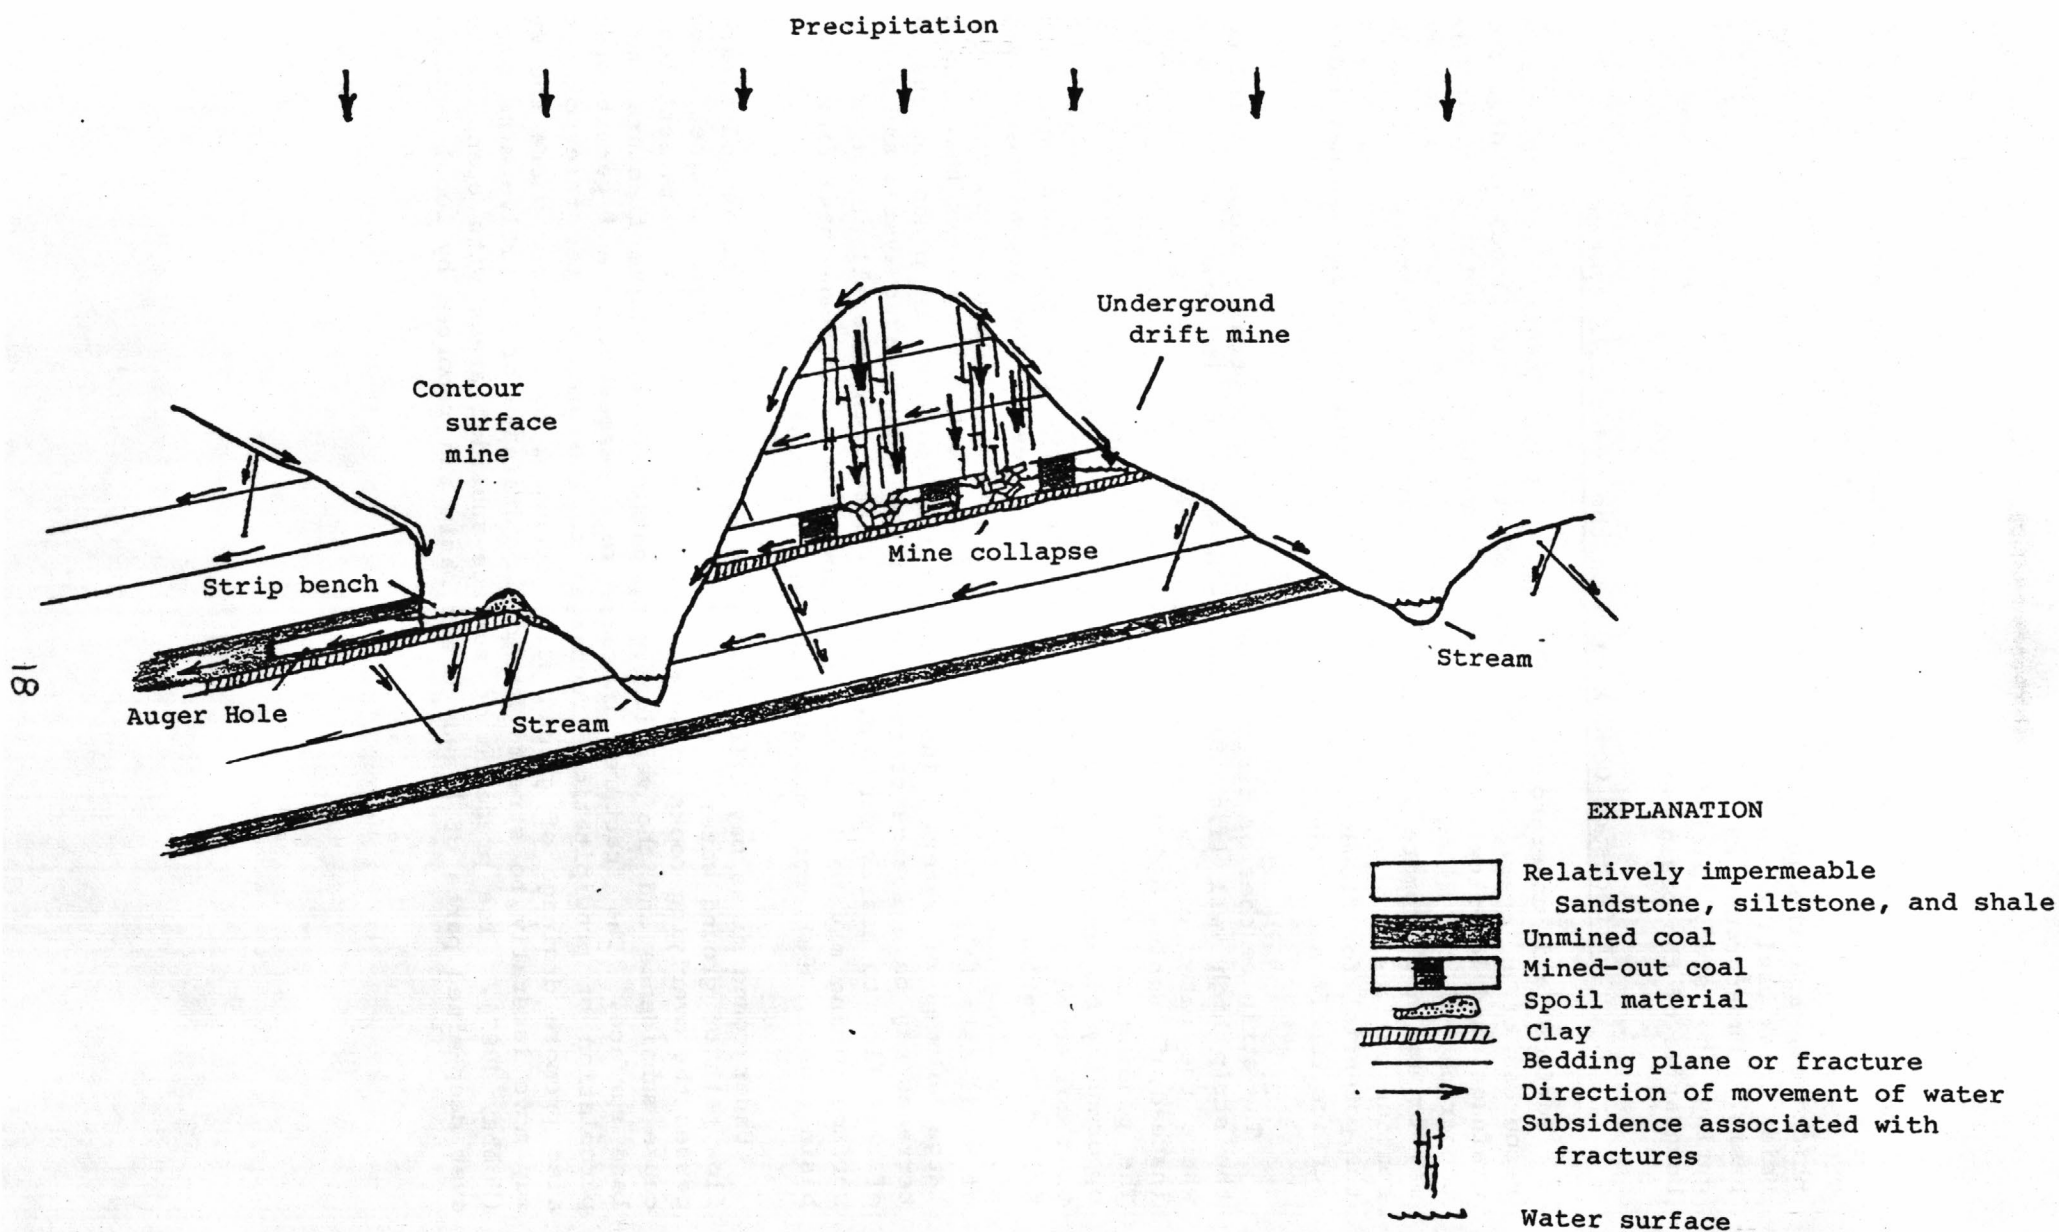


Figure 9.--Relation between dip of coal, relation and condition of abandoned underground mines, and movement of water.

Commonly, sealed and abandoned underground mines store large volumes of water that seeps through mine openings and increases base flow in adjacent streams. Drift mines on hills may slope upward or downward away from the local surface drainage, or they may be horizontal. Where the dip of the rocks is away from the local surface drainage, recharge precipitation, surface runoff, and ground water in a basin may be intercepted by subsidence fractures and diverted to underground mines that drain into another drainage basin (Ward and Wilmoth, 1968). In active underground mines, pumps commonly are used to remove excess water in the mines.

An example of the combined effects of underground and surface mining on peakflows and base flows in small basins (Borchers and others, in press) is illustrated in figure 10, in which runoff in five small and adjacent basins near Brier Creek basin are compared. The peakflows were in response to a storm on November 2, 1979, when measured storm precipitation in the basins ranged from 1.01 inches (Allen Creek) to 1.28 inches (Marsh Fork). Examination of figure 10 indicates that the highest measured peakflow in the basins occurred in Marsh Fork--an unmined basin; the lowest measured peakflow occurred in Allen Creek--the basin with the greatest amount of mining (20 percent of basin drainage area surface mined and 51 percent underground mined). Six days after the peakflows, base flows were lowest at Marsh Fork and greatest at Milam Fork--a basin with 1 percent of the basin drainage area surface mined and 37 percent underground mined. Pumpage to remove excess water in underground mines appears as small bumps on the Still Run basin hydrograph.

Streamflow measurements at numerous synoptic sites in Drawdy and Brier Creek basins (figs. 11 and 12) during February and March 1983, show the effects of coal mining on the quantity and distribution of base flow in unmined and mined areas in each basin. Synoptic measurements of streamflow in the unmined basins--Horsecamp Run, Gilmer Run, and Collison Creek--were not made, because no appreciable land-use activity sufficient enough to affect the quantity and distribution of base flow in the basins was observed.

Drawdy Creek

Streamflow measurements made during medium to high base-flow conditions at numerous sites in Drawdy Creek basin (site 4) indicate that mining activity has altered the natural hydrologic system of the basin (fig. 11). As shown in figure 11, subbasins with the highest and lowest base-flow yield generally contain coal mines.

Parts of the basin that are stratigraphically downdip and beneath the elevation of the mined beds of coal generally have the highest base-flow yields. In contrast, the lowest base-flow-yield areas generally are underlain by underground coal mines and are updip from areas of high yield. Some areas of high and low base-flow yield are adjacent to each other, but separated by basin divides (see Morgan Branch and adjacent subbasins to the west in fig. 11). The coal beds in the ridges separating these areas have been deep


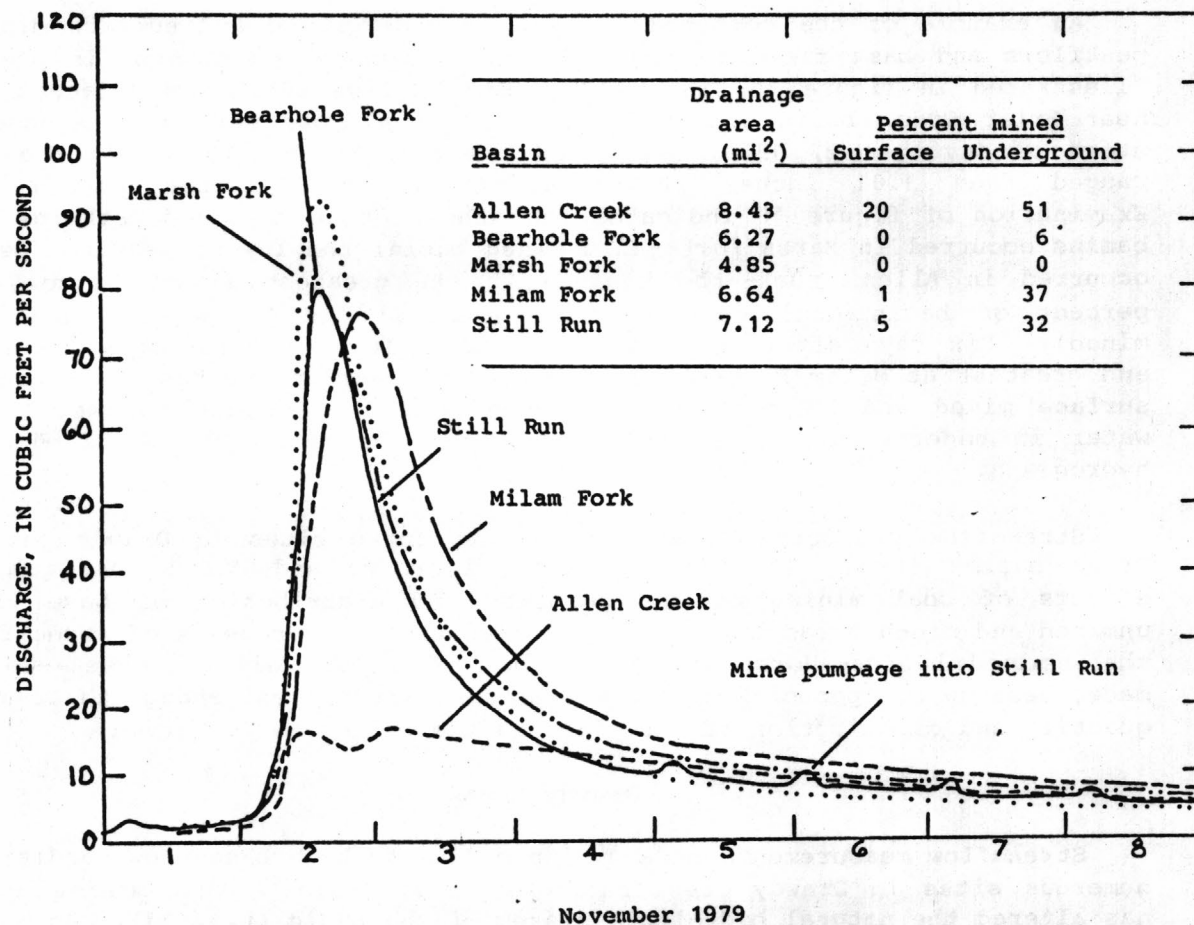


Figure 10.--Basin peakflow response to storm of November 1979. Modified from Borchers and others in press.

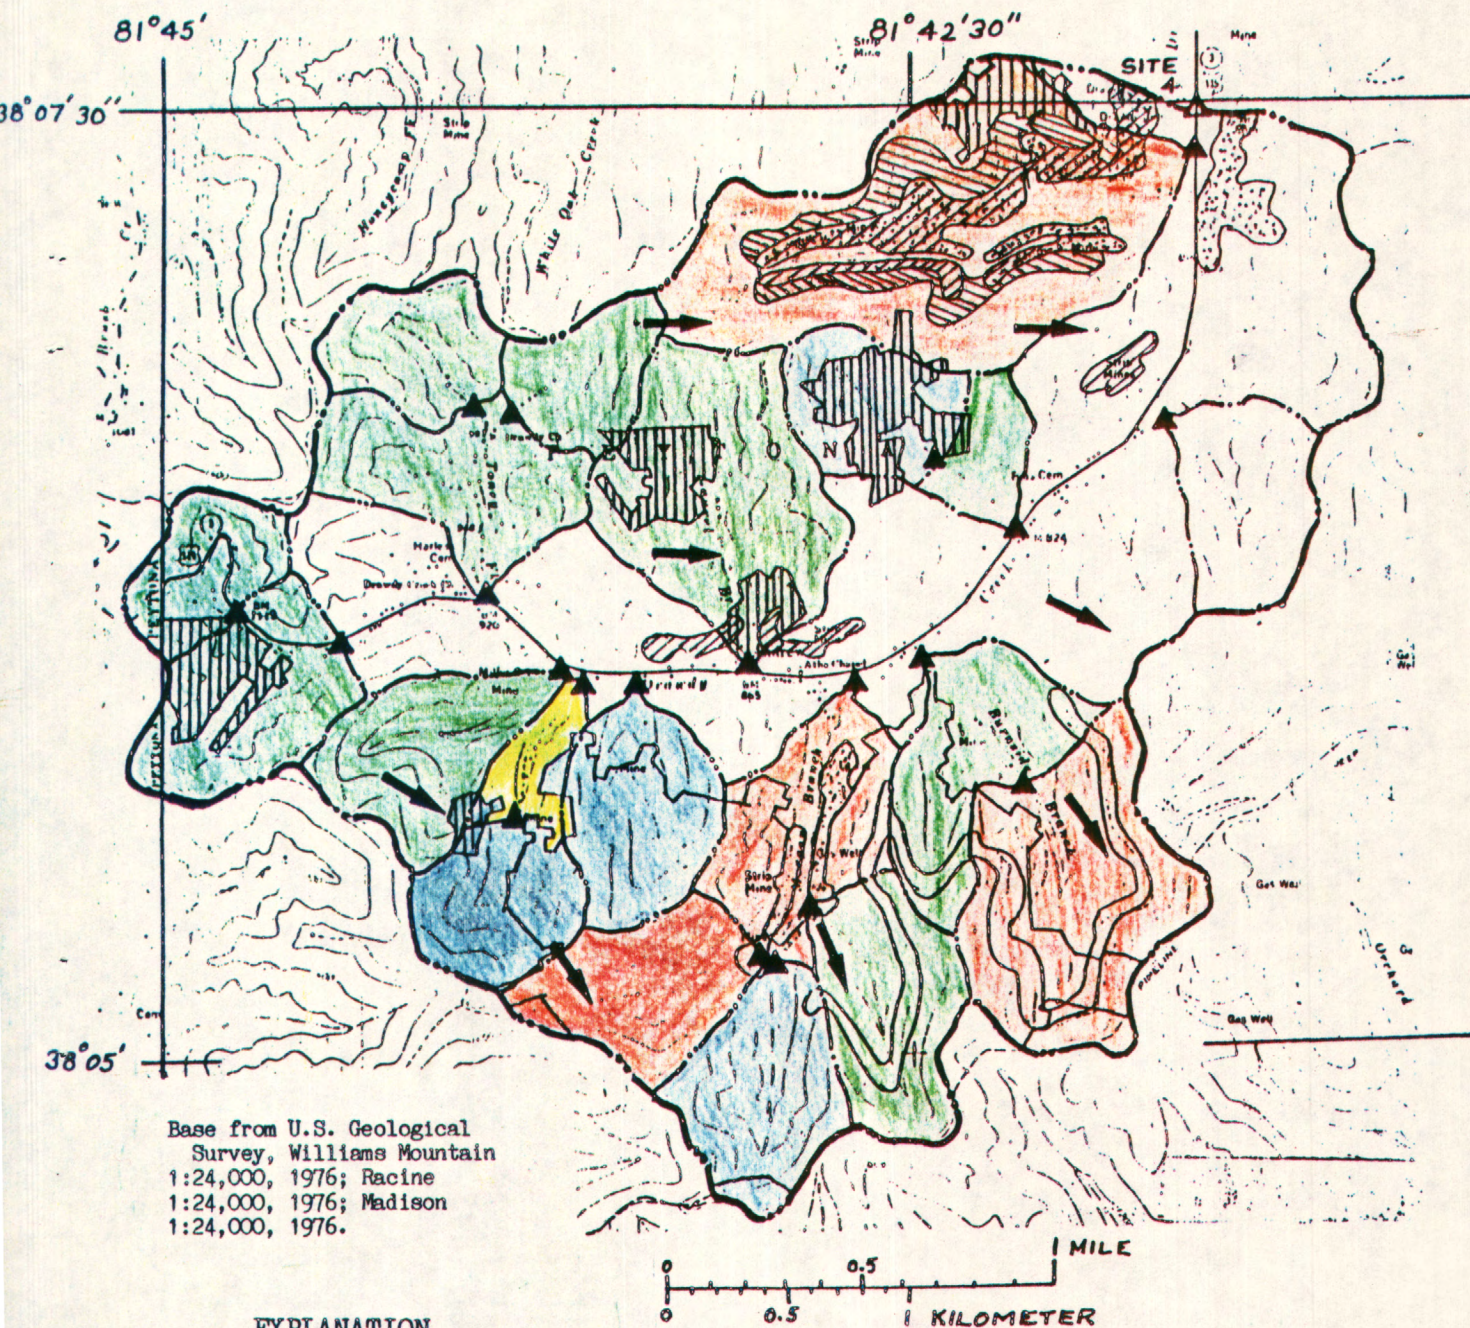

EXPLANATION

BASEFLOW YIELD RANGE, IN
 CUBIC FEET PER SECOND
 PER SQUARE MILE

- 0-1.00
- 1.00-1.75
- 1.75-2.50
- >2.50
- Undetermined

- Contour surface mine
- Underground mine
- Continuous streamflow gaging
- SITE 4 station and rainfall site number
- Synoptic streamflow measuring site
- Generalized dip of coal
- Basin boundary
- Subbasin boundary

Figure 11.--Base-flow yield in Drawdy Creek basin, February, 1983.

mined and in some outcrop areas the coal has been strip mined. Visual observation of drainage from some of the underground mine openings along the western hillsides of Morgan Branch and the general dip of the coal beds and rocks indicate that part of the base flow in Morgan Branch basin is water diverted underground through mines from adjacent drainage subbasins.

In effect, the capture and diversion of precipitation through subsidence fractures in low base-flow yield subbasins probably has increased the recharge area of high base-flow yield subbasins, such as Morgan Branch and Burnside Branch. This, in turn, provides more ground water that is available for maintaining base flow.

Brier Creek

Areas of high and low base-flow yield in streams in Brier Creek basin similarly occur mainly in or near extensively mined areas (fig. 12).

The areas with high base-flow yields also generally are stratigraphically downdip and beneath the elevation of the mined beds of coal. Areas with the lowest yields generally are underlain by underground mines. The streamflow measurements made in Drawdy and Brier Creek basins were not sufficient to determine individual contributions by surface mines or underground mines to total base flow in the basins.

SIMULATION OF RAINFALL-RUNOFF RESPONSE IN COAL-MINED AND IN UNDISTURBED WATERSHEDS

Description of Model

The U.S. Geological Survey's Precipitation-Runoff Modeling System used in this study is documented in the users' manual (Leavesley and others, 1983). It was developed to provide deterministic physical-process modeling capabilities for estimating the effects of climate and land use on the hydrologic system of small basins. The model is designed to function as either a lumped- or distributed-parameter type model and will simulate both daily mean flow and stormflow. For this study, the data required to drive the model consist of precipitation, air temperature, and pan evaporation data.

Model Characteristics

The distributed-parameter modeling capability is provided by partitioning a basin into hydrologic-response units (HRU's) on the basis of measureable climatic, physiographic, vegetative, land-use, and soils features. Partitioning permits accounting for temporal and spatial variations of basin physical and hydrologic characteristics. Each HRU is considered homogeneous with respect to these characteristics and its hydrologic response. The sum of the responses of all HRU's, weighted by unit area produces the total system response, which, in this report, is daily mean streamflow.

The watershed system is described as a series of linear or nonlinear reservoirs with outputs combined to produce the total system response (fig. 13). Water in the upper soil zone is increased by infiltration of rainfall and snowmelt, and depleted by evapotranspiration. Average rooting depth of the predominant vegetation that covers the soil surface defines the depth of this zone.

Surface runoff, Q_1 , occurs after the upper soil zone reaches field-moisture capacity, and also when rainfall exceeds the maximum infiltration rate. The volume of rain that becomes Q_1 is computed using a variable contributing-area concept described by Hewlett and Nutter (1970). Seepage to the ground-water reservoir, S_1 , first occurs only after the upper soil zone reaches field-moisture capacity; it is assumed to have a maximum daily limit. Excess infiltration, available after S_1 is satisfied, then becomes recharge to the subsurface reservoir, S_2 . The subsurface reservoir, representing shallow ground-water zones, is the source of all subsurface flow, Q_2 , that moves through the soil from points of infiltration to some point of discharge above the water table or into the ground-water reservoir S_3 . Subsurface flow moves rapidly to stream channels and supports the recession of snowmelt and stormflow hydrographs.

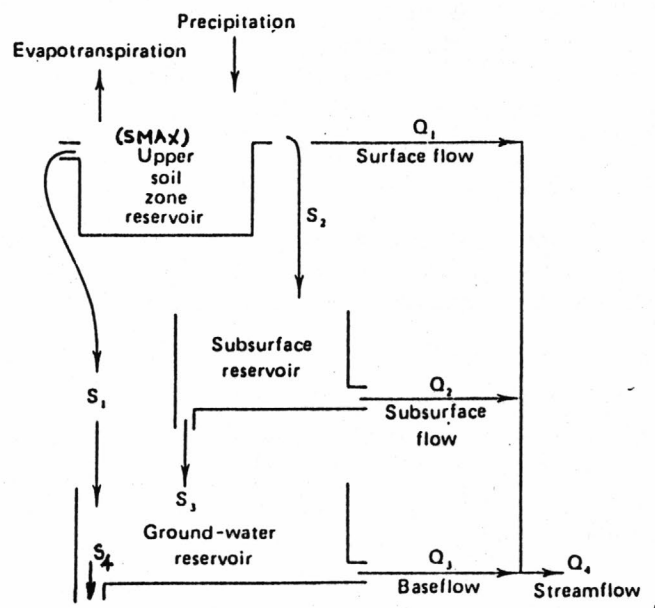


Figure 13.--Schematic diagram of the watershed model. Modified from Weeks and others, 1974.

Recharge to the ground-water reservoir can occur from the upper soil zone and from the subsurface reservoir. Seepage from the subsurface reservoir to the ground-water reservoir is a function of a daily seepage rate and the amount of water in the subsurface reservoir. The ground-water reservoir is assumed to be a linear reservoir and is the source of all long-term base flow or ground-water discharge, Q_3 , to streams. Movement of water through the ground-water system to points beyond the area of interest (ground-water sink) is by seepage, S_4 , which is a function of storage in the ground-water reservoir. The sum of outputs Q_1 , Q_2 , and Q_3 produce the total daily streamflow, Q_4 .

The model structure and operation flow chart shown in figure 14 identifies those model components that attempt to reproduce the physical processes of the hydrologic cycle. The model structure is divided into climatic, land-phase, and snow components. The climatic component accepts and adjusts input data to better define the climate in each HRU. Variations in climate that result from changes in physical characteristics, vegetation cover, and time are adjusted for each HRU on the basis of each HRU's median elevation, slope, aspect, and vegetation.

The land-phase components simulate the effects of vegetation, soil, and geology of an HRU. This includes interception, infiltration, evapotranspiration, soil-water accounting, surface runoff, subsurface flow, and ground-water discharge.

The snow component simulates the initiation, accumulation, and depletion of snowpack on each HRU. The snowpack is maintained and modified on both a water-equivalent basis and as a dynamic heat reservoir. Selected physical characteristics of delineated hydrologic response units for each basin are summarized in table 3.

Data Requirements

Daily precipitation, air temperature, and pan-evaporation data are needed to drive the model on a daily-flow mode. Where pan-evaporation data are not available, they can be estimated by the modeling system using daily solar radiation, or minimum and maximum air-temperature data.

Precipitation data, recorded at 15-minute intervals, were obtained from recording rain gages located at the outflow gaging station in each of the study basins. Daily maximum and minimum air-temperature data were obtained from National Weather Service (NWS) rainfall stations usually located within 10 miles of the basins. Daily values of pan-evaporation data also were obtained from the NWS, which maintains a climatic station at Bluestone Reservoir approximately 35 miles east of Brier Creek basin (site 5).

Basin characteristics, such as land slope, aspect, and elevation were obtained from U.S. Geological Survey topographic maps at a scale of 1:24,000 (figs. 4, 5, 6, 7, and 8). The types, extent, and cover density of the predominant vegetation in the study basins were determined by visual observation, topographic maps (scale 1:24,000), and land use-land cover maps (U.S. Geological Survey, 1979, 1981) at a scale of 1:250,000.

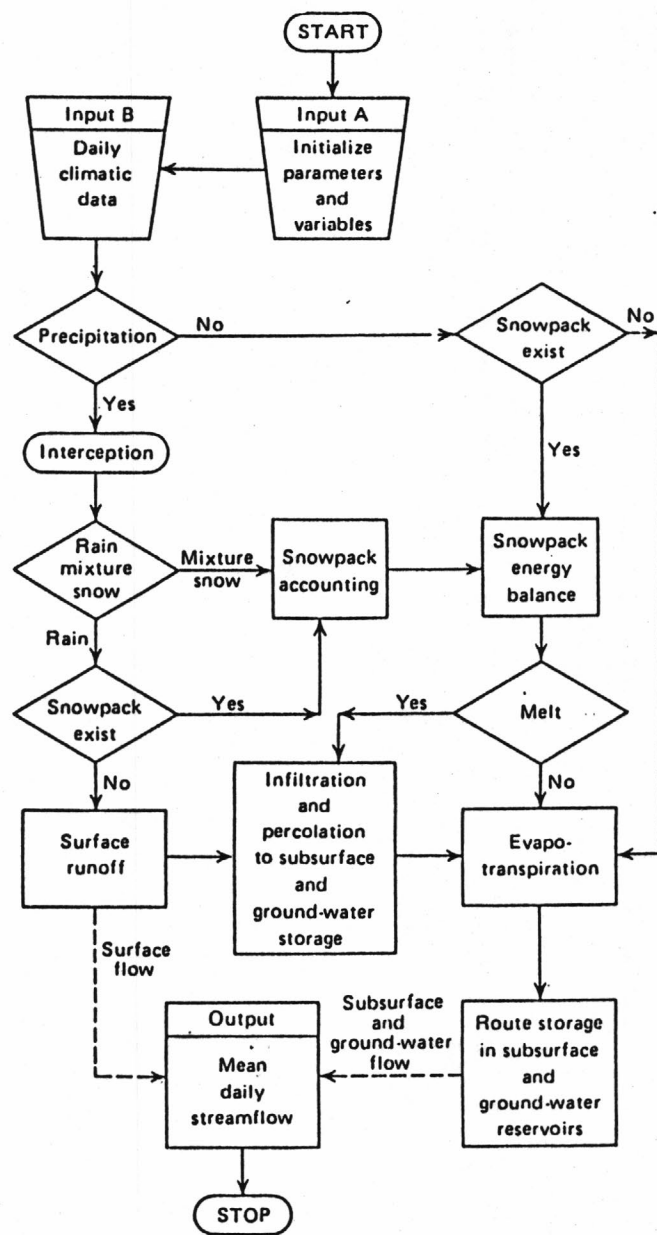


Figure 14.--Flow chart of the digital watershed model. From Weeks and others, 1974.

Table 3.--Summary of selected characteristics of the hydrologic response units used in the model

HRU number	Area (acres)	Aspect (compass direction)	Mean overland slope (percent)	Median elevation ^{1/} (feet)	Major vegetation ^{2/}	Soils
<u>Horsecamp Run Basin</u>						
1	1,420	NE	26	3,180	Grass/Forest	Siltloam
2	1,153	W	22	3,470	Grass/Forest	Siltloam
3	1,632	SW	32	3,450	Grass/Forest	Siltloam
<u>Gilmer Run Basin</u>						
1	467	NNE	19	3,400	Grass	Stony siltloam
2	685	W	28	3,600	Forest	Stony siltloam
<u>Collison Creek Basin</u>						
1	775	N	15	2,040	Forest	Stony siltloam
2	1,024	SW	15	2,090	Forest	Stony siltloam
<u>Drawdy Creek Basin</u>						
1	3,232	NE	20	1,140	Forest	Siltloam
^{3/2}	1,728	SE	16	1,090	Forest/Bare	Stony siltloam
<u>Brier Creek Basin</u>						
1	3,604	NW	34	1,640	Forest	Siltloam
^{3/2}	1,005	NE	19	1,950	Forest/Bare	Stony siltloam

^{1/} Datum is sea level.

^{2/} Forest--Mostly deciduous hardwoods and some conifers.

^{3/} Hydrologic response unit (HRU) representing mined areas.

Soils data were compiled from a statewide, general soil-associations map (U.S. Soil Conservation Service, 1979). The map shows the soil associations in the basins. Because the general soils map did not show the spatial extent of the major individual soil series within the soil associations, it was assumed that each soil series is uniformly distributed and present in equal proportion within a soil association.

Data such as soil type, texture, water-holding capacities, rooting depth, and depth to bedrock were obtained from U.S. Soil Conservation Service County soil-survey reports (Latimer, 1915; U.S. Soil Conservation Service, 1967, 1972, 1975) available for adjacent and nearby areas.

Hydrologic-data requirements consist mainly of continuous streamflow records measured at the outflow gaging station at each basin. The streamflow data used for fitting the model to the study basins were those for the gaging stations listed in table 1.

Model Calibration and Verification

Calibration of the model was necessary to obtain estimates of model parameters defining hydrologic properties of the watersheds. The calibrating procedure was based on 1 year of hydrologic data and consisted of fitting simulated discharge to observed daily mean discharge. A series of model runs, in which initial model parameter values were changed, were conducted to obtain a "best-fit" of the model output to observed data at each site.

The calibration process was based on a combination of trial-and-error adjustments and limited automatic optimization. The automatic-optimization procedure (Rosenbrock, 1960) used the following objective function (OF) to minimize the sums of the absolute differences between the simulated daily mean flow and the observed daily mean flow:

$$OF = \text{minimum} \sum_{i=1}^n |Q_i - S_i|$$

where Q_i = observed discharge,
 S_i = simulated discharge,
 n = number of days, and
 i = ith day

Initial estimates of land-phase model parameters, such as interception, cover density, evapotranspiration losses, and soil-moisture storage, were based on the physical characteristics (soils, vegetation, land use, and topography) of the watersheds. Model parameters affecting surface, subsurface and ground-water routing coefficients, and subsurface and ground-water storage and depletion rates were based on measured streamflow records. Model parameters affecting snowpack accumulation and snowmelt timing were based on other model applications (Leavesly, 1981). Appendix A contains a comprehensive list of parameters derived from the model calibration for each basin; included are the model parameter names, definitions, and values used during calibration.

Some of the more important calibrated model parameters (Appendix A) found to be sensitive for predicting streamflow are SMAX, RSEP, RCB, GSNK, RCF, RCP, SCN, and SC1. One of the more important parameters, SMAX, is the soil-moisture storage capacity above which soil water moves to the models subsurface and ground-water reservoirs and ultimately to the stream channel (fig. 13). As SMAX increases, more water can be stored in the soil zone and is available for evapotranspiration, ET. As SMAX gets smaller, less water is available for ET losses and more water can reach the stream channel. RSEP and RCB are routing coefficients affecting the rate water moves from the subsurface reservoir to the ground-water reservoir, and the base-flow-recession rate, respectively. As RSEP increases, more water seeps from the subsurface reservoir into the ground-water reservoir. RCB controls the timing of ground-water contribution to base flow. As RCB increases, water from ground-water storage is discharged as base flow at a faster rate. GSNK is a routing coefficient directly affecting the rate water moves from the ground-water reservoir to points beyond the basin--ground-water sink. RCF and RCP are routing coefficients affecting the shape of the subsurface flow recession immediately following peak flows. SCN and SC1 are empirical coefficients affecting the timing and amount of surface runoff during storm periods.

Hydrologic-response-unit delineations in the unmined basins were based primarily on basin physical characteristics (slope and aspect). Model components affecting the surface system (basin physical characteristics, soils, and cover density) were defined as a distributed-parameter system. However, model components affecting the subsurface and ground-water system (soil-moisture storage, and subsurface and ground-water routing coefficient) were defined as a lumped-parameter system. Sufficient data were not available to permit definition of the spatial variability of subsurface ground-water model parameters within the basins. Calibrated model parameter values for the three unmined basins are almost the same magnitude, which reflects the similarity in soil types and depths, vegetation, topography, geology, and streamflow characteristics in the basins. Only one subsurface reservoir and one ground-water reservoir were used to describe the ground-water system of each basin.

Hydrologic-response-unit delineations in the mined basins were based mainly on basin physical characteristics, such as slope, aspect, and the presence of mined areas in the basins. Because of the spatial distribution of mining activity, the limited tributary runoff data within the basins, and the small areal extent of surface mining in the basins, surface- and underground-mined areas were aggregated and considered as one HRU. It was assumed that the mined areas are homogeneous with respect to climate, basin characteristics, and hydrologic response. Each mined basin was delineated into two HRU's--one representing unmined areas and the other representing mined areas.

Initial estimates of model parameters that define soil-water relations in the mined areas were based on visual estimates of the distribution, composition, depths of spoil materials in the basins, and other information describing the hydraulic properties of spoil materials (Younos and Shanholtz, 1980) in nearby surface-mined areas. Model parameters that define subsurface and ground-water storage, and flow-routing coefficients in the mined areas

were based mainly on measured streamflow records at outflow gaging stations in the basins and on other information that describe ground-water and surface-water relations in small, intensively mined (underground in combination with surface) basins (Hobba, 1981).

The adequacy of the model for simulating long-term streamflow was demonstrated by simulating daily flows for substantially longer periods of record at each site. Model calibration and verification results are provided in the following section.

Model Simulations

Historic Conditions

Before the model could be considered suitable for predicting the hydrologic response to various hypothetical mining situations, it was necessary to demonstrate its ability to reasonably simulate observed response to historic conditions. The adequacy of the model was determined during the calibration and verification process by comparing simulated streamflow and water-budget items to those observed or deduced from hydrologic observation and interpretation. The adequacy of simulated to measured discharges was based on comparisons of monthly and annual discharge volumes, and comparisons of graphs showing seasonal runoff distribution, hydrologic-response timing, minimum and maximum daily mean flows, recession rates, and duration of flow. This section of the report provides comparisons of simulated and observed streamflow and water budgets for the periods of simulation.

Streamflow

The hydrographs in figures 15 to 19 illustrate model calibration results for each site. Model calibration results for unmined sites--Horsecamp Run, Gilmer Run, and Collison Creek--are based on 1972 water-year data. Observation of the hydrographs in figures 15-17 indicates that predicted discharges at the sites generally are in agreement with observed discharges. The magnitude and timing of predicted daily maximum and recession flows, and the seasonal runoff distributions compare favorably with observed values.

Differences between predicted and observed daily discharges at Horsecamp Run, Gilmer Run, and Collison Creek generally were greatest during the winter periods (February and March) (figs. 15-17). These sites are located in the higher mountainous areas of the State, where the lowest temperatures and greatest snowfall accumulations occur. Simulated discharges generally were greater than observed during early February and less than observed during late February and early March. This probably results from a combination of the following factors: (1) periods of ice-affected discharge and precipitation records in which intermittent periods of record are lost, (2) inadequate definition of model parameters that influence the rate and timing of snowpack accumulation and snowmelt during periods of extremely cold weather, and (3) the inability of the model to simulate ice and frozen-ground effects on streamflow. In general, differences between predicted and observed daily discharges were lowest during the fall, summer, and spring seasons.

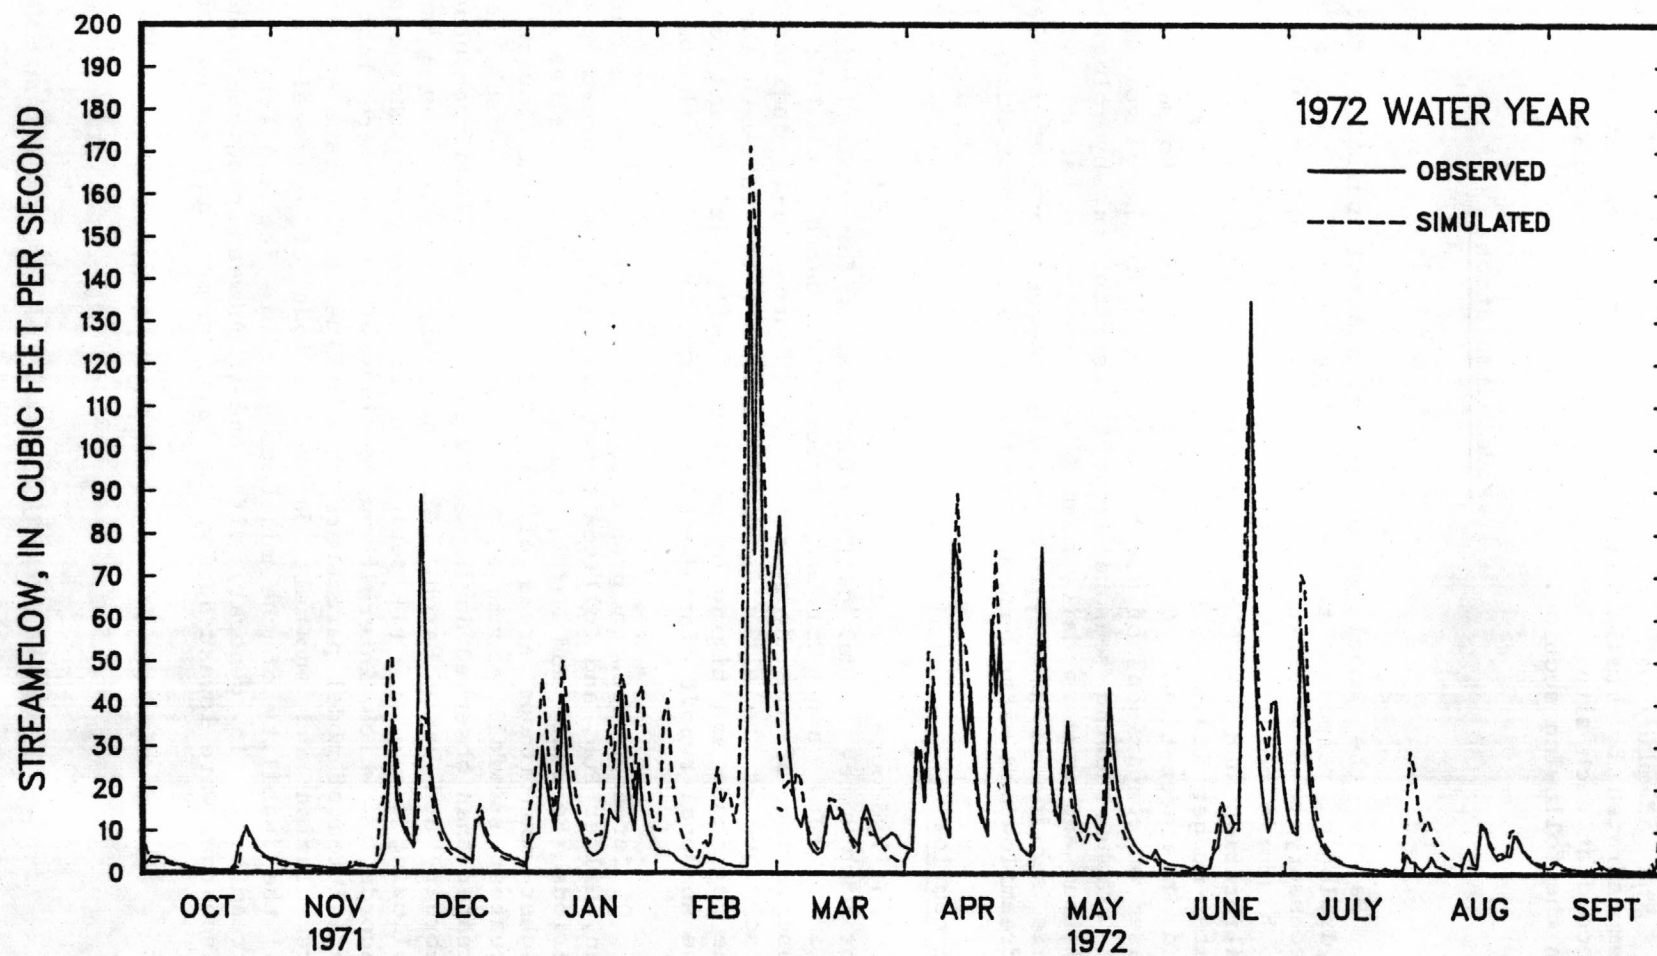


Figure 15—Observed and simulated daily mean streamflow at Horsecamp Run at Harman, October 1971–September 1972.

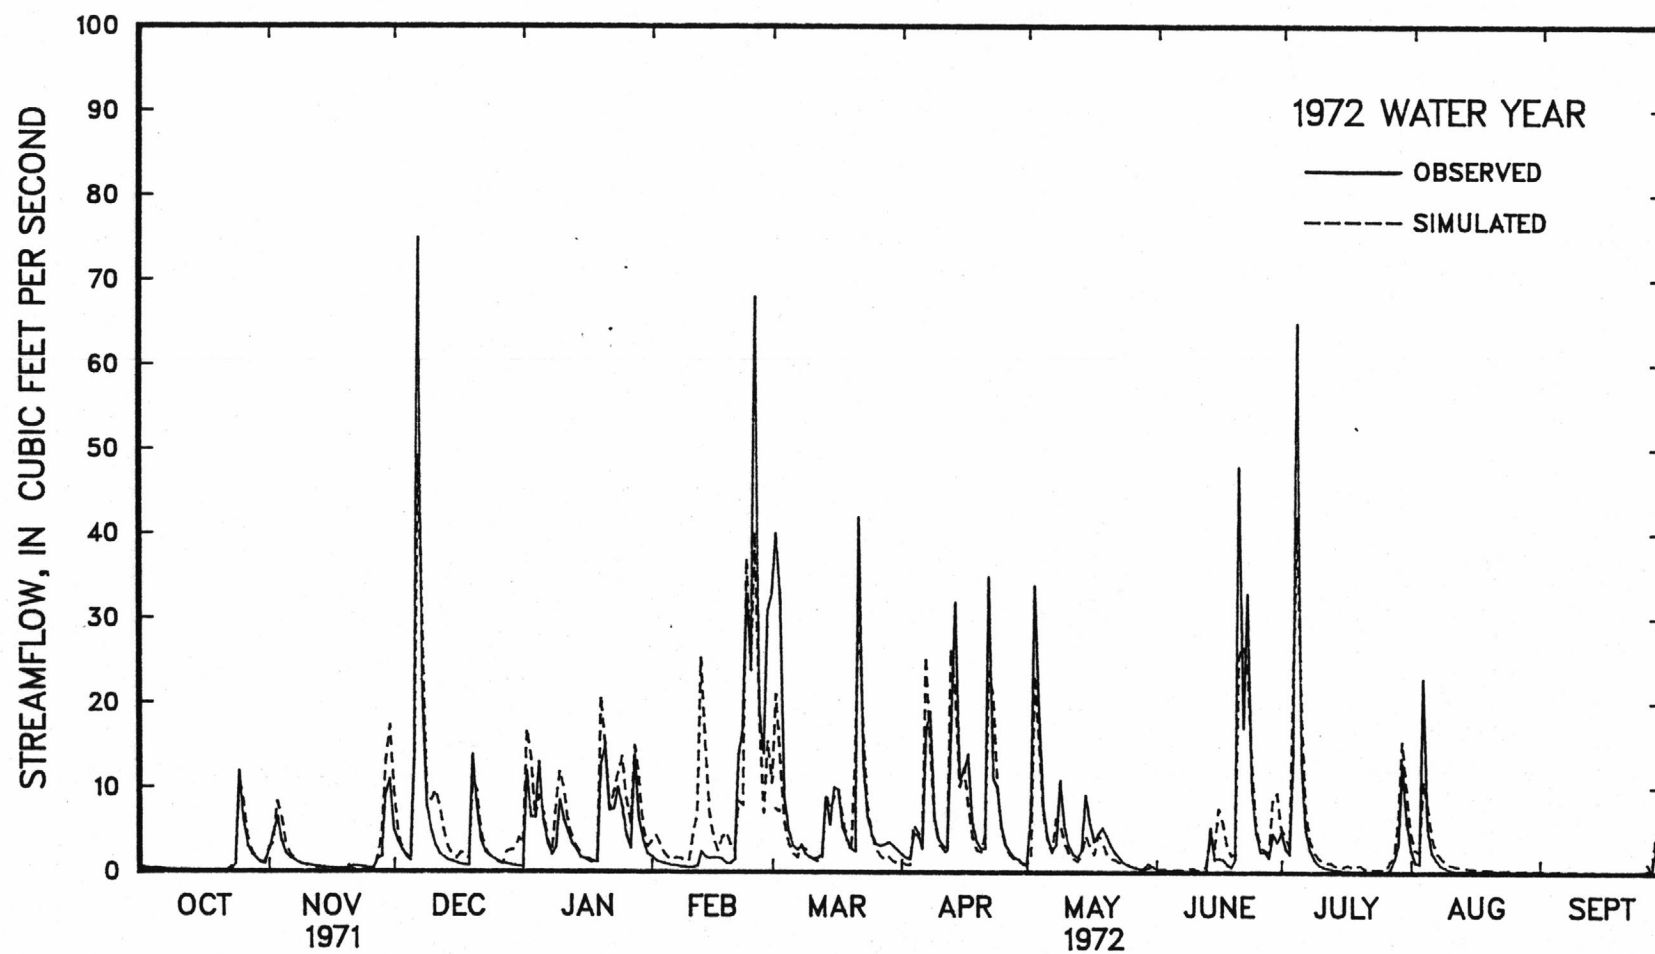


Figure 16—Observed and simulated daily mean streamflow at Gilmer Run near Marlinton, October 1971–September 1972.

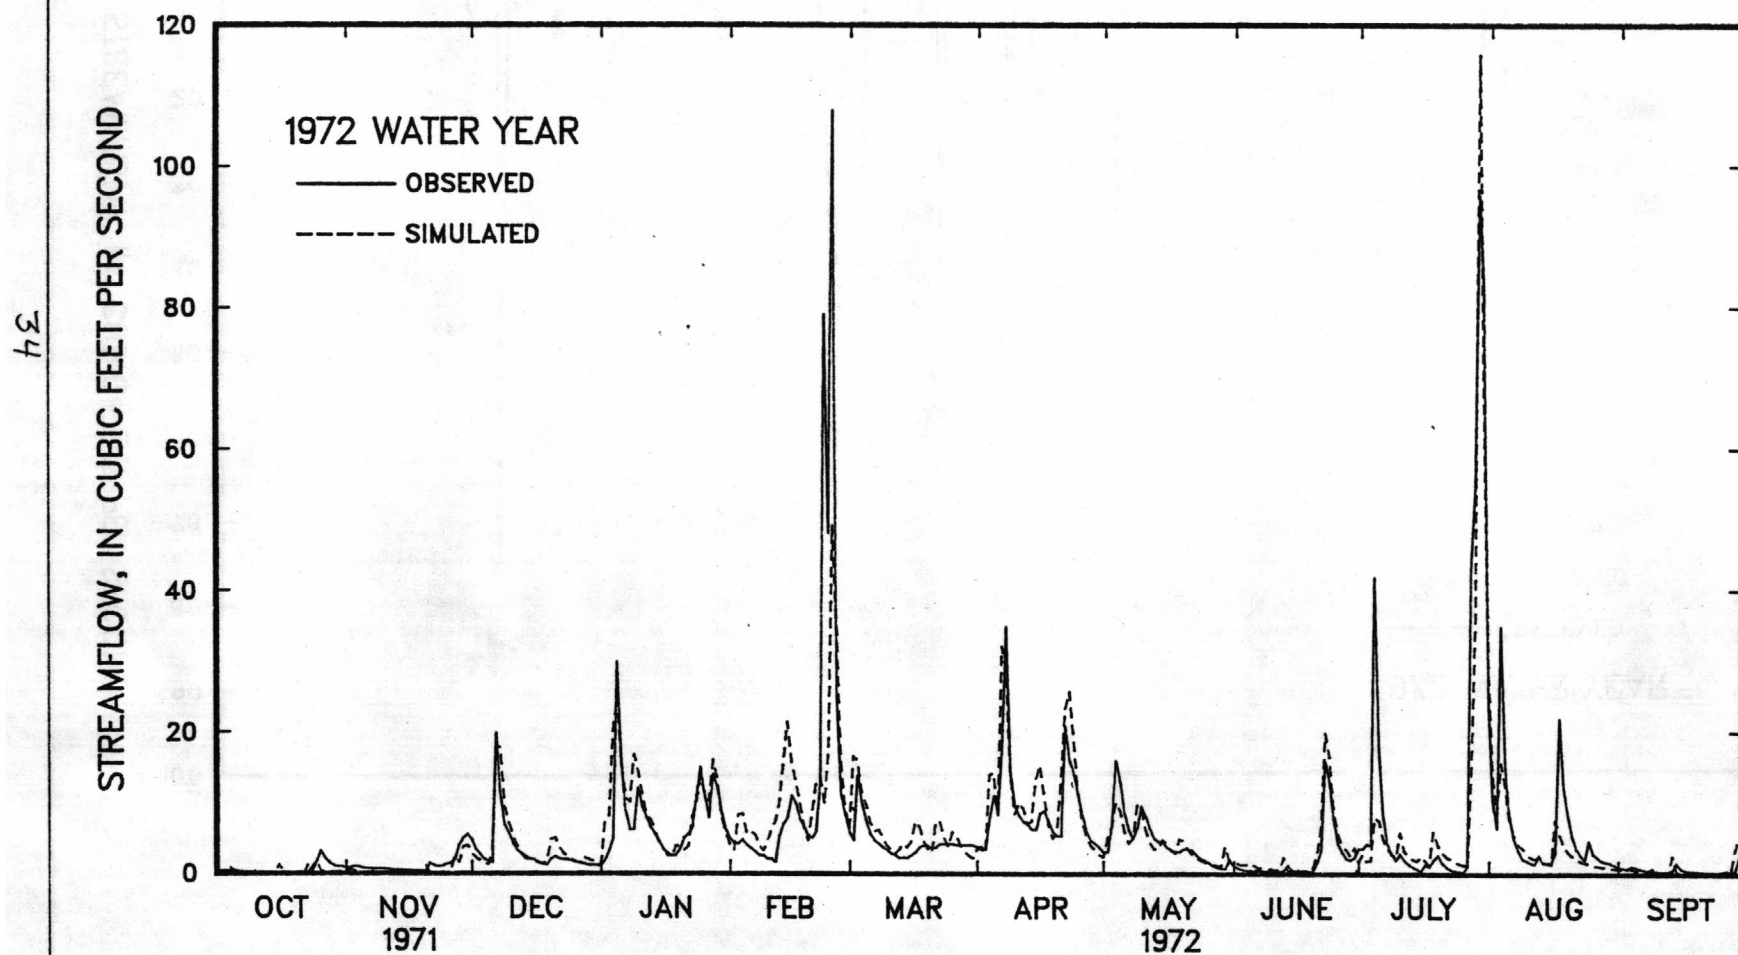


Figure 17--Observed and simulated daily mean streamflow at Collision Creek near Nallen, October 1971-September 1972.

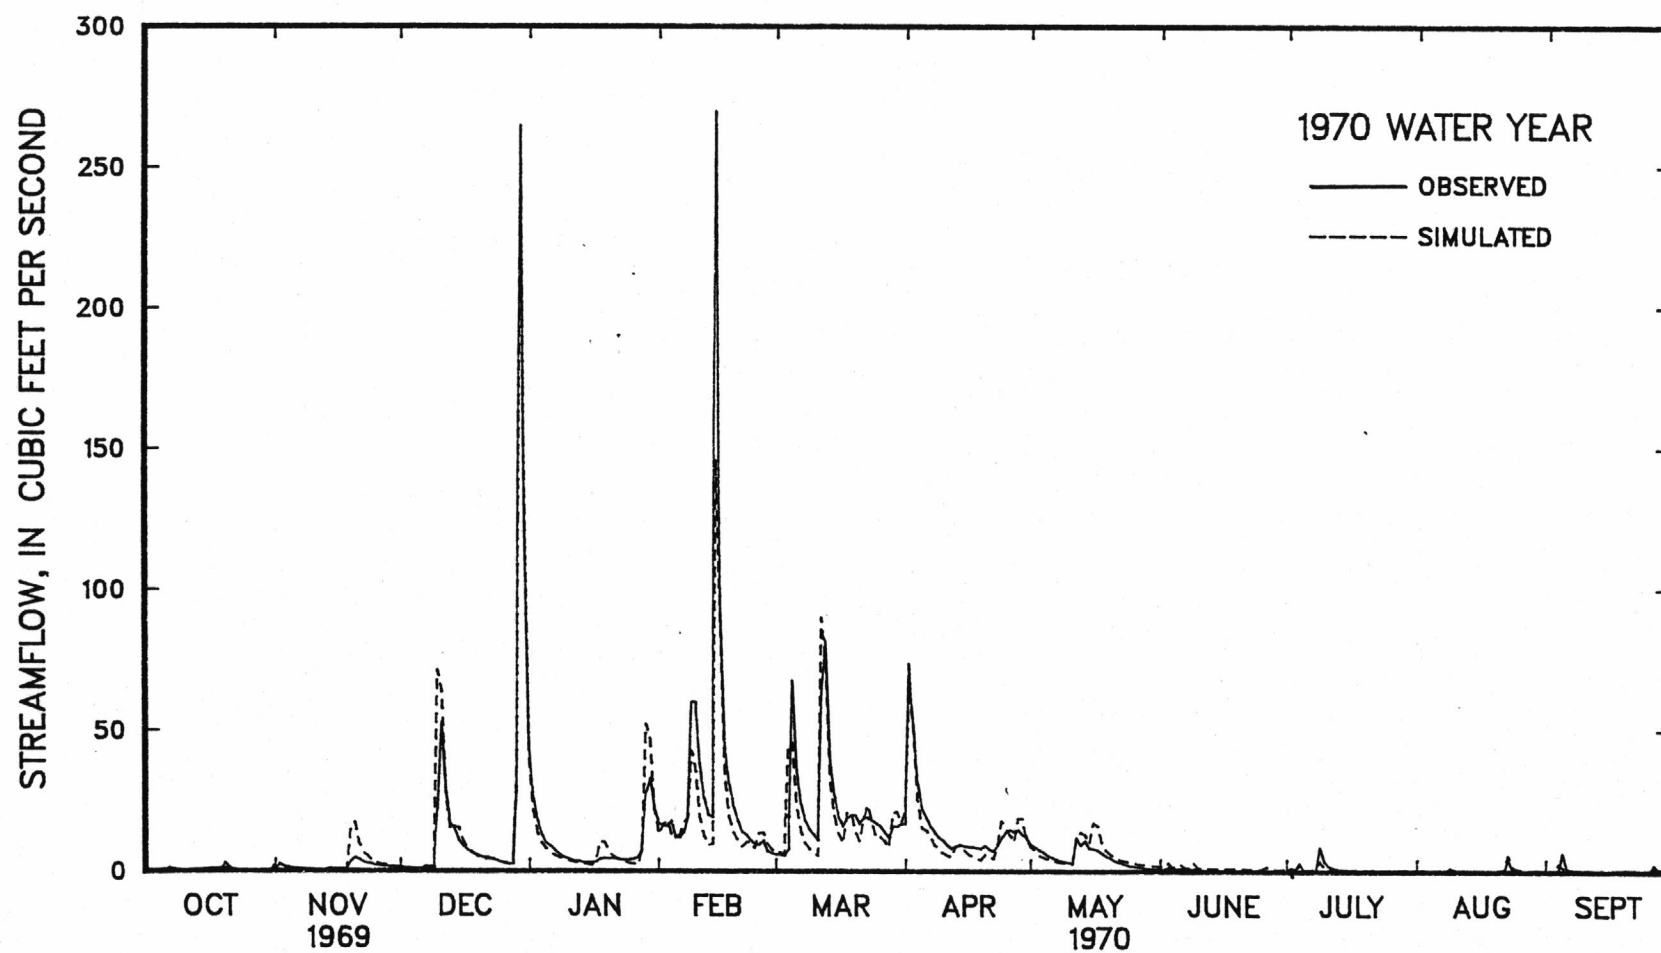


Figure 18—Observed and simulated daily mean streamflow at Drawdy Creek near Peytona, October 1969–September 1970.

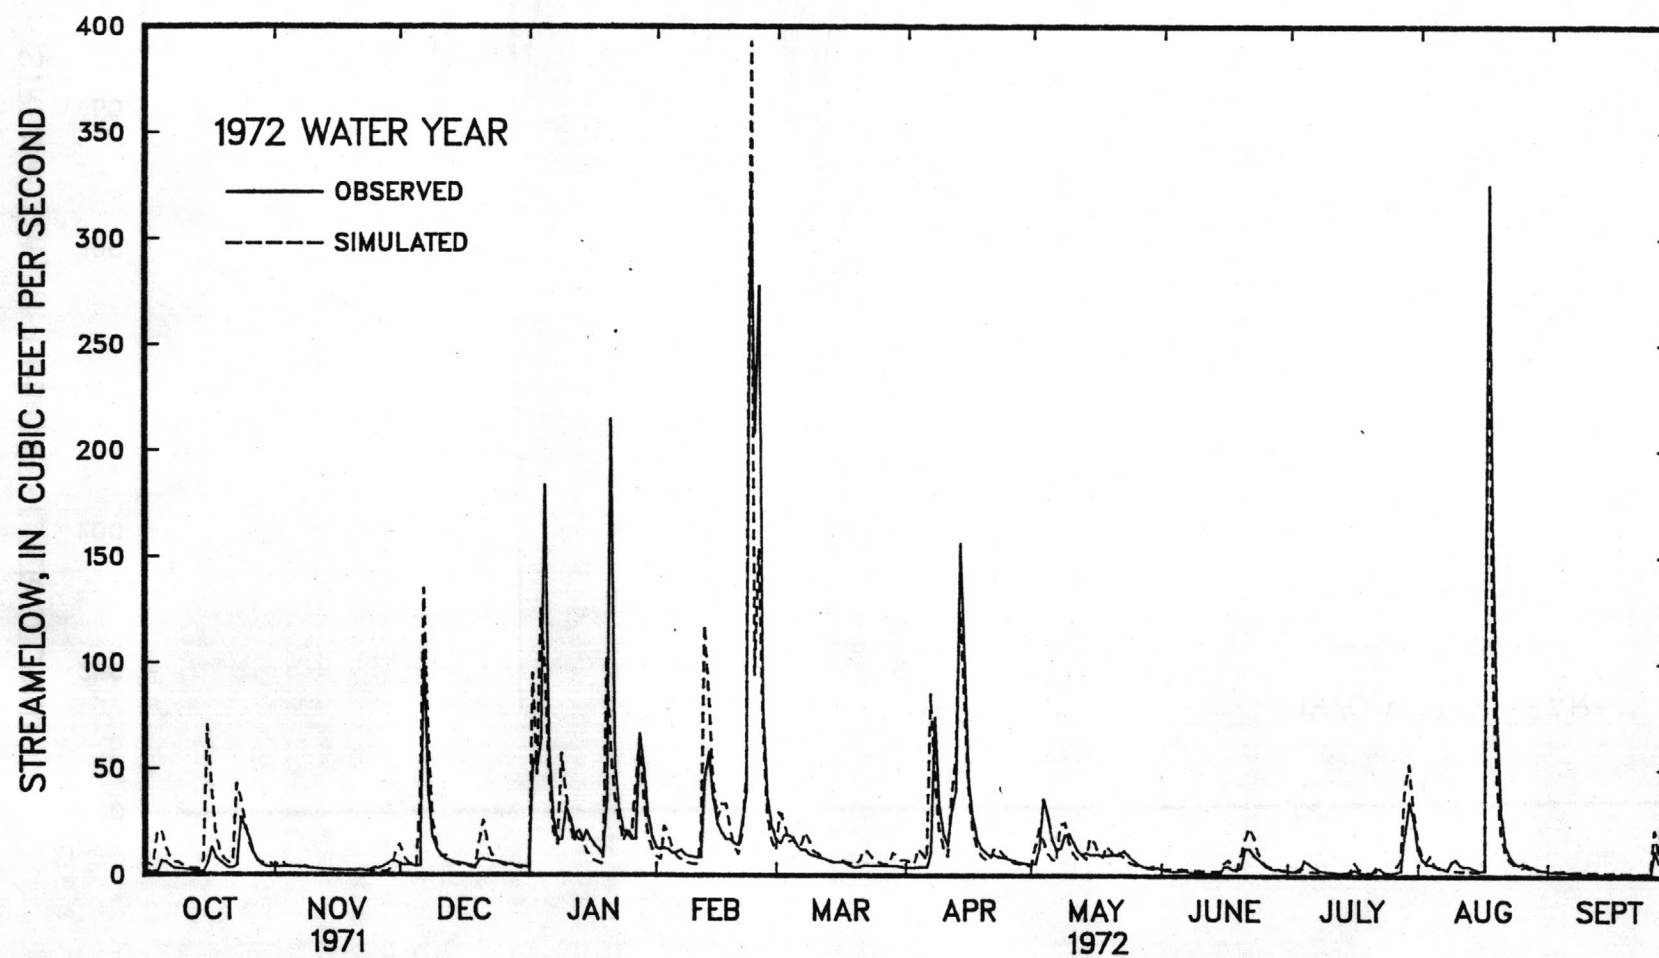


Figure 19—Observed and simulated daily mean streamflow at Brier Creek at Fanrock, October 1971–September 1972.

Model-calibration results for mined sites--Drawdy and Brier Creeks--are based on 1970 and 1972 water-year data, respectively. Observation of the hydrographs in figures 18 and 19 also indicates that predicted daily-mean discharges at the sites generally are in close agreement with observed discharges.

Annual precipitation and measured and simulated annual runoff for the period of simulated record at all sites are given in table 4. The difference between the simulated and measured annual discharge volumes also is given in table 4 as both a volume error and as a percent-difference error in terms of measured discharge. Examination of the table indicates that the errors in simulated annual flow volumes for all sites ranged from +0.14 (1 percent) to -6.29 inches (14 percent). The smallest mean annual volume error for the period of simulated record was at Drawdy Creek--+0.01 inch or less than 1 percent. The largest mean annual volume error for the period of simulated record was at Brier Creek--+0.90 inch or 4 percent.

Indices used to assess the model's ability to simulate longer-term records are monthly and annual discharge volumes (fig. 20 and table 5), and duration of daily flows for the periods of simulated record (figs. 21-25).

A comparison of monthly and total annual runoff volumes shown in figure 20 and in table 5 indicates that monthly runoff errors during calibration ranged from -0.01 (2 percent) to +2.08 inches (77 percent), whereas average monthly runoff errors during verification ranged from -0.01 (0 percent) to +1.20 inches (71 percent) (table 5). The largest errors occurred during summer and fall periods when observed flow volumes were usually the lowest. Total annual runoff errors during calibration ranged from -0.36 (1 percent) to +5.43 inches (20 percent); average total annual runoff errors during verification ranged from +0.26 (1 percent) to -1.84 inches (8 percent). In general, the accumulated runoff during the winter period (December-March) was less than observed, and the accumulated runoff during the summer period (June-September) was greater than observed at most sites for the calibration and verification simulations. During winter periods, the errors probably resulted from inadequate precipitation input and inadequate definition of model parameters that affect snowpack accumulation and snowmelt runoff. During summer periods, the errors probably result from inadequate definition of model parameters that affect soil-moisture accretion and depletion rates, subsurface and groundwater storage volumes, and flow-rating coefficients.

Duration of daily flow curves for all sites, prepared from observed data and data generated by the models, are shown in figures 21 through 25, respectively. The duration curves show the flow variability and distribution in time throughout the range of flow experienced at the sites during the simulated period. Observation of the duration curves shows that the variations in simulated flow generally reproduce the variations in observed flow closely for all sites. The differences between the curves are small throughout the range of flow at most sites.

Table 4.--Summary of annual precipitation, observed and simulated annual runoff, and associated error for the period of simulated record

Water year	Annual precipitation (inches)	Runoff, in inches		Error	Error, in percentage
		observed	simulated		
<u>Horsecamp Run at Harman, W. Va.</u>					
*1972	48.24	26.71	32.14	+5.43	20
1973	40.11	25.20	23.47	-1.73	7
1974	40.02	27.24	25.84	-1.40	5
1975	39.07	25.47	22.31	-3.16	12
1976	28.31	12.55	11.53	-1.02	8
Mean	39.15	23.43	23.06	-0.37	2
<u>Gilmer Run near Marlinton, W. Va.</u>					
1971	43.53	34.95	28.66	-6.29	14
*1972	50.57	34.81	35.51	+ .70	2
1973	60.74	40.29	43.27	+2.98	5
1974	47.28	28.87	30.23	+1.36	3
Mean	50.53	34.73	34.42	- .31	<1
<u>Collison Creek near Nallen, W. Va.</u>					
*1972	50.55	26.97	26.61	- .36	1
1973	52.41	27.55	25.97	-1.58	6
1974	58.51	27.39	32.23	+4.84	18
1975	54.71	33.36	28.71	-4.66	14
1976	45.85	15.35	19.59	+4.24	28
Mean	52.76	26.13	26.62	+ .49	2
<u>Drawdy Creek near Peytona, W. Va.</u>					
*1970	39.43	15.87	14.88	- .99	6
1971	47.47	16.93	17.27	+ .34	2
1972	36.15	18.86	16.00	-2.86	15
1973	49.99	21.44	21.67	+ .23	1
1974	61.99	24.19	27.50	+3.31	14
Mean	47.01	19.46	19.46	+ .01	<1
<u>Briar Creek at Fanrock, W. Va.</u>					
1971	36.81	16.93	17.07	+ .14	1
*1972	53.73	28.99	30.40	+1.41	5
1973	43.87	23.27	24.41	+1.14	5
Mean	45.60	23.06	23.96	+ .90	4

* Calibration year.

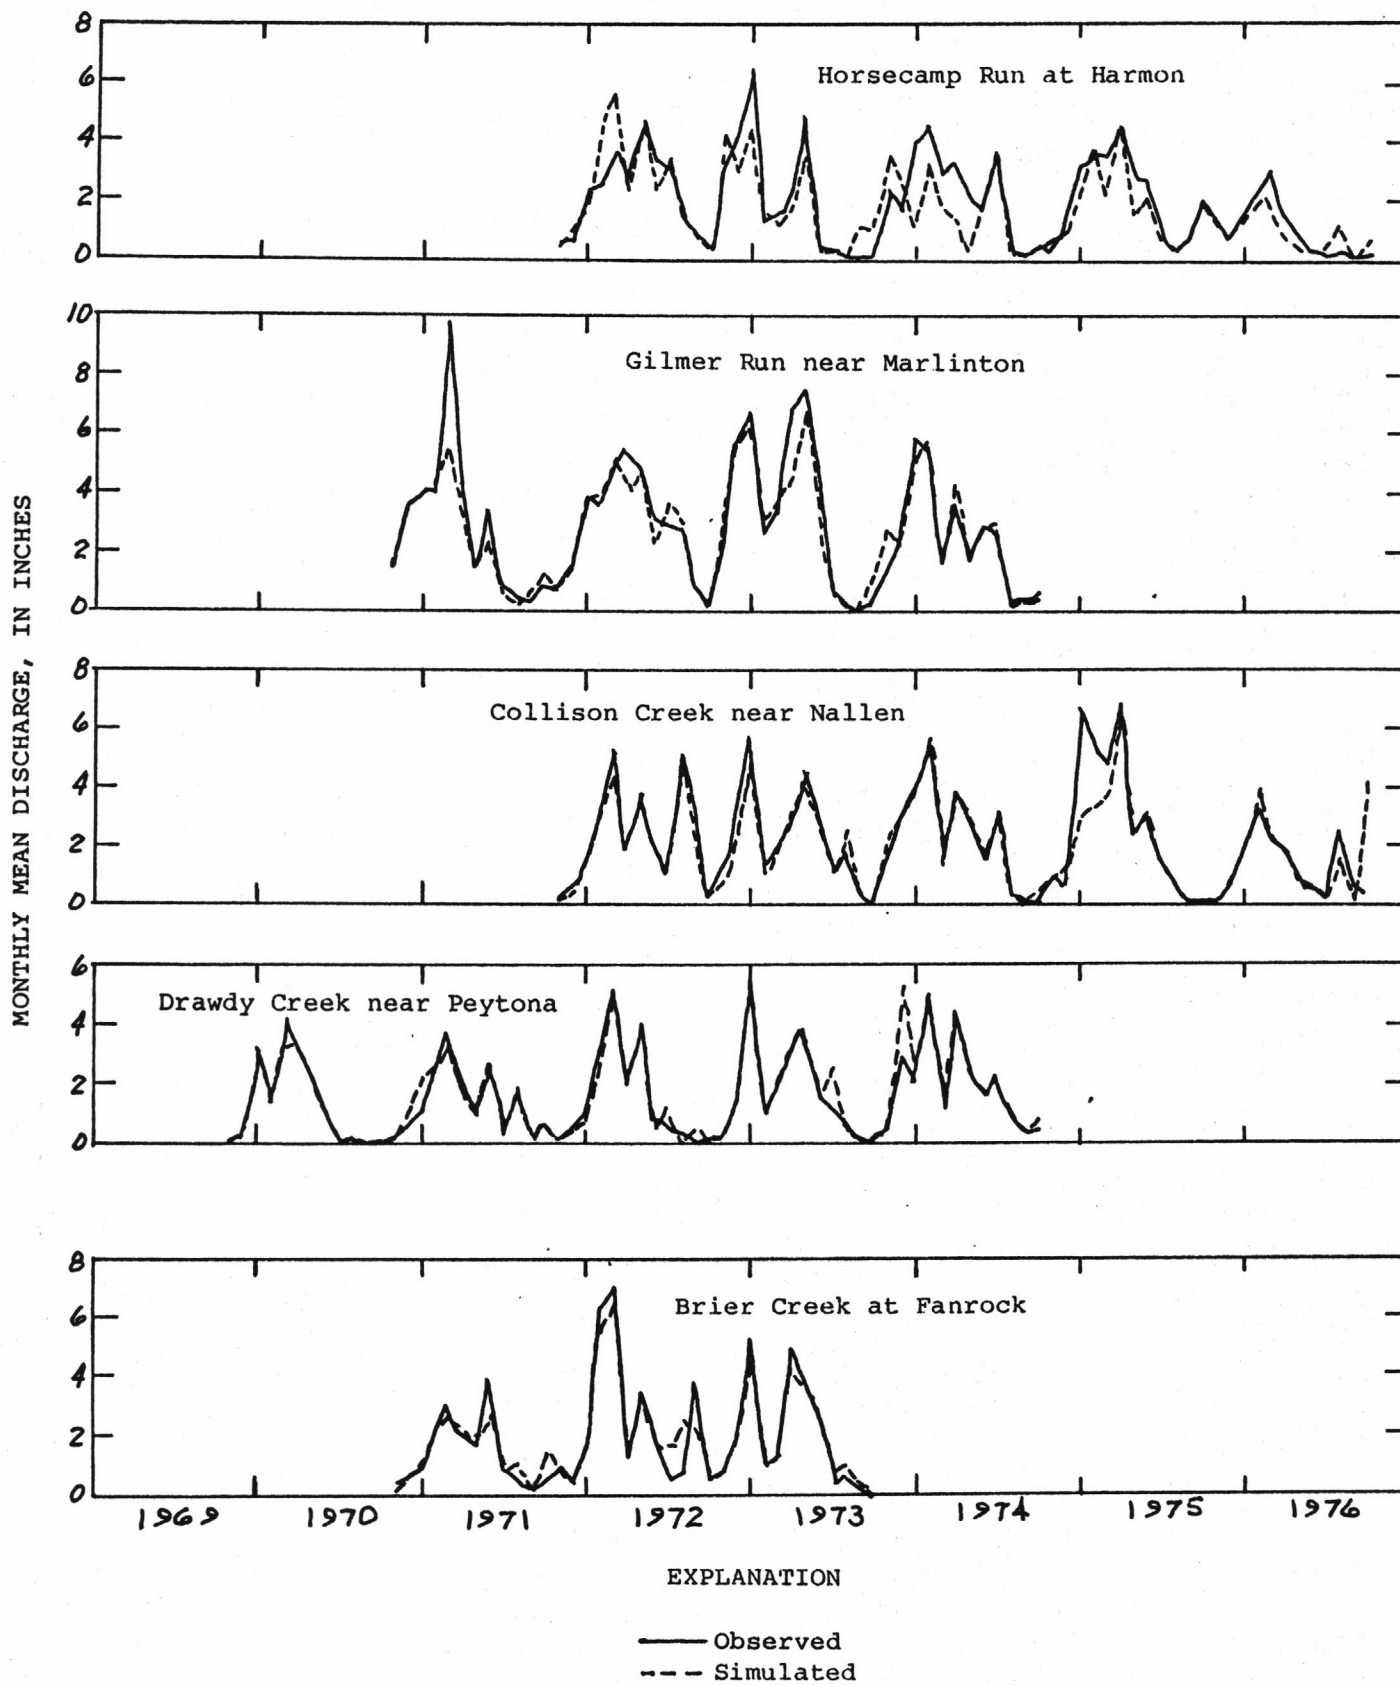


Figure 20.--Observed and simulated monthly mean discharge at study basins, 1969-76.

Table 5.—Summary of observed and simulated monthly and annual runoff during calibration and verification period of record for study basins
[Data given in inches, except where indicated]

Simulated basins

Month	1972/				1973-1974/			
	Observed	Simu-	Error, in	Percent	Observed	Simu-	Error, in	Percent
		Runoff				Runoff		
Oct	0.56	0.66	+0.10	18	1.01	2.67	+1.66	166
Nov	0.64	1.02	+0.38	59	1.93	1.90	-0.03	2
Dec	2.38	1.92	-0.46	19	3.76	2.82	-0.94	25
Jan	3.68	4.96	+1.28	35	7.11	5.58	-1.53	21
Feb	3.66	5.56	+1.90	52	2.72	2.51	-0.21	8
Mar	3.19	5.15	+1.96	61	2.94	2.30	-0.64	22
Apr	4.69	5.25	+0.56	12	2.58	1.91	-0.67	26
May	3.35	2.44	-0.91	27	1.23	1.17	-0.06	5
June	3.16	2.98	-0.18	6	1.38	1.06	-0.32	24
July	1.46	1.25	-0.21	15	0.28	0.25	-0.03	9
Aug	0.77	0.77	0.00	0	0.27	0.48	+0.21	78
Sept	0.27	0.20	-0.07	26	0.71	0.78	+0.07	10
Total	28.71	32.14	+3.43	20	22.64	20.80	-1.84	8

Simulated Run near Marlinton

Month	1972/				1973-1974/			
	Observed	Simu-	Error, in	Percent	Observed	Simu-	Error, in	Percent
		Runoff				Runoff		
Oct	0.68	0.71	+0.03	4	1.68	2.08	+0.40	71
Nov	1.16	1.50	+0.34	29	3.91	4.32	+0.41	10
Dec	3.83	4.29	+0.46	12	5.54	5.28	-0.26	5
Jan	3.68	4.96	+1.28	35	7.11	5.58	-1.53	21
Feb	3.66	5.56	+1.90	52	2.72	2.51	-0.21	8
Mar	3.19	5.15	+1.96	61	2.94	2.30	-0.64	22
Apr	4.69	5.25	+0.56	12	2.58	1.91	-0.67	26
May	3.07	2.20	-0.87	28	3.50	2.84	-0.66	19
June	2.95	2.18	-0.77	26	1.62	1.07	-0.55	34
July	2.88	2.22	-0.66	23	0.41	0.20	-0.21	51
Aug	0.86	0.75	-0.11	13	0.28	0.25	-0.03	9
Sept	0.19	0.20	+0.01	5	0.27	0.48	+0.21	78
Total	34.81	35.51	+0.70	2	34.71	34.04	-0.67	2

Simulated Run near Mellen

Month	1972/				1973-1974/			
	Observed	Simu-	Error, in	Percent	Observed	Simu-	Error, in	Percent
		Runoff				Runoff		
Oct	0.23	0.15	-0.08	35	0.28	0.30	+0.02	7
Nov	0.47	0.22	-0.25	53	2.28	1.54	-0.74	33
Dec	1.32	1.57	+0.25	19	4.50	3.55	-0.95	21
Jan	3.22	3.82	+0.60	19	3.93	3.92	-0.01	0
Feb	5.38	4.49	-0.89	17	2.69	2.67	-0.02	1
Mar	3.13	2.43	-0.70	23	2.68	2.67	-0.01	0
Apr	3.71	2.43	-1.28	35	2.25	2.92	+0.67	30
May	1.91	1.78	-0.13	7	1.94	2.27	+0.33	17
June	1.86	1.21	-0.65	33	1.42	1.59	+0.17	12
July	5.19	4.21	-0.98	19	1.25	1.21	-0.04	3
Aug	2.61	2.00	-0.61	23	0.24	0.17	-0.07	29
Sept	0.22	0.26	+0.04	18	0.21	1.23	+1.02	493
Total	26.97	26.62	-0.35	1	25.95	26.64	+0.69	3

Simulated basins

Simulated Run near Portona

Month	1972/				1973-1974/			
	Observed	Simu-	Error, in	Percent	Observed	Simu-	Error, in	Percent
		Runoff				Runoff		
Oct	0.98	0.06	-0.92	93	0.38	0.28	-0.10	26
Nov	0.23	0.40	+0.17	74	1.38	2.06	+0.68	49
Dec	3.06	3.27	+0.21	7	2.59	2.63	+0.04	2
Jan	4.54	3.15	-1.39	31	1.50	2.75	+1.25	83
Feb	3.24	3.10	-0.14	4	2.13	2.75	+0.62	31
Mar	3.27	2.00	-1.27	39	2.97	2.75	-0.22	7
Apr	2.27	2.00	-0.27	12	2.09	2.00	-0.09	3
May	0.74	0.91	+0.17	23	1.61	1.58	-0.03	2
June	0.68	0.19	-0.49	71	1.33	1.30	-0.03	2
July	0.11	0.11	0.00	0	0.28	0.25	-0.03	9
Aug	0.05	0.11	+0.06	120	0.05	0.05	0.00	0
Sept	0.09	0.08	-0.01	55	0.18	0.18	0.00	0
Total	19.87	14.88	-4.99	25	20.38	20.64	+0.26	1

Simulated Run at Farnock

Month	1972/				1973-1974/			
	Observed	Simu-	Error, in	Percent	Observed	Simu-	Error, in	Percent
		Runoff				Runoff		
Oct	0.95	2.18	+1.23	129	0.67	0.79	+0.12	18
Nov	0.50	0.49	-0.01	2	1.47	1.42	-0.05	3
Dec	1.67	2.41	+0.74	44	3.07	3.00	-0.07	2
Jan	6.33	5.73	-0.60	9	1.37	1.91	+0.54	43
Feb	7.14	6.86	-0.28	4	2.15	3.91	+1.76	82
Mar	3.27	3.62	+0.35	11	2.45	3.57	+1.12	46
Apr	1.25	1.72	+0.47	38	2.83	2.03	-0.80	28
May	1.81	1.69	-0.12	7	3.24	2.53	-0.71	22
June	0.59	0.89	+0.30	51	0.60	0.51	-0.09	15
July	0.78	1.02	+0.24	31	0.28	0.25	-0.03	9
Aug	0.05	0.05	0.00	0	0.18	0.18	0.00	0
Sept	0.51	0.76	+0.25	53	0.10	1.01	+0.91	217
Total	28.99	30.40	+1.41	5	20.10	20.77	+0.67	3

1/ Calibration period
2/ Verification period

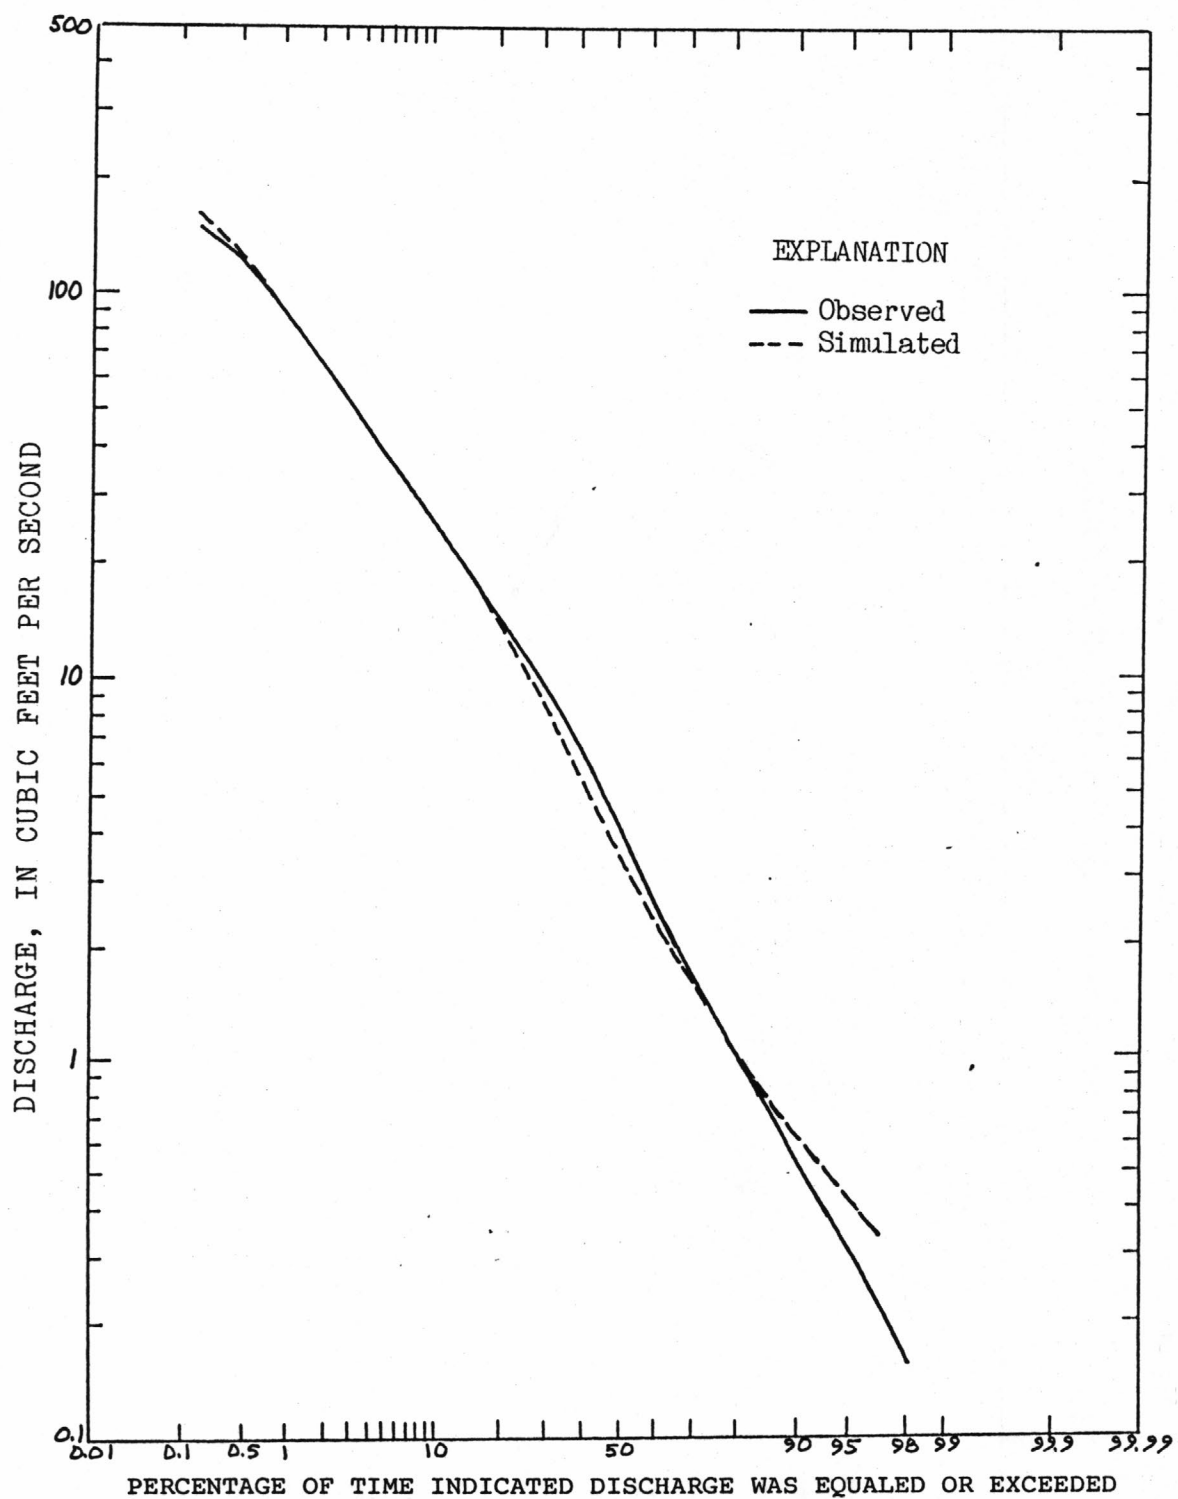


Figure 21.--Duration curves of daily mean discharge at Horsecamp Run at Harmon, 1972-76.

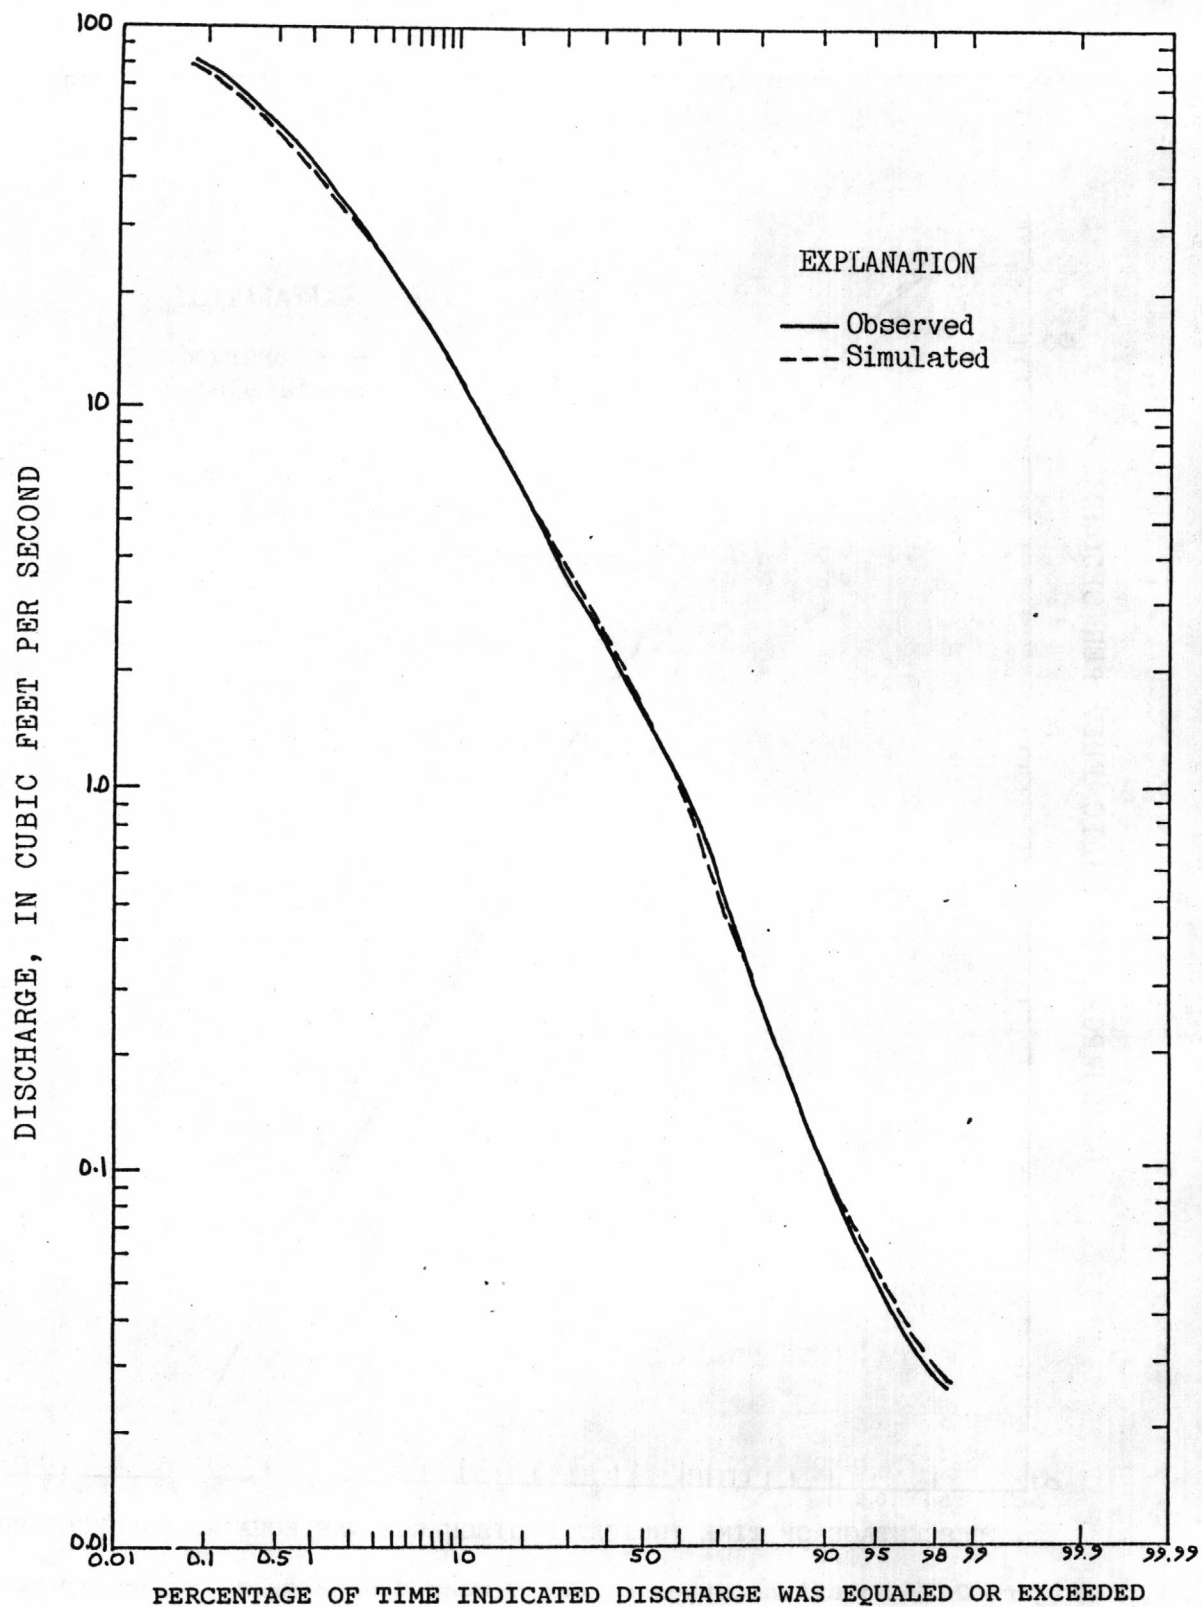


Figure 22.--Duration curves of daily mean discharge at Gilmer Run near Marlinton, 1971-74.

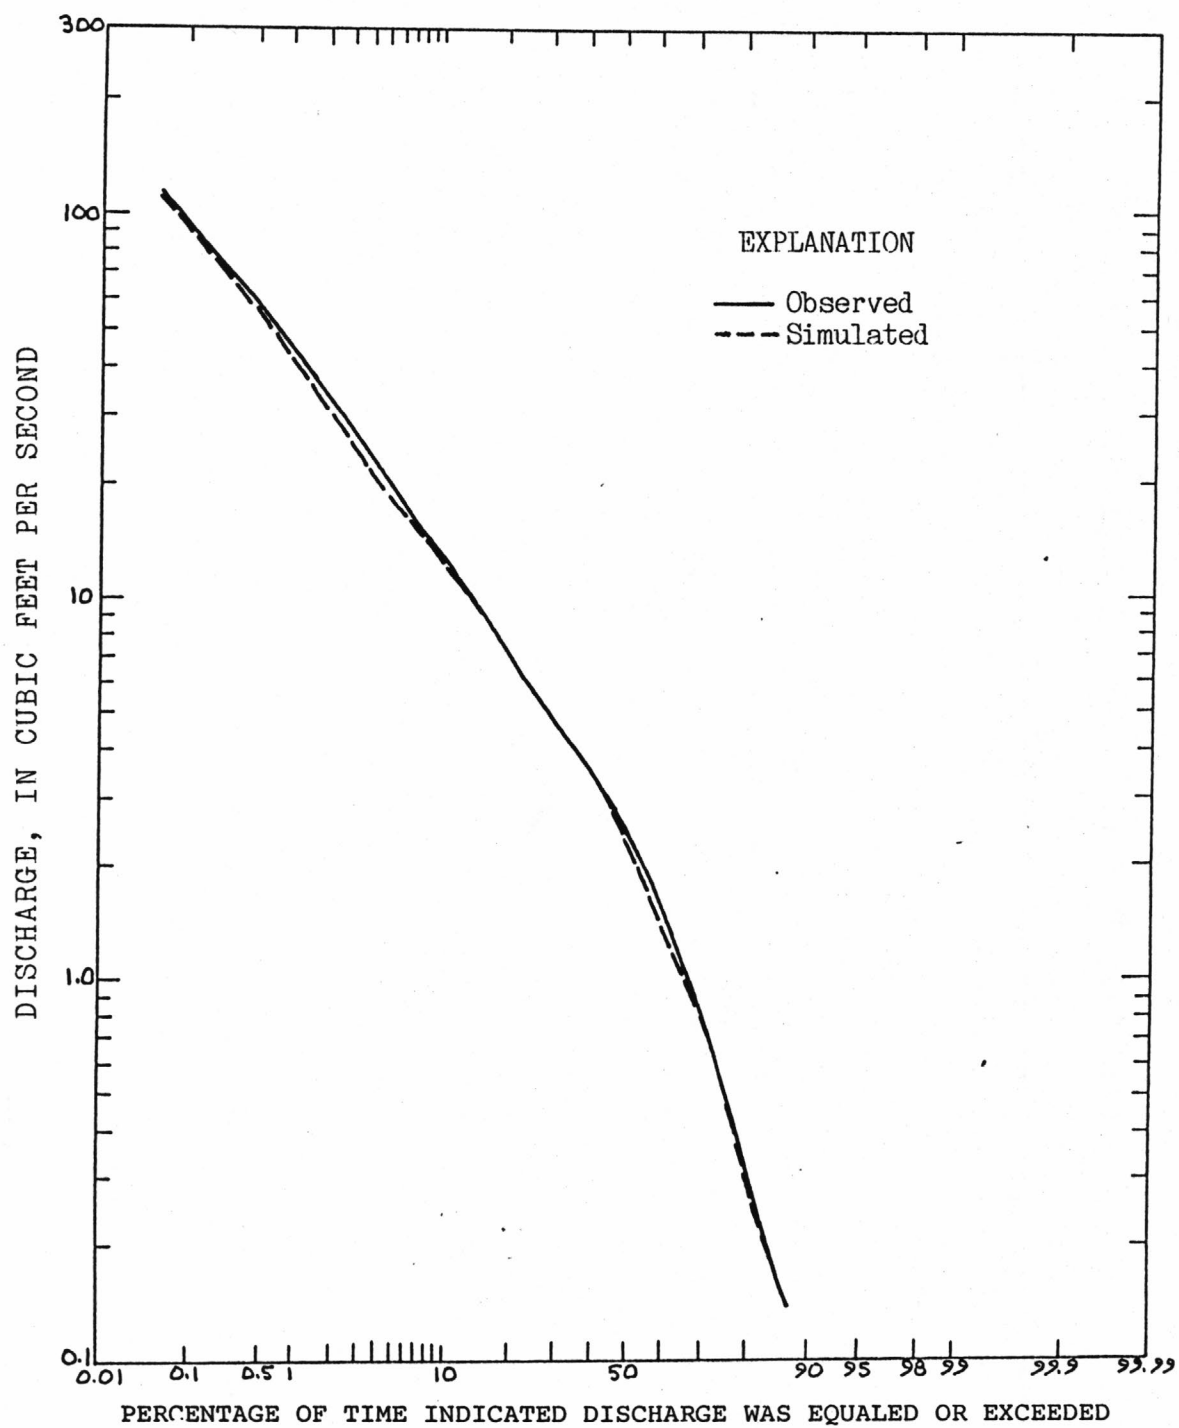


Figure 23.--Duration curves of daily mean discharge at Collison Creek near Nallen, 1972-76.

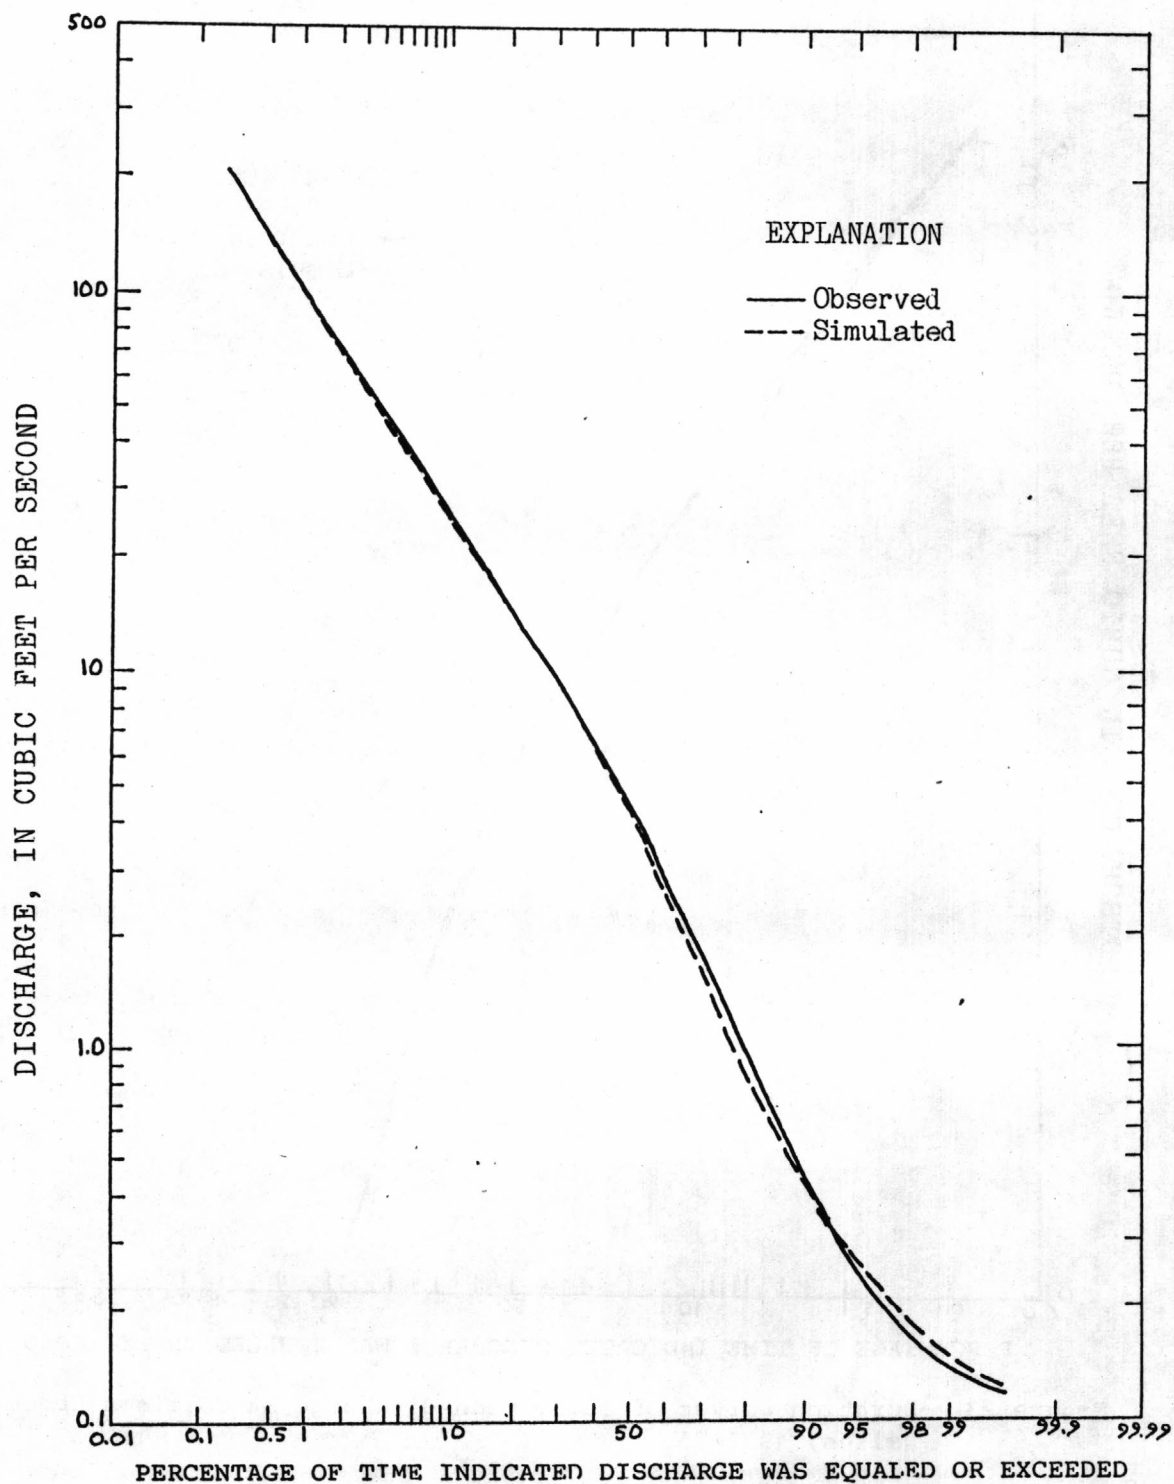


Figure 24.--Duration curves of daily mean discharge at Drawdy Creek near Peytona, 1970-74.

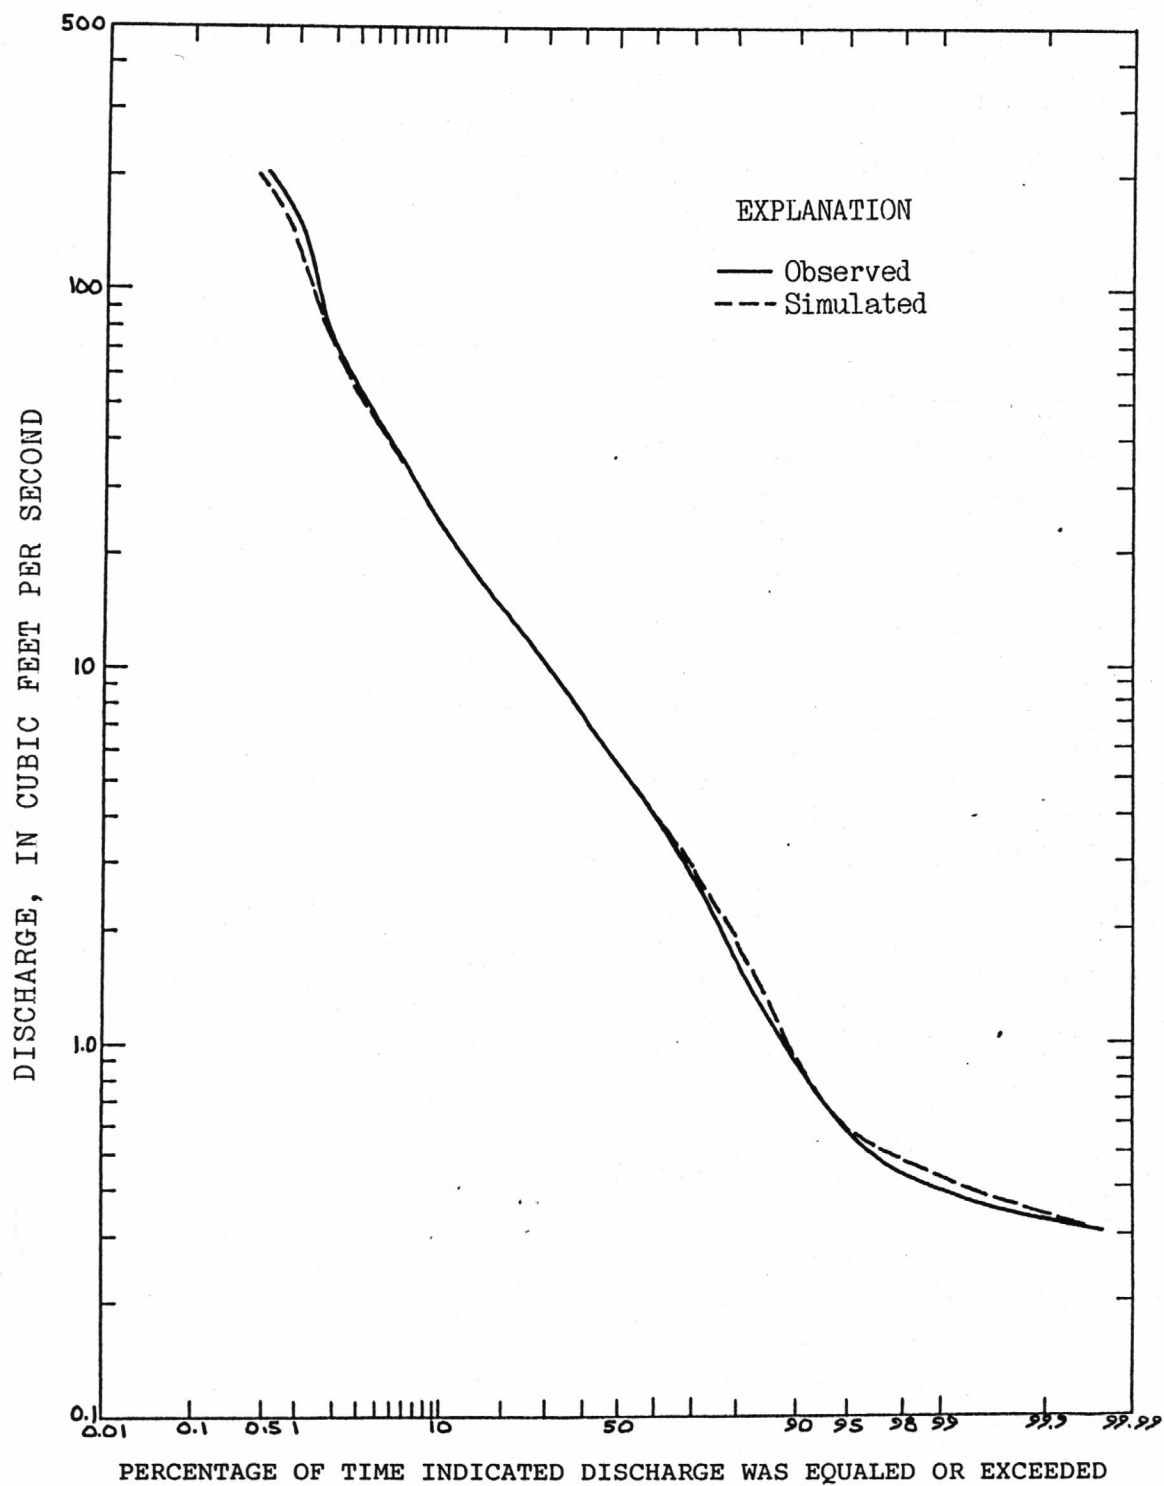


Figure 25.--Duration curves of daily mean discharge at Brier Creek at Fanrock, 1971-73.

The agreement between simulated and observed discharges during the calibration and verification periods (figs. 15 to 25 and tables 4 and 5) indicates that the model reasonably simulated observed streamflow conditions in the basins for the study period. Sources of modeling errors noted in earlier sections of the report include (1) inadequate definition of model parameters that affect the rate and timing of snowpack accumulation and snowmelt runoff during periods of extremely cold weather, (2) inadequate definition of model parameters that affect soil-moisture accretion and depletion rates, subsurface and ground-water storage volumes, and flow-routing coefficients, and (3) precipitation records with lost periods of record.

The major source of modeling error probably results from inadequate definition of meteorologic (precipitation, air temperature, and pan-evaporation) input data. Model simulations were based on precipitation data from only one rain gage in each basin, from air-temperature data from National Weather Service climate sites usually within 10 miles from the study basins, and from pan-evaporation data from a recording site generally more than .50 miles from most of the basins.

It should be noted that the periods of record used for calibration and verification simulations are short-term and do not reflect the extremes of climatic conditions needed for long-term extension of streamflow records or determination of streamflow characteristics.

The derived model parameters are not unique; at best, they represent average values for the HRU's (unmined and mined) in the basins and are an index to, rather than a measure of, the physical system. These approximations introduce a source of error that may limit the accuracy of predictions obtained by the models. However, on the basis of observed and simulated discharge comparisons and the given constraints on input data, the calibrated models may be of sufficient adequacy to permit a general examination of the hydrologic system of the study basins. Model estimates must be qualified as being the best initial estimates based on current assumptions, input data constraints, model imperfections, and achieved levels of accuracy. Better definition and longer-term records of meteorologic and hydrologic data within the study areas, in conjunction with additional refinement of specific model parameters, should improve accuracy and predictive capability.

Water Budget

In addition to simulating daily mean streamflow, the calibrated model simulates water budgets that may be used to examine the hydrologic system of the basins. Block diagrams of the water budgets for the study basins during the 1972-73 water years are shown in figure 26. The water-budget analyses are based on the assumptions that model-parameter values given in table A-3 of Appendix A are appropriate and that no changes in basin ground-water or surface-water storage occurred in the unmined basins. Because the coal beds and rocks generally dip away from parts of the mined basins, it was assumed that underground transfer of water from Drawdy and Brier Creek basins to adjacent basins mainly occurred through underground mines that extend beyond the basin boundaries. Although some of the contour strip mines in the basins extended beyond the basin boundaries, it was assumed that surface runoff diverted along strip terraces into adjacent basins was negligible.

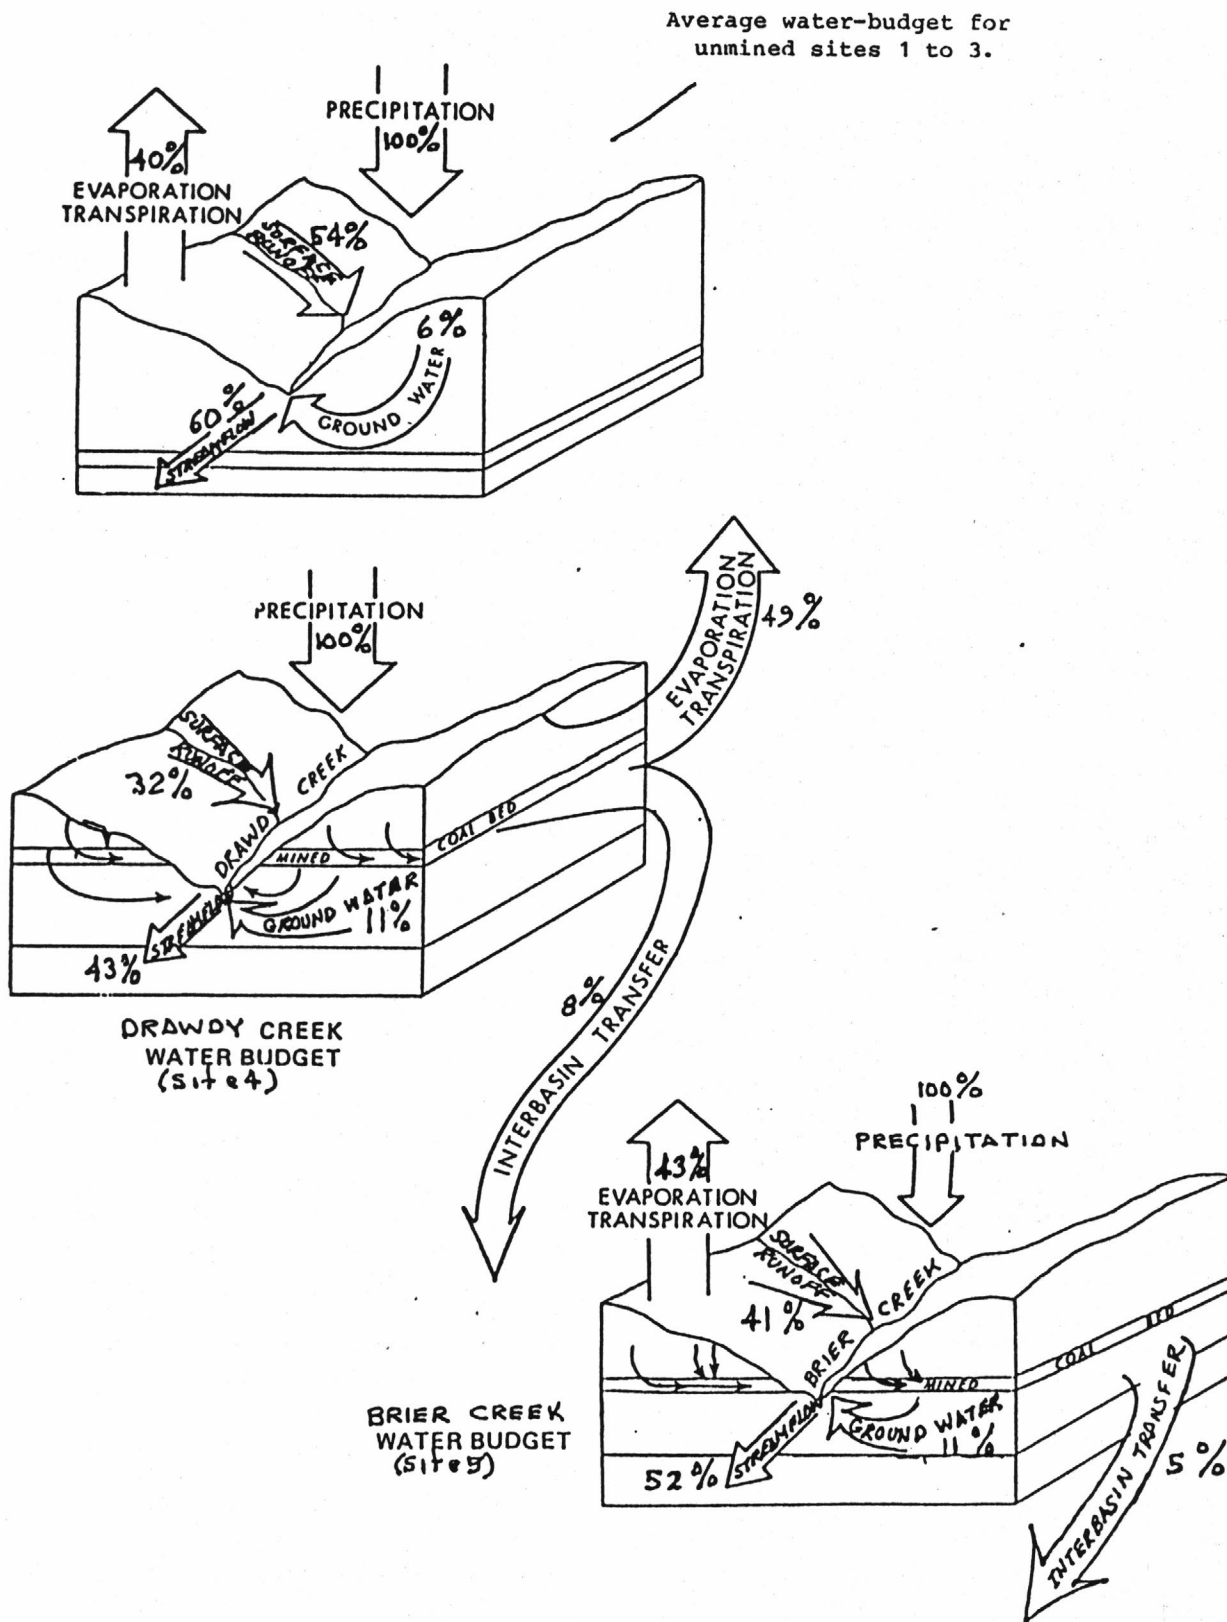


Figure 26.--Approximate percentages of simulated water-budget components for mined and unmined basins, October 1, 1971 to September 30, 1973. Modified from Hobba, 1981.

The simulated water budgets in figure 26 show that the total annual runoff for the unmined sites--Horsecamp Run, Gilmer Run, and Collison Creek--averaged 60 percent (31.16 inches) of the average annual precipitation at the sites during the period of simulation. Annual evapotranspiration losses averaged 40 percent (20.95 inches) of precipitation. Of the total annual runoff, approximately 91 percent (28.30 inches) was surface runoff (surface runoff plus subsurface flow) and 9 percent (2.86 inches) was ground-water discharge.

Simulations show that the total annual runoff at Brier Creek basin averaged approximately 52 percent (27.40 inches) of the average annual precipitation. Annual evapotranspiration losses averaged 43 percent (22.53 inches), and interbasin transfer of water (ground-water sink) averaged 5 percent (2.37 inches). The surface flow and ground-water discharge components of total streamflow are substantially different from those of the unmined basins. Of the total annual runoff in Brier Creek basin, 79 percent (21.59 inches) was surface runoff and 21 percent (5.81 inches) was ground-water discharge. The large base-flow component of total annual runoff in Brier Creek basin probably results from significant rock permeability and water stored in the rocks and in underground mines.

Of the basins studied, Drawdy Creek had the lowest average total annual runoff--43 percent (18.84 inches) of precipitation. Annual evapotranspiration losses averaged 49 percent (21.38 inches) of average annual precipitation. Of the total annual runoff, 74 percent (13.90 inches) was surface runoff and 26 percent (4.95 inches) was ground-water discharge. Simulations indicate that interbasin transfer of water from Drawdy Creek basin averaged 8 percent (3.35 inches) of the average annual precipitation. The low total annual runoff in Drawdy Creek basin probably results primarily from increased recharge of precipitation and runoff losses to ground-water in the rocks and in underground mines. Most of the increase in ground-water storage is assumed to be lost to a ground-water sink--interbasin transfer of ground water by natural gravity drainage and (or) mine pumpage from underground mines to adjacent basins.

A more detailed water budget for the entire period of simulated record at all sites is given in table 6. Inflow consisted of observed precipitation and outflow consisted of evapotranspiration, surface runoff, subsurface flow, ground-water discharge, and interbasin transfer of water (ground-water sink). The change in storage in the basins consisted of changes in soil moisture and in the subsurface and ground-water reservoirs between the beginning and end of each year. The errors in the annual water budget range from less than 1 to about 10 percent. The larger errors result from adjustments applied to observed winter precipitation data to reflect the influence of elevation on precipitation in the basin.

A comparison of simulated water-budget items in table 6 indicates that the component percentages of total annual runoff at all sites were very similar to those shown in figure 26. Total annual runoff at the unmined sites ranged from 11.53 inches in Horsecamp Run in 1976 to as much as 43.28 inches at Gilmer Run in 1973. Total annual runoff at the mined sites ranged from 14.88 inches at Drawdy Creek in 1970 to as much as 30.39 inches at Brier Creek in 1972.

Table 6.--Summary of water budget simulated for study basins

[Data in inches, except where indicated]

Water year	Inflow		Outflow					Change in storage				Inflow - (outflow + change in storage)	Error, in percentage
	Observed precipitation	Evapo- trans- piration	Overland runoff		Ground- water runoff	Ground- water sink	Sum	Change in soil moisture	Change in sub- surface reservoir	Change in ground- water reservoir	Sum		
			Surface	Subsurface									
<u>Horsecamp Run at Harman</u>													
1972	48.24	20.11	1.49	28.39	2.25	0	52.24	0.00	+0.86	-0.08	+0.78	-4.78	9.9
1973	40.11	18.21	3.39	18.43	1.66	0	41.69	+ .16	+ .82	+ .03	+1.01	-2.59	6.4
1974	40.02	18.03	1.58	22.32	1.93	0	43.86	- .90	- .15	- .04	-1.09	-2.75	6.8
1975	39.07	19.34	1.20	19.45	1.66	0	41.65	+ .35	+ .60	+ .06	+1.01	-3.59	9.2
1976	28.31	17.32	0.83	9.52	1.18	0	28.85	+ .58	+1.01	- .04	+1.55	-2.09	7.4
Mean	39.15	18.60	1.70	19.62	1.74	0	41.66	+ .04	+ .63	- .01	+ .66	-3.17	8.0
<u>Gilmer Run near Marlinton</u>													
1971	43.53	17.10	4.39	22.19	2.08	0	45.76	-0.33	+0.53	+0.06	+0.26	-2.49	5.7
1972	50.57	16.35	5.43	27.53	2.54	0	51.85	+ .70	+ .91	- .03	+1.58	-2.86	5.7
1973	60.74	20.50	10.25	30.34	2.68	0	63.77	+ .01	+ .37	+ .01	+ .39	-3.42	5.6
1974	47.28	19.53	7.94	20.25	2.04	0	49.76	-1.14	+ .43	- .04	- .75	-1.74	3.7
Mean	50.53	18.37	7.00	25.08	2.34	0	52.79	- .19	+ .56	.00	+ .37	-2.63	5.2
<u>Collison Creek near Nallen</u>													
1972	50.55	22.97	2.57	20.05	3.98	0	49.57	+0.74	+1.14	-0.03	+1.85	-0.87	1.7
1973	52.41	27.52	2.29	19.65	4.02	0	53.48	- .12	+0.33	- .02	+0.19	-1.26	2.4
1974	58.51	26.74	3.49	24.55	4.19	0	58.97	- .60	+ .90	+ .02	+ .32	- .78	1.3
1975	54.71	25.91	2.59	22.11	4.02	0	54.63	+ .12	+ .79	- .02	+ .89	- .81	1.5
1976	45.85	24.71	2.59	14.20	2.80	0	44.30	+ .80	+1.55	+ .16	+2.51	- .96	2.1
Mean	52.41	25.57	2.71	20.11	3.80	0	52.19	+ .19	+ .94	+ .02	+1.15	- .94	1.8
<u>Drawdy Creek near Peytona</u>													
1970	39.43	23.89	0.97	10.17	3.74	2.41	41.18	-1.18	+0.16	+0.08	-0.94	-0.81	2.0
1971	47.47	27.06	.80	11.96	4.52	2.84	47.19	+0.50	+ .21	+ .51	+1.22	- .94	2.0
1972	36.15	18.70	.71	11.02	4.27	2.94	37.64	- .63	+ .17	- .46	- .92	- .57	1.6
1973	49.99	24.06	.99	15.07	5.62	3.75	49.49	+ .50	+ .25	+ .12	+ .87	- .37	0.7
1974	61.99	30.69	4.02	17.51	5.97	4.32	62.51	- .70	+ .28	+ .24	- .18	- .34	.5
Mean	47.01	24.88	1.50	13.15	4.82	3.25	47.60	- .30	+ .21	+ .10	+ .01	- .60	1.3
<u>Brier Creek at Fanrock</u>													
1971	36.81	20.26	2.50	10.68	3.90	2.46	39.80	+0.28	+0.17	-0.78	-0.33	-2.66	7.2
1972	52.53	22.56	6.64	17.71	6.04	2.39	55.34	+ .32	+ .27	- .38	+ .21	-3.02	5.7
1973	43.87	22.49	4.01	14.82	5.58	2.34	49.24	-1.69	- .45	- .76	-2.90	-2.47	5.6
Mean	44.40	21.77	4.38	14.40	5.17	2.40	48.12	- .36	.00	- .64	-1.01	-2.72	6.1

Recharge to the ground-water system generally is equal to the ground-water-discharge component of total streamflow plus interbasin transfer of ground water to points outside the basin, plus net increased storage in soil moisture and in the subsurface and ground-water reservoirs in the basins. The simulated water budget in table 6 shows that annual recharge in the unmined basins ranged from 1.93 inches at Horsecamp Run in 1974 to as much as 5.83 inches at Collison Creek in 1972. The overall average annual recharge for all unmined basins was 3.53 inches. The range of simulated annual recharge for the unmined basins agrees closely with the range of recharge (from less than 3.00 to 5.50 inches) reported by Hopkins (1970), and Bain and Friel (1972) for nearby basins of similar physical settings and land use.

Simulated annual recharge in the mined basins ranged from 6.15 inches in 1970 to as much as 10.29 inches in Drawdy Creek in 1973 (table 6). The overall average annual recharge for the mined sites was 8.17 inches.

Approximately 2.93 inches or 36 percent of the average annual recharge for the mined basins was lost to ground-water sinks. Recharge in the mined basins is greater than that of the unmined basins. This probably results, in part, from increased permeability of surface rocks caused by surface subsidence fractures associated with collapsed underground mines. Such fractures would increase downward percolation of precipitation and would capture ground-water discharge and surface and subsurface flow to deeper rocks and (or) underground mine workings.

Simulations further showed that annual evapotranspiration losses at all sites ranged from 16.35 inches at Gilmer Run in 1972 to 30.69 inches at Drawdy Creek in 1972. Average annual evapotranspiration losses for all sites ranged from 18.60 inches at Horsecamp Run to 25.57 at Collison Creek. The range of simulated evapotranspiration losses for the study basins was similar to that (22.75 to 27.46 inches) reported by Chang and others (1976) for other nearby basins.

Hypothetical Conditions

The predictive capabilities of the calibrated models permit an evaluation of the basin hydrologic responses (streamflow, ground-water storage, and water budget) to various hypothetical mining conditions. Predictions of hydrologic responses to hypothetical mining, however, are subject to a high degree of uncertainty because of the sparsity and reliability of climate, soil, surface-water, and ground-water data in the basins. Predicted hydrologic responses produced by the models should only be viewed as rough order-of-magnitude estimates of possible hydrologic changes that could occur in response to various hypothetical mining situations.

A series of model simulations in which two hypothetical mining situations were imposed on Drawdy and Brier Creek basins were made to evaluate the possible hydrologic consequences of mining on streamflow. In the analysis, model parameters representing land-use conditions in both basins were modified to reflect (1) total unmined conditions and (2) a 100-percent increase over actual mining. All other model inputs and parameters were assumed to remain constant and, thus, were not evaluated.

Streamflow

The effects of the hypothetical mining conditions on streamflow and basin storage in Drawdy and Brier Creek basins are shown in figures 27 and 28 where duration curves of simulated streamflow were compared. The data in figures 27 and 28 show substantial differences in variability of simulated streamflow in response to the hypothetical changes imposed at the mined sites.

The flow-duration curves that represent unmined situations at both sites are steep throughout the range of flow and reflect limited contribution of water from ground-water storage, which is typical of most unmined basins. In contrast, the curves that represent mined conditions flatten at the lower end and indicate well-sustained ground-water discharge. The differences between the curves for both sites show that discharges of ground water increase directly with the increase of mining in the basins.

Results shown in figure 27 indicate that flow at the 90-percent duration point for the 70-percent mined condition in Drawdy Creek basin would increase by about 0.80 cubic feet per second or 6,000 percent more than that simulated for the unmined condition. Similarly, results shown in figure 28 indicate that flow at the 90-percent duration point for the 44-percent mined condition in Brier Creek basin would increase by about 0.58 cubic feet per second or 90 percent. The increase in low flows reflect the increase of ground-water storage in the rocks and in underground mines that would result from the increase of mining in the basins.

Further inspection of the flow-duration curves in figures 27 and 28 indicates that the flows in the medium- to high-flow range decrease in response to increased mining in the basins. Results for Drawdy Creek basin (fig. 27) indicate that the flow at the 10-percent duration point for the 70-percent mined condition would decrease by about 9 cubic feet per second or 30 percent less than that simulated for the unmined condition. For Brier Creek basin (fig. 28), the simulated flow at the 10-percent duration point for the 44-percent mined condition would decrease by about 6 cubic feet per second or 20 percent. The decrease of flows in the medium to high range reflect surface and subsurface flow losses and increased recharge to ground water.

At high flows (5-percent duration point and less) the curves in figures 27 and 28 appear to converge for all mining conditions. This indicates that runoff would become similar during high rainfall events, regardless of the magnitude of mining in the basin.

Water Budget

The water budgets simulated for actual and hypothetical mining conditions in Drawdy Creek basin from 1970 to 1974 and in Brier Creek basin from 1971 to 1973 are given in table 7. The data in table 7 show that the average total annual runoff at Drawdy Creek would decrease in response to increased mining in the basin. Results indicate that for the 35-percent mined condition (actual), average total annual runoff would be about 2.88 inches or 13 percent less than simulated for the hypothetical unmined condition; for the 70-percent mined condition, average total runoff would be about 26 percent less.

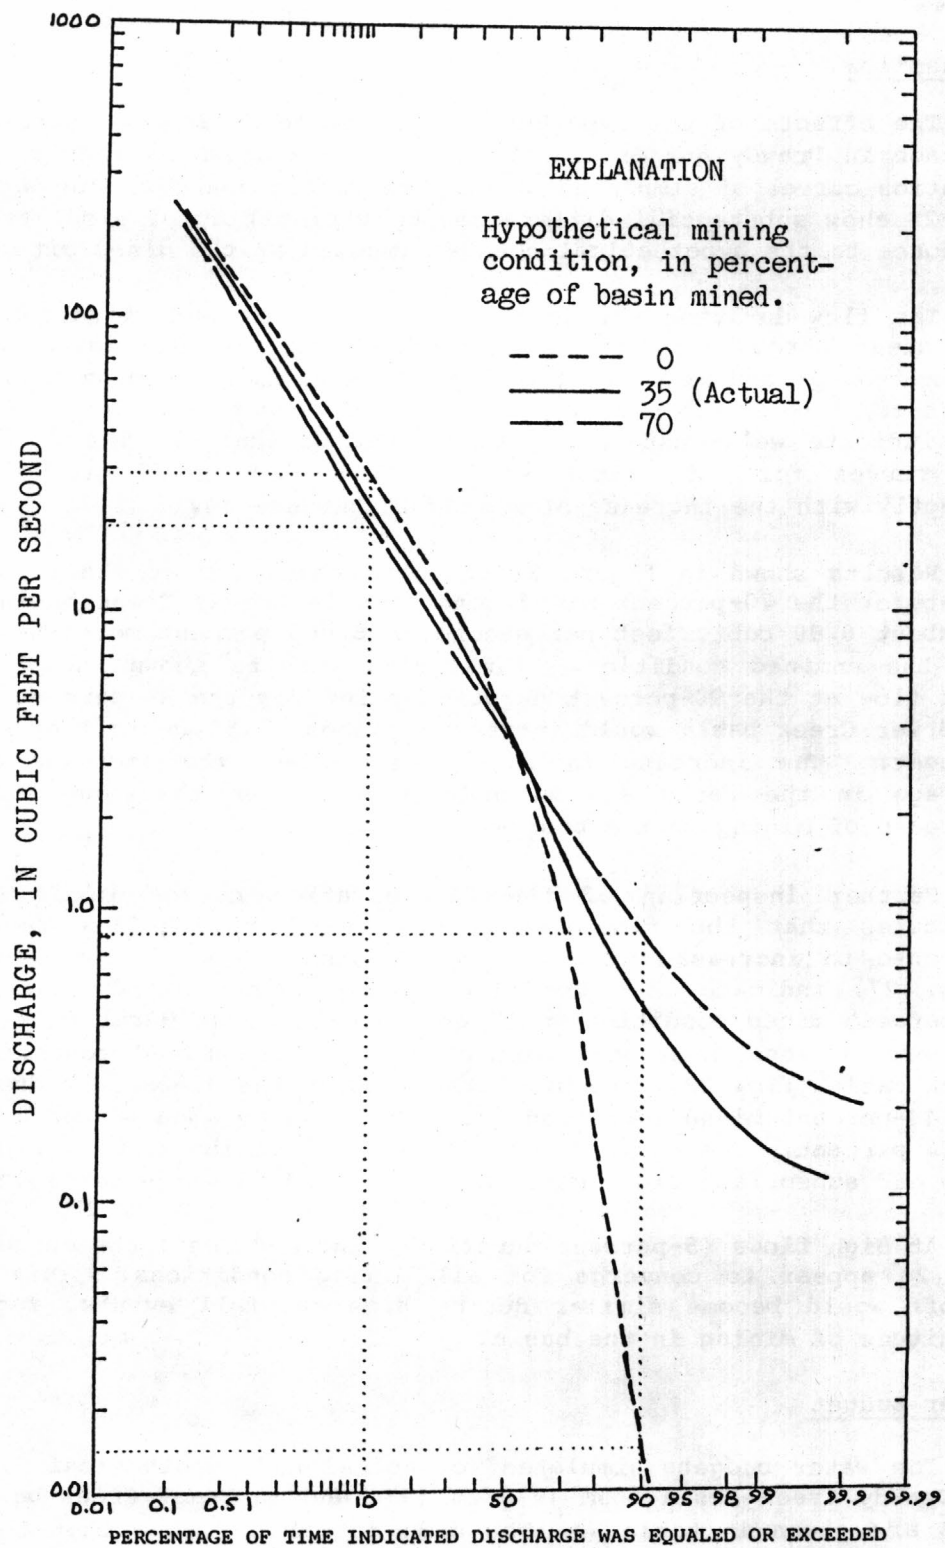


Figure 27.--Duration curves of daily mean streamflow simulated under various mining conditions at Drawdy Creek near Peytona, 1970-74.

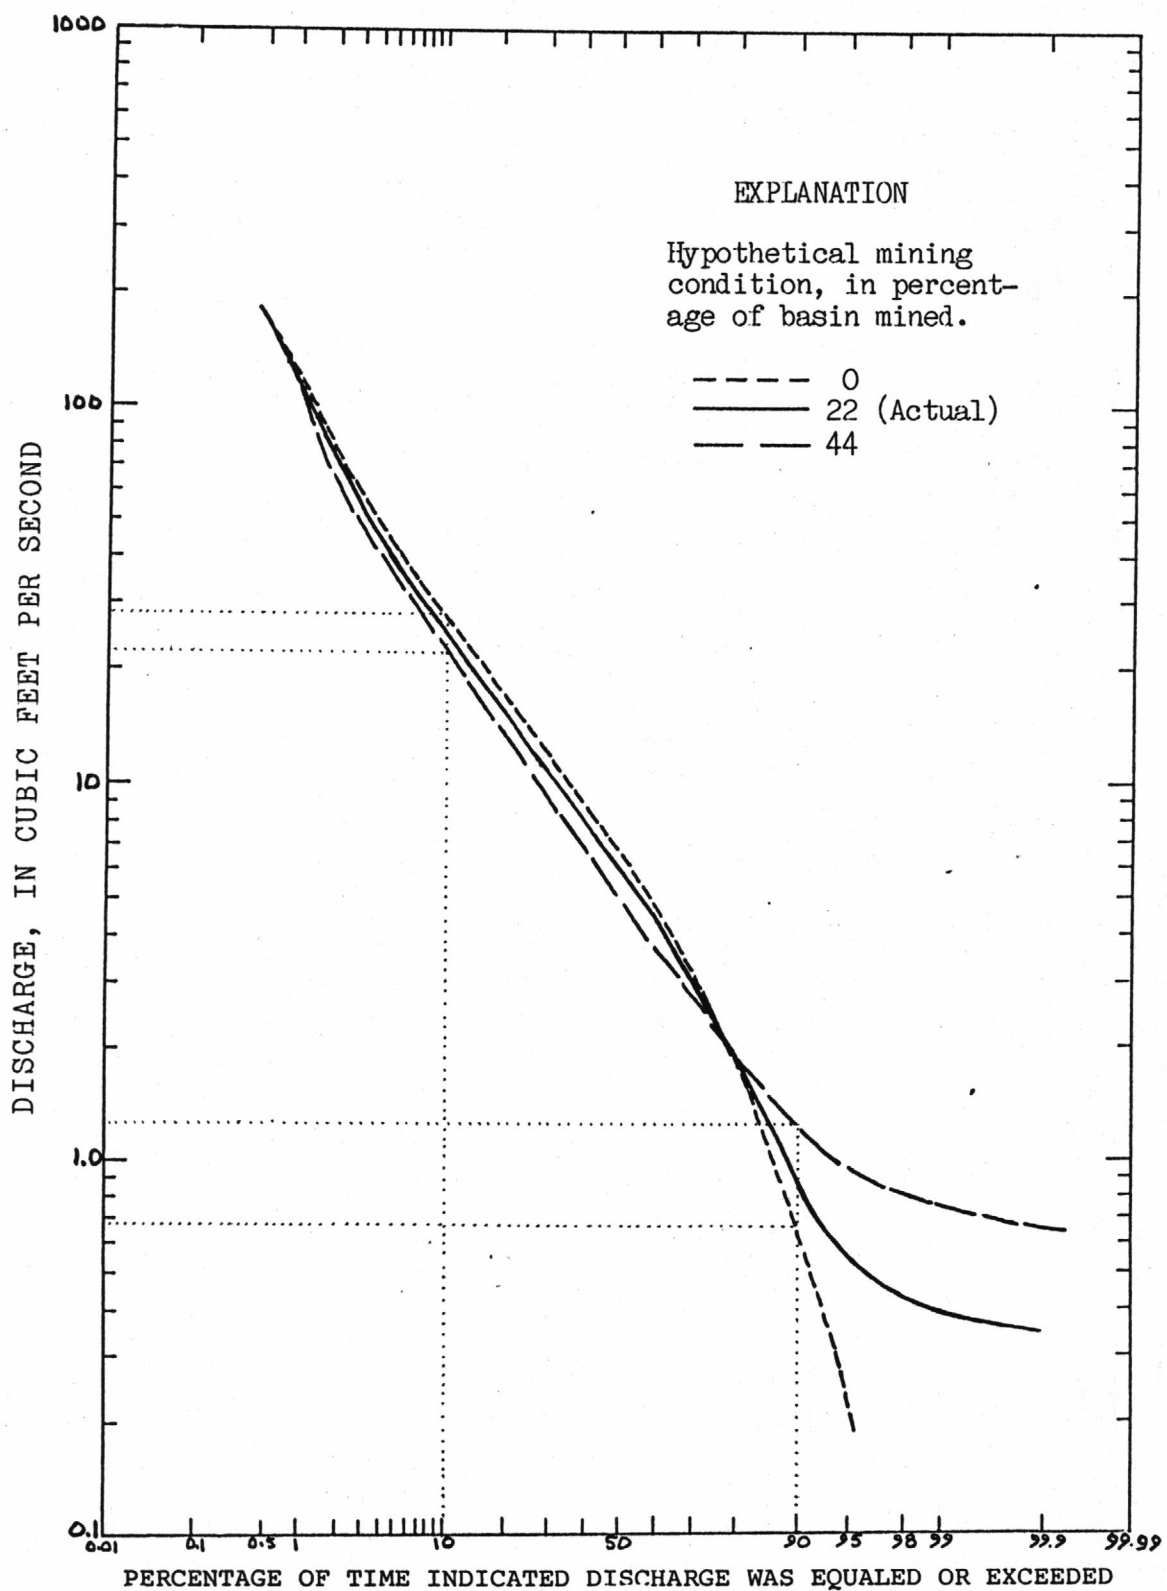


Figure 28.--Duration curves of daily mean streamflow simulated under various mining conditions at Brier Creek at Fanrock, 1971-73.

Table 7.--Simulated water budgets for Drawdy and Brier Creek basins under various mining conditions
[Data given in inches, except where indicated.]

Water year	Inflow		Outflow					Change in storage				Inflow - (outflow + change in storage)
	Observed precipitation	Evapo-transpiration	Overland runoff		Ground-water runoff	Ground-water sink	Sum	Change in soil moisture	Change in sub-surface reservoir	Change in ground-water reservoir	Sum	
			Surface	Subsurface								
<u>Drawdy Creek near Peytona</u>												
<u>Hypothetical Unmined Condition (0 percent mined)</u>												
1970	39.43	24.59	1.21	12.30	3.83	0	41.98	-1.55	+0.16	0	-1.39	-1.16
1971	47.47	27.90	0.89	14.26	4.74	0	47.79	+0.83	+ .21	+0.06	+1.10	-1.42
1972	36.15	19.23	.83	13.40	4.28	0	37.74	- .97	+ .16	- .05	-0.86	-0.73
1973	49.99	24.71	1.16	18.09	5.73	0	49.69	+ .55	+ .24	0	+ .79	- .49
1974	61.99	31.66	5.63	19.54	5.84	0	62.67	- .52	+ .25	0	- .27	- .41
Mean	47.01	25.62	1.94	15.52	4.89	0	47.97	- .33	+ .20	0	- .13	- .83
<u>Actual Mining Condition (35 percent unmined)</u>												
1970	39.43	23.89	0.97	10.17	3.74	2.41	41.18	-1.18	+0.16	+0.08	-0.94	-0.81
1971	47.47	27.06	.80	11.96	4.52	2.85	47.19	+0.50	+ .21	+ .51	+1.22	- .94
1972	36.15	18.70	.71	11.02	4.27	2.94	37.64	- .63	- .17	- .46	-1.26	- .23
1973	49.99	24.06	.99	15.07	5.62	3.75	49.49	+ .50	+ .25	+ .12	+ .87	- .37
1974	61.99	30.69	4.02	17.51	5.97	4.32	62.51	- .70	+ .28	+ .24	- .18	- .34
Mean	47.01	24.88	1.50	13.15	4.82	3.25	47.60	- .30	+ .21	+ .10	- .06	- .54
<u>Hypothetical Mining Condition (70 percent mined)</u>												
1970	39.43	23.18	0.73	8.03	3.60	4.82	40.36	-0.82	+0.17	-0.16	-0.49	-0.44
1971	47.47	26.21	.70	9.65	4.30	5.69	46.55	+ .18	+ .21	+ .97	+1.36	- .44
1972	36.15	18.16	.59	8.64	4.25	5.88	37.52	- .27	+ .17	- .86	- .96	- .41
1973	49.99	23.42	.82	12.05	5.51	7.51	49.31	+ .44	+ .25	+ .23	+ .92	- .24
1974	61.99	29.74	2.41	15.49	6.11	8.64	62.39	- .88	+ .30	+ .49	- .09	- .31
Mean	47.01	24.12	1.05	10.77	4.75	6.51	47.23	- .27	+ .22	+ .20	+ .04	- .36
<u>Brier Creek at Fanrock</u>												
<u>Hypothetical Unmined Condition (0 percent mined)</u>												
1971	36.81	21.01	2.32	11.03	4.19	0	38.55	+0.33	+0.20	+0.38	+0.91	-2.65
1972	52.53	23.46	6.38	18.46	6.96	0	55.26	+ .32	+ .25	- .14	+ .43	-3.16
1973	43.87	23.25	3.85	15.75	6.39	0	49.24	-2.10	- .44	- .23	-2.77	-2.60
Mean	44.40	22.57	4.18	15.08	5.85	0	47.68	- .48	0	0	- .48	-2.80
<u>Actual Mining Condition (22 percent mined)</u>												
1971	36.81	20.26	2.50	10.68	3.90	2.46	39.80	+0.28	+0.17	-0.78	-0.33	-2.66
1972	52.53	22.56	6.64	17.71	6.04	2.39	55.34	+ .32	+ .27	- .38	+ .21	-3.02
1973	43.87	22.49	4.01	14.82	5.58	2.34	49.24	-1.69	- .45	- .76	-2.90	-2.47
Mean	44.40	21.77	4.38	14.40	5.17	2.40	48.12	- .36	0	- .64	-1.01	-2.72
<u>Hypothetical Mining Condition (44 percent mined)</u>												
1971	36.81	19.51	2.68	10.32	3.60	4.93	41.04	+0.22	+0.15	-1.95	-1.58	-2.65
1972	52.53	21.66	6.90	16.97	5.12	4.78	55.43	+ .32	+ .29	-0.63	- .02	-2.88
1973	43.87	21.73	4.17	13.88	4.78	4.68	49.24	-1.27	- .43	-1.31	-3.01	-2.36
Mean	44.40	20.97	4.58	13.72	4.50	4.80	48.57	- .24	0	-1.30	-1.54	-2.63

Because the percentage of basin mined was increased to 70 percent, average annual recharge in Drawdy Creek basin increased by about 6.41 inches or 130 percent more than that simulated for the unmined condition. Most of the additional recharge would be diverted to a ground-water sink--interbasin transfer of water from the basin by natural drainage and (or) mine pumpage from underground mines to adjacent basins. Simulations indicate that average annual ground-water sink losses, which were assumed to be zero for the unmined condition, would be 3.25 inches for the actual mined condition and would increase to about 6.50 inches for the 70-percent mined condition.

The data for Brier Creek basin in table 7 similarly show decreased annual runoff, increased recharge to ground water, and increased losses to a ground-water sink in response to increased mining in the basin. Results indicate that, for the 44-percent mined condition, average total annual runoff would be about 2.31 inches or 9 percent less than simulated for the unmined condition; average annual recharge would increase by about 3.45 inches or 60 percent, and ground-water sink losses would average about 4.80 inches.

The effects of mining on annual runoff in Drawdy and Brier Creek basins are shown in figures 29 and 30, where the seasonal distribution of the components of average total monthly runoff are compared. Simulations indicate that surface and subsurface flow in both basins would decrease substantially during most of the year in response to increased mining in the basins. These losses would be greatest during the wet season (winter-spring) when precipitation is greatest. Results for Drawdy Creek basin (fig. 29) indicate that, for the 70-percent mined condition, average subsurface flow during March would decrease by about 0.95 inches or 39 percent less than that simulated for the unmined condition. For the 44-percent mined condition in Brier Creek basin (fig. 30), average subsurface flow during March would decrease by about 0.26 inches or 14 percent.

Ground-water discharge for Drawdy and Brier Creek basins would also decrease during the wet season but would increase during the dry season (summer-fall). Results for Drawdy Creek basin (fig. 29) indicate that for the 70-percent mined condition, average ground-water discharge during March would decrease by about 0.22 inches or 26 percent less than that simulated for the unmined condition; however, average ground-water discharge during September would increase by about 0.13 inches or 430 percent. For the 44-percent mined condition in Brier Creek basin (fig. 30), average ground-water discharge during March would decrease by about 0.28 inches or 32 percent, and average ground-water discharge during September would increase by about 0.07 inches or 100 percent. The decrease in ground-water discharge during the wet season in both basins reflects the combined effects of ground-water sink losses and the amount of recharge needed to replenish depleted ground-water storage in the rocks and in underground mines. The increase in ground-water discharge during the dry season reflects the increase of ground-water storage in the rocks and in underground mines.

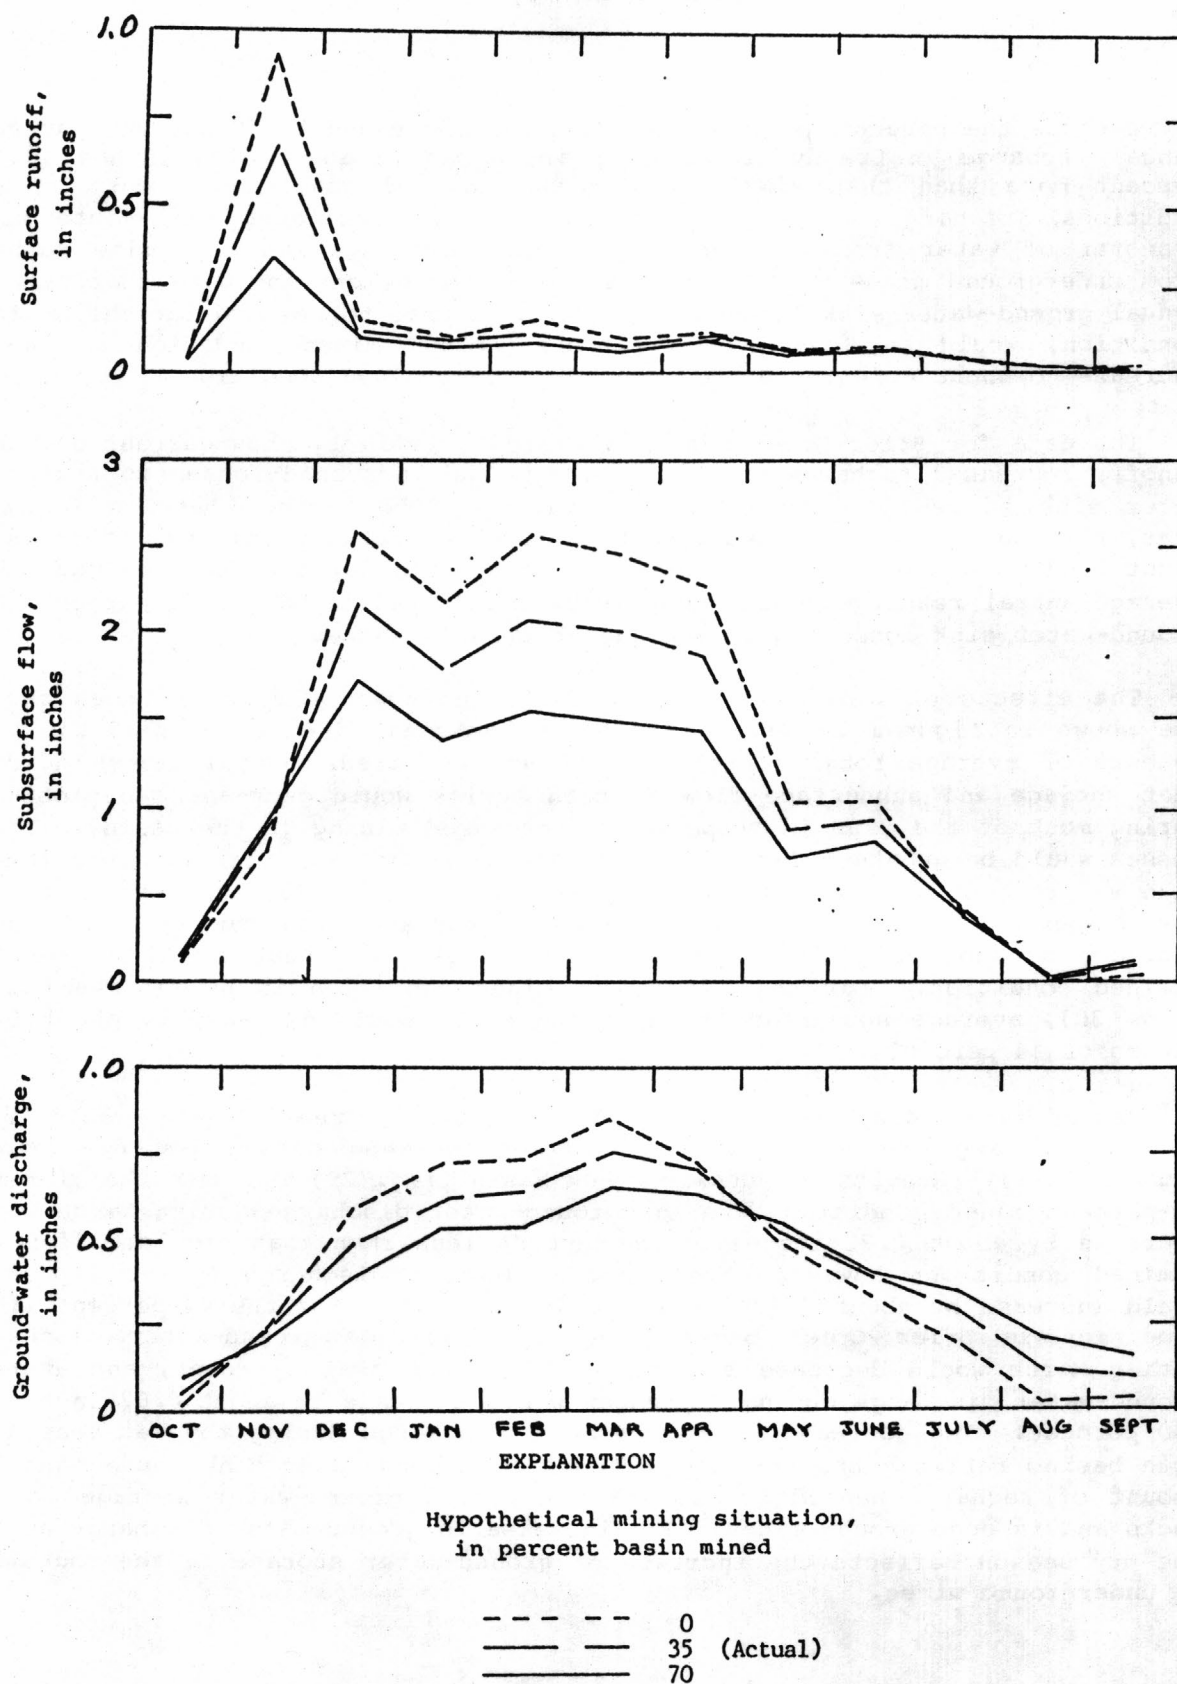


Figure 29.--Seasonal distribution of components of average total monthly runoff simulated at Drawdy Creek near Peytona, 1970-74.

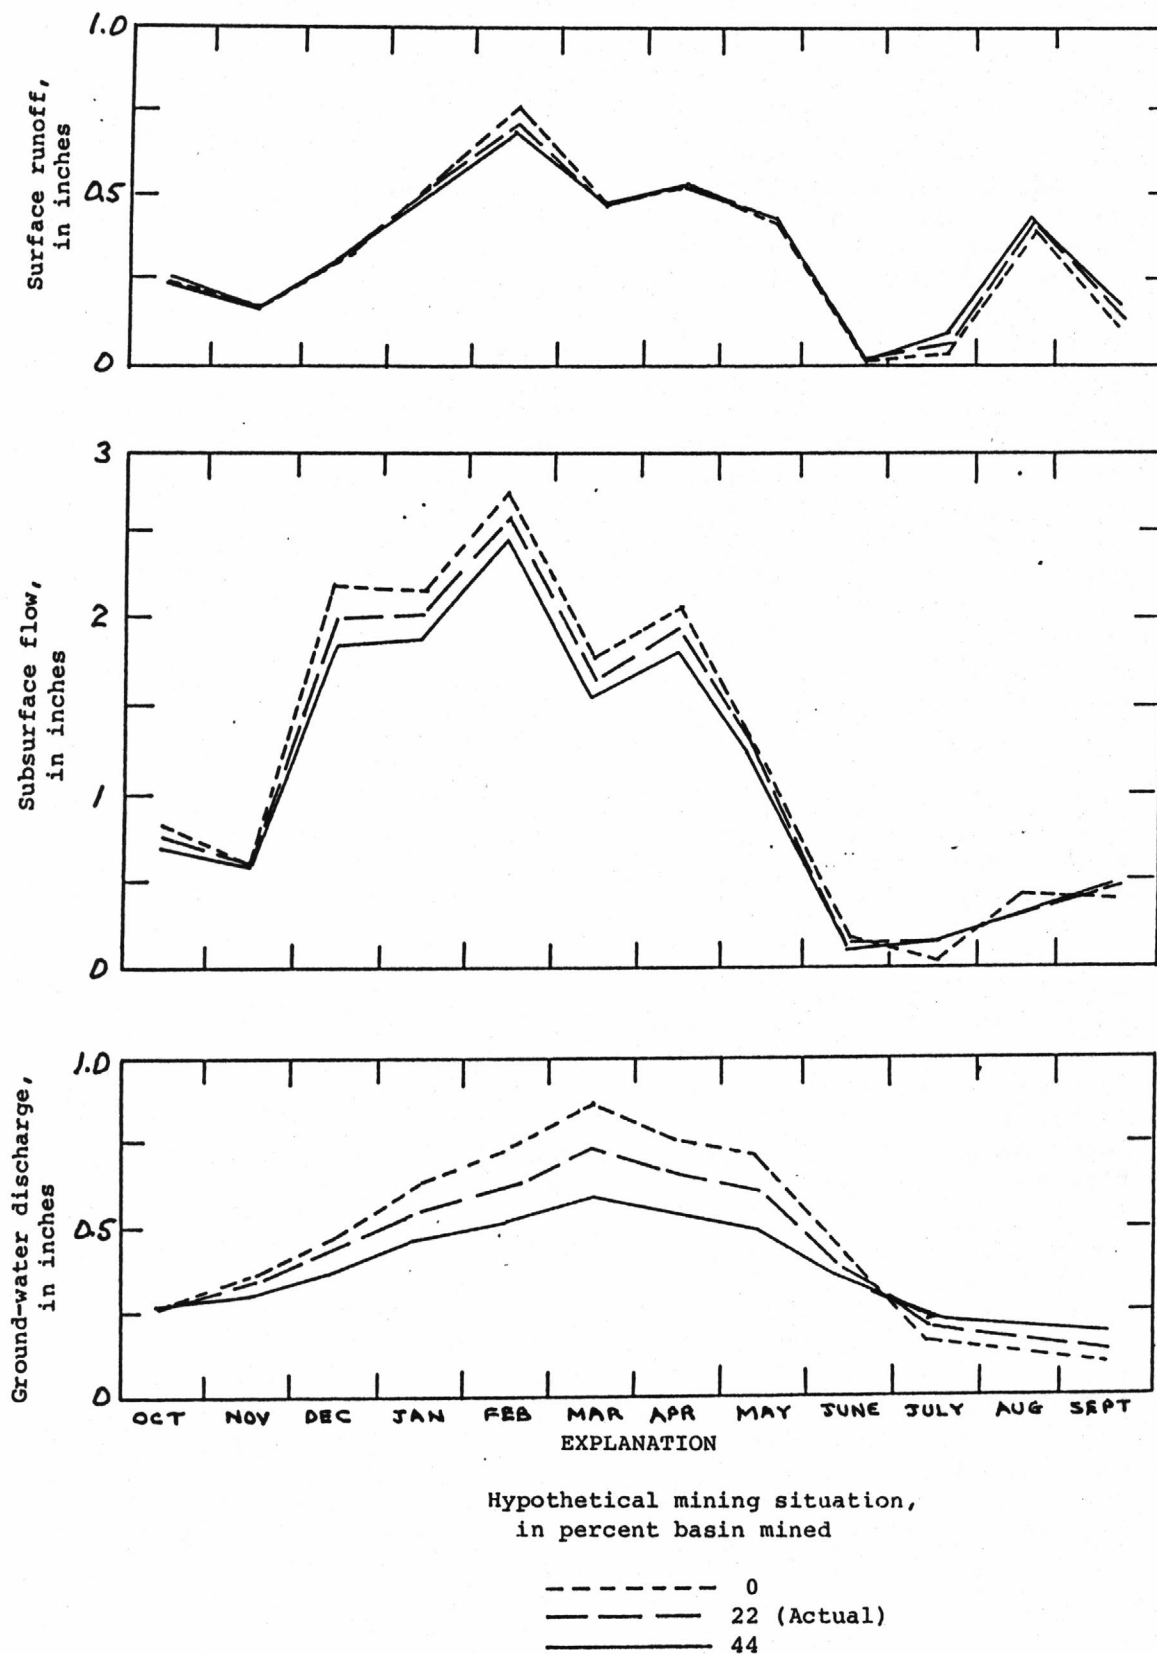


Figure 30.--Seasonal distribution of components of average total monthly runoff simulated at Brier Creek at Fanrock, 1971-73.

SUMMARY AND CONCLUSIONS

The U.S. Geological Survey Precipitation-Runoff Modeling System was calibrated and verified for simulating streamflow in five small watersheds in West Virginia. The sites, which have drainage areas that range from 1.80 to 7.75 square miles, are located in similar geologic and hydrologic settings, but have different land-use characteristics. Three of the basins--Horsecamp Run, Gilmer Run, and Collison Creek--are relatively undisturbed and are primarily forested with some grasslands and pasture. The remaining basins--Drawdy and Brier Creeks--are extensively mined for coal (surface in combination with underground) above stream-drainage level. About 2.7 square miles or 35 percent of Drawdy Creek basin has been mined, and about 1.57 square miles or 22 percent of Brier Creek basin has been mined.

Low-flow measurements at numerous synoptic sites in Drawdy and Brier Creek basins indicate that coal mining has substantially altered the hydrologic systems of these basins. The effects of mining on streamflow in the basins were identified as (1) reduced base flow in stream segments underlain by underground mines, (2) increased base flow in streams that are downdip and stratigraphically below the elevation of the mined coal beds, and (3) interbasin transfer of ground water through underground mines. These changes probably reflect increased permeability of surface rocks caused by subsidence fractures associated with collapsed underground mines in the basins. Such fractures would increase downward percolation of precipitation, surface and subsurface flow, and ground-water discharge to deeper rocks or to underground mine workings.

The models of each basin were calibrated with 1 year of precipitation and runoff records and were verified with longer-term precipitation and runoff records of 2 to 4 years duration. The adequacy of the models for simulating streamflow was based on comparisons of monthly and annual streamflow volumes, seasonal runoff distribution, minimum and maximum daily mean flows, recession rates, and duration of daily flows. Differences between observed and simulated annual flow volumes ranged from 1 to 28 percent and, for mean annual flow volumes, from less than 1 to 4 percent.

By simulating streamflow, evapotranspiration losses, and changes in basin water storage, the models quantify the hydrologic water balance for each basin during the period of record, and provide a means to predict possible changes in hydrologic response to various hypothetical coal-mining scenarios. Model simulation of the basin water budgets indicate that, during water years 1972-73, the total annual runoff for the three unmined basins averaged 60 percent of the average annual precipitation; annual evapotranspiration losses averaged 40 percent. Of the total annual runoff, approximately 91 percent was surface and subsurface flow, and 9 percent was ground-water discharge. Changes in storage in the soil zone and in the subsurface and ground-water reservoirs in the basin were negligible.

In contrast, simulations for the mined basins indicate that the total annual runoff at Drawdy Creek averaged only 43 percent of average annual precipitation--the lowest of all study basins. The low total annual runoff probably results primarily from increased recharge of precipitation and runoff losses to ground water in rocks and in underground mines. Most of the increase in ground-water storage is assumed to be lost to a ground-water sink--that is, interbasin transfer of ground water by natural drainage and (or) mine pumpage from underground mines that extend into adjacent basins. Simulations indicate that interbasin transfer of ground water from Drawdy Creek basin averaged 8 percent of average annual precipitation. Annual evapotranspiration losses in Drawdy Creek basin averaged 49 percent of precipitation. Of the total annual runoff, approximately 74 percent was surface and subsurface flow, and 26 percent was ground-water discharge.

Simulations for Brier Creek basin indicate that the total annual runoff averaged about 52 percent of the average annual precipitation, annual evapotranspiration losses averaged 43 percent, and ground-water-sink losses averaged 5 percent. Of the total annual runoff, 79 percent was surface and subsurface flow, and 21 percent was ground-water discharge.

Results of model simulations with hypothetical mining conditions in Drawdy Creek basin from 1970 through 1974 and in Brier Creek basin from 1971 through 1973 show that streamflow characteristics, the water budget and the seasonal distribution of streamflow in the basins would be significantly modified in response to an increase in mining in the basins. Simulations indicate that the effects of increasing mining from a hypothetical unmined condition to twice the actual mining condition in each of the basins would be to increase low flows and to decrease medium and moderately high flows. High flows in response to intense rainfall would become similar in both basins, regardless of the magnitude of mining in the basins.

Simulations for the hypothetical unmined condition and for twice the actual mined condition indicate that average total annual runoff in Drawdy and Brier Creek basins would decrease by about 26 and 9 percent, respectively. These losses would primarily reflect surface and subsurface flow losses and increased recharge of precipitation to ground water in the rocks and in underground mines. Average annual recharge in Drawdy and Brier Creek basins would increase by about 130 and 60 percent, respectively. The increase in recharge would significantly increase ground-water storage in the basins, which in turn would be depleted mostly by increased losses to ground-water sinks and to base flow in streams during dry periods.

Simulations further indicate that surface- and subsurface-flow losses in the mined basins would occur throughout most of the year. These losses would be greatest during winter and spring and least during summer and fall. Ground-water discharge during winter and spring also would decrease, whereas during summer and fall, ground-water discharge would increase substantially. Model analysis indicates that the average monthly base flow during September would increase by about 430 percent at Drawdy Creek and 100 percent at Brier Creek.

Results of the study may have transfer value to other geographical areas in Central Appalachia with similar topographic, geologic, and hydrologic settings, and coal-mining activities (surface in combination with underground mines).

This study may be considered a practical example of the use of watershed models for estimating the hydrologic characteristics of ungaged basins and for predicting the hydrologic effects of coal mining. Climatic data that drive the model--daily precipitation, air temperature, and pan-evaporation data--may be readily available from the literature, may be measured at climatic stations in the ungaged area or may be extrapolated from other nearby stations. Measurable basin physical characteristics such as drainage area, land and channel slopes, aspects (general compass direction of land slope), and altitude and vegetation cover may be obtained from U.S. Geological Survey 7½ minute topographic maps; soil types and characteristics may be obtained from U.S. Soil Conservation Service soils maps and surveys; land use may be obtained from U.S. Geological Survey land-use maps (scale 1:250,000), from color infra-red photography or may be obtained from other more recent aerial photographic coverage of the study area.

REFERENCES CITED

- Bains, G. L., and Friel, E. A., 1972, Water resources of the Little Kanawha River basin, West Virginia: West Virginia Geological and Economic Survey River Basin Bulletin 2, 122 p.
- Borchers, J. W., Ehlke, T. A., Mathes, M. V., and Downs, S. C., in press, The effects of coal mining on the hydrologic environment of selected stream basins in southern West Virginia: U.S. Geological Survey Water-Resources Investigations Report 84-4300.
- Chang, Mingteh, Lee, Richard, and Dickerson, W. H., 1976, Adequacy of hydrologic data for application in West Virginia: West Virginia University, Water Resources Institute Bulletin 7, 145 p.
- Dugolinsky, B. K., and Behling, M. C., compilers, 1978, 1978 West Virginia mineral producers directory: West Virginia Geological and Economic Survey Mineral Resource Series No. 1, 5th ed., 155 p.
- Ehlke, T. A., Runner, G. S., and Downs, S. C., 1982, Hydrology of Area 9, Eastern Coal Province, West Virginia: U.S. Geological Survey Water-Resources Investigations Report 81-803, 63 p.
- Fenneman, N. M., and Johnson, D. W., 1946, Physical Division of the United States: U.S. Geological Survey Map, scale 1:7,000,000 (Reprint 1964).
- Hewlett, J. D., and Nutter, W. L., 1970, The varying source area of streamflow from upland basins, paper presented at the Symposium on Interdisciplinary Aspects of Watershed Management, Montana State University, August 3-6, 1970, 18 p.
- Hobba, W. A., Jr., 1981, Effects of underground mining and mine collapse on the hydrology of selected basins in West Virginia: West Virginia Geological and Economic Survey Report of Investigations RI-33, 77 p.
- Hopkins, H. T., 1970, Occurrence of fresh water in the Lee Formation in parts of Elliott, Johnson, Lawrence, Magoffin, and Morgan Counties, eastern coalfield region, Kentucky: U.S. Geological Survey Water-Supply Paper 867, 44 p.
- Latimer, W. J., 1915, Soil survey of Boone County, West Virginia: U.S. Department of Agriculture, Bureau of Soils Report, 26 p.
- Leavesly, G. H., Jr., Lichty, R. W., Troutman, B. M., and Saindon, L. G., 1981, A precipitation-runoff modeling system for evaluating the hydrologic impacts of energy resources development, paper presented at the Western Snow Conference, 1981: 12 p.
- 1983, Precipitation-runoff modeling system: user's manual: U.S. Geological Survey Water-Resources Investigations Report 83-4238, 280 p.

REFERENCES CITED (Continued)

- National Oceanic and Atmospheric Administration, 1973, Climatography of the United States No. 81--Monthly normals of temperature, precipitation, and heating and cooling degree days 1941-70, West Virginia: Asheville, North Carolina, 9 p.
- 1977, Climatography of the United States No. 60--Climate of West Virginia: Asheville, North Carolina, 19 p.
- Porter, W. E., and Wilmoth, B. M., 1968, Ground-water hydrology of the Monongahela River basin in West Virginia: West Virginia Geological and Economic Survey River Basin Bulletin 1, 54 p.
- Rosenbrock, H. H., 1960, An automatic method for finding the greatest or least value of a function: The Computer Journal, v. 3, p. 175-184.
- Runner, G. S., 1980, Hydrologic data for runoff studies on small drainage areas: U.S. Geological Survey Open-File Report 80-560, 169 p.
- U.S. Geological Survey, 1979, Land use and land cover, 1972-73 Charleston, West Virginia; Ohio: U.S. Geological Survey Land Use Series Map L-57, Scale 1:250,000.
- 1981, Land use and land cover, 1973-76, Bluefield, West Virginia; Virginia; Kentucky: U.S. Geological Survey Land Use Series Map L-109, Scale 1:250,000.
- U.S. Soil Conservation Service, 1967, Soil Survey of Tucker County and parts of northern Randolph County, West Virginia: U.S. Department of Agriculture, Soil Conservation Service and Forest Service Report, 131 p.
- 1972, Soil Survey of Greenbrier County, West Virginia: U.S. Department of Agriculture, Soil Conservation Service Report, 188 p.
- 1975, Soil Survey of Fayette and Raleigh Counties, West Virginia: U.S. Department of Agriculture, Soil Conservation Service Report, 185 p.
- 1979, General soil map, West Virginia: Scale 1:750,000.
- Weeks, J. B., Leavesley, G. H., Jr., Welder, F. A., and Saulnier, G. J., Jr., 1974, Simulated effects of oil-shale development on the hydrology of Piceance basin, Colorado: U.S. Geological Survey Professional Paper 908, 82 p.
- Welker, D. B., and Behling, M. C., Compilers, 1982, 1982 West Virginia mineral producers directory: West Virginia Geological and Economic Survey Mineral Resources Series, No. 1, 9th ed., 147 p.
- Younos, T. M., and Shanholtz, V. O., 1980, Soil texture and hydraulic properties of postmining soil as related to the premining soil horizons: Proceedings of the Symposium on Surface Mining Hydrology, Sedimentology, and Reclamation, University of Kentucky, Lexington, Kentucky, p. 153-157.

APPENDIX A--Precipitation-Runoff Modeling System Parameters and Variables

CONTENTS

	Page
Table A-1. Monthly values for climatic variables used for study sites.....	64
A-2. Variables and associated values used in defining climatic data.....	66
A-3. Parameters for daily runoff computations defined by calibration of each site.....	67

Table A-1--Monthly values for climatic variables used for study sites

PAT, the maximum air temperature (in degrees Celsius) which, when exceeded, forces precipitation to be rain regardless of minimum temperature.

AJMX, adjustment factor for proportion of rain in a rain-snow mix event.

TLX, lapse rate for maximum daily air temperature.

TLN, lapse rate for minimum daily air temperature.

EVC, evaporation-pan coefficient.

RDM, slope of maximum-minimum air temperature-sky cover relationship.

RDC, Y-intercept of maximum-minimum air temperature-sky cover relationship.

<u>Climatic Variable</u>							
<u>Month</u>	<u>PAT</u>	<u>AJMX</u>	<u>TLX</u>	<u>TLN</u>	<u>EVC</u>	<u>RDM</u>	<u>RDC</u>
<u>Horsecamp Run at Harman, W. Va. (site 1)</u>							
Jan.	4.5	1.00	1.5	1.5	0.24	-0.10	2.15
Feb.	4.5	1.00	1.5	1.5	.24	- .10	2.15
Mar.	0	1.00	1.5	1.5	.24	- .10	2.15
April	0	1.00	1.5	1.5	.40	- .10	2.15
May	0	1.00	1.5	1.5	.59	- .07	1.64
June	0	1.00	1.5	1.5	.89	- .07	1.64
July	0	1.00	1.5	1.5	1.00	- .07	1.64
Aug.	0	1.00	1.5	1.5	1.00	- .07	1.64
Sept.	0	1.00	1.5	1.5	.89	- .07	1.64
Oct.	0	1.00	1.5	1.5	.57	- .07	1.64
Nov.	0	1.00	1.5	1.5	.34	- .10	2.15
Dec.	0	1.00	1.5	1.5	.19	- .10	2.15
<u>Gilmer Run near Marlinton, W. Va. (site 2)</u>							
Jan.	0	1.00	1.5	1.5	0.24	-0.10	2.15
Feb.	0	1.00	1.5	1.5	.24	- .10	2.15
Mar.	0	1.00	1.5	1.5	.24	- .10	2.15
Apr.	0	1.00	1.5	1.5	.40	- .10	2.15
May	0	1.00	1.5	1.5	.59	- .07	1.64
June	0	1.00	1.5	1.5	.89	- .07	1.64
July	0	1.00	1.5	1.5	1.00	- .07	1.64
Aug.	0	1.00	1.5	1.5	1.00	- .07	1.64
Sept.	0	1.00	1.5	1.5	.89	- .07	1.64
Oct.	0	1.00	1.5	1.5	.57	- .07	1.64
Nov.	0	1.00	1.5	1.5	.34	- .10	2.15
Dec.	0	1.00	1.5	1.5	.19	- .10	2.15

Table A-1.--Monthly values for climatic variables used for study site
(continued)

Month	Climatic Variable						
	PAT	AJMX	TLX	TLN	EVC	RDM	RDC
<u>Collison Creek near Nallen, W. Va. (site 3)</u>							
Jan.	0	1.00	1.5	1.5	0.24	-0.10	2.15
Feb.	0	1.00	1.5	1.5	.24	- .10	2.15
Mar.	0	1.00	1.5	1.5	.24	- .10	2.15
Apr.	0	1.00	1.5	1.5	.40	- .10	2.15
May	0	1.00	1.5	1.5	.59	- .07	1.64
June	0	1.00	1.5	1.5	1.5	- .07	1.64
July	0	1.00	1.5	1.5	2.0	- .07	1.64
Aug.	0	1.00	1.5	1.5	2.0	- .07	1.64
Sept.	0	1.00	1.5	1.5	2.0	- .07	1.64
Oct.	0	1.00	1.5	1.5	2.0	- .07	1.64
Nov.	0	1.00	1.5	1.5	1.5	- .10	2.15
Dec.	0	1.00	1.5	1.5	.19	- .10	2.15
<u>Drawdy Creek near Peytona, W. Va. (site 4)</u>							
Jan.	1.0	0.80	1.5	1.5	0.24	-0.10	2.15
Feb.	1.0	.80	1.5	1.5	.24	- .10	2.15
Mar.	0	.80	1.5	1.5	.24	- .10	2.15
Apr.	0	.80	1.5	1.5	.40	- .10	2.15
May	0	.80	1.5	1.5	.59	- .07	1.64
June	0	.80	1.5	1.5	.89	- .07	1.64
July	0	.80	1.5	1.5	2.00	- .07	1.64
Aug.	0	.80	1.5	1.5	2.00	- .07	1.64
Sept.	0	.80	1.5	1.5	2.00	- .07	1.64
Oct.	0	.80	1.5	1.5	1.00	- .07	1.64
Nov.	0	.80	1.5	1.5	1.00	- .10	2.15
Dec.	0	.80	1.5	1.5	.19	- .10	2.15
<u>Brier Creek at Fanrock, W. Va. (site 5)</u>							
Jan.	4.0	1.00	1.5	1.5	0.24	-0.10	2.15
Feb.	4.0	1.00	1.5	1.5	.24	- .10	2.15
Mar.	4.0	1.00	1.5	1.5	.24	- .10	2.15
Apr.	4.0	1.00	1.5	1.5	.40	- .10	2.15
May	0	1.00	1.5	1.5	.59	- .07	1.64
June	0	1.00	1.5	1.5	.89	- .07	1.64
July	0	1.00	1.5	1.5	1.00	- .07	1.64
Aug.	0	1.00	1.5	1.5	1.10	- .07	1.64
Sept.	0	1.00	1.5	1.5	1.20	- .07	1.64
Oct.	0	1.00	1.5	1.5	1.00	- .07	1.64
Nov.	0	1.00	1.5	1.5	1.00	- .10	2.15
Dec.	4.0	1.00	1.5	1.5	.19	- .10	2.15

Table A-2.--Variables and associated values used in defining climatic data

Variable	Description	Site 1	Site 2	Site 3	Site 4	Site 5
PARS	Predicted solar radiation correction factor for summer day with precipitation.	0.50	0.50	0.80	0.80	0.80
PARW	Predicted solar radiation correction factor winter day with precipitation.	.40	.40	.80	.80	.80
RDMX	Maximum percent of potential solar radiation.	.80	.80	.80	.80	.80
CSEL	Climate station elevation, in feet.	1,922	2,100	1,757	675	1,280
RMXA	Proportion of rain in a rain-snow precipitation event above which snow albedo is not reset (snow-pack accumulation state).	.80	.80	.80	.80	.80
RMXM	Same as RMXA but for snowpack stage.	.60	.60	.60	.60	.60
CTS	Air temperature ET coefficient.	.0106	.0106	.0106	.0106	.0106
TST	Temperature index to determine specific data of start of transpiration.	1,400	1,400	1,400	1,400	1,400
CTW	Proportion of potential evapotranspiration that is sublimated from a snow surface (decimal form).	0	0	0	0	0
ISP1	Julian date to start looking for spring snowmelt stage.	75	45	45	1	1
ISP2	Julian date to force snowpack to spring snowmelt stage.	90	90	90	1	1
EAIR	Emissivity of dry air.	.757	.757	.757	.757	.757
FWCAP	Free water holding capacity of snowpack expressed as a decimal fraction of total snowpack water equivalent.	.04	.04	.04	.04	.04
DENI	Initial density of new-fallen snow.	.05	.20	.20	.20	.20
DENMX	Average maximum snowpack density.	.45	.45	.45	.45	.45
SETCON	Snowpack settlement time constant.	.10	.05	.05	.05	.05
BST	Temperature above which precipitation is all rain and below which it is all snow, in degree Celsius.	-1.00	-1.00	-1.00	0	2.0
RDB	Sky cover solar-radiation computation.	.22	.22	.22	.22	.22
RDP	Sky cover solar-radiation computation.	.61	.61	.61	.61	.61

Table A-3.--Parameters for daily runoff computations defined by calibration for each site

COVDNS, Summer vegetation cover density (decimal).

COVDNW, Winter vegetation cover density (decimal).

TRNCF, Transmission coefficient for shortwave radiation through the winter vegetation canopy (decimal form).

SNST, Interception storage capacity of major winter vegetation for snow (inches); assigned a constant value of 0.05.

RNSTS, Interception-storage capacity of major summer vegetation (inches).

RNSTW, Interception-storage capacity of major winter vegetation (inches).

ITST, Month transpiration begins; assigned a constant value of 4.

ITND, Month transpiration ends; assigned a constant value of 11.

SMAX, Maximum available water-holding capacity of soil profile (inches).

SMAV, Current available water-holding capacity of soil profile (inches).

REMX, Maximum available water-holding capacity of soil recharge zone (inches).

RECHR, Current available water-holding capacity of soil recharge zone (inches).

SCN, Coefficient in contributing area-moisture index relationship.

SC1, Exponent in contributing area-moisture index relationship.

SEP, Maximum daily recharge from soil-moisture excess to designated ground-water reservoir (inches per day); assigned a constant value of zero.

RSEP, Coefficient used in computing the seepage rate from the subsurface reservoir to the ground-water reservoir.

RES, Initial storage in each subsurface flow routing reservoir (inches).

GW, Initial storage in each ground-water flow routing reservoir (inches).

RESMX, Coefficient for computing seepage from the subsurface reservoir to its designated ground-water reservoir, assigned a constant value of 1.00.

REXP, Exponent for computing seepage from subsurface reservoir to its designated ground-water reservoir; assigned a constant value of 1.00.

GSNK, Coefficient used in computing the seepage rate from the ground-water reservoir to a ground-water sink.

RCF, Subsurface flow routing coefficient.

RCP, Subsurface flow coefficient.

RCB, Ground-water flow routing coefficient.

Table A-3.--Parameters for daily runoff computations defined by calibration for each site--continued.

Site number	HRU number	Predominant cover/type	COVDNS	COVDNW	TRNCF	RNSTS	RNSTW	SMAX	SMAV	REMX	RECHR	SCN	SC1	RSEP	RES	GW	GSNK	RCF	RCP	RCB
1	1	Grass/Forest	0.60	0.50	0.65	0.10	0.05	1.00	1.00	0.45	0.45	0.001	1.00	0.02	0.03	0.11	0	0.01	0.50	0.06
	2	Grass/Forest	.60	.50	.65	.10	.05	1.00	1.00	.45	.45	.001	1.00	.02	.03	.11	0	.01	.50	.06
	3	Grass/Forest	.60	.50	.65	.10	.05	1.00	1.00	.45	.45	.001	1.00	.02	.03	.11	0	.01	.50	.06
2	1	Grass	.80	.20	.65	.10	.02	1.50	1.10	.50	.20	.002	1.00	.04	0	.016	0	.05	1.00	.06
	2	Forest	.50	.20	.65	.10	.02	1.50	1.10	.50	.20	.002	1.00	.04	0	.016	0	.05	1.00	.03
3	1	Forest	.90	.30	.15	.10	.02	1.20	0.30	1.00	.10	.001	1.00	.05	0	.06	0	.05	0.50	.09
	2	Forest	.90	.30	.15	.10	.02	1.20	.30	1.00	.10	.001	1.00	.05	0	.06	0	.05	.50	.09
4	1	Forest	.70	.30	.15	.10	.02	3.00	2.60	1.00	.40	.00001	1.00	.10	0	.005	0	.10	.60	.12
	2	Forest/Bare	.50	.10	.15	.10	.02	5.00	4.40	2.00	1.00	.00001	0.50	.40	0	.35	0.01	.10	.50	.005
5	1	Forest	.80	.40	.40	.05	.03	3.80	3.25	.50	.05	.00001	1.00	.10	0	.01	0	.01	.75	.03
	2	Forest/Bare	.70	.40	.40	.05	.03	5.20	4.90	1.00	.90	.00001	.75	.25	0	80	.0004	.02	1.00	.0001

USGS LIBRARY-RESTON



3 1818 00062034 2