

EFFECTS OF SURFACE COAL MINING AND RECLAMATION ON THE
GEOHYDROLOGY OF SIX SMALL WATERSHEDS IN WEST-CENTRAL INDIANA

By Jeffrey D. Martin, Richard F. Duwelius, and Charles G. Crawford

U.S. GEOLOGICAL SURVEY

Open-File Report 87-210



Indianapolis, Indiana

1987

DEPARTMENT OF THE INTERIOR
DONALD PAUL HODEL, Secretary
U.S. GEOLOGICAL SURVEY
Dallas L. Peck, Director

For additional information
write to:

District Chief
U.S. Geological Survey
5957 Lakeside Boulevard
Indianapolis, Indiana 46278

Copies of this report
can be purchased from:

U.S. Geological Survey
Books and Open-File Reports
Box 25425, Federal Center
Denver, Colorado 80225

CONTENTS

	Page
Abstract.....	1
Introduction.....	2
Purpose and scope.....	2
Previous studies.....	2
Study area and watersheds.....	5
Methods of investigation.....	6
Geohydrology of study watersheds.....	7
Temperature.....	7
Precipitation.....	11
Surface water.....	12
Annual mean discharge.....	12
Daily mean discharge.....	14
Hydrographs.....	14
Discharge duration.....	14
Extremes.....	22
Runoff.....	24
Annual runoff and water loss.....	24
Monthly runoff.....	26
Peak discharge.....	29
Precipitation-runoff relations.....	31
Storm hydrographs.....	31
Precipitation-runoff volumes.....	48
Watershed response.....	49
Ground water.....	50
General description of ground-water systems in west-central Indiana.....	50
Unconsolidated aquifers.....	50
Consolidated aquifers.....	52
Description of ground-water systems in the study watersheds...	54
Big Slough.....	54
Hooker Creek.....	62
Unnamed tributary to Honey Creek.....	64
Unnamed tributary to Sulphur Creek.....	69
Pond Creek.....	77
Unnamed tributary to Big Branch.....	81
Effects of surface coal mining and reclamation on the geohydrology of small watersheds in west-central Indiana.....	84
Watershed morphology, surface runoff, and detention storage.....	85
Soils, vegetation, infiltration, and evapotranspiration.....	88
Ground-water systems.....	89
Summary and conclusions.....	91
References cited.....	95

ILLUSTRATIONS

Page

Figure 1.	Map showing location of the six study watersheds and streamflow-gaging stations in Clay, Owen, Sullivan, and Vigo Counties.....	3
2.	Map showing mean annual temperature and mean annual precipitation at climatological stations in and near the study area, 1951-80.....	8
3-9h.	Graphs showing:	
3.	Mean monthly temperature and mean monthly precipitation at Spencer and Terre Haute climatological stations, 1951-80.....	9
4.	Monthly mean temperature at Daggett, Spencer, and Terre Haute climatological stations, 1981 and 1982 water years.....	9
5.	Daily maximum and minimum temperatures at Daggett climatological station, 1981 and 1982 water years.....	10
6a.	Daily mean discharge and daily precipitation at Big Slough, 1981 and 1982 water years.....	15
6b.	Daily mean discharge and daily precipitation at Hooker Creek, 1981 and 1982 water years.....	16
6c.	Daily mean discharge and daily precipitation at unnamed tributary to Honey Creek, 1981 and 1982 water years...	17
6d.	Daily mean discharge and daily precipitation at unnamed tributary to Sulphur Creek, 1981 and 1982 water years.	18
6e.	Daily mean discharge and daily precipitation at Pond Creek, 1981 and 1982 water years.....	19
6f.	Daily mean discharge and daily precipitation at unnamed tributary to Big Branch, 1981 and 1982 water years....	20
7.	Duration curves of daily mean discharge, 1981 and 1982 water years.....	21
8.	Monthly precipitation and runoff, 1981 and 1982 water years.....	27
9a.	Instantaneous discharge and accumulated precipitation for the thunderstorm of May 24, 1981.....	32
9b.	Instantaneous discharge and accumulated precipitation for the thunderstorm of June 9-10, 1981.....	34
9c.	Instantaneous discharge and accumulated precipitation for the thunderstorm of May 29, 1982.....	36
9d.	Instantaneous discharge and accumulated precipitation for the thunderstorm of September 1, 1982.....	38
9e.	Instantaneous discharge and accumulated precipitation for the frontal storm of May 26-27, 1981.....	40
9f.	Instantaneous discharge and accumulated precipitation for the frontal storm of December 21-22, 1981.....	42
9g.	Instantaneous discharge and accumulated precipitation for the frontal storm of January 22, 1982.....	44
9h.	Instantaneous discharge and accumulated precipitation for the frontal storm of April 16-17, 1982.....	46
10.	Map showing Big Slough watershed and data-collection sites..	55
11.	Graph showing distribution of water levels in a nest of wells finished in till at Big Slough, June 17, 1982.....	56

ILLUSTRATIONS--Continued

	Page
Figure 12. Map showing altitude of the water table at Big Slough, May 18, 1982.....	58
13. Graphs showing daily precipitation and ground-water levels at Big Slough, 1981 and 1982 water years.....	59
14. Hydrogeologic section showing generalized stratigraphy and direction of ground-water flow at Big Slough.....	60
15. Geologic column showing distribution of water levels in a well open to the Linton Formation (CS-1) and a well open to the Staunton Formation (CS-1B) near Big Slough, June 17, 1982.....	61
16. Map showing Hooker Creek watershed and data-collection sites	63
17. Map showing unnamed tributary to Honey Creek watershed and data-collection sites.....	65
18. Graphs showing daily precipitation and daily mean ground- water levels at unnamed tributary to Honey Creek, 1981 and 1982 water years.....	66
19-21. Maps showing:	
19. Altitude of the water table at unnamed tributary to Honey Creek, August 20, 1981.....	67
20. Altitude of the water table at unnamed tributary to Honey Creek, May 19, 1982.....	68
21. Unnamed tributary to Sulphur Creek watershed and data- collection sites.....	70
22. Hydrogeologic section showing generalized stratigraphy and direction of ground-water flow at unnamed tributary to Sulphur Creek.....	71
23. Map showing altitude of the water table at unnamed tributary to Sulphur Creek, July 15, 1982.....	72
24. Graphs showing daily precipitation and daily mean lake and ground-water levels at unnamed tributary to Sulphur Creek, 1981 and 1982 water years.....	73
25. Graphs showing distributions of water levels in a nest of wells finished in reclaimed mine spoil or bedrock at unnamed tributary to Sulphur Creek.....	75
26. Geologic column showing distribution of water levels in a well screened in till (MR-6), a well open to the Dugger Formation (MR-6B), and a well open to the Dugger and Petersburg Formations (MR-6SS) at unnamed tributary to Sulphur Creek, September 7, 1982.....	76
27. Map showing Pond Creek watershed and data-collection sites..	78
28. Hydrogeologic section showing generalized stratigraphy and direction of ground-water flow at Pond Creek.....	79
29. Graphs showing daily precipitation and daily mean discharge and ground-water levels at Pond Creek, 1981 and 1982 water years.....	80
30. Map showing unnamed tributary to Big Branch watershed and data-collection sites.....	82
31. Graphs showing daily precipitation and daily mean lake and ground-water levels at unnamed tributary to Big Branch, 1981 and 1982 water years.....	83

TABLES

	Page
Table 1. Annual precipitation and annual mean discharge.....	13
2. Extremes of daily mean discharge.....	23
3. Annual runoff and annual water loss.....	25
4. Instantaneous peak discharge.....	30
5a-h. Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the:	
5a. Thunderstorm of May 24, 1981.....	33
5b. Thunderstorm of June 9-10, 1981.....	35
5c. Thunderstorm of May 29, 1982.....	37
5d. Thunderstorm of September 1, 1982.....	39
5e. Frontal storm of May 26-27, 1981.....	41
5f. Frontal storm of December 21-22, 1981.....	43
5g. Frontal storm of January 22, 1982.....	45
5h. Frontal storm of April 16-17, 1982.....	47
6. Hydraulic conductivity of till, spoil, and bedrock.....	51

FACTORS FOR CONVERTING INCH-POUND UNITS TO METRIC
(INTERNATIONAL SYSTEM) UNITS

<u>Multiply inch-pound units</u>	<u>By</u>	<u>To obtain SI units</u>
inch (in.)	25.4	millimeter (mm)
foot (ft)	0.3048	meter (m)
mile (mi)	1.609	kilometer (km)
square foot (ft ²)	0.09290	square meter (m ²)
square mile (mi ²)	2.590	square kilometer (km ²)
acre-foot (acre-ft)	1,233	cubic meter (m ³)
inch per year (in/yr)	2.54	centimeter per year (cm/yr)
foot per day (ft/d)	0.3048	meter per day (m/d)
cubic foot per second per square mile [(ft ³ /s)/mi ²]	0.01093	cubic meter per second per square kilometer [(m ³ /s)/km ²]
gallon per minute (gal/min)	3.785	liter per minute (L/min)

To convert degree Fahrenheit (°F) to degree Celsius (°C)

$$5/9 \times (°F - 32) = °C$$

National Geodetic Vertical Datum of 1929 (NGVD of 1929): A geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, formerly called "Mean Sea Level."



EFFECTS OF SURFACE COAL MINING AND RECLAMATION ON THE GEOHYDROLOGY OF SIX
SMALL WATERSHEDS IN WEST-CENTRAL INDIANA

By Jeffrey D. Martin, Richard F. Duwelius, and Charles G. Crawford

ABSTRACT

Six small watersheds in west-central Indiana were selected for study of the hydrologic effects of surface coal mining and reclamation. The watersheds include mined and reclaimed; mined and unreclaimed; and unmined, agricultural land uses, and are each less than 3 square miles in area. Surface-water, ground-water, and meteorologic data for the 1981 and 1982 water years were used to describe and compare hydrologic systems of the six watersheds and to identify hydrologic effects of mining and reclamation.

Discharge at the unreclaimed watersheds was continuous during the study period, whereas discharge at the other watersheds was intermittent and more variable. Peak discharges were greater at the agricultural watersheds than at the unreclaimed watersheds, primarily because of large final-cut lakes in the unreclaimed watersheds. Annual runoff was greatest at the unreclaimed watersheds, intermediate at the agricultural watersheds, and least at the reclaimed watersheds.

Hydrologic effects of mining were identified by comparing the hydrologic systems at mined and unreclaimed watersheds with those at unmined, agricultural watersheds. Comparisons of the hydrologic systems of these watersheds indicate that surface coal mining without reclamation has the potential to increase annual runoff, base flow, and ground-water recharge to the bedrock; reduce peak flow rates and variation in flow; lower the water table in upland areas; change the relation between surface- and ground-water divides; and create numerous, local flow systems in the shallow ground water.

Hydrologic effects of reclamation were identified by comparing the hydrologic systems at mined and reclaimed watersheds with those at mined and unreclaimed watersheds. Reclamation has the potential to decrease annual runoff, base flow, and recharge to the bedrock; increase peak flow rates, variation in flow, and the response to thunderstorms; reestablish the premining relation between surface- and ground-water divides; and create less local flow systems in the shallow ground water.

Hydrologic effects of mining and reclamation were identified by comparing the hydrologic systems at mined and reclaimed watersheds with those at unmined, agricultural watersheds. The presence or absence of a large final-cut lake in the reclaimed watershed greatly influences the hydrologic systems and the effects of mining and reclamation. Surface coal mining and reclamation have the potential to decrease annual runoff, base flow, and peak flow rates; increase the variability of flow and recharge to the bedrock; reestablish the premining relation between surface- and ground-water divides; and lower the water table in upland areas.

INTRODUCTION

Purpose and Scope


The purposes of this report are to (1) describe and compare the surface- and ground-water systems of six small watersheds in the coal-mining region of Indiana, (2) identify and discuss the effects of surface coal mining and reclamation on the geohydrology of these six watersheds, and (3) discuss potential geohydrologic effects of mining and reclamation on small watersheds in west-central Indiana.

The study watersheds include mined and reclaimed; mined and unreclaimed; and unmined, agricultural land uses and are each less than 3 mi² (square miles) in area (fig. 1). A continuous-record, streamflow-gaging station; at least one continuous-record, precipitation gage; and at least one continuous-record, ground-water well were installed in or near each watershed. One climate station was established at Daggett in the vicinity of the six watersheds (fig. 1). Forty-seven wells finished in unconsolidated deposits and 20 wells finished in bedrock were installed in or near the watersheds.

Hydrologic and meteorologic data for the 1981 and 1982 water years are used to describe the surface- and ground-water systems of the study watersheds. Temperature and precipitation data are compared to 30-year averages (1951-80). Annual, daily, and instantaneous discharge characteristics are compared between water years and among watersheds. Precipitation-runoff relations are compared on annual, monthly, and storm-event time intervals. Unconsolidated and bedrock aquifers, flow systems, and ground-water/surface-water relations are described. Differences and similarities in the surface- and ground-water systems at these six watersheds are used to infer potential hydrologic effects of surface coal mining and reclamation on small watersheds in west-central Indiana. Surface- and ground-water quality are not discussed.

Previous Studies

Most studies of the hydrologic effects of surface coal mining in Indiana emphasized the effects of mining on water quality, primarily surface-water quality (Corbett and Agnew, 1968; Corbett, 1969; Wilber and others, 1980, 1985; Peters, 1981; Wangness and others, 1981a, 1981b, 1983; Zogorski and others, 1981; Wangness, 1982; Wilber and Boje, 1982). Few studies attempted to investigate the effects of mining on the quantity of water. A summary of some studies on the effects of surface coal mining on water quantity in the Interior and Appalachian Coal Provinces follows.

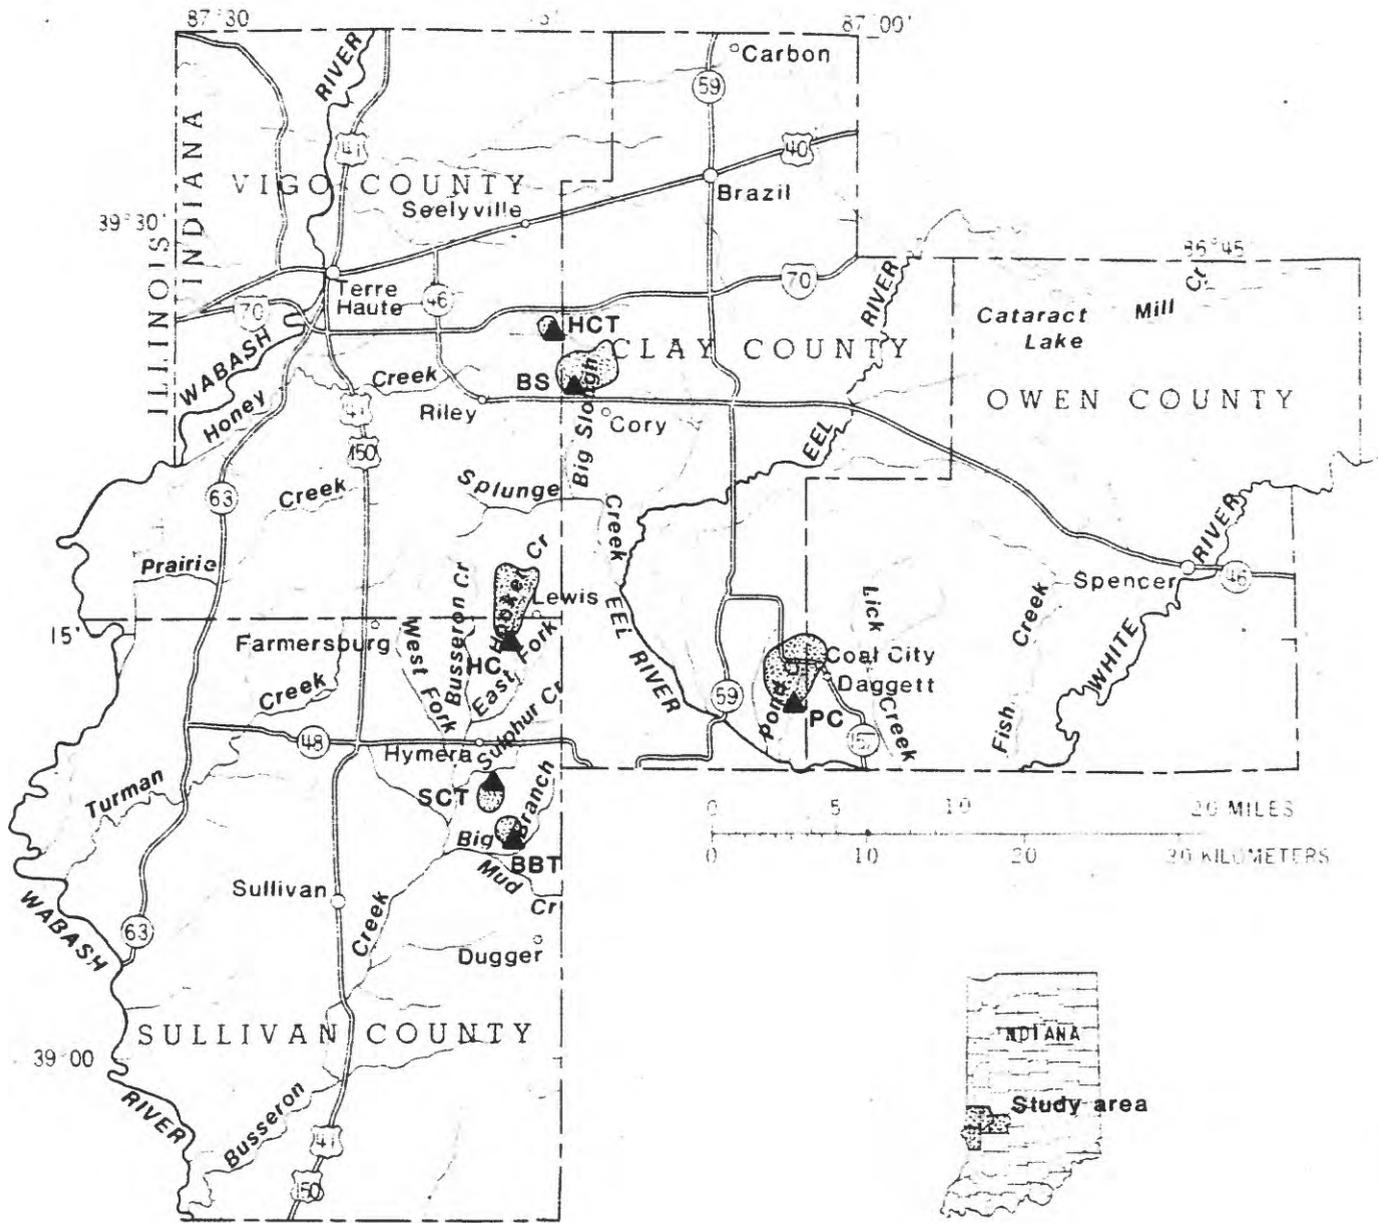

EXPLANATION

- ▲ BS Big Slough near Cory
 - ▲ HC Hooker Creek near Lewis
 - ▲ HCT Unnamed tributary to Honey Creek near Cory
 - ▲ SCT Unnamed tributary to Sulphur Creek near Hymera
 - ▲ PC Pond Creek near Coal City
 - ▲ BBT Unnamed tributary to Big Branch near Hymera
-  Watershed

Figure 1.-- Location of the six study watersheds and streamflow-gaging stations in Clay, Owen, Sullivan, and Vigo Counties.

The U.S. Geological Survey conducted one of the first studies of the hydrologic effects of surface coal mining in the rugged, forested terrain of the Beaver Creek watershed in eastern Kentucky (Collier and others, 1970). Runoff characteristics from 1955 to 1966 for two small watersheds (less than 1 mi²) were compared. Peak flows were greater in the watershed containing 10.4 percent mined land than in the unmined watershed. The unmined watershed had greater magnitude and duration of low flows. Annual totals and monthly distributions of runoff were similar for both watersheds. Water impoundments created by mining provided recharge to ground water in the mine spoil.

Curtis (1978) studied the effects of mining and reclamation on the hydrology of small, mountain watersheds in eastern Kentucky and western West Virginia. Peak flow rates were 3 to 5 times greater in active or recently mined watersheds than in unmined, forested watersheds. Data from these same watersheds showed that peak flow rates in mined watersheds after reclamation were less than those from unmined watersheds. Curtis (1978) attributed the reduction in peak flows to the establishment of vegetation on the reclaimed mine spoil.

Brabets (1984) compared the surface-water characteristics of seven small watersheds (1.46 to 18.4 mi²) in Illinois and concluded that mined and unreclaimed watersheds have greater base flows and less flow variation than unmined, agricultural watersheds. In addition, unreclaimed watersheds have lower peak discharges, lower storm runoff volumes, less runoff during wet months, and more runoff during dry months than unmined, agricultural watersheds.

The first study of the hydrologic effects of mining in Indiana was conducted in the Patoka River watershed, an extensively mined, unglaciated area in southwestern Indiana. Corbett (1965) measured the flow in numerous streams during the summer and fall drought of 1964 and found that streams draining mined areas had flow whereas those draining similar or larger unmined areas were dry. Watersheds with flow ranged from 0.5 to 71 mi² in size and surface mining comprised 8.7 to 86.7 percent of the watershed area. Corbett (1965) concluded that mine spoil has a large capacity to store water and that the storage capacity of spoil may reduce flood flows as well as increase base flows.

The effects of mining on the hydrology of small watersheds are inconsistent between coal provinces but show regional similarities. In the forested, steep terrain of eastern Kentucky and western West Virginia, mining increased peak flows and decreased base flows, whereas in the flatter, agricultural coal fields of Illinois and Indiana, mining decreased peak flows and increased base flows. The discrepancy in results illustrates the need for site-specific information and the hazards of extrapolating conclusions from one area to another.

Study Area and Watersheds

Clay, Owen, Sullivan, and Vigo Counties comprise the study area in west-central Indiana (fig. 1). The study area contains Pennsylvanian bedrock which is covered by Illinoian till. Landforms are predominantly wide, flat flood plains in the lowland areas and broad, rolling plains in the upland areas. Soils are deep and are very slowly to moderately permeable. Precipitation averages about 39.5 in/yr (inches per year), about one-third of which runs off as streamflow. Outwash and alluvium are the principal sources of ground water in the area although some wells in till or bedrock supply enough water for domestic use. Most of the land is used for agriculture, primarily row-crop corn and soybeans or pasture. A description of the geology, geomorphology, soils, climate, hydrology, water use, land use, population, and coal-mining history of the study area is given in Martin and others (1987).

Six watersheds were selected to compare the hydrologic systems of mined and unmined watersheds. All watersheds are located within a 12-mile radius (fig. 1). The proximity of the watersheds minimizes variations in weather, geology, soils, and other physical conditions. Small watersheds were selected because most coal is mined in small watersheds and information on the hydrology of small watersheds is scarce. Two of the six watersheds were selected as controls and represent agricultural land use, the most common land use in the study area. The remaining four watersheds represent types of mined watersheds that occur in Indiana, both reclaimed and unreclaimed. Detailed information on the morphology, geology, soils, land use, and coal-mining history of each study watershed is given in Martin and others (1987). A brief description of each watershed follows.

Big Slough and Hooker Creek are streams that drain unmined, agricultural watersheds (fig. 1). Row-crop corn and soybeans are the principal crops. Soils are moderately well-drained silt loams and the watersheds have well-developed dendritic drainage systems.

Unnamed tributary to Honey Creek and unnamed tributary to Sulphur Creek are streams that drain mined and reclaimed watersheds (fig. 1). Ridges of mine spoil have been graded to a gently rolling topography. Soils are well drained and consist of 6 to 12 in. (inches) of silt-loam topsoil that had been stockpiled and then replaced over shale and sandstone fragments of the graded mine spoil. Both watersheds are beginning to develop incised drainage systems. Unnamed tributary to Sulphur Creek watershed contains a final-cut lake at the outlet of the watershed. A final-cut lake results when the last pit in a coal mine is not filled with spoil and graded to a somewhat level topography but is allowed to fill with water. Grasses and legumes form the vegetative cover in each watershed. The vegetative cover is dense at unnamed tributary to Sulphur Creek watershed and is sparse at unnamed tributary to Honey Creek watershed.

Pond Creek and unnamed tributary to Big Branch are streams that drain mined and unreclaimed watersheds (fig. 1). Approximately one-half of Pond Creek watershed is unmined, agricultural or forested land. Soils are very well-drained, shaly silty loams that have formed on steep-sloping spoil banks. Both watersheds contain numerous impoundments of water from past surface

mining. Drainage systems are complex with many enclosed areas that do not contribute surface runoff to streamflow. The ridges of mine spoil are covered with pine trees but the surface of the spoil is mostly devoid of vegetation.

In order to reduce wordiness and repetition, the word "unnamed" has been dropped from the stream and watershed names. For example, unnamed tributary to Sulphur Creek is hereafter referred to in the text as Sulphur Creek tributary. The name refers to either the stream or watershed, depending on the context of use. References to the watershed in the report refer to the drainage areas above the gaging stations. The full names are used in the tables and figures. Further, to remind the reader of the predominant land use in each watershed, a short identifier follows the watershed name in the tables, figures, and at selected places in the text. The land-use identifiers are: (Unmined), unmined, agriculture; (Reclaimed), mined and reclaimed; and (Unreclaimed), mined and unreclaimed.

Methods of Investigation

Temperature and other meteorological variables were measured from October 1980 to June 1983 at the climatological station established for the study in Daggett (fig. 1). Precipitation and discharge were measured in the six watersheds at 5-minute intervals from October 1980 to June 1983. Discharge at Big Branch tributary was measured at 15-minute intervals. At least one continuous-record, float-type rain gage was installed in or near each watershed. Big Slough and Hooker Creek were equipped with two rain gages. Continuous-record, discharge gages were installed on each stream. The gaging stations at Big Slough (03360109 Big Slough near Cory), Hooker Creek (03342110 Hooker Creek near Lewis), and Pond Creek (03360125 Pond Creek near Coal City) are located on the stream banks and have natural controls. V-notch weirs were installed at the outlets of final-cut lakes in Sulphur Creek tributary (03342167 Unnamed tributary to Sulphur Creek near Hymera) and Big Branch tributary (03342219 Unnamed tributary to Big Branch near Hymera). A Parshall flume was installed at Honey Creek tributary (03341568 Unnamed tributary to Honey Creek near Cory).

Twenty wells were installed in bedrock and 47 wells were installed in unconsolidated deposits. Wells installed in bedrock were drilled using mudrotary methods, cased with 5-in diameter polyvinyl chloride casing, and sealed. The remainder of the hole was airhammered and left open. Wells installed in unconsolidated deposits were drilled with a hollow-stem auger, 2-in and 4-in diameter casings and screens were set, and the holes were backfilled with pea gravel around the screen or drill cuttings for the remainder of the hole. Water levels were measured continuously at 11 wells from December 1980 to May 1983 and were measured intermittently at 56 wells from October 1980 to September 1983. Daily hydrologic and meteorological data and a complete description of the instrumentation and methods of data collection are given in Renn and others (1985).

Hydraulic conductivities given in this report were estimated from slug tests using the method of Bouwer and Rice (1976, p. 424-425). Values of hydraulic conductivity from this method compared favorably with those from the methods of Skibitzke (1958) and Cooper and others (1967).

Although data were collected for part of the 1983 water year, only data collected during the 1981 and 1982 water years were analyzed in this report. A water year is a 12-month period that begins October 1 and ends September 30, and is named for the calendar year in which it ends (Langbein and Iseri, 1960, p. 21). For example, the 1981 water year is the period October 1, 1980 through September 30, 1981.

GEOHYDROLOGY OF STUDY WATERSHEDS

Temperature

Air temperature is measured at eight National Weather Service climatological stations in and near the study area (fig. 2). The Bowling Green and Elliston climatological stations do not measure temperature. Mean annual temperature for the 30-year period 1951-80 ranged from 52.1 °F (degrees Fahrenheit) at Indianapolis to 55.6 °F at Crane Naval Depot. The average of the mean annual temperature at the eight climatological stations shown in figure 2 is 53.2 °F. January is usually the coldest month and July is usually the warmest month (fig. 3).

Annual mean temperature at Daggett was 51.8 °F for the 1981 water year and 50.1 °F for the 1982 water year. Both water years were cooler than the 30-year mean annual temperature at the climatological stations in and near the study area. Annual mean temperature at the eight climatological stations ranged from 51.2 to 55.5 °F for the 1981 water year and from 50.0 to 54.0 °F for the 1982 water year. Annual mean temperature was warmer during the 1981 water year than the 1982 water year at all climatological stations.

Monthly mean temperatures for December, January, February, April, and June during the 1982 water year were substantially colder than during the 1981 water year (fig. 4). Monthly mean temperature for May during the 1982 water year was substantially warmer than during the 1981 water year. Monthly mean temperatures for the remaining months were approximately the same for both water years. January, April, and June of the 1982 water year were markedly colder than the 30-year mean monthly temperatures (figs. 3 and 4).

Freezing temperatures occurred from late October to late March in the water year 1981 and from late October to mid-April in the 1982 water year (fig. 5). Frequent periods of thawing occurred during both winters.





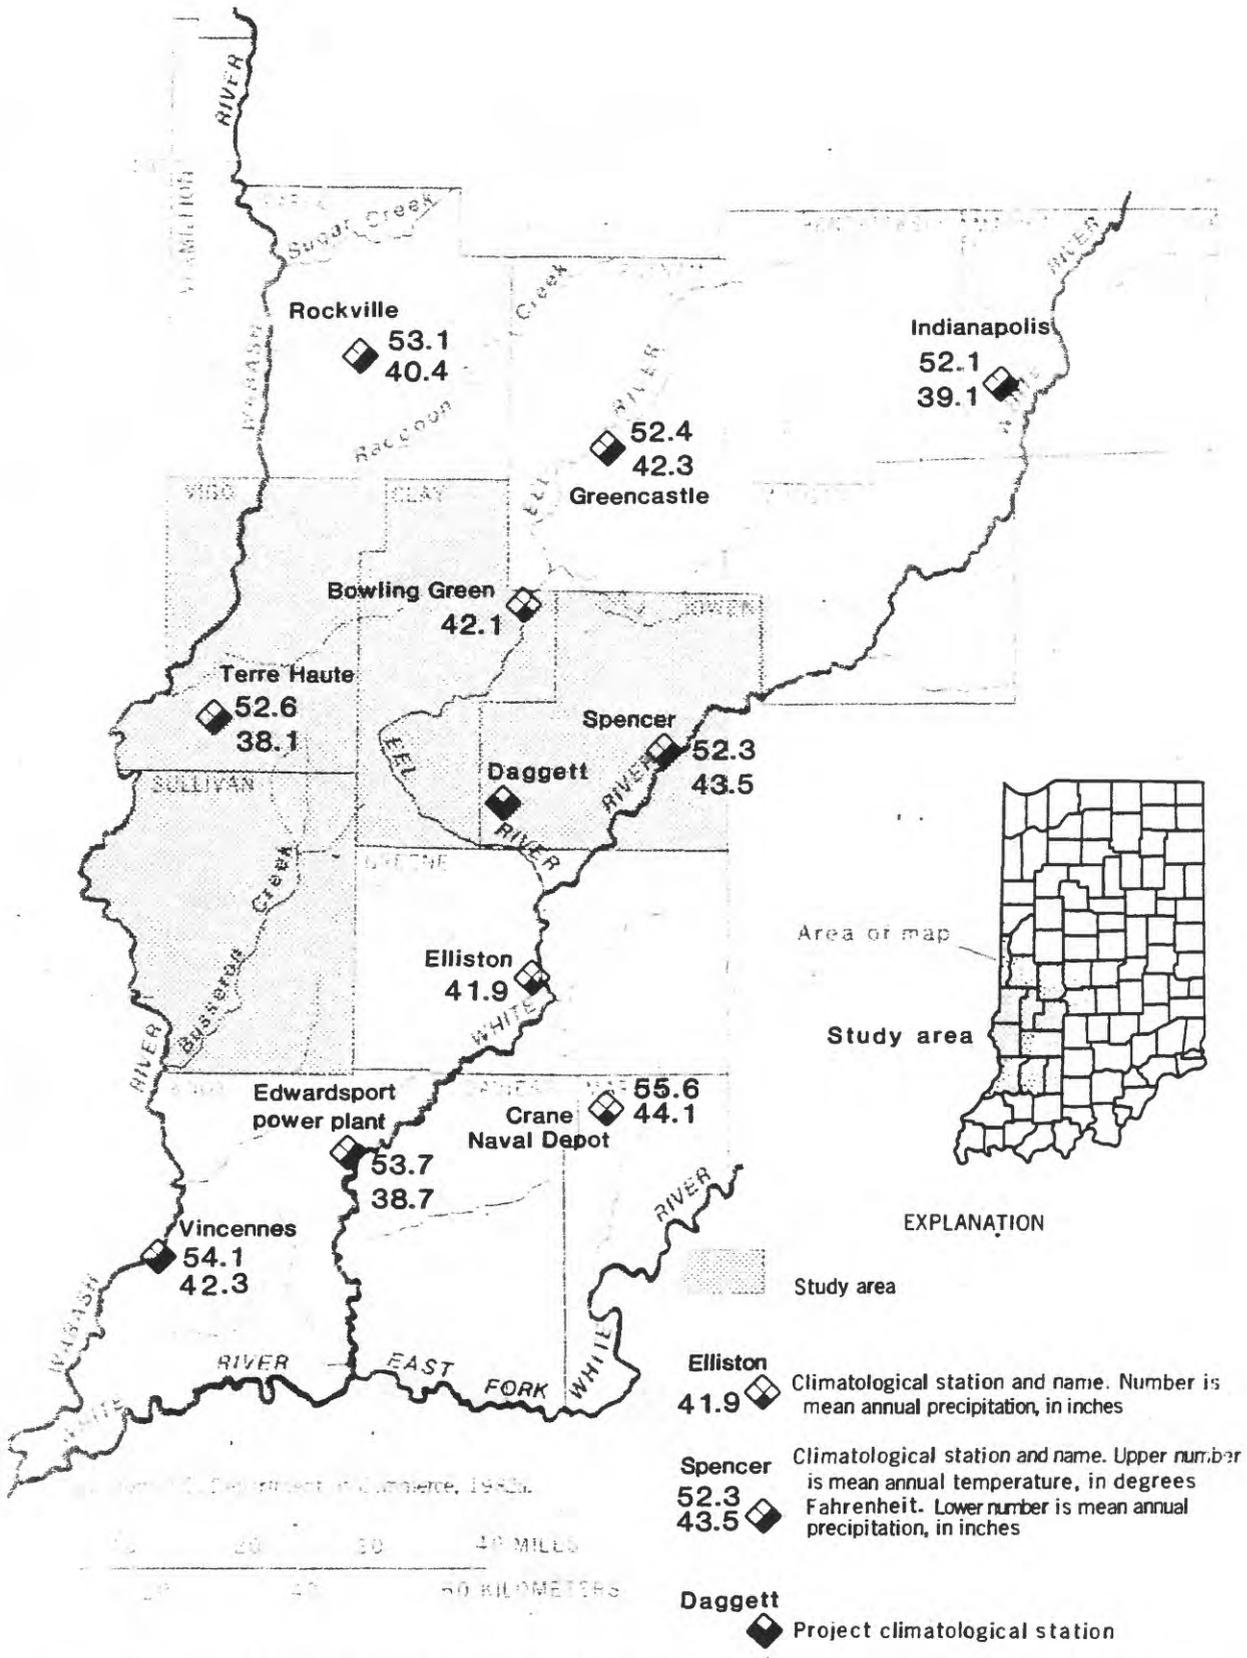


Figure 2.-- Mean annual temperature and mean annual precipitation at climatological stations in and near the study area, 1951-80.

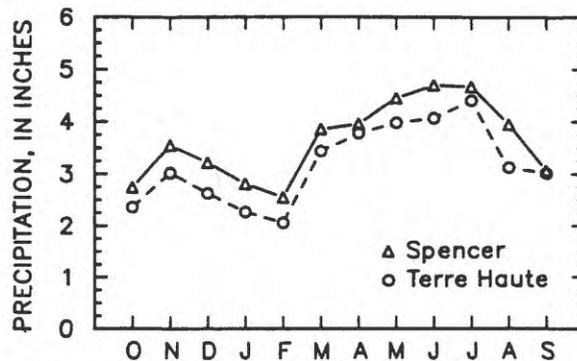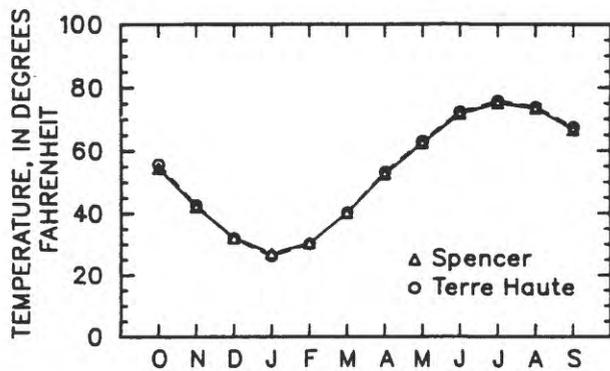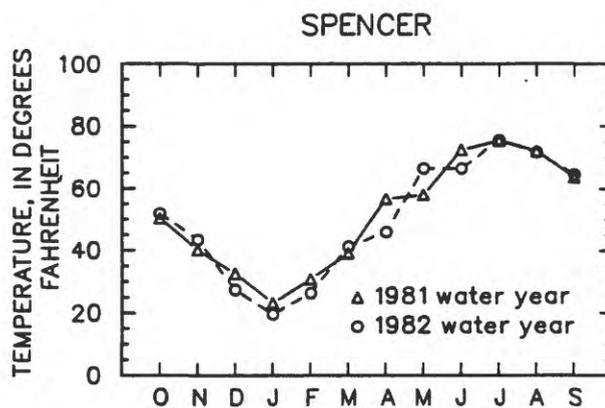

Data from U.S. Department of Commerce, 1982a.

Figure 3. -- Mean monthly temperature and mean monthly precipitation at Spencer and Terre Haute climatological stations, 1951-80.

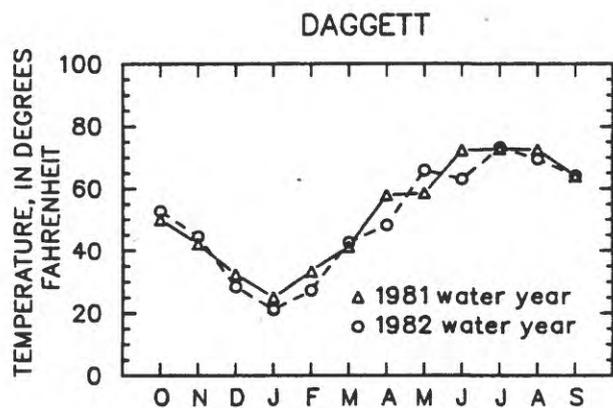

Data for Spencer and Terre Haute from U.S. Department of Commerce, 1980-82.

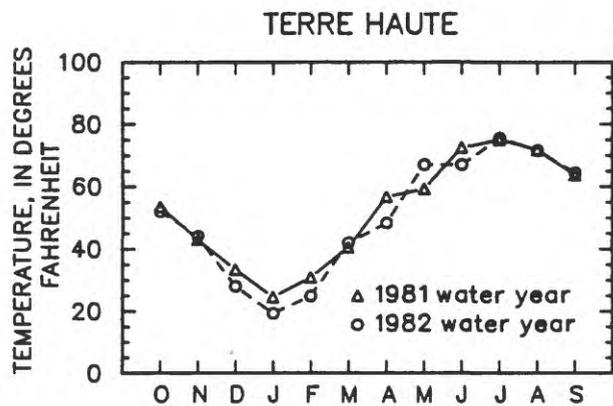


Figure 4. -- Monthly mean temperature at Daggett, Spencer, and Terre Haute climatological stations, 1981 and 1982 water years.

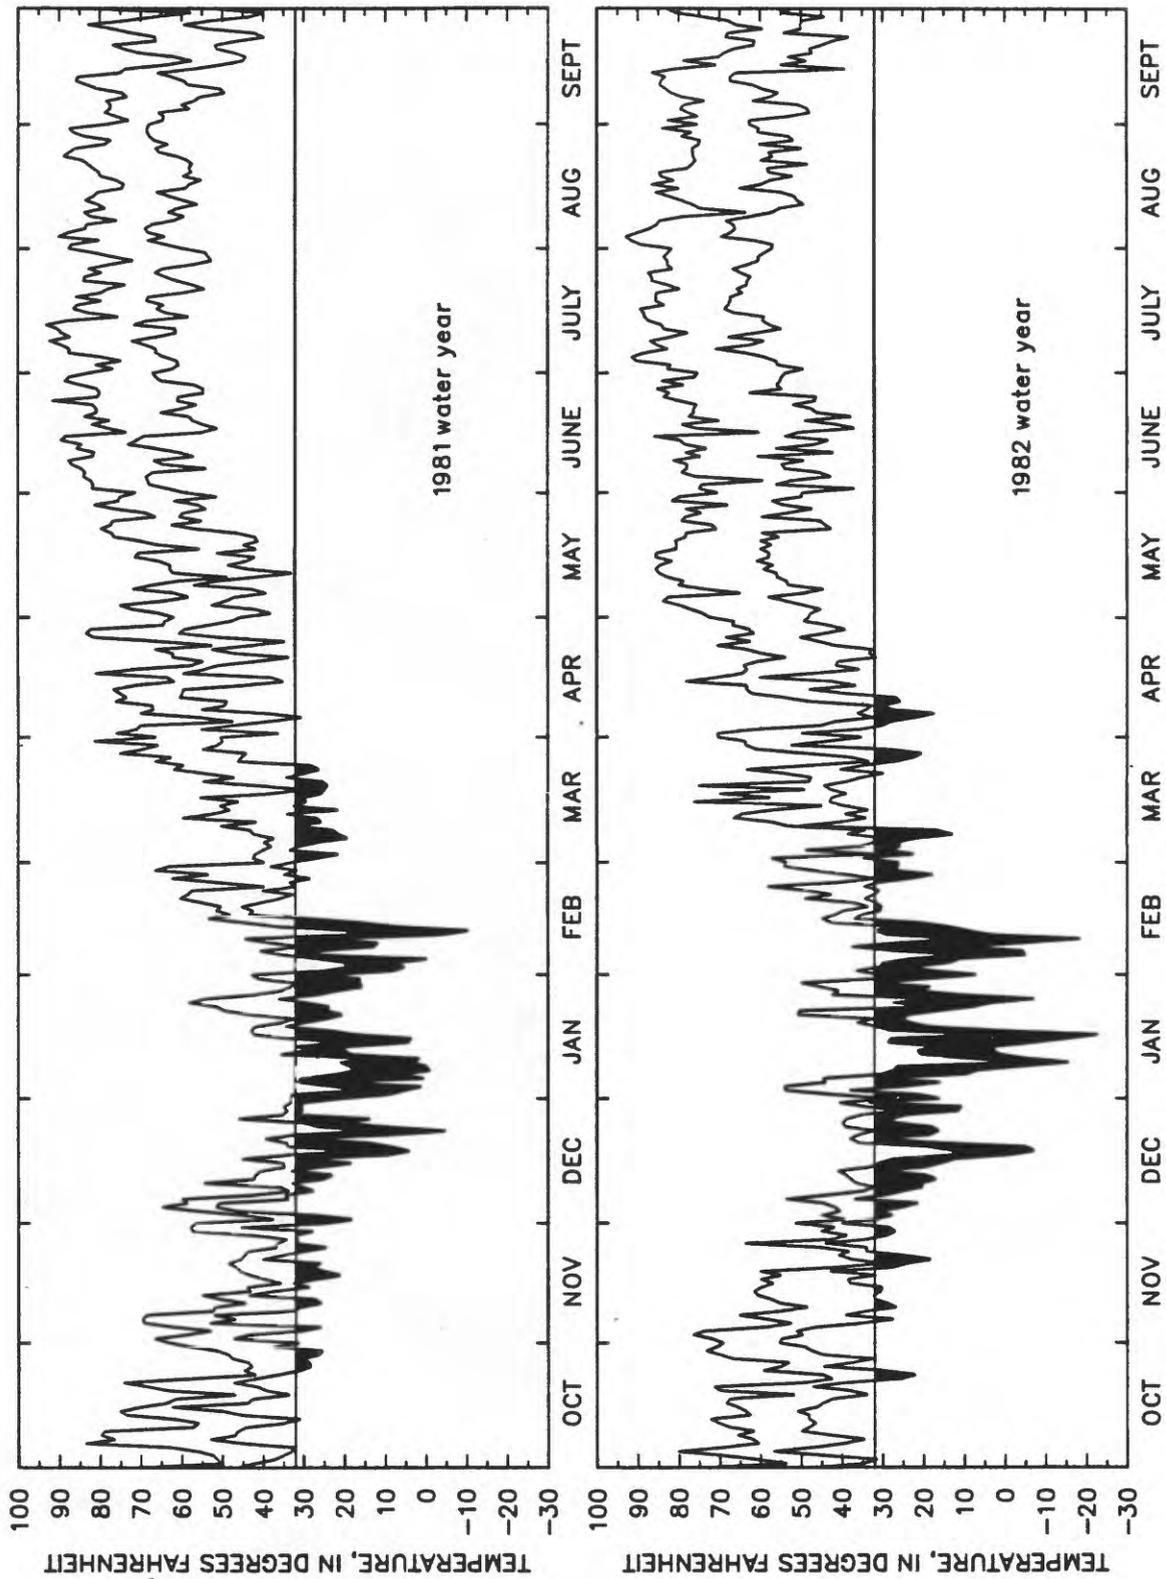


Figure 5. -- Daily maximum and minimum temperatures at Daggett climatological station, 1981 and 1982 water years. Temperatures at or below freezing are shaded.

Precipitation

Mean annual precipitation at 10 National Weather Service climatological stations in and near the study area ranged from 38.1 in. at Terre Haute to 44.1 in. at Crane Naval Depot during the period 1951-80 (fig. 2). No pattern is apparent in the distribution of mean annual precipitation. The average of the mean annual precipitation at the 10 climatological stations is 41.3 in.

Precipitation at Spencer and Terre Haute climatological stations is fairly evenly distributed throughout the year, with adequate amounts during the growing season (fig. 3). Monthly precipitation is usually greatest in June or July and is usually least in February, January, or October. Mean monthly precipitation is about 0.5 in. more at Spencer than at Terre Haute.

Annual precipitation in the study watersheds ranged from 31.4 to 41.4 in. for the 1981 water year and from 36.8 to 49.2 in. for the 1982 water year (table 1). The large ranges illustrate the spatial variability of precipitation. Even in watersheds with two rain gages, the difference in annual precipitation at the two gages ranged from 0.5 to 3.8 in. For watersheds with two rain gages, the average precipitation measured at the two rain gages is used as the best estimate of precipitation in that watershed.

All watersheds except Honey Creek tributary received more precipitation in the 1982 water year than in the 1981 water year (table 1). Annual precipitation for the 1981 water year in the six study watersheds was generally less than the 30-year mean (41.3 in.), but annual precipitation for the 1982 water year was generally greater than the 30-year mean. Annual precipitation at the 10 climatological stations ranged from 34.7 to 48.8 in. (average 43.4 in.) for the 1981 water year and from 38.0 to 52.1 in. (average 46.9 in.) for the 1982 water year.

Monthly precipitation at each of the six watersheds was greatest in May and least in January for the 1981 water year and was greatest in May (July at Big Slough) and least in October or November for the 1982 water year (fig. 8). The 1981 water year was significantly drier in December, January, and March but was wetter in April and May than the 1982 water year. July and September were generally drier in the 1981 water year than in the 1982 water year, but this trend was not observed at all watersheds because of the variability of thunderstorms.

Record snowfall (58.2 in.) was measured at the Indianapolis climatological station from November 1981 to April 1982 (U.S. Department of Commerce, 1982b). Mean annual snowfall at Indianapolis is 22.9 in. (U.S. Department of Commerce, 1982b). A significant snow cover at the watersheds was verified by several field visits during the winter of the 1982 water year. Although a snow cover was also present during the 1981 water year, the cover was not as frequent or deep as that during the 1982 water year.

Somewhat similar patterns of the occurrence and magnitude of daily precipitation are apparent at each of the six watersheds (figs. 6a-f).

Surface Water

The flow of water can be described by a variety of technical terms and expressed in many different units of measure (Langbein and Iseri, 1960; U.S. Geological Survey, 1977, p. 1-4, 1-5). The distinction among terms often is subtle and can lead to confusion. In this report, runoff is used to describe the yield of a watershed and is expressed as inches of water over the watershed. Discharge is used to describe the flow rate measured at the gage and is expressed in cubic feet per second per square mile to compare watersheds of different sizes. Expressing discharge on an area basis is useful for comparing different size watersheds but is not entirely without compromise. Peak discharge per area commonly is inversely proportional to watershed area (Gregory and Walling, 1973, p. 197).

Annual Mean Discharge

Annual mean discharge at the six watersheds ranged from 0.433 to 1.83 (ft³/s)/mi² (cubic feet per second per square mile) (table 1). For the 1981 water year, Pond Creek and Big Branch tributary had the largest annual mean discharge, Honey Creek tributary and Sulphur Creek tributary had the smallest, and Big Slough and Hooker Creek had intermediate annual mean discharge. Groupings based on annual mean discharge for the 1982 water year were somewhat different. Honey Creek tributary still had the smallest discharge, Big Branch tributary still had the largest discharge, but the annual mean discharge at Sulphur Creek tributary and Pond Creek were more similar to those at Big Slough and Hooker Creek (table 1).

Annual mean discharge was associated with annual precipitation to the extent that, for each watershed, the water year with the greatest mean discharge also was the water year with the greatest precipitation. However, linear regression using data from all watersheds failed to find a statistically significant relation between annual mean discharge and annual precipitation. Lack of a significant relation indicates that differences in annual mean discharge are not entirely explained by differences in annual precipitation.

Table 1.--Annual precipitation and annual mean discharge

Watershed	Drainage area (square miles)	Annual precipitation (inches)		Annual mean discharge ¹ (cubic feet per second per square mile)	
		1981	1982	1981	1982
		water year	water year	water year	water year
Big Slough (Unmined)	2.70	41.4	42.1	0.809	1.38
Hooker Creek (Unmined)	2.72	36.5	46.1	.871	1.28
Unnamed tributary to Honey Creek (Reclaimed)	.11	37.3	36.8	.448	.433
Unnamed tributary to Sulphur Creek (Reclaimed)	.21	31.4	44.1	.556	1.12
Pond Creek near (Unreclaimed)	1.97	39.1	49.2	1.11	1.44
Unnamed tributary to Big Branch (Unreclaimed)	.32	35.8	39.8	1.30	1.83

¹ Annual mean discharge is the average of 365 daily mean discharges.

Daily Mean Discharge

Hydrographs

Similar patterns of high flows among the watersheds result from similar patterns of precipitation and other climatic influences (figs. 6a-f). Similarities are especially evident during periods of regional frontal storms (November through May) and snowmelt (January through March). Patterns of peak flows from June through September are less similar because of the spatial variability of thunderstorms. Flows typically are greatest at Big Slough and Hooker Creek and are least at Big Branch tributary.

Major differences among the watersheds are evident in low flows and in hydrograph shape. Pond Creek and Big Branch tributary continually flow. The other watersheds had no flow at some time during both water years. The recession limbs of the hydrographs for Sulphur Creek tributary, Pond Creek, and Big Branch tributary are more extended than those for the other watersheds (figs. 6a-f). The extended recession limbs graphically illustrate that after a storm, runoff decreases at a much slower rate at Sulphur Creek tributary, Pond Creek, and Big Branch tributary than at the other watersheds. The extended recessions are probably associated with the final-cut lakes and other water impoundments which collect and delay surface runoff in these watersheds. Additional information on zero flow and hydrograph shape is contained in the sections "Extremes" and "Watershed Response."

Discharge duration

Discharge-duration curves are cumulative frequency curves that show discharges that are equaled or exceeded a certain percentage of the time. The slope of the curve indicates the variability of flow. Steeply sloping curves indicate highly variable discharge, whereas moderately sloping curves indicate relatively stable discharge. Duration curves (fig. 7) were calculated from 730 daily mean discharges during the 1981 and 1982 water years.

Two groups of curves in figure 7 are apparent on the basis of slope and the point where each curve intersects (or fails to intersect) the X-axis. Duration curves for Pond Creek and Big Branch tributary indicate that discharge was continuous and less variable than discharge at the other watersheds. Discharge at the other watersheds was intermittent. Periods of no flow occurred about 2 percent of the time at Big Slough, about 24 percent of the time at Hooker Creek, about 76 percent of the time at Honey Creek tributary, and about 21 percent of the time at Sulphur Creek tributary. The large percentage of no-flow days at Honey Creek tributary is characteristic of ephemeral streams that only flow during and immediately after storms or snowmelt. Hooker Creek was dry more frequently than Big Slough, probably because of transpiration from the greater amount of riparian forest along Hooker Creek.

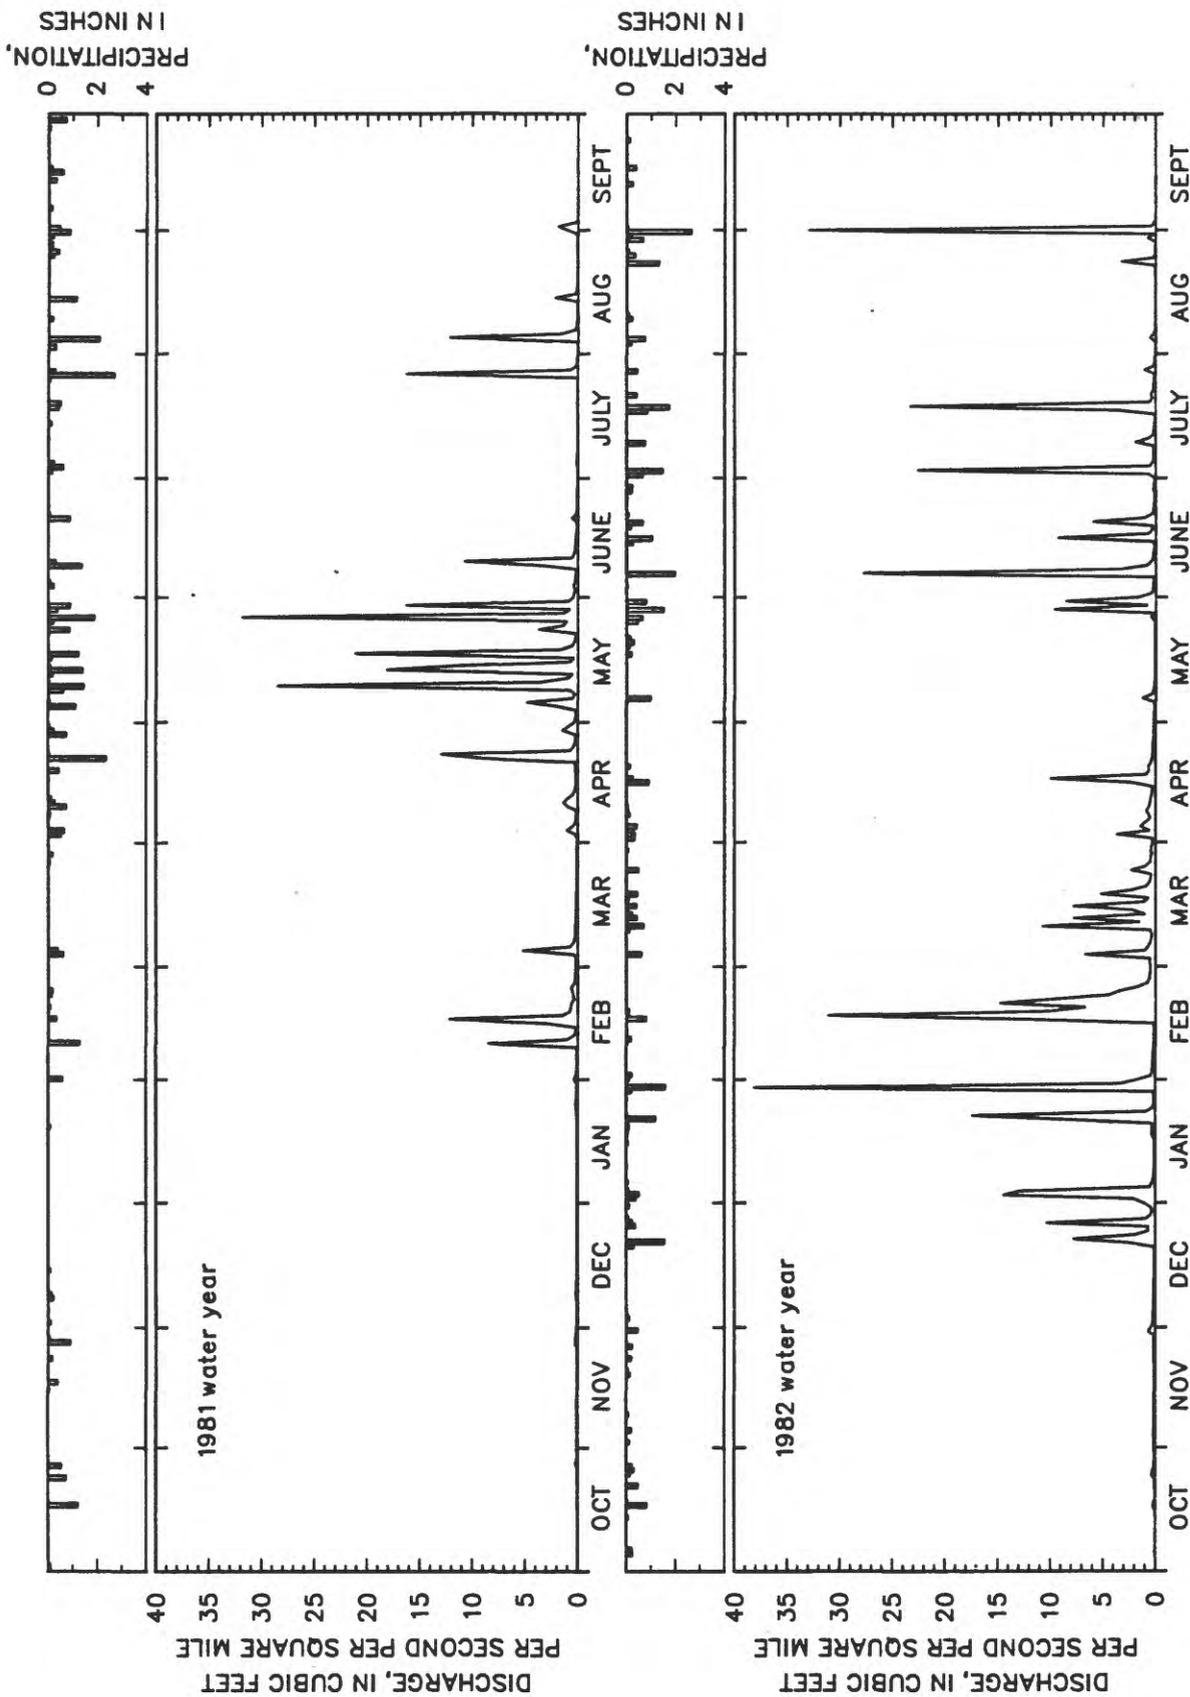


Figure 6a. -- Daily mean discharge and daily precipitation at Big Slough, 1981 and 1982 water years.

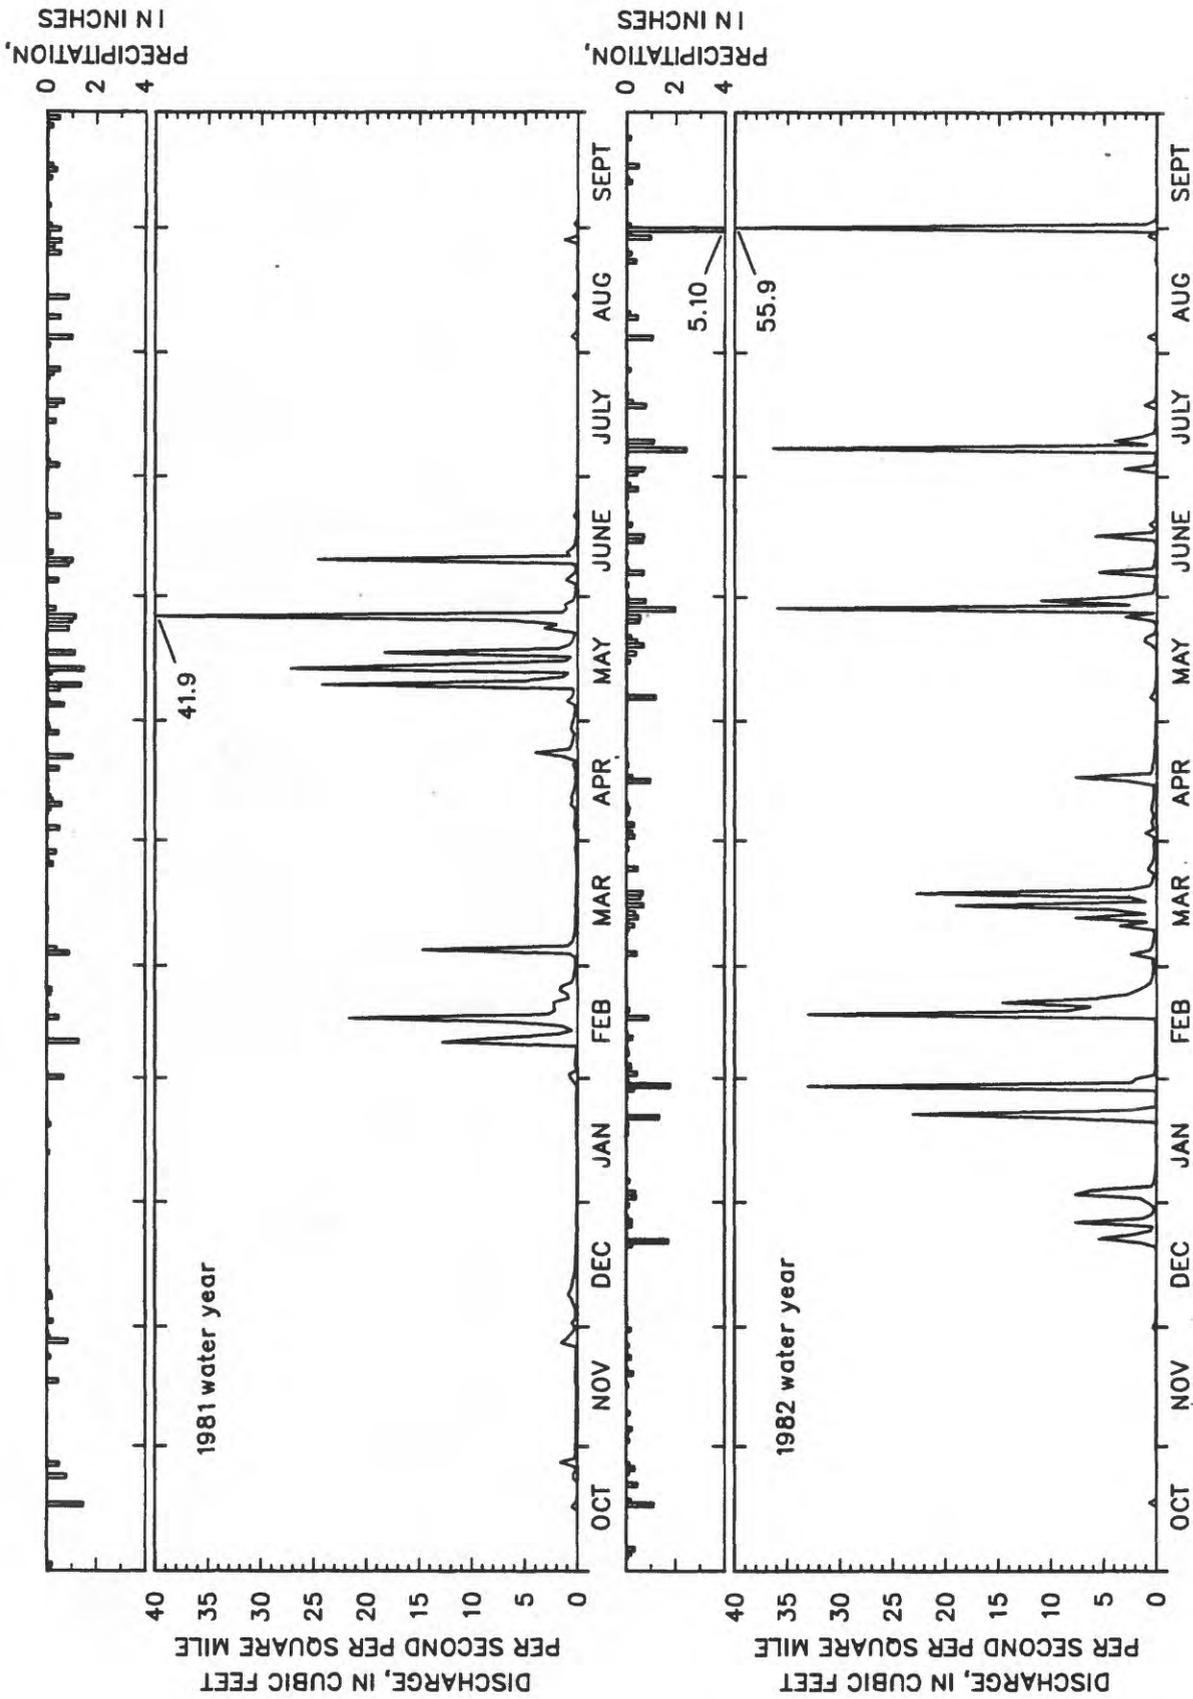


Figure 6b. --- Daily mean discharge and daily precipitation at Hooker Creek, 1981 and 1982 water years.

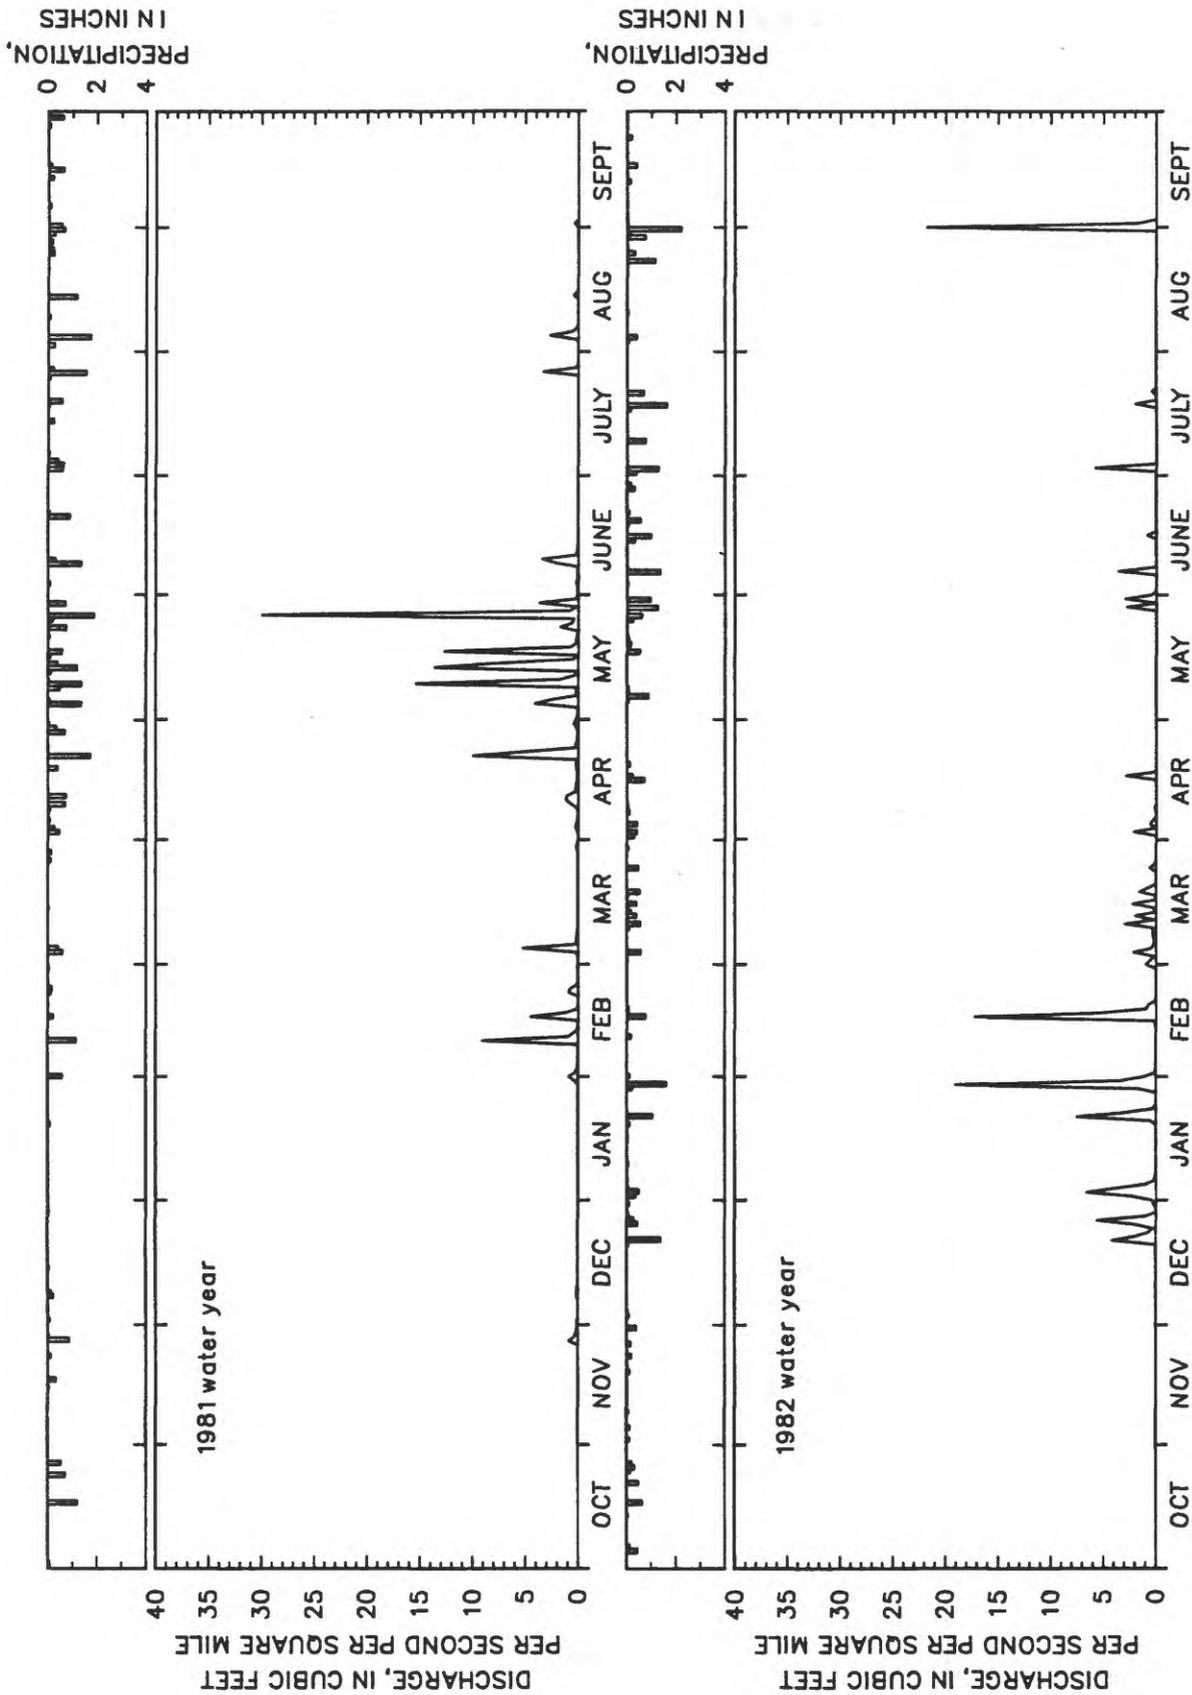


Figure 6c. -- Daily mean discharge and daily precipitation at unnamed tributary to Honey Creek, 1981 and 1982 water years.

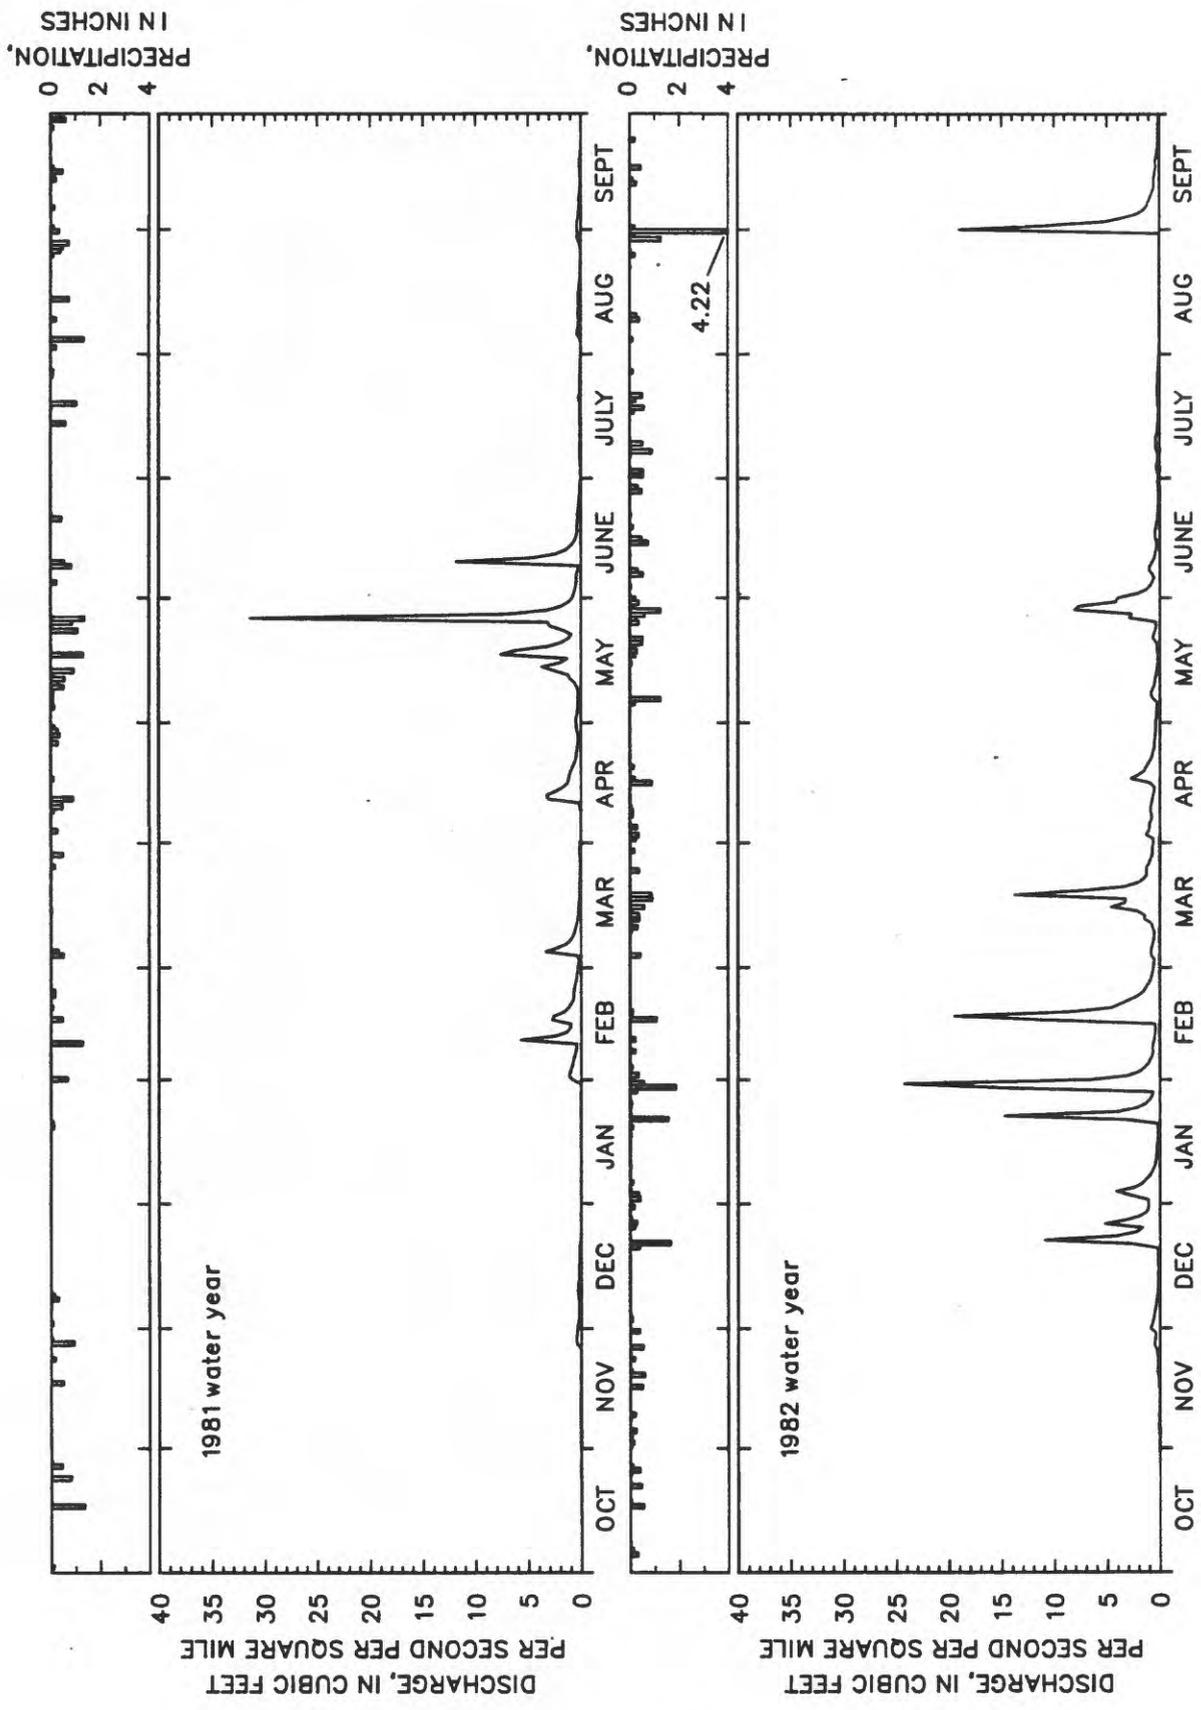


Figure 6d. --- Daily mean discharge and daily precipitation at unnamed tributary to Sulphur Creek, 1981 and 1982 water years.

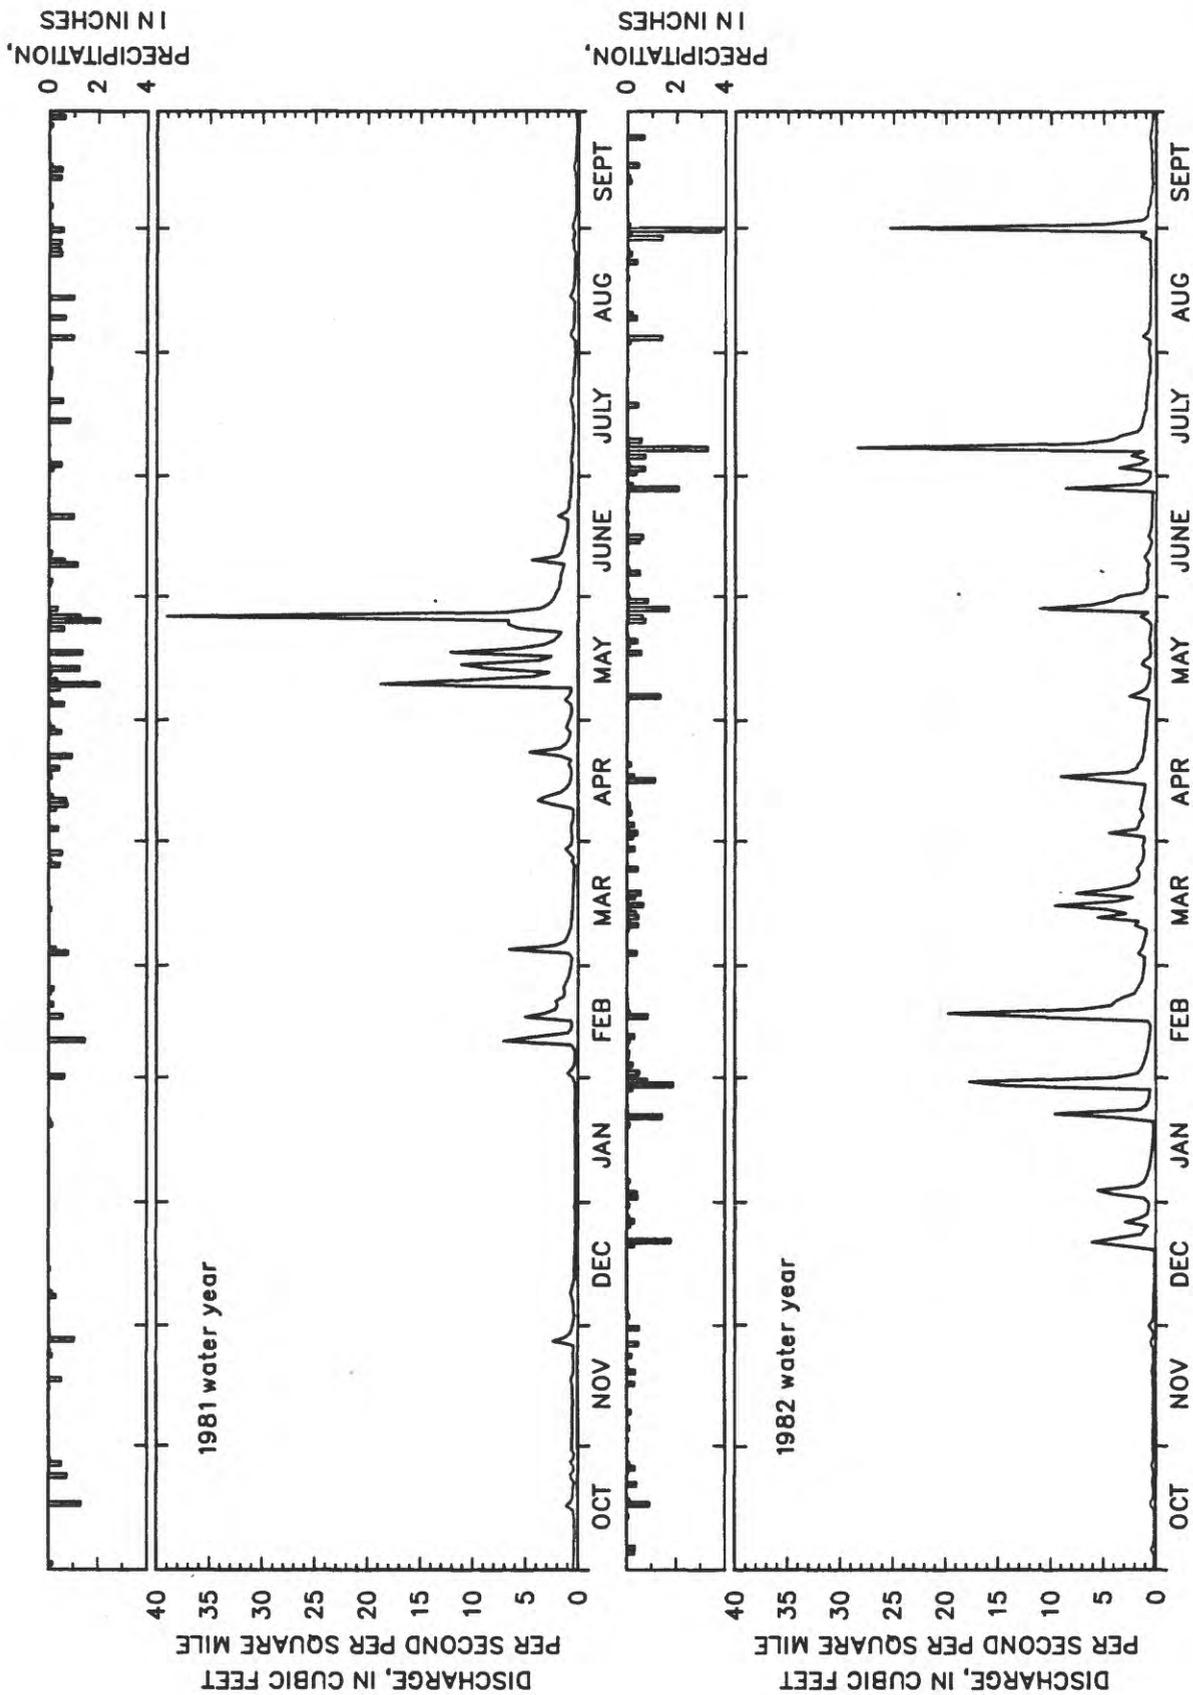


Figure 6e. --- Daily mean discharge and daily precipitation at Pond Creek, 1981 and 1982 water years.

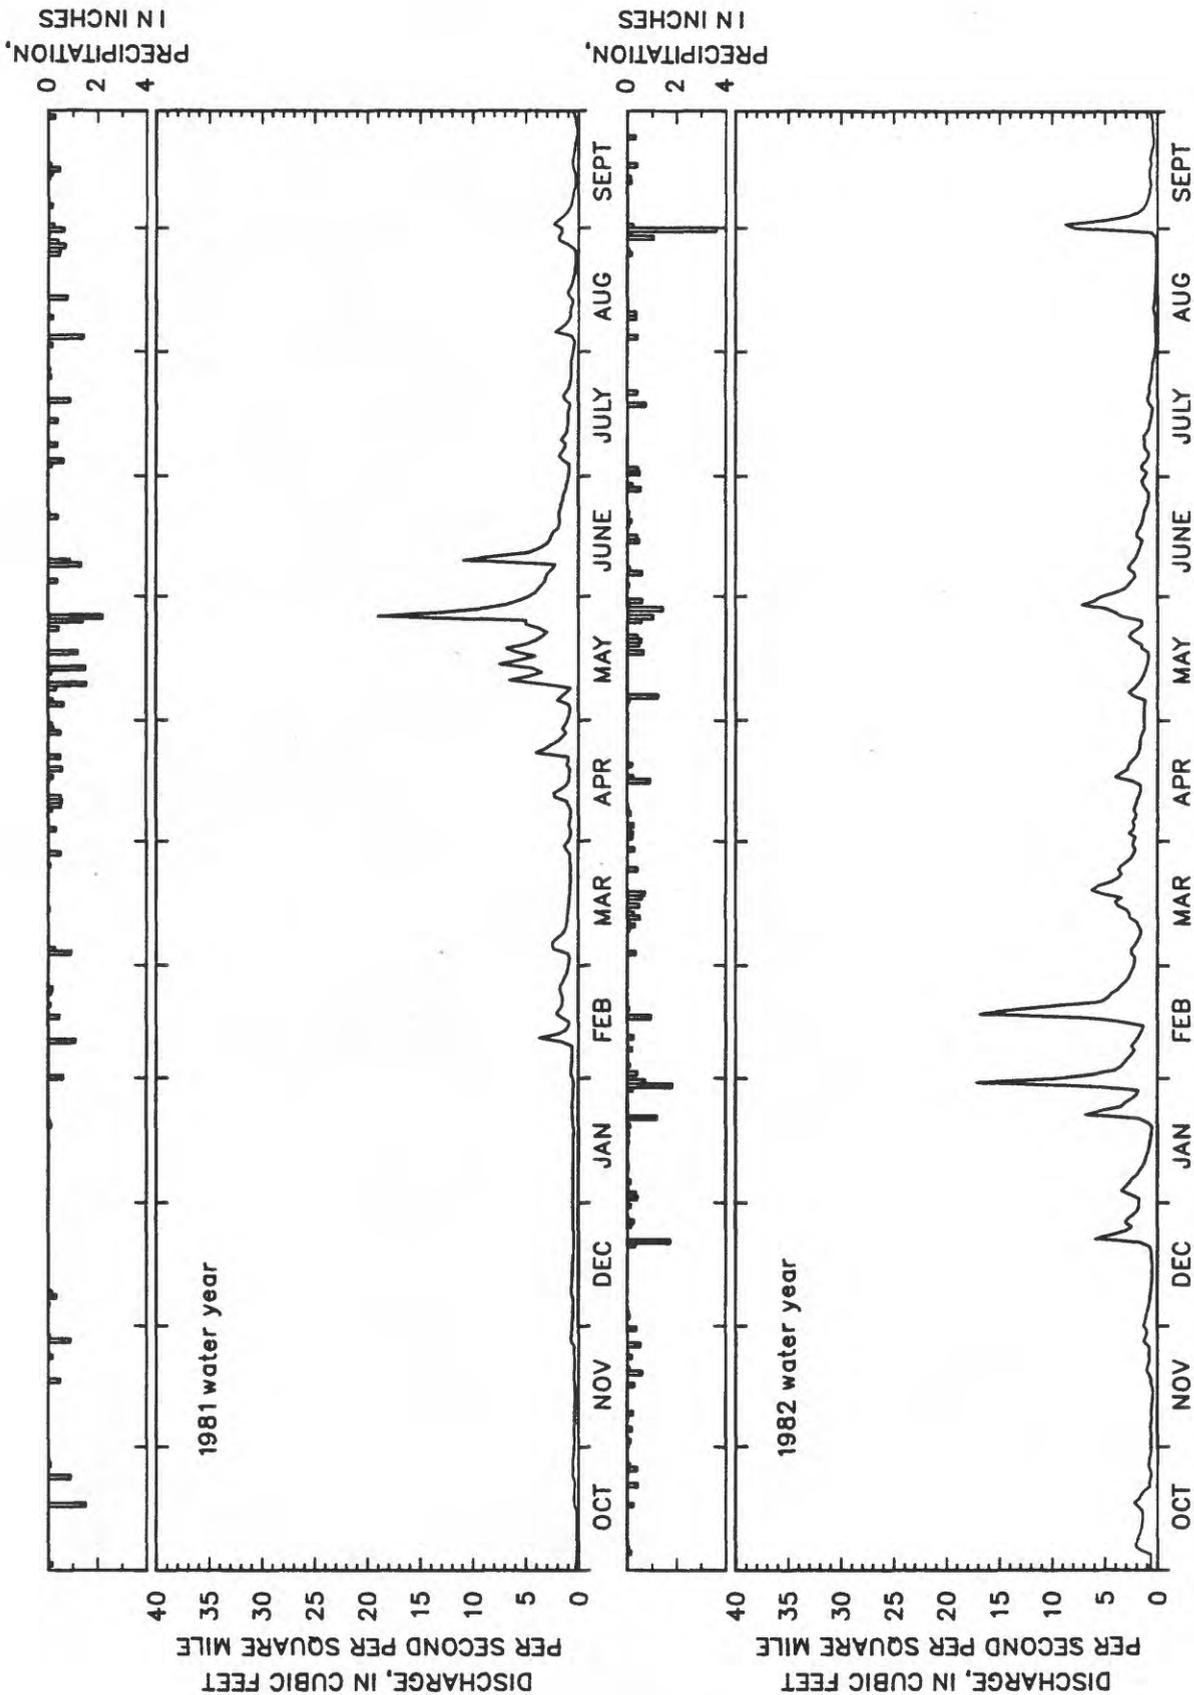


Figure 6f. -- Daily mean discharge and daily precipitation at unnamed tributary to Big Branch, 1981 and 1982 water years.

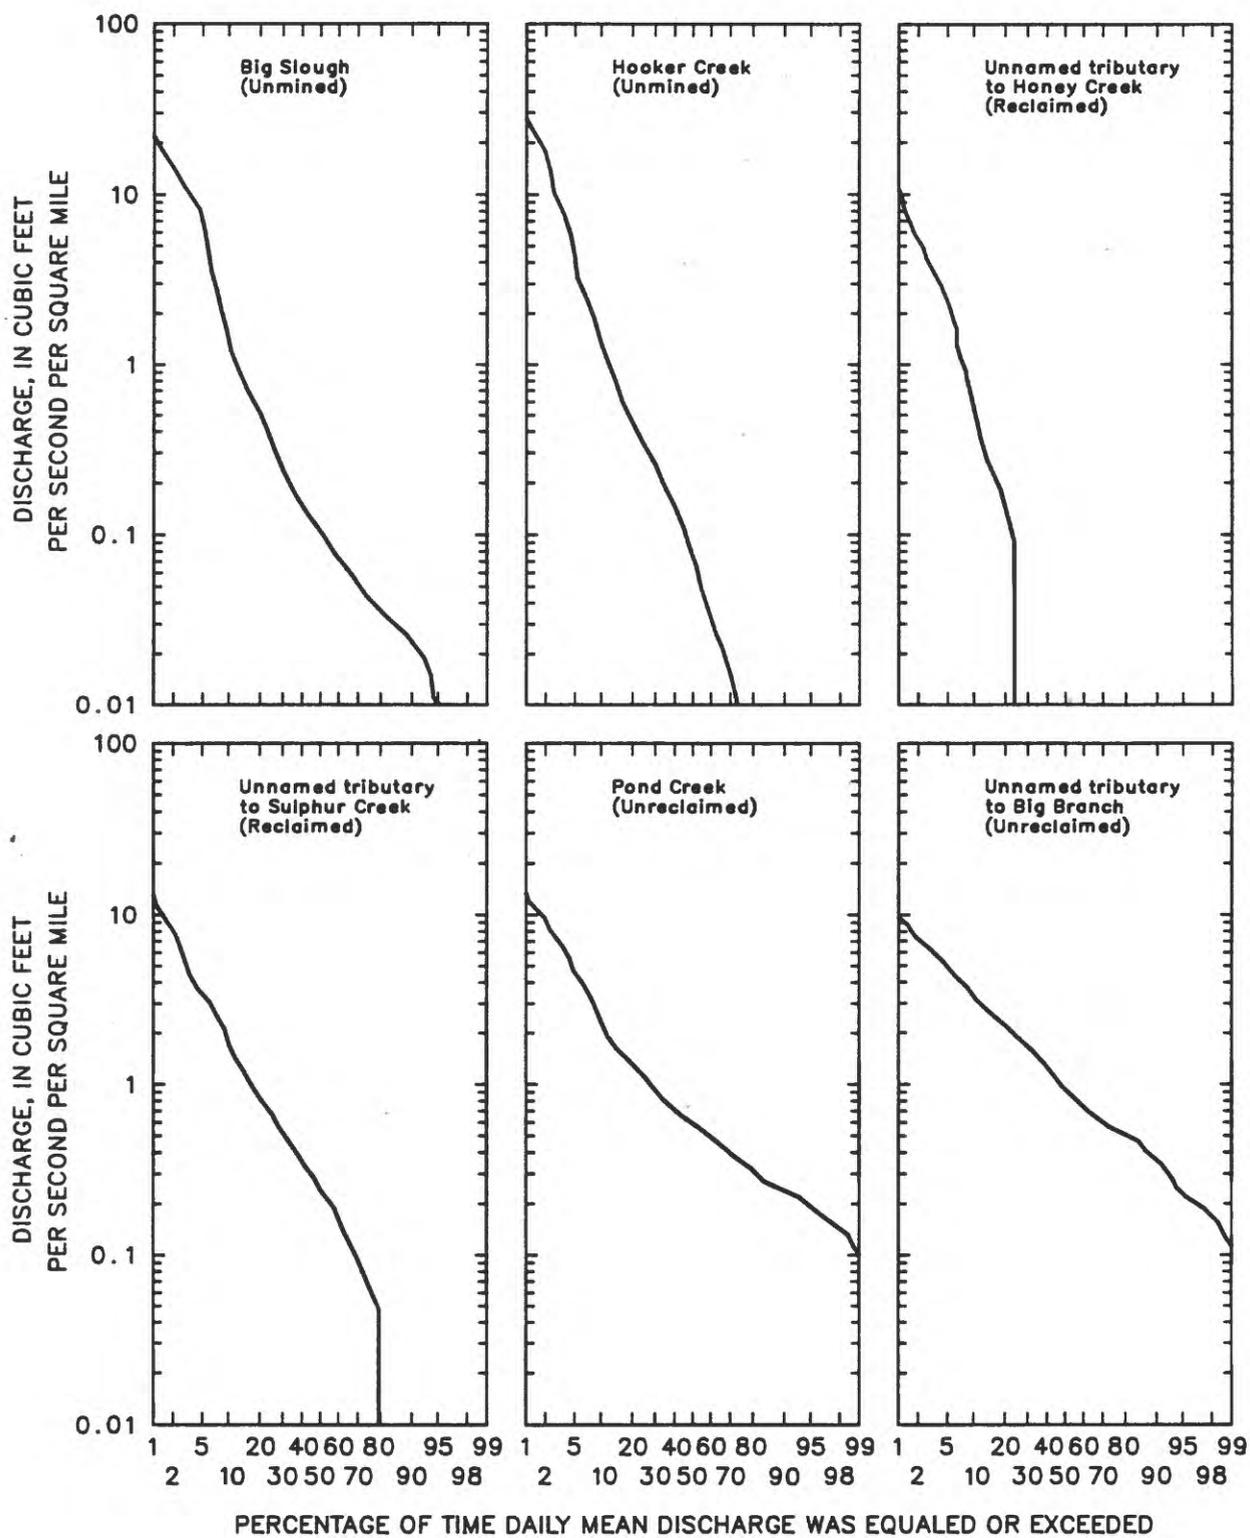


Figure 7. -- Duration curves of daily mean discharge, 1981 and 1982 water years.

Two other groups of curves in figure 7 also are apparent on the basis of discharge that is equaled or exceeded 1 percent of the time. Daily mean discharge equaled or exceeded 1 percent of the time at Big Slough and Hooker Creek was 22.4 and 28.2 (ft³/s)/mi², respectively, whereas the 1-percent discharge at the other watersheds ranged from 9.80 to 13.1 (ft³/s)/mi². Median discharge (discharge equaled or exceeded 50 percent of the time) at Pond Creek and Big Branch tributary was 2.4 to almost 13 times greater than the median discharge at Big Slough, Hooker Creek, and Sulphur Creek tributary. Median discharge at Honey Creek tributary was 0.00 (ft³/s)/mi².

Extremes

The five maximum and minimum daily mean discharges at each watershed for the 1981 and 1982 water years illustrate the extreme flow characteristics (table 2). The five highest daily mean discharges were usually greater at Big Slough and Hooker Creek than at the other watersheds. The five highest daily mean discharges at Honey Creek tributary, Sulphur Creek tributary, Pond Creek, and Big Branch tributary are similar in magnitude. Nearly all of the high flows in the 1981 water year occurred during the heavy frontal storms of May and June. Precipitation on frozen soil and (or) snowmelt caused most of the high flows to occur during January and February in the 1982 water year (figs. 5, 6a-f, and table 2). Intense thunderstorms during July and September caused some of the largest high flows during the 1982 water year, but few high flows were observed during the summer of the 1981 water year (figs. 6a-f and table 2).

Honey Creek tributary had the greatest number of no-flow days, followed by Hooker Creek, Sulphur Creek tributary, and Big Slough (table 2). Low flows for Pond Creek and Big Branch tributary were similar during both water years. Low flows generally occurred during late summer and fall and occasionally during winter.

Table 2.--Extremes of daily mean discharge
 [(ft³/s)/mi²], cubic feet per second per square mile]

Watershed	High flow				Low flow			
	1981 water year		1982 water year		1981 water year		1982 water year	
	Discharge [(ft ³ /s)/mi ²]	Date	Discharge [(ft ³ /s)/mi ²]	Date	Discharge [(ft ³ /s)/mi ²]	Date	Discharge [(ft ³ /s)/mi ²]	Date
Big Slough (Unmined)	31.9	May 27	38.1	Jan 30	0.000	14 days	0.000	Oct 1
	28.5	May 10	33.0	Sept 1	.000		.000	Oct 2
	21.1	May 18	31.1	Feb 17	.000		.000	Oct 3
	18.1	May 14	27.8	June 7	.007		.007	Oct 4
	16.3	May 30	23.3	July 19	.007		.007	Oct 12
	16.3	July 27						
Hooker Creek (Unmined)	41.9	May 27	55.9	Sept 1	.000	91 days	.000	81 days
	27.2	May 14	36.4	July 8				
	24.6	June 10	36.0	May 29				
	24.3	May 10	33.1	Jan 30				
	21.7	Feb 16	33.1	Feb 17				
Unnamed tributary to Honey Creek (Reclaimed)	30.0	May 27	21.8	Sept 1	.000	259 days	.000	298 days
	15.5	May 10	19.1	Jan 30				
	13.6	May 14	17.3	Feb 16				
	12.7	May 18	7.55	Jan 22				
	10.0	Apr 22	6.64	Jan 3				
Unnamed tributary to Sulphur Creek (Reclaimed)	31.4	May 27	24.3	Jan 31	.000	98 days	.000	53 days
	11.9	June 10	19.5	Feb 17				
	7.62	May 18	19.0	Sept 1				
	7.14	May 28	14.8	Jan 23				
	6.19	May 19	14.8	Jan 30				
Pond Creek (Unreclaimed)	39.1	May 27	28.4	July 8	.147	Sept 24	.076	Dec 17-
	18.8	May 10	25.4	Sept 1	.152	Sept 25		Dec 20
	12.2	May 18	19.8	Feb 17	.157	Sept 23	.081	Dec 16
	11.2	May 11	17.8	Jan 31	.157	Sept 28		
	11.2	May 15	14.2	Jan 30	.162	Sept 26		
Unnamed tributary to Big Branch (Unreclaimed)	19.1	May 27	17.2	Jan 31	.125	Sept 25	.063	Aug 22-
	13.1	May 28	16.9	Feb 17	.156	Sept 24		Aug 26
	10.9	June 10	13.8	Feb 18	.156	Sept 26		
	9.06	May 29	9.69	Feb 19	.188	Oct 6-		
	8.13	June 11	9.38	Feb 1		Oct 16		

Runoff

Annual runoff and water loss

Annual runoff was greatest at Big Branch tributary and least at Honey Creek tributary for both water years (table 3). The relative magnitudes and patterns of annual runoff are the same as the magnitudes and patterns of annual mean discharge (table 1) because discharge and runoff are the same quantities expressed in different units of measure.

Annual runoff coefficients attempt to account for the effect of precipitation on runoff. The annual runoff coefficient is the annual runoff expressed as a percentage of the annual precipitation. Incorporating differences in precipitation in the amount of runoff did not appreciably change results based on runoff alone. The unreclaimed watersheds had the greatest runoff, the reclaimed watersheds had the least runoff, and runoff at the agricultural watersheds was intermediate. An exception to this pattern was during the 1982 water year when Big Slough had a larger runoff coefficient than Pond Creek (table 3).

Annual runoff expressed as a percentage of annual precipitation averaged 55.5 percent at Big Branch tributary, 39.5 percent at Pond Creek, 35.5 percent at Big Slough, 35.3 percent at Hooker Creek, 29.2 percent at Sulphur Creek tributary, and 16.6 percent at Honey Creek tributary.

Annual water loss is the difference between annual precipitation and annual runoff. The term "water loss" developed from the concept of runoff as the residual precipitation after losses from evapotranspiration. Water loss can be used to estimate evapotranspiration in large watersheds where surface- and ground-water divides coincide and the flow of ground water beneath the gage is negligible (Hoyt and others, 1936; Williams and others, 1940).

In this study, water loss is used to examine the combined effects of evapotranspiration and ground-water movement into or out of the watershed. Without accurate information on ground-water divides and flow paths, estimates of evapotranspiration based on water loss are unreliable. For example, if surface- and ground-water divides coincide but a substantial part of the precipitation that percolates to the water table flows out of the watershed beneath the gage (does not contribute to streamflow measured at the gage), then evapotranspiration is overestimated. Another source of uncertainty occurs when surface- and ground-water divides do not coincide. For example, if the ground-water divides enclose an area substantially larger than the surface-water divides, and all of the ground water contributes to streamflow measured at the gage, then evapotranspiration is underestimated.

Table 3.--Annual runoff and annual water loss

Watershed	Annual runoff (inches)		Annual runoff coefficient ¹ (percent)		Annual water loss ² (inches)		Annual precipitation (inches)		
	1981 water year	1982 water year	1981 water year	1982 water year	1981 water year	1982 water year	1981 water year	1982 water year	
Big Slough (Unmined)	11.0	18.7	14.85	44.4	35.50	30.4	23.4	41.4	42.1
Hooker Creek (Unmined)	11.9	17.5	14.70	38.0	35.30	24.6	28.6	36.5	46.1
Unnamed tributary to Honey Creek (Reclaimed)	6.3	6.0	6.15	16.3	16.60	31.0	30.8	37.3	36.8
Unnamed tributary to Sulphur Creek (Reclaimed)	7.5	15.2	11.35	34.5	29.20	23.9	28.9	31.4	44.1
Pond Creek (Unreclaimed)	15.2	19.7	17.45	40.0	39.45	23.9	29.5	39.1	49.2
Unnamed tributary to Big Branch (Unreclaimed)	17.5	24.7	21.10	62.1	55.50	18.3	15.1	16.70	35.8
								35.8	39.8
									37.80

¹ Annual runoff coefficient is annual runoff divided by annual precipitation multiplied by 100 percent.

² Annual water loss is annual precipitation minus annual runoff.

Annual water loss ranged from 15.1 to 31.0 in. (table 3). Water loss during both years was least at Big Branch tributary and was greatest at Honey Creek tributary. No relation is evident between water loss and precipitation, runoff, or water year. Inspection of the average annual water loss shows that Big Slough, Hooker Creek, Sulphur Creek tributary, and Pond Creek have similar average water losses (table 3). Honey Creek tributary has approximately 4.5 in. more water loss than the other four watersheds and Big Branch tributary has approximately 10 in. less water loss than the other four watersheds. It is unlikely that differences in evapotranspiration alone account for the large differences in water loss in these two watersheds. The high water loss at Honey Creek tributary is likely caused by ground-water flow beneath the gage. Water infiltrates into the soil, percolates to the water table, and is discharged downstream of the gaging station. The low water loss at Big Branch tributary is probably caused by increased streamflow owing to the inflow of ground water from areas adjacent to the watershed.

Monthly runoff

Major differences in monthly precipitation and runoff are evident between the 1981 and 1982 water years (fig. 8). Precipitation during the 1981 water year was greatest during May and least during January and December. Precipitation was much more evenly distributed during the 1982 water year. The major part of the annual runoff for the 1981 water year was during May with much smaller amounts during the other months. Runoff for the 1982 water year was more evenly distributed with the greatest amounts caused by snowmelt in January and February or by rainfall in March. The large amounts of runoff during July and September were caused by thunderstorms (figs. 6a-f).

As with annual runoff, differences in monthly runoff are apparent among watersheds. During May of the 1981 water year, runoff was 2 to 3 in. less at Honey Creek tributary and Sulphur Creek tributary than at the other watersheds (fig. 8). However, the most noticeable differences in monthly runoff were during the low-flow periods from October 1980 through January 1981 and from July 1981 through November 1981. Relatively large amounts of runoff were recorded during these months at Big Branch tributary and Pond Creek whereas much smaller amounts or no runoff were recorded at the other watersheds.

Runoff exceeded precipitation at Big Branch tributary during December, January, and June of the 1981 water year and during February and April of the 1982 water year. The relation between precipitation and runoff for these months could be caused by delayed base flow that originates within the watershed but probably is additional evidence that ground water enters Big Branch tributary from outside of the watershed. Snowmelt during February 1982 caused runoff to exceed precipitation at all watersheds except Honey Creek tributary (fig. 8).

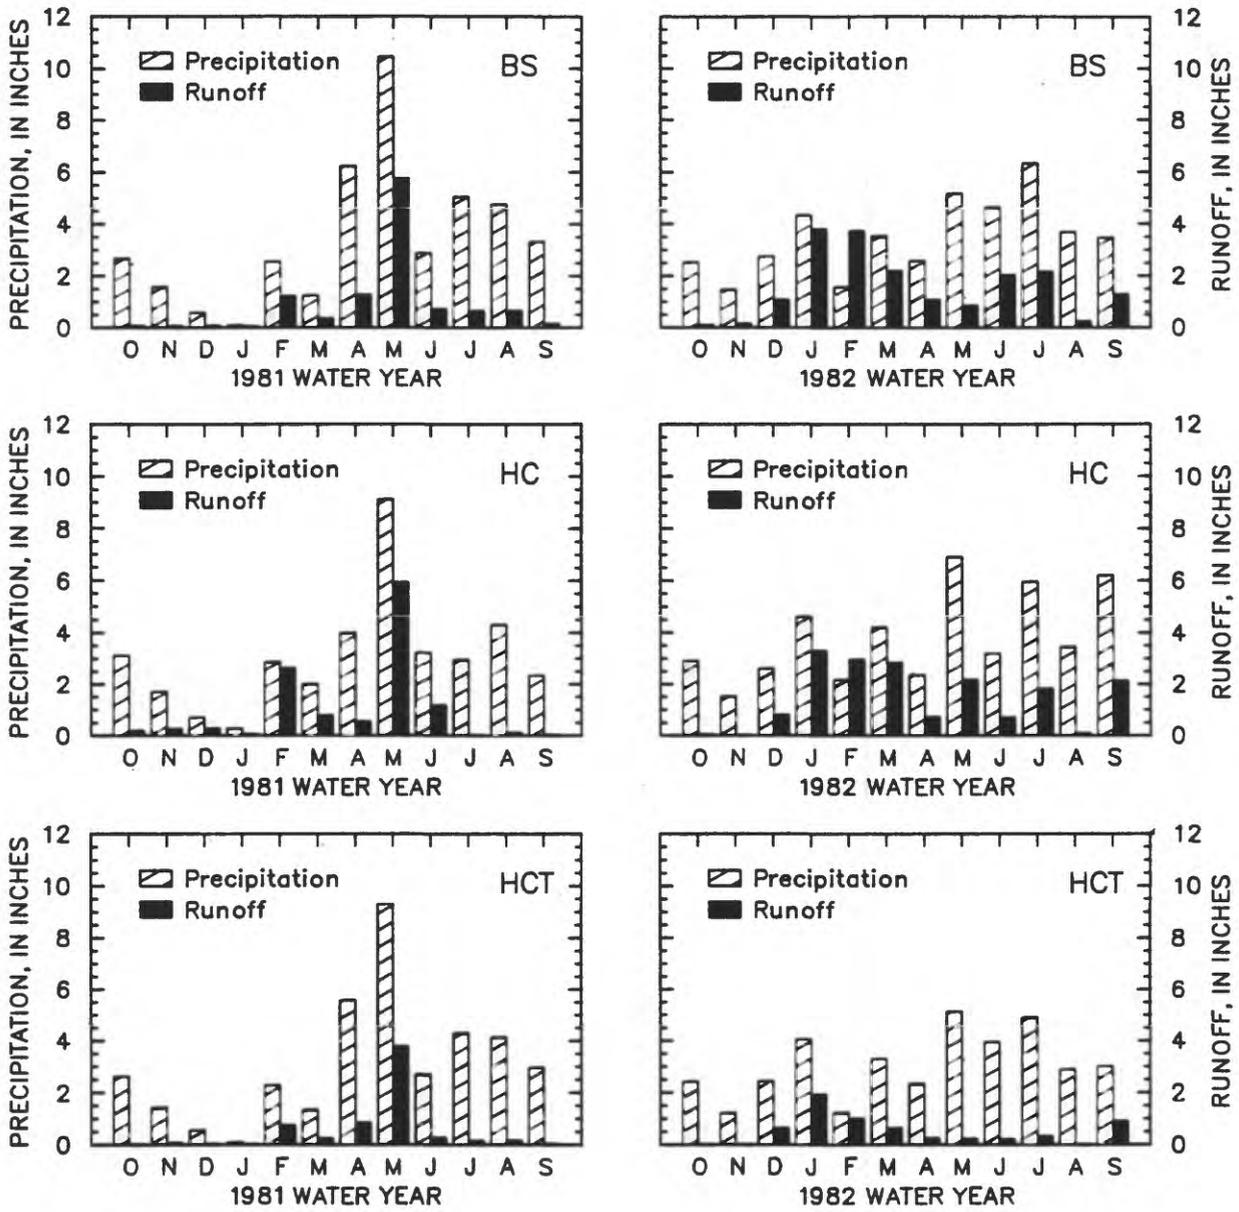


Figure 8. -- Monthly precipitation and runoff, 1981 and 1982 water years. BS, Big Slough (Unmined); HC, Hooker Creek (Unmined); HCT, unnamed tributary to Honey Creek (Reclaimed); SCT, unnamed tributary to Sulphur Creek (Reclaimed); PC, Pond Creek (Unreclaimed); BBT, unnamed tributary to Big Branch (Unreclaimed).

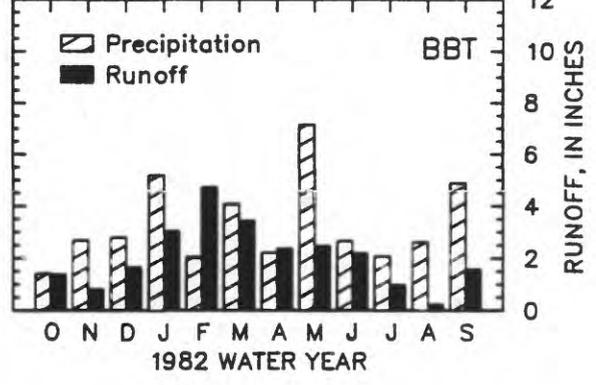
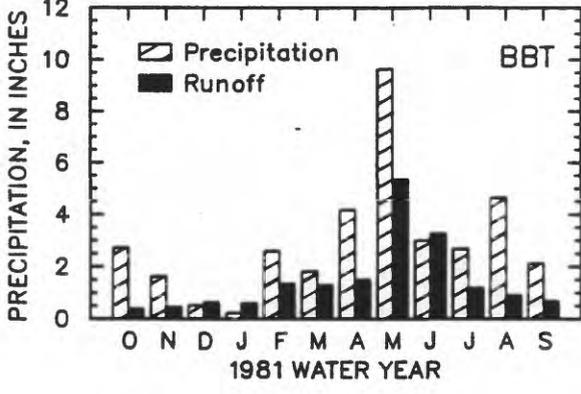
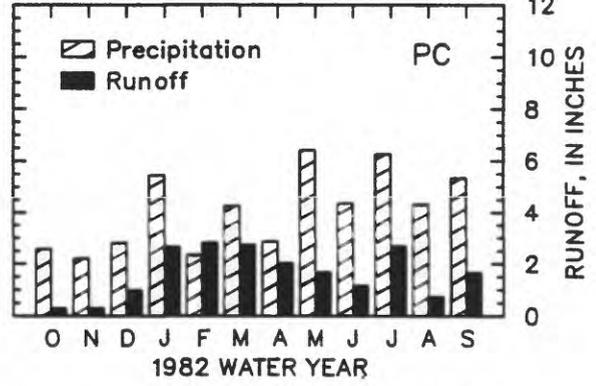
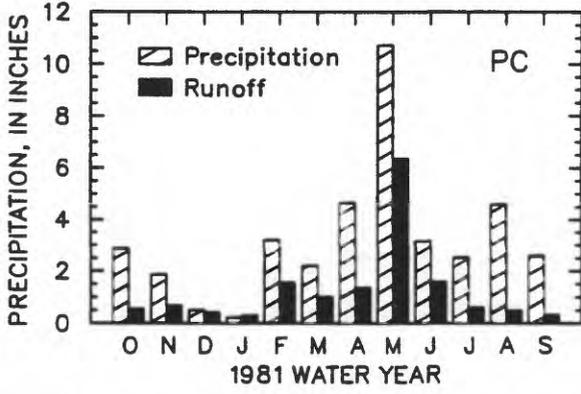
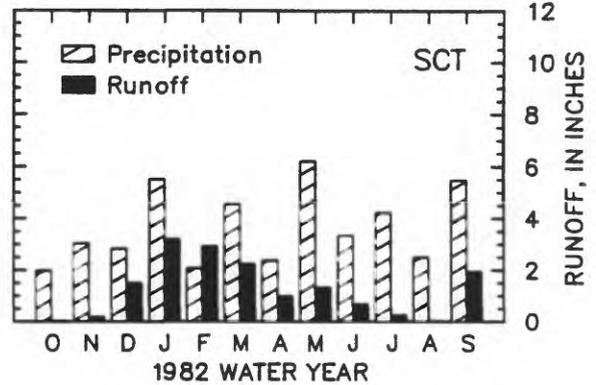
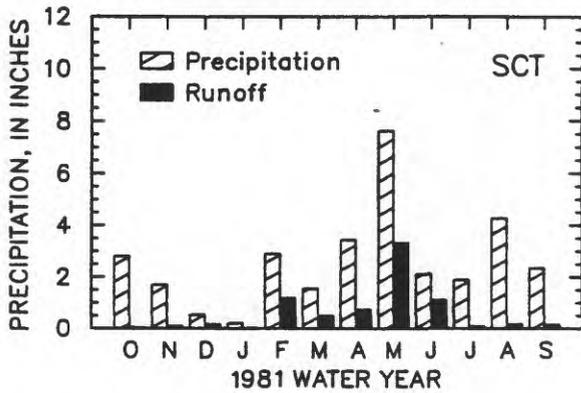


Figure 8. -- Continued.

Peak Discharge

The dates of the five largest instantaneous peak discharges (table 4) are similar to those of the five largest daily mean discharges (table 2). The dates are similar, but not the same, because table 4 shows the maximum discharge per 5-minute interval whereas table 2 shows the maximum discharge per day. High-intensity, short-duration storms characteristic of thunderstorms that typically occur during summer are as likely to cause peak flow rates as low-intensity, long-duration storms characteristic of frontal storms that typically occur during winter and spring. Five of nine peak discharges greater than $150 \text{ (ft}^3/\text{s)}/\text{mi}^2$ were caused by thunderstorms (table 4).

The majority of peak discharges during the 1981 water year were caused by frequent periods of rainfall on saturated soils during May. The majority of peak discharges during the 1982 water year were caused by thunderstorms in July and September or by rainfall on frozen soils and (or) snowmelt during January and February.

The smallest peak discharges were at Big Branch tributary and Sulphur Creek tributary, probably because of the final-cut lakes at the mouths of these watersheds. These lakes reduce peak discharge by storing and slowly releasing surface runoff. The greatest peak discharges were at Hooker Creek, Big Slough, and to a lesser degree, especially during the 1982 water year, at Honey Creek tributary (table 4).

Peak discharges for September 1, 1982, at Pond Creek and for February 17, 1982, at Big Branch tributary are unknown. Record was lost because of a recorder malfunction on September 1, 1982, and a frozen stilling well on February 17, 1982. The day of the peak and the relative magnitude of the peak were estimated by comparing hydrographs with intensities and volumes of precipitation.

Table 4.--Instantaneous peak discharge

Watershed	1981 water year			1982 water year		
	Peak discharge (cubic feet per second per square mile)	Date	Time	Peak discharge (cubic feet per second per square mile)	Date	Time
Big Slough (Unmined)	155.6	July 27	1735	155.9	Sept 1	0615
	123.7	May 18	0945	153.3	June 7	1155
	111.5	May 30	0815	151.5	July 3	0530
	111.1	May 27	0430	127.8	July 19	0515
	93.7	Aug 5	1430	101.9	Jan 23	0055
Hooker Creek (Unmined)	155.9	May 27	0505	251.1	Sept 1	0655
	17.6	June 10	0335	212.9	July 8	0940
	94.9	May 18	0955	182.4	May 29	1645
	84.9	Feb 10	1905	130.9	Jan 23	0140
	68.0	Feb 16	1035	102.2	Mar 16	0540
Unnamed tributary to Honey Creek (Reclaimed)	163.6	May 27	0245	88.2	Sept 1	0620
	109.1	May 18	0855	80.0	Jan 22	2400
	72.7	Apr 22	2135	68.2	July 3	0520
	67.3	May 14	2020	67.3	Jan 30	1400
	54.5	June 9	2325	42.7	Dec 27	0045
Unnamed tributary to Sulphur Creek (Reclaimed)	57.1	May 27	0130	38.6	Sept 1	1210
	22.9	June 10	0550	33.8	Jan 31	0740
	13.8	May 18	1715	31.4	Feb 16	2030
	10.0	Feb 10	2140	27.1	Jan 23	0050
	4.05	Feb 16	1355	19.0	Mar 19	1150
Pond Creek (Unreclaimed)	85.8	May 27	0215	110.7	July 8	0950
	57.9	May 10	1620	----- ¹	Sept 1	----- ¹
	32.0	May 18	1050	32.5	Jan 31	0820
	25.9	May 15	0035	32.5	Feb 16	2100
	20.3	Feb 10	1830	28.4	Jan 23	0115
Unnamed tributary to Big Branch (Unreclaimed)	23.8	May 27	1015	19.7	Jan 31	1015
	14.7	June 10	1000	----- ¹	Feb 17	----- ¹
	7.81	May 15	0630	11.6	Sept 1	1345
	7.81	May 18	1800	7.81	May 29	2230
	6.88	May 10	2230	7.50	Jan 23	0545

¹ Date and relative magnitude of peak flow rate were estimated.

Precipitation-Runoff Relations

Storm hydrographs

Eight storms were selected to study the response of runoff to precipitation and to compare responses among watersheds. Storms were selected for study by using the following criteria: (1) Instantaneous (5-minute interval, 288 values per day) discharge and precipitation data were available for at least five of the six watersheds. (2) Both high-intensity, short-duration thunderstorms and low-intensity, long-duration frontal storms would be studied. (3) Storms with large volumes of precipitation were most suitable for study. (4) Temporal distribution and volume of precipitation during the storm were similar among watersheds. On the basis of the above criteria, four thunderstorms and four frontal storms were selected. The selected thunderstorms occurred on May 24, 1981 (fig. 9a and table 5a); June 9-10, 1981 (fig. 9b and table 5b); May 29, 1982 (fig. 9c and table 5c); and September 1, 1982 (fig. 9d and table 5d). The selected frontal storms occurred on May 26-27, 1981 (fig. 9e and table 5e); December 21-22, 1981 (fig. 9f and table 5f); January 22, 1982 (fig. 9g and table 5g); and April 16-17, 1982 (fig. 9h and table 5h).

The greatest amount of precipitation for the eight storms selected for study occurred on September 1, 1982, and ranged from 2.26 to 5.26 in. (table 5d). The least amount of precipitation for the eight storms occurred on May 24, 1981, and ranged from 0.43 to 1.10 in. (table 5a). Maximum precipitation intensity occurred during the thunderstorm of September 1, 1982, and ranged from 0.28 to 0.52 in. during 5 minutes, from 0.52 to 0.75 in. during 10 minutes, and from 1.21 to 2.84 in. during 1 hour (table 5d). The smallest maximum precipitation intensity for the eight storms occurred during the frontal storm of January 22, 1982, and ranged from 0.07 to 0.09 in. during 5 minutes, from 0.09 to 0.14 in. during 10 minutes, and from 0.27 to 0.35 in. during 1 hour (table 5g).

Methods of hydrograph separation typically are used to determine the source components of storm runoff (surface runoff, interflow, or ground-water flow). A quantitative determination of the source components of storm runoff was not attempted because of the confounding effect of the final-cut lakes in Sulphur Creek tributary, Pond Creek, and Big Branch tributary watersheds. Hydrograph separation was used in this study to determine the total volume of storm runoff, regardless of source. Volumes of storm runoff were calculated by determining the discharge (base flow) immediately before the initial rise of the hydrograph. When discharge returned to base flow, storm runoff was assumed to have ceased. If discharge failed to return to base flow before another storm occurred, the recession curve and the corresponding volume of runoff were estimated. For all cases where estimates were required, the estimated volume of storm runoff was less than 5 percent of the total volume of storm runoff. The volume of storm runoff is the total volume of runoff minus the volume of base flow. The time from the initial rise of the hydrograph to the instantaneous peak discharge (the first occurrence of the maximum discharge if more than one) also was determined for each storm hydrograph.

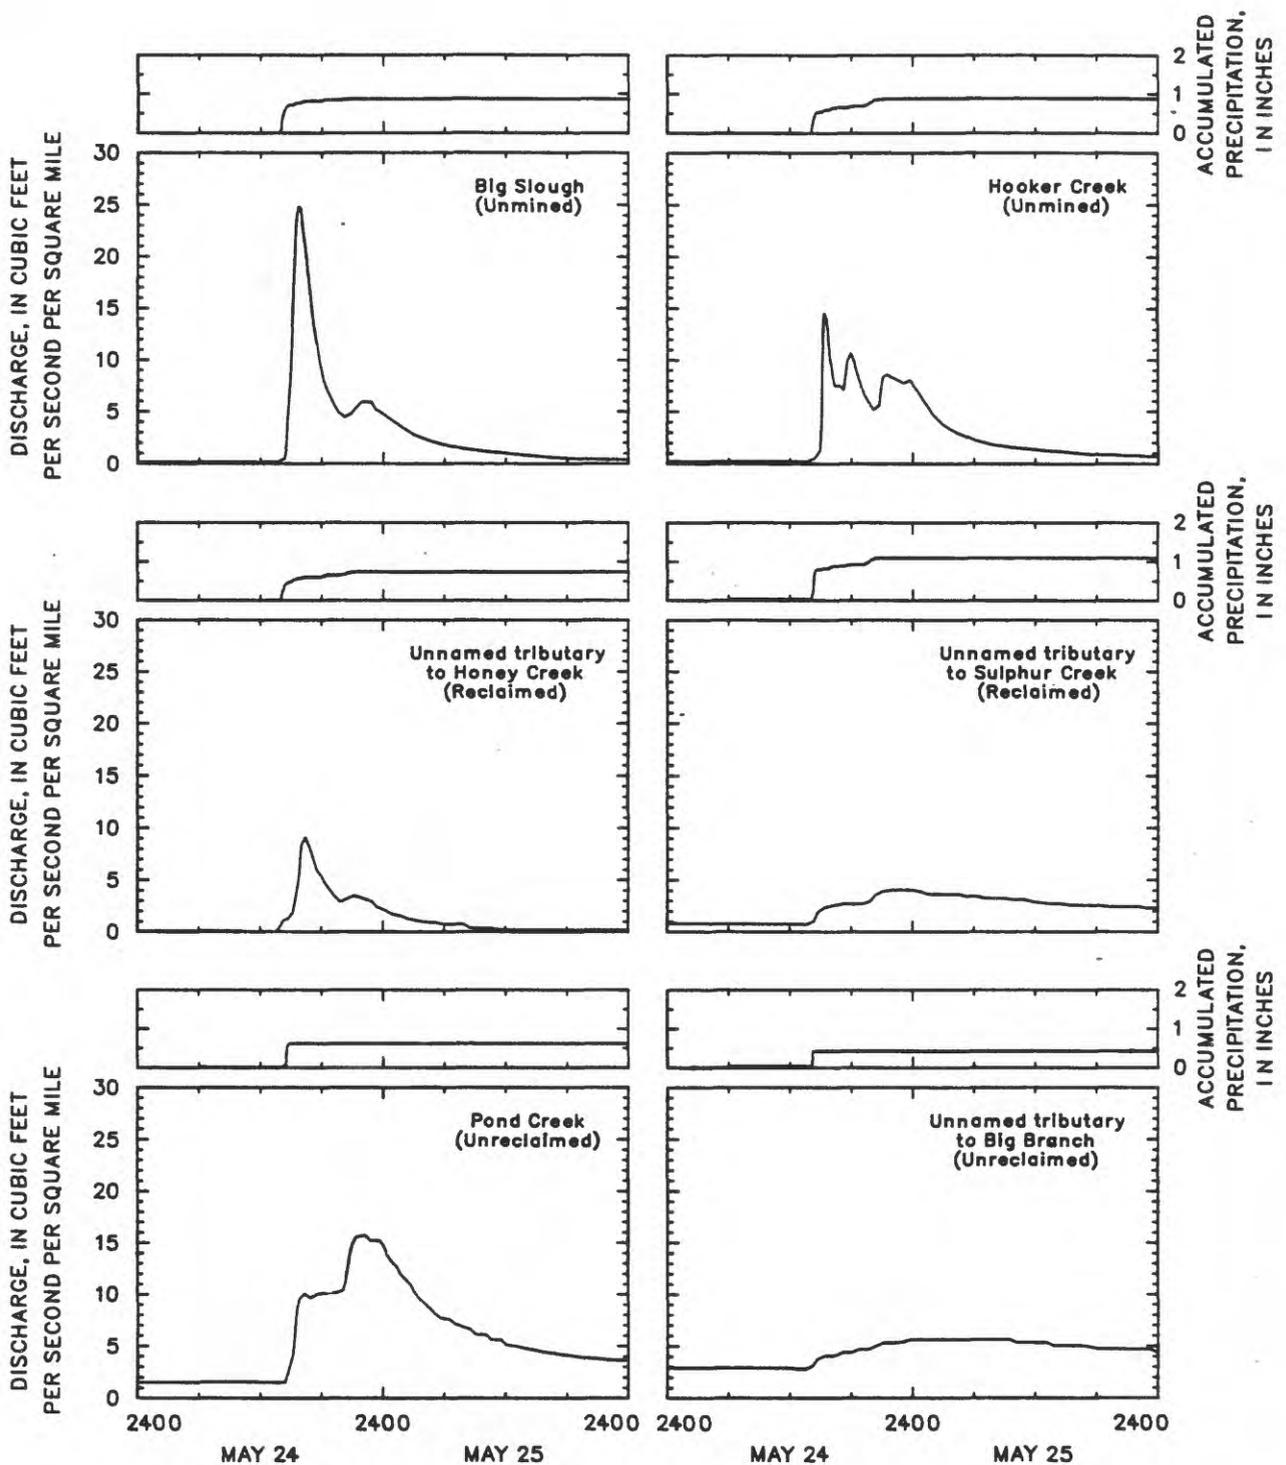


Figure 9a. -- Instantaneous discharge and accumulated precipitation for the thunderstorm of May 24, 1981.

Table 5a.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the thunderstorm of May 24, 1981

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	7 days (inches)	
Big Slough (Unmined)	0.87	0.15	17.2	1.75	0.22	0.34	0.71	0.03	0.03	1.39
Hooker Creek (Unmined)	.88	.19	21.6	1.33	.18	.27	.54	.00	.00	1.14
Unnamed tributary to Honey Creek (Reclaimed)	.74	.08	10.8	2.25	.12	.23	.49	.05	.05	.74
Unnamed tributary to Sulphur Creek (Reclaimed)	1.10	.15	13.6	6.92	.44	.54	.77	.00	.00	1.34
Pond Creek (Unreclaimed)	.62	.39	62.9	7.17	.27	.46	.61	.00	.00	1.37
Unnamed tributary to Big Branch (Unreclaimed)	.43	.15	34.9	9.25	.30	.39	.39	.00	.00	1.21

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

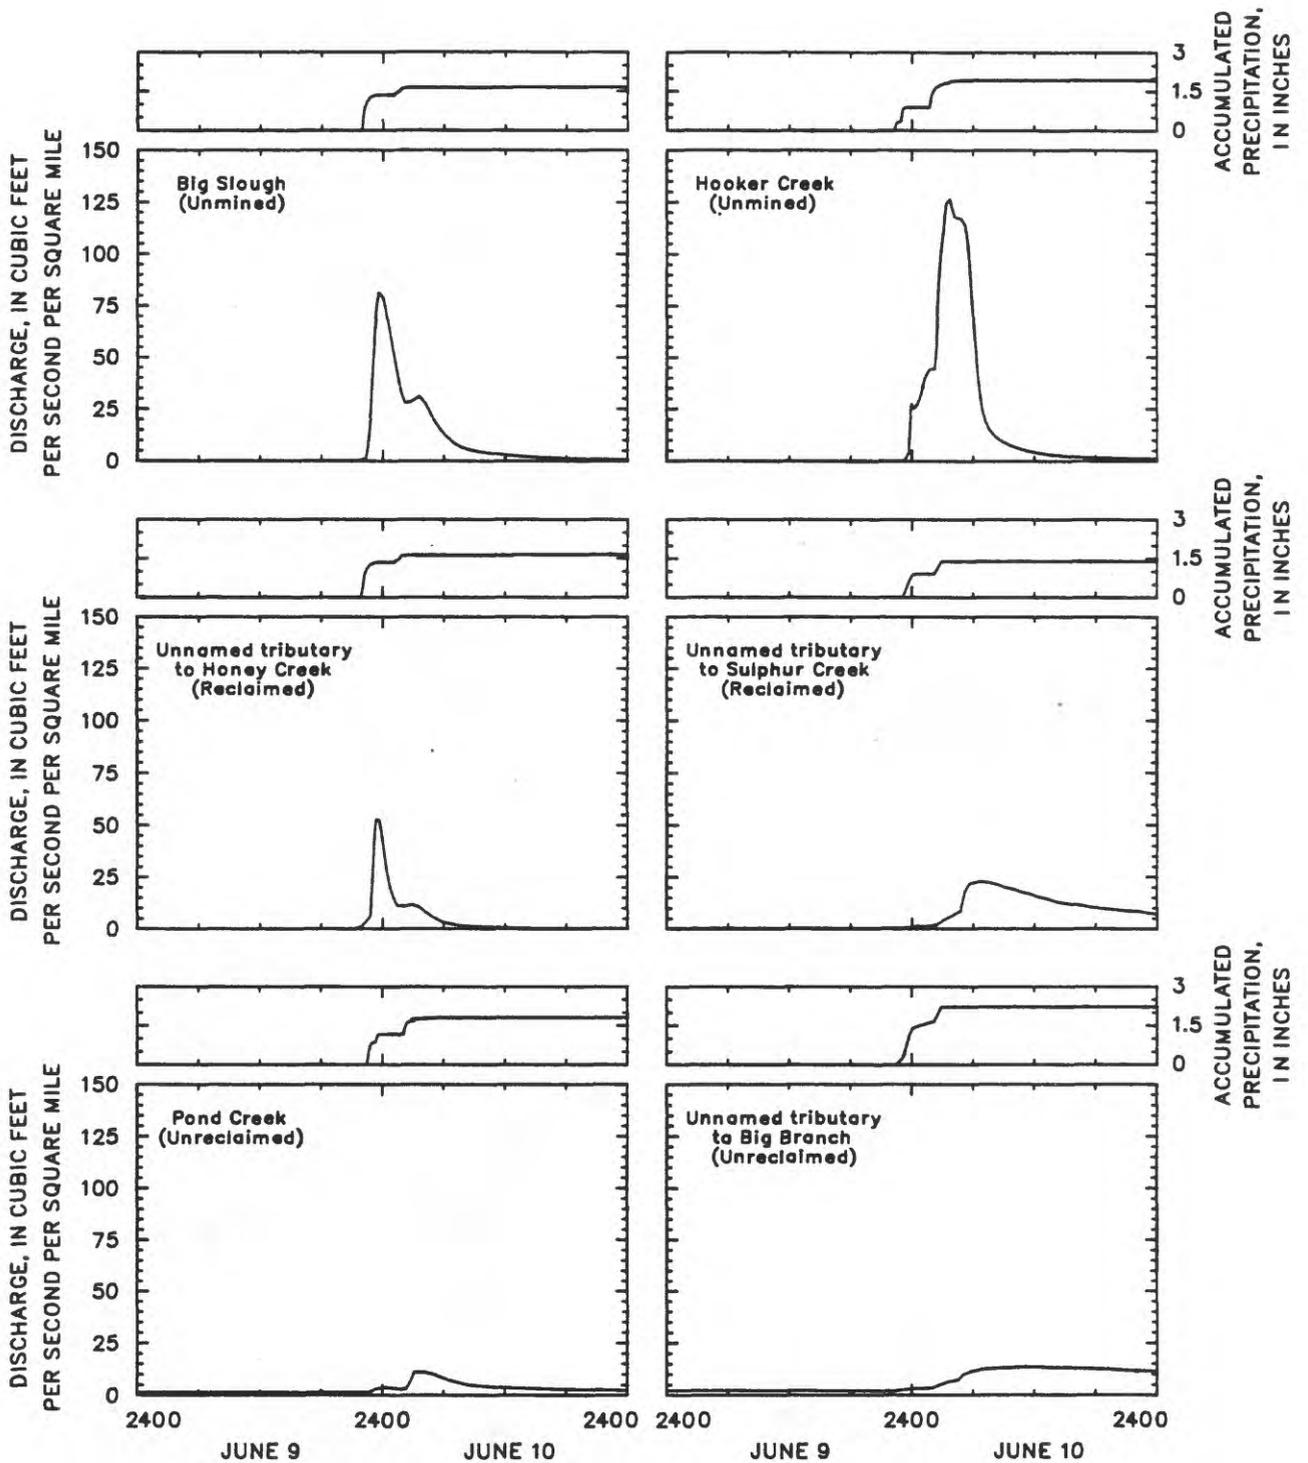


Figure 9b. -- Instantaneous discharge and accumulated precipitation for the thunderstorm of June 9-10, 1981.

Table 5b.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the thunderstorm of June 9-10, 1981

Watershed	Precipitation volume (inches)	Storm runoff volume (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	
Big Slough (Unmined)	1.65	0.53	32.1	1.67	0.27	0.53	1.30	0.00	0.29
Hooker Creek (Unmined)	1.93	.97	50.3	5.17	.27	.40	.85	.00	.46
Unnamed tributary to Honey Creek (Reclaimed)	1.65	.21	12.7	1.42	.27	.53	1.30	.00	.09
Unnamed tributary to Sulphur Creek (Reclaimed)	1.39	.73	52.5	6.00	.11	.18	.85	.00	.23
Pond Creek (Unreclaimed)	1.81	.15	8.3	5.25	.24	.47	1.04	.00	.18
Unnamed tributary to Big Branch (Unreclaimed)	2.22	.75	33.8	10.75	.14	.24	1.15	.00	.37

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

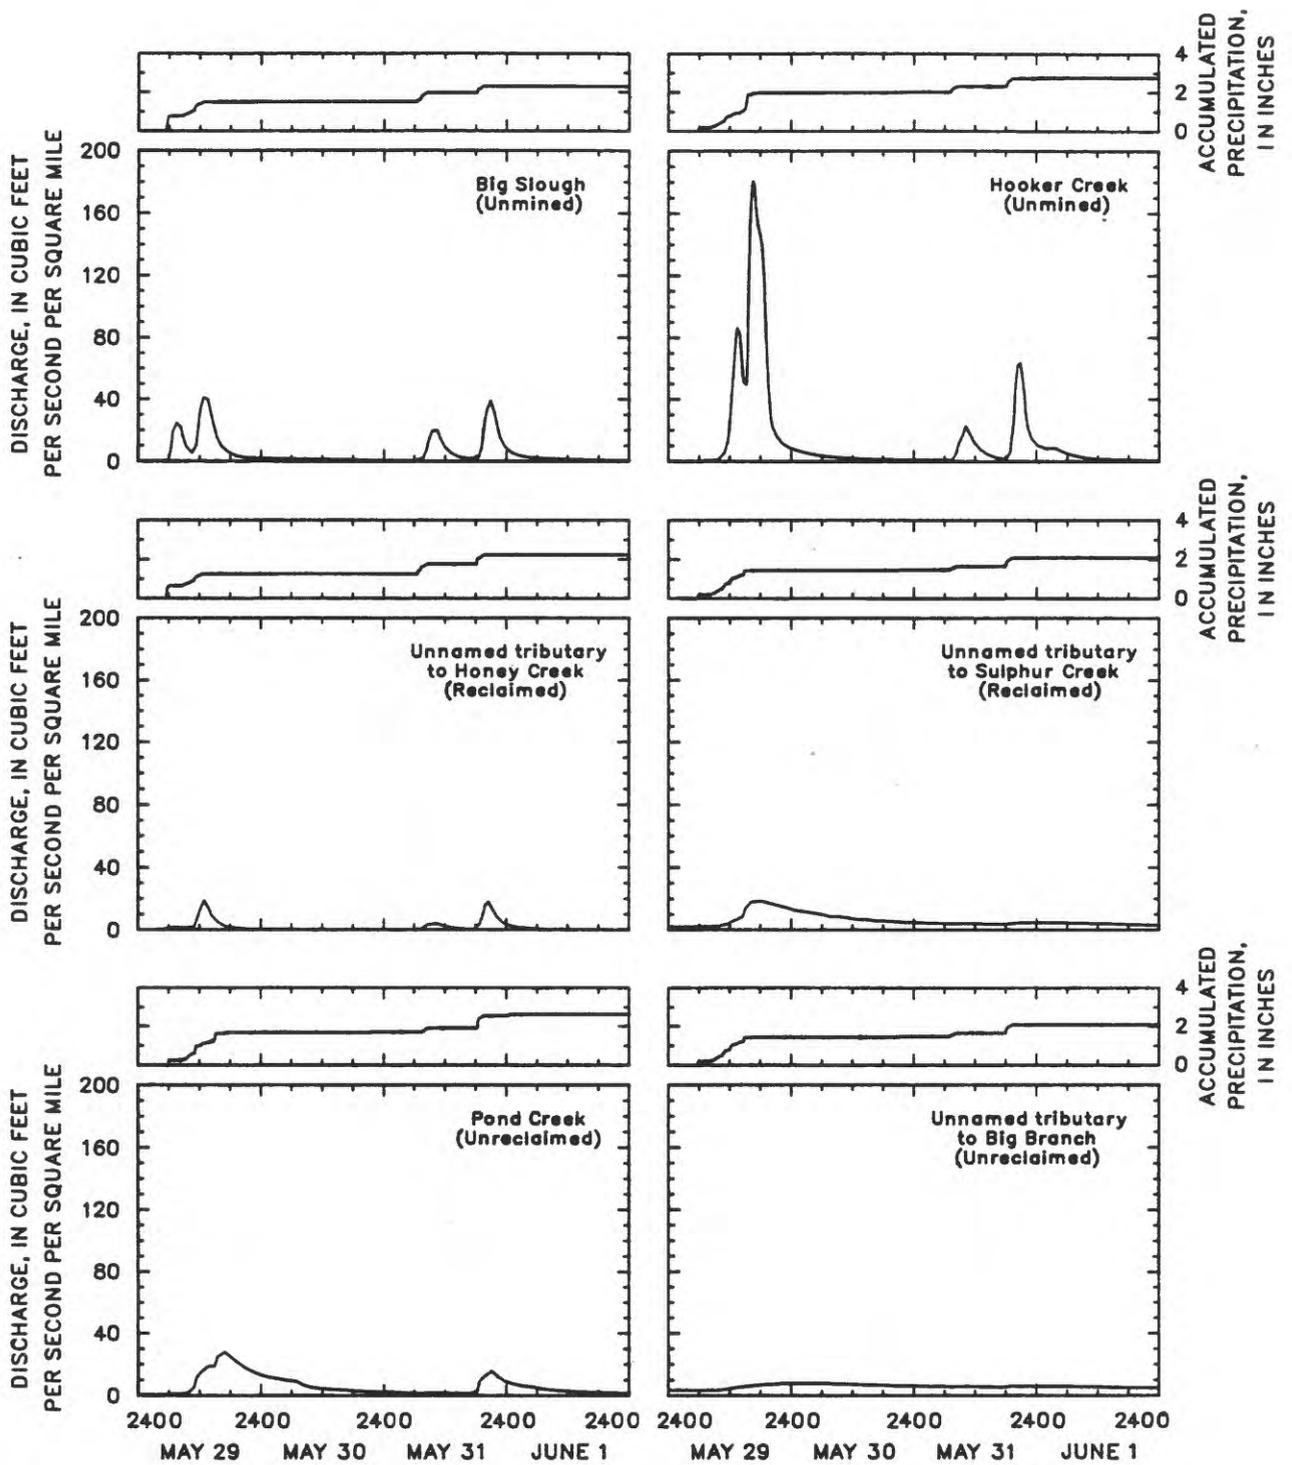


Figure 9c. -- Instantaneous discharge and accumulated precipitation for the thunderstorm of May 29, 1982.

Table 5c.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the thunderstorm of May 29, 1982

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	7 days (inches)	
Big Slough (Unmined)	1.50	0.37	24.7	7.67	0.21	0.33	0.78	1.09	1.24	
Hooker Creek (Unmined)	2.00	1.44	72.0	10.92	.22	.33	.83	1.09	1.28	
Unnamed tributary to Honey Creek (Reclaimed)	1.26	.11	8.7	7.33	.19	.31	.65	.88	.92	
Unnamed tributary to Sulphur Creek (Reclaimed)	1.42	.61	43.0	10.67	.17	.20	.30	1.21	1.73	
Pond Creek (Unreclaimed)	1.71	.60	35.1	10.75	.21	.32	.42	1.37	1.42	
Unnamed tributary to Big Branch (Unreclaimed)	1.48	.30	20.3	16.50	.16	.20	.28	1.62	2.03	

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

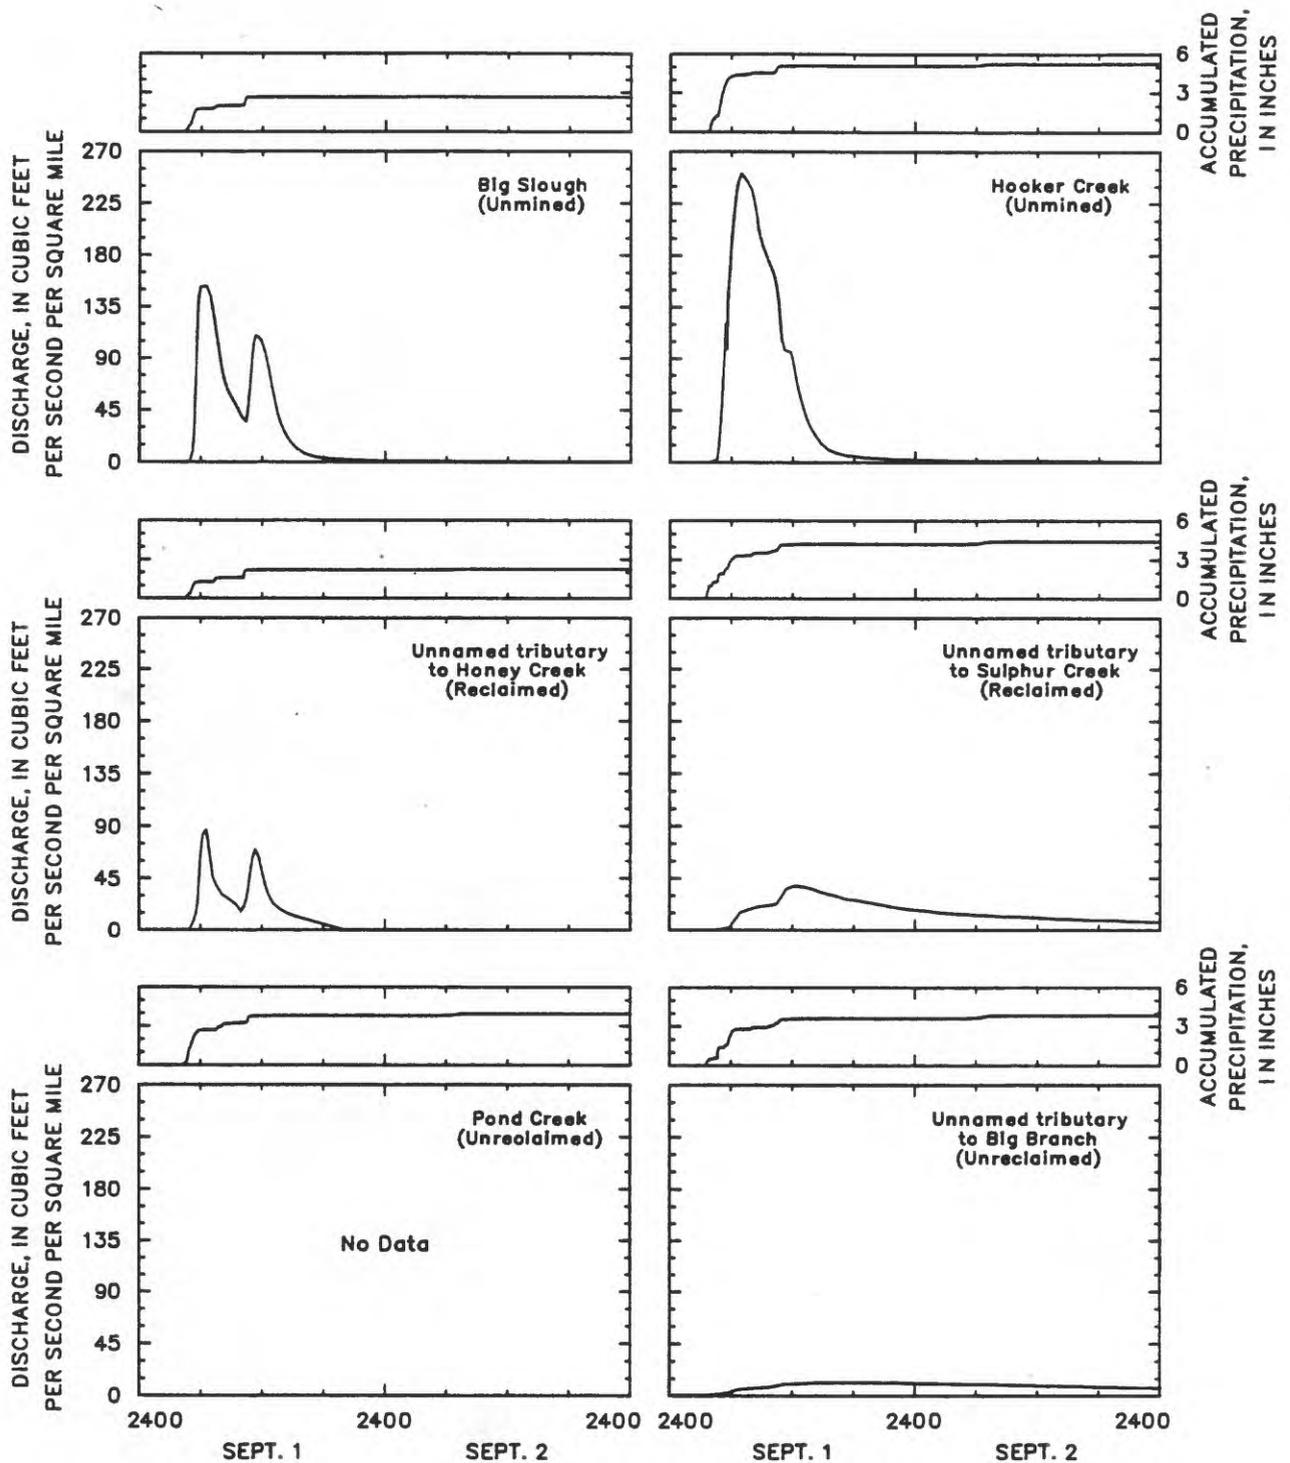


Figure 9d. -- Instantaneous discharge and accumulated precipitation for the thunderstorm of September 1, 1982.

Table 5d.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the thunderstorm of September 1, 1982

[-----, no data available]

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	7 days (inches)	
Big Slough (Unmined)	2.64	1.23	46.6	1.58	0.28	0.53	1.62	0.81	1.21	
Hooker Creek (Unmined)	5.26	2.19	41.6	2.33	.38	.68	2.84	1.14	1.36	
Unnamed tributary to Honey Creek (Reclaimed)	2.26	.60	26.6	1.58	.30	.52	1.21	.89	1.23	
Unnamed tributary to Sulphur Creek (Reclaimed)	4.42	1.84	41.6	8.58	.39	.58	1.29	1.46	1.71	
Pond Creek (Unreclaimed)	3.95	-----	-----	-----	.40	.72	2.25	1.55	1.75	
Unnamed tributary to Big Branch (Unreclaimed)	3.84	.92	24.0	10.00	.52	.75	1.34	1.25	1.50	

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

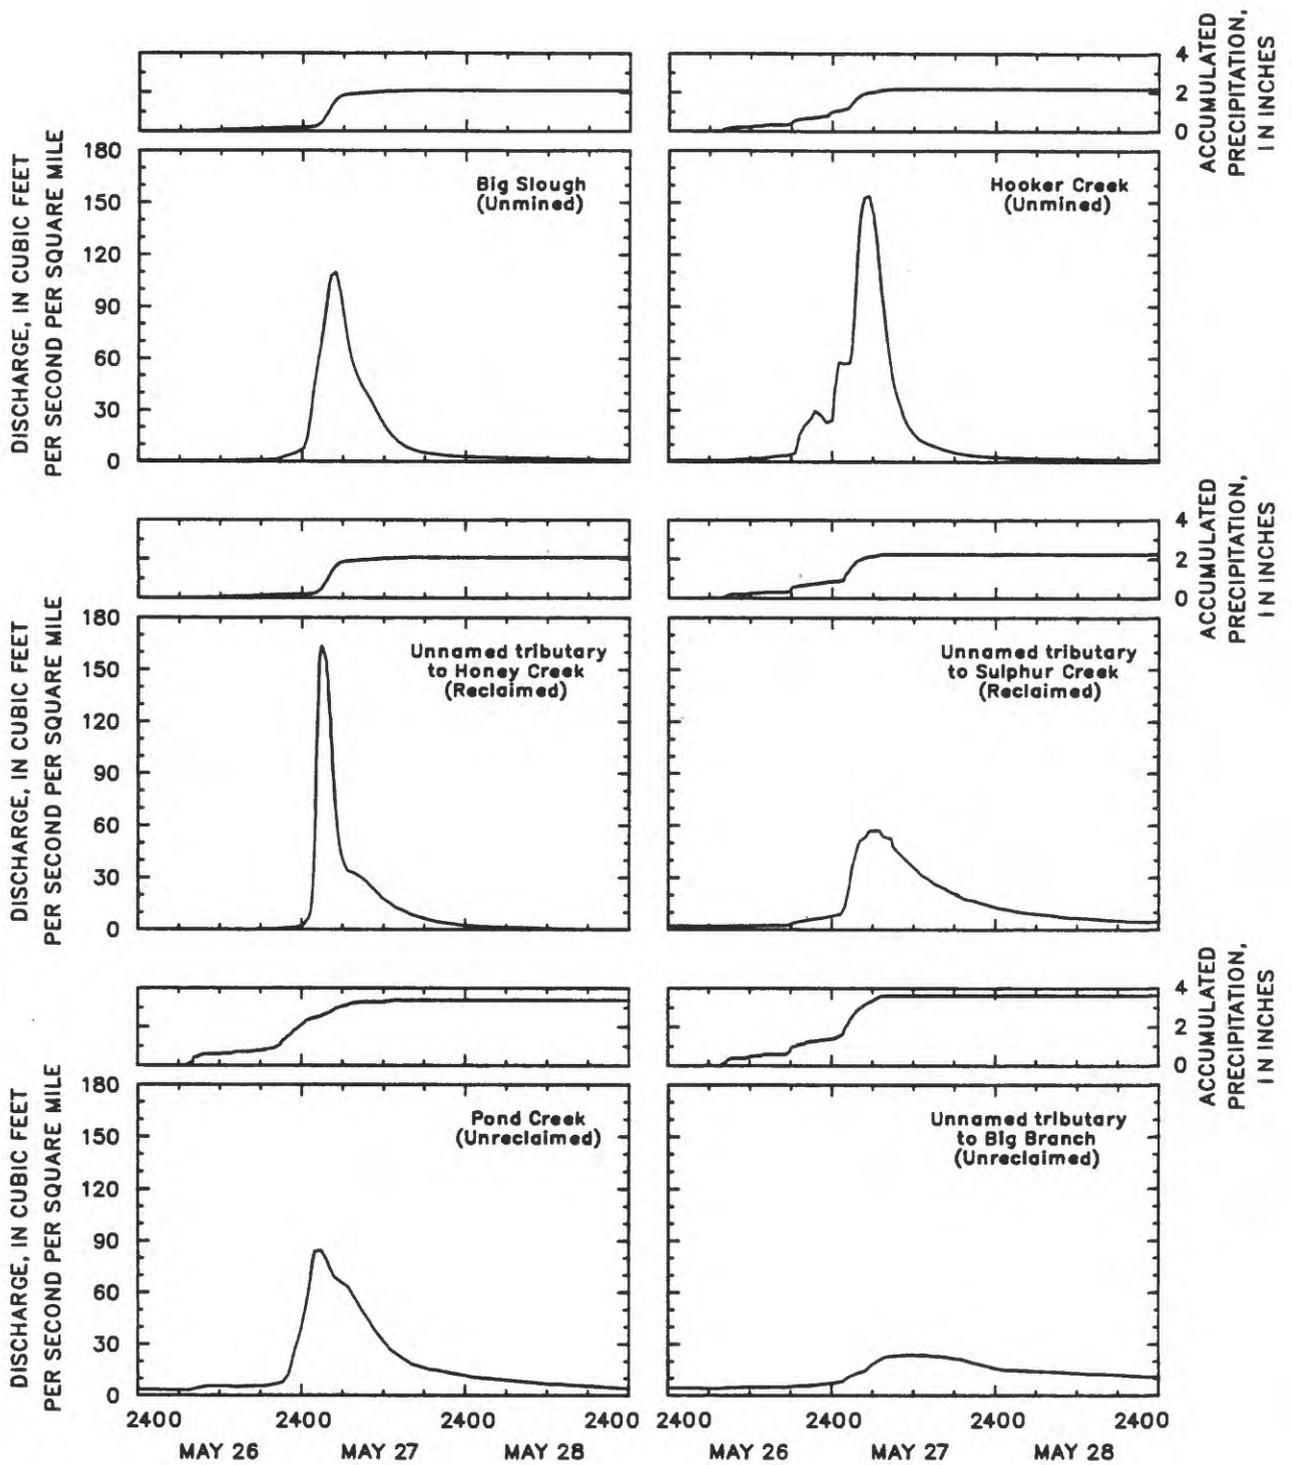


Figure 9e. -- Instantaneous discharge and accumulated precipitation for the frontal storm of May 26-27, 1981.

Table 5e.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the frontal storm of May 26-27, 1981

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	7 days (inches)	
Big Slough (Unmined)	2.08	1.24	59.6	18.42	0.06	0.11	0.61	0.90	0.90	0.90
Hooker Creek (Unmined)	2.19	1.79	81.7	21.17	.05	.08	.40	.88	.88	.88
Unnamed tributary to Honey Creek (Reclaimed)	2.08	1.14	54.8	6.50	.06	.11	.61	.74	.74	.79
Unnamed tributary to Sulphur Creek (Reclaimed)	2.26	1.34	59.3	17.08	.08	.15	.57	1.10	1.10	1.12
Pond Creek (Unreclaimed)	3.38	1.64	48.5	18.33	.13	.22	.40	.62	.62	.62
Unnamed tributary to Big Branch (Unreclaimed)	3.62	1.27	35.1	26.25	.09	.17	.69	.43	.43	.43

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

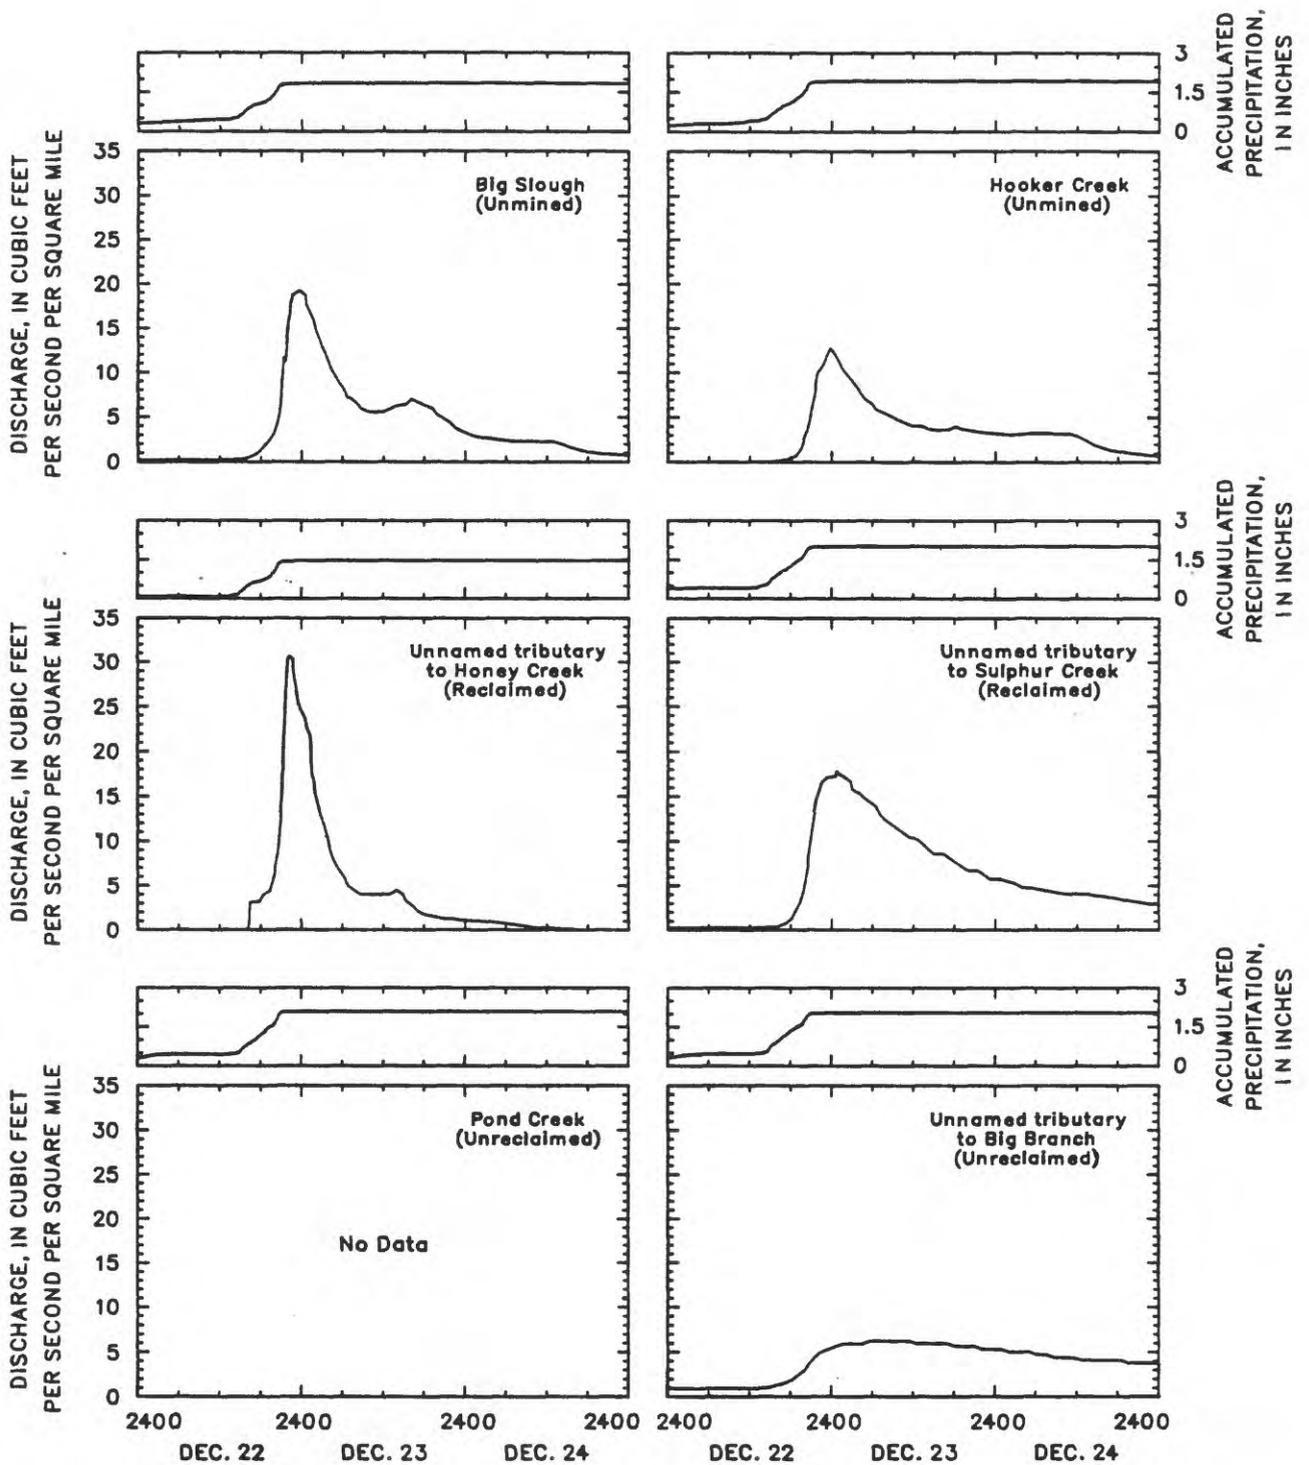


Figure 9f. -- Instantaneous discharge and accumulated precipitation for the frontal storm of December 21-22, 1981.

Table 5f.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the frontal storm of December 21-22, 1981

[----, no data available]

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:		
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	3 days (inches)	7 days (inches)		
Big Slough (Unmined)	1.83	0.43	23.5	15.83	0.05	0.09	0.40	0.00	0.00	0.00	
Hooker Creek (Unmined)	1.93	.35	18.1	15.92	.11	.14	.61	.00	.00	.00	
Unnamed tributary to Honey Creek (Reclaimed)	1.47	.38	25.9	5.75	.07	.12	.41	.00	.00	.00	
Unnamed tributary to Sulphur Creek (Reclaimed)	2.03	.76	37.4	10.50	.07	.09	.37	.00	.00	.00	
Pond Creek (Unreclaimed)	2.09	----	----	----	.08	.13	.44	.00	.00	.00	
Unnamed tributary to Big Branch (Unreclaimed)	2.05	.57	27.8	25.00	.06	.09	.36	.00	.00	.00	

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

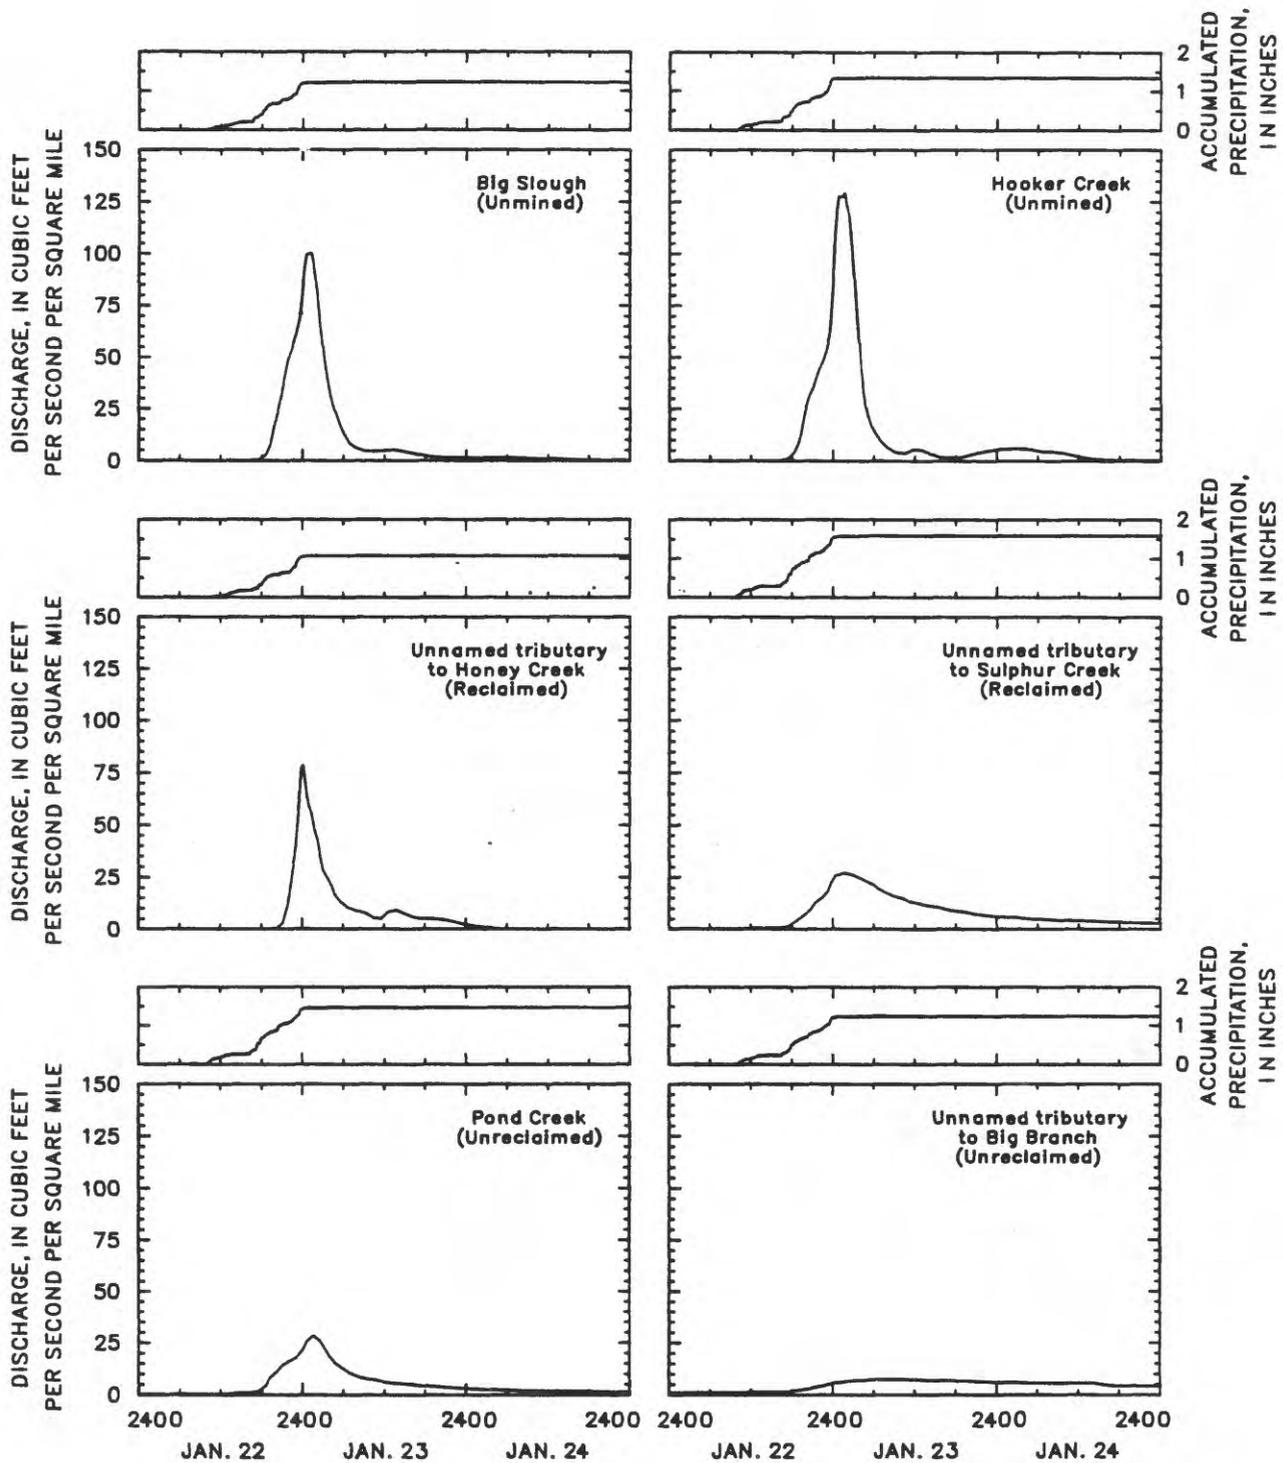


Figure 9g. -- Instantaneous discharge and accumulated precipitation for the frontal storm of January 22, 1982.

Table 5g.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the frontal storm of January 22, 1982

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:			Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)		3 days (inches)
Big Slough (Unmined)	1.22	30.99	81.2	13.42	0.07	0.09	0.27	0.16	0.24
Hooker Creek (Unmined)	1.34	41.28	95.5	14.75	.08	.09	.35	.12	.19
Unnamed tributary to Honey Creek (Reclaimed)	1.07	5.65	60.8	5.50	.09	.11	.27	.13	.20
Unnamed tributary to Sulphur Creek (Reclaimed)	1.59	6.99	62.3	14.92	.09	.14	.33	.11	.18
Pond Creek (Unreclaimed)	1.47	7.50	34.0	14.92	.08	.13	.31	.10	.10
Unnamed tributary to Big Branch (Unreclaimed)	1.24	8.71	57.3	19.45	.08	.10	.23	.11	.18

1 Storm runoff volume is the total runoff volume minus the base-flow volume.
2 Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.
3 Storm runoff may include up to 0.26 in. from snowmelt.
4 Storm runoff may include up to 0.20 in. from snowmelt.
5 Storm runoff may include up to 0.24 in. from snowmelt.
6 Storm runoff may include up to 0.23 in. from snowmelt.
7 Storm runoff may include up to 0.10 in. from snowmelt.
8 Storm runoff may include up to 0.31 in. from snowmelt.

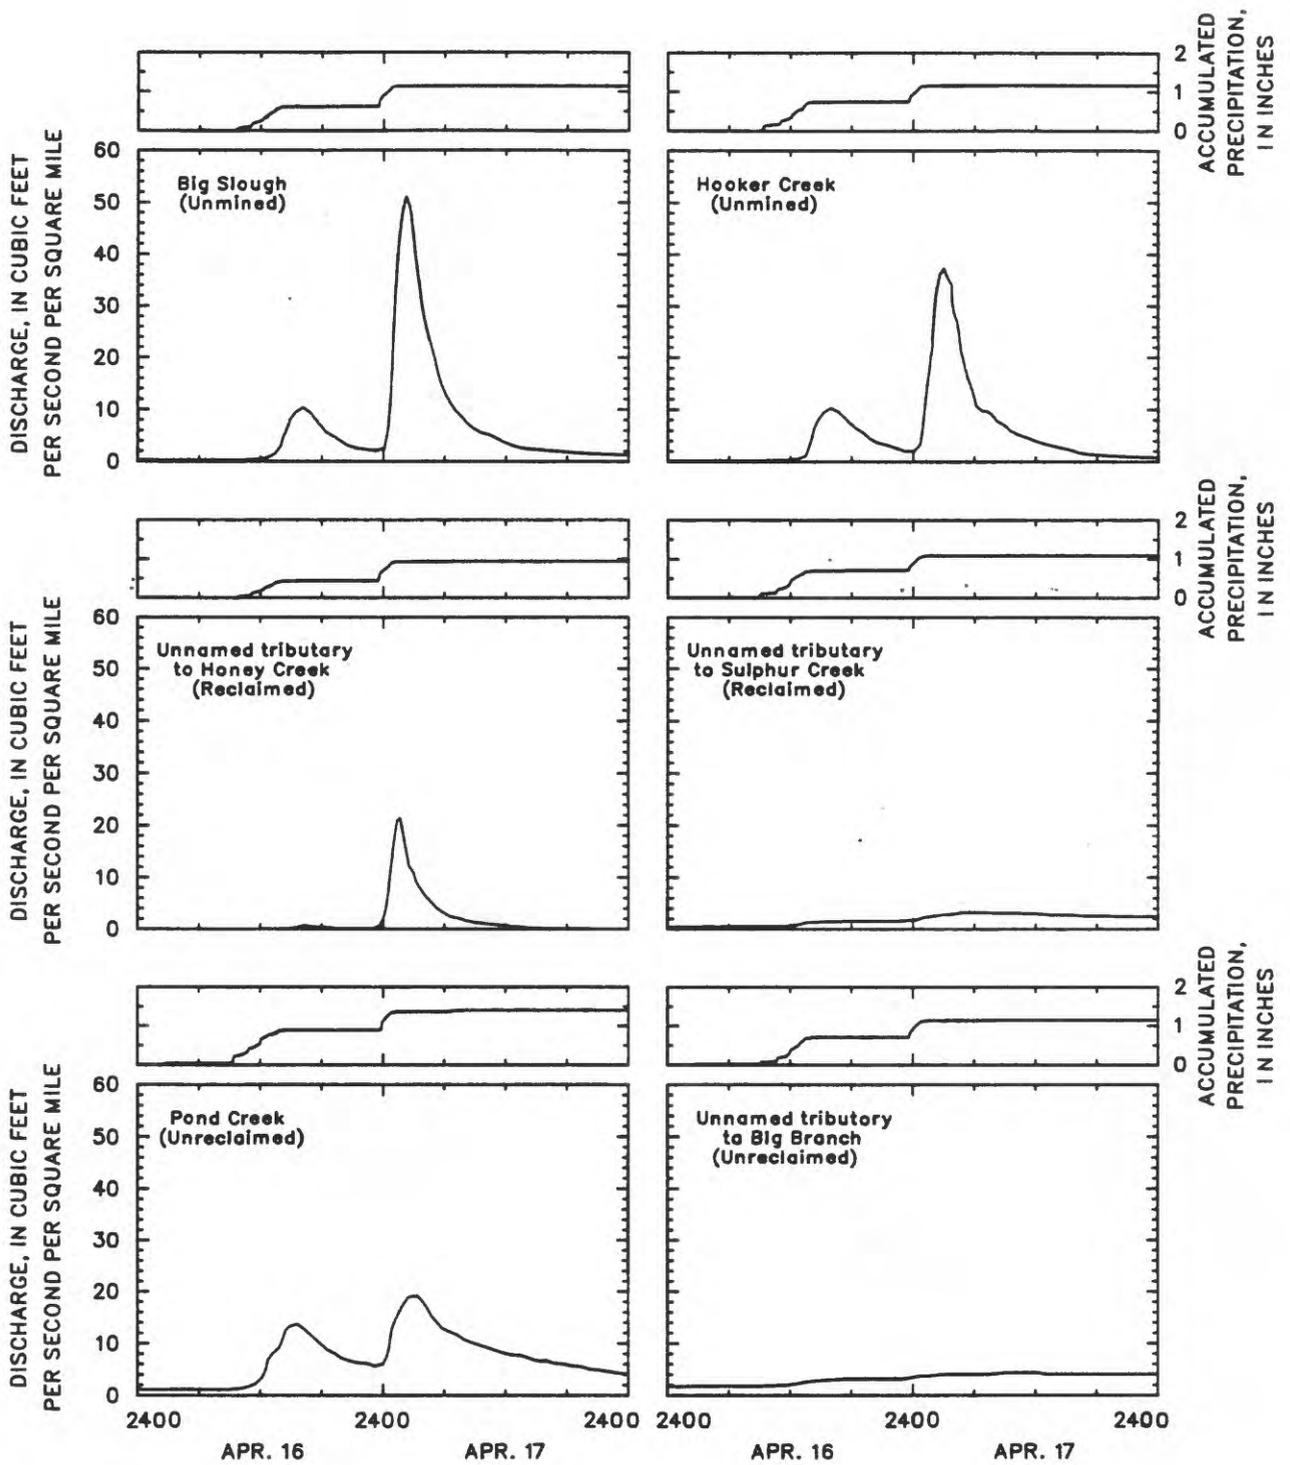


Figure 9h. -- Instantaneous discharge and accumulated precipitation for the frontal storm of April 16-17, 1982.

Table 5h.--Volumes of precipitation and runoff and times from beginning of rise to peak discharge for the frontal storm of April 16-17, 1982

Watershed	Precipitation volume (inches)	Storm runoff volume ¹ (inches)	Runoff coefficient ² (percent)	Time from rise to peak (hours)	Maximum precipitation for:				Precipitation during previous:	
					5 minutes (inches)	10 minutes (inches)	1 hour (inches)	7 days (inches)	3 days (inches)	7 days (inches)
Big Slough (Unmined)	1.14	0.45	39.5	16.58	0.12	0.19	0.40	0.00	0.00	0.11
Hooker Creek (Unmined)	1.17	.38	32.5	17.50	.07	.12	.32	.00	.00	.18
Unnamed tributary to Honey Creek (Reclaimed)	.94	.11	11.7	11.50	.09	.17	.35	.00	.00	.07
Unnamed tributary to Sulphur Creek (Reclaimed)	1.09	.20	18.3	23.08	.08	.10	.27	.00	.00	.16
Pond Creek (Unreclaimed)	1.40	.50	35.7	17.33	.15	.19	.43	.00	.00	.20
Unnamed tributary to Big Branch (Unreclaimed)	1.15	.25	21.7	25.50	.07	.12	.35	.00	.00	.09

¹ Storm runoff volume is the total runoff volume minus the base-flow volume.

² Runoff coefficient is storm runoff volume divided by precipitation volume multiplied by 100 percent.

Precipitation-runoff volumes

The frontal storms of January 22, 1982, and May 26-27, 1981, generated much greater proportions of runoff (volume of runoff divided by volume of precipitation, or simply, the runoff coefficient) than the other six storms. Average runoff from all six watersheds was approximately 65 and 57 percent of precipitation for these two storms, but average runoff only ranged from 27 to 36 percent of precipitation for the other six storms (tables 5a-h). Runoff for the storm of January 22, 1982, occurred after an extended period of freezing temperatures when 1.07 to 1.59 in. of rain fell on a cover of snow with about 0.10 to 0.31 in. of water equivalent. Snowmelt and reduced infiltration because of frozen soil helped cause 34.0 to 95.5 percent of the rainfall to run off (table 5g). Large proportions of runoff resulted from the storm of May 26-27, 1981, when 2.08 to 3.62 in. of precipitation fell on wet soil. Runoff ranged from 35.1 to 81.7 percent of precipitation (table 5e). The largest runoff coefficient (95.5 percent) was at Hooker Creek during the storm of January 22, 1982 (table 5g). The smallest runoff coefficient (8.3 percent) was at Pond Creek during the storm of June 9-10, 1981 (table 5b).

No pattern in runoff coefficients was apparent among watersheds. Relative rankings of watersheds, based on the runoff coefficients, varied widely from storm to storm and failed to show consistent differences among watersheds. The most consistent patterns were at Hooker Creek and Honey Creek tributary for three of the eight storms. Hooker Creek had the greatest runoff coefficient for three storms and Honey Creek tributary had the smallest runoff coefficient for three storms. However, the largest runoff coefficient for at least one of the eight storms was at Big Slough, Hooker Creek, Sulphur Creek tributary, and Pond Creek. The smallest runoff coefficient for at least one of the eight storms was at Hooker Creek, Honey Creek tributary, Pond Creek, and Big Branch tributary.

Variations in the relative rankings of watersheds by runoff coefficients for the eight storms could not be explained by maximum precipitation intensity, precipitation volume, or the amount of precipitation in the previous 3 or 7 days (tables 5a-h). Lack of a relation between storm runoff coefficients and precipitation volume, intensity, antecedent moisture, or watershed indicates that the proportion of precipitation that contributes to streamflow cannot be determined solely from land use, watershed morphology, precipitation volume, maximum precipitation intensity, and (or) antecedent moisture as measured in this study.

Lack of a consistent pattern in runoff coefficients among the six watersheds indicates that watershed characteristics (morphology, land use, and soil and vegetation types) are not necessarily consistent, dominant controls on the volume of runoff produced by storms. Differences or similarities in these watershed characteristics do not cause obvious differences or similarities in runoff volume for these watersheds and storms. Additional factors, such as temporal and spatial variations in precipitation distribution, intensity, and volume; antecedent soil moisture; and infiltration rate and capacity also influence storm runoff. Large differences in infiltration rates and capacities occur over small ranges of soil moisture (Wells and others, 1983, p. 27). The effect of a single factor (such as land use) on the volume of storm runoff is difficult to discern because of interactions of storm and watershed characteristics.

Watershed response

Storm hydrographs indicate the capability of a watershed to transport water on and in the land, through stream channels and lakes, and to the outlet of the watershed. Watersheds responsive to storms transport water rapidly and are characterized by hydrographs that rise rapidly, have a high peak discharge, and return to base flow rapidly. Less responsive watersheds transport water to the outlet at a slower rate. Hydrographs for these watersheds rise slowly to a lower peak discharge and return to base flow more slowly.

Hydrographs for thunderstorms and frontal storms show marked differences in response among watersheds (figs. 9a-h). Big Slough, Hooker Creek, and Honey Creek tributary respond quickly to precipitation and often have multiple, well-defined peaks corresponding to isolated downpours of precipitation during the storm (figs. 9a, 9c, 9d, and 9h). Sulphur Creek tributary and Big Branch tributary are much less responsive to precipitation. Multiple peaks are subdued at Sulphur Creek tributary and are absent at Big Branch tributary (figs. 9a, 9c, 9d, and 9h). Pond Creek typically responds more rapidly than Sulphur Creek tributary and Big Branch tributary but less rapidly than Big Slough, Hooker Creek, and Honey Creek tributary.

Storm hydrographs for Big Slough, Hooker Creek, and Honey Creek tributary (figs. 9f and 9g) and for Big Slough (fig. 9a) show minor peaks that do not correspond to isolated downpours of precipitation. These minor peaks probably indicate interflow, a component of runoff that moves through the shallow saturated horizons of the soil and reaches the stream channels more slowly than overland flow. Interflow, if present, at Sulphur Creek tributary, Pond Creek, and Big Branch tributary is probably obscured by the slow release of surface runoff from the surface mine impoundments.

Watershed response, as indicated by the time from the initial rise of the hydrograph to the peak discharge, was much faster during thunderstorms than during frontal storms (tables 5a-h). Times from initial rise to peak during thunderstorms were much faster for Big Slough, Hooker Creek, and Honey Creek tributary than for the other watersheds. This indicator of watershed response failed to show differences among watersheds for frontal storms, probably because of the long duration of frontal storms. During frontal storms, the initial rise in the hydrograph may occur early in the storm whereas peak discharge often occurs late in the storm. Honey Creek tributary generally had the shortest times from rise to peak whereas the longest times were at Big Branch tributary (tables 5a-h).

Ground Water

General Description of the Ground-Water Systems in West-Central Indiana

Unconsolidated aquifers

The unconsolidated aquifers in west-central Indiana are composed of deposits of glacial drift of Pleistocene age, alluvium of Holocene age, and spoil from coal mining. Drift covers most of the area (Martin and others, 1987, p. 9) and ranges from less than 50 to more than 100 ft (feet) in thickness. The drift is composed of outwash from glacial meltwater, clayey till, and small lenses of sand and gravel in till. Glacial drift near streams may be reworked to form alluvial deposits. Hydrologic properties of the Wabash and Eel River outwash aquifers are described by Martin and others (1987, p. 17).

Illinoian till covers most of west-central Indiana and consists of clay and silt with minor amounts of sand and gravel. Till is not usually considered to be an aquifer, but because of a normally shallow water table in small upland watersheds, the till is commonly a source of water for dug wells. Yields of wells in till are low, usually less than 3 gal/min (gallons per minute). Aquifer tests in the till indicate decreasing hydraulic conductivity with depth. Hydraulic conductivity estimated from 14 slug tests at 12 wells ranged from 4×10^{-4} to 9×10^{-1} ft/d (feet per day) and the median was 9×10^{-3} ft/d (table 6). Differences in hydraulic conductivity of the till could be caused by fractures. Highly fractured zones commonly are found near the surface in areas of glacial till, and fractures can increase the bulk hydraulic conductivity of till by one to three orders of magnitude (Freeze and Cherry, 1979, p. 152). Vertical fractures and thin, horizontal zones of increased permeability were observed in trenches dug into the till to examine the soil horizons. The fractures and horizontal zones readily produced water on excavation of the trenches. The till is recharged by infiltration and percolation of precipitation. Relatively high hydraulic conductivity near the surface suggests that the majority of the horizontal flow is in the upper part of the till. Flow is primarily toward discharge areas along streams although some water may enter the bedrock aquifers.

Lenses of sand and gravel within the till are present in some areas. These lenses are often small and discontinuous but wells in sand and gravel lenses are capable of producing more water than wells in till. Typical yields for wells in sand and gravel lenses range from 3 to 10 gal/min (Banaszak, 1985, p. 52). The lenses of sand and gravel have hydraulic conductivities several orders of magnitude greater than the surrounding till and act as confined aquifers. Although few lenses of sand and gravel were discovered by drilling for this study, their presence in this area has been documented (Watkins and Jordan, 1962a, 1962b, 1963, p. 6). Larger, more continuous sand and gravel aquifers are often found in bedrock valleys that have been buried by glacial drift. Yields from wells in these confined aquifers range from 5 to 75 gal/min (Banaszak, 1985, p. 52).

Table 6.--Hydraulic conductivity of till, spoil, and bedrock

[BBT, unnamed tributary to Big Branch (Unreclaimed);
BS, Big Slough (Unmined); HC, Hooker Creek (Unmined);
HCT, unnamed tributary to Honey Creek (Reclaimed);
PC, Pond Creek (Unreclaimed); SCT, unnamed tributary to
Sulphur Creek (Reclaimed)]

Watershed	Well number	Aquifer material ¹	Calculated hydraulic conductivity ^{2,3} (feet per day)			
BS	BS-5	Till	6x10 ⁻³			
BS	BS-7	Till	4x10 ⁻⁴			
BS	BS-9S	Till	8x10 ⁻²	2x10 ⁻¹		
BS	BS-9M	Till	4x10 ⁻³	1x10 ⁻²		
BS	BS-10S	Till	4x10 ⁻²			
BS	BS-10M	Till	8x10 ⁻³			
BS	BS-10D	Till	6x10 ⁻³			
BS	BS-11	Till	2x10 ⁻²			
SCT	MR-6	Till	4x10 ⁻³			
PC	PC-3	Till	4x10 ⁻²			
PC	PC-4	Till	7x10 ⁻³			
PC	PC-6S	Till	9x10 ⁻¹			
HCT	CR-1	Spoil	3x10 ⁻¹			
HCT	CR-3	Spoil	7x10 ⁻³	1x10 ⁻²		
HCT	CR-5	Spoil	6x10 ⁻²			
PC	PC-2S	Spoil	6x10 ⁻²			
PC	PC-2M	Spoil	1x10 ⁻³			
PC	PC-2D	Spoil	2x10 ⁻³			
BBT	MU-1	Spoil	2x10 ⁻²			
HC	CS-2	Bedrock	1x10 ⁻²			
HC	CS-3	Bedrock	3x10 ⁻²			
HC	HC-2	Bedrock	8x10 ⁻¹			
HC	HC-3	Bedrock	1x10 ⁻¹			
SCT	MR-2	Bedrock	4x10 ⁻²	4x10 ⁻²		
SCT	MR-3	Bedrock	3x10 ⁻³	4x10 ⁻³	6x10 ⁻³	9x10 ⁻³
SCT	MR-6B	Bedrock	2x10 ⁻²	3x10 ⁻²		
SCT	MR-6SS	Bedrock	2x10 ⁻³			
SCT	MR-7	Bedrock	2x10 ⁻⁴	3x10 ⁻⁴	4x10 ⁻³	
PC	PC-1SS	Bedrock	8x10 ⁻³			
PC	PC-5	Bedrock	3x10 ⁻²	2x10 ⁻¹		
PC	PC-7	Bedrock	5x10 ⁻³			

¹ Till contains various amounts of sand and gravel.

² Hydraulic conductivity estimated from slug tests using the method of Bouwer and Rice (1976, p. 424-425).

³ Multiple values of hydraulic conductivity at a single well result from using different recovery times for estimating hydraulic conductivity.

Spoil from mining coal is a heterogeneous mixture primarily consisting of till and shale but commonly contains smaller amounts of soil, siltstone, sandstone, limestone, and (or) coal. Composition, compaction, and distribution of these materials within the spoil are usually highly variable, are largely unknown, and have significant effects on the hydrologic properties of the spoil. Spoil has greater volume and porosity than the pre-mining overburden but may or may not have a greater hydraulic conductivity. Weiss and Razem (1984, p. 554) reported values of hydraulic conductivity for spoil in Ohio that ranged from 0.3 to 5.4 ft/d, as much as two orders of magnitude greater than the pre-mining overburden. L. L. Bobo and S. E. Eikenberry (U.S. Geological Survey, written commun., 1980) estimated hydraulic conductivities as great as 130 ft/d at the reclaimed mine that contains Honey Creek tributary watershed. However, the hydraulic conductivity of spoil estimated for this study from eight slug tests at seven wells ranged from 1×10^{-3} to 3×10^{-1} ft/d and the median was 1.5×10^{-2} ft/d (table 6). These values of hydraulic conductivity for spoil are similar to those for till.

The large water-storage capacity of spoil has been well documented (Corbett, 1965, p. 1-8; Grubb and Ryder, 1972, p. 32; Agnew and Corbett, 1973, p. 164-165; Curtis, 1977, p. 152-153; 1978, p. 18; Cartwright and Hunt, 1981, p. 9; Razem, 1984, p. 33; Banaszak, 1985, p. 55). A water table usually develops in the spoil, but under various hydrogeologic conditions the spoil may remain unsaturated, or nearly so (Lindorff, 1980, p. 35; Razem, 1984, p. 26, 31).

Hydrologic properties of the spoil are influenced by methods of mining and reclamation. Area mining employs draglines or large shovels to strip the overburden and expose the coal. Stripped overburden is cast in piles where coal has been removed. Boulders and gravel may roll to the base of the pile and form zones of high hydraulic conductivity. In unreclaimed mines these spoil piles are left as they were created. In reclaimed mines the spoil ridges are graded to a level or gently rolling surface by bulldozers. Movement of heavy machinery compacts the surface layers of the spoil, thereby reducing shallow hydraulic conductivity and impeding infiltration. Recharge to the spoil is by infiltration of precipitation on the spoil surface, by percolation of water from surface runoff that has collected in depressions or impoundments above the water table, and (or) by lateral flow from adjacent, unmined aquifers. Discharge is generally toward lakes or streams that cut below the water table in the spoil, although some water may flow to deeper aquifers.

Consolidated aquifers

The consolidated bedrock aquifers in west-central Indiana are primarily composed of shale, siltstone, sandstone, coal, and limestone of Pennsylvanian age and limestones of Mississippian age (Martin and others, 1987, p. 4). Ground water flows in the bedrock primarily in fractures, along bedding planes, in the cleats (joints) of coal seams, and in unfractured sandstone with sufficient primary permeability (Heath, 1984, p. 44).

Shales and siltstones commonly are considered confining beds but fractures caused by jointing, faulting, or blasting can reduce or destroy the confining effect of these rocks and increase their hydraulic conductivities by several orders of magnitude. Schubert (1980, p. 64-65) presented compelling evidence of fracture-dominated flow in the bedrock of eastern coal-mining regions. The size and amount of fractures and, therefore, the hydraulic conductivity caused by fractures generally decreases with depth. Based on this evidence, fractures probably are also a significant hydrologic control in bedrock aquifers of west-central Indiana. Many wells in the study area are finished in shale and yield enough water for domestic needs. Water-bearing zones also occur along bedding planes and at contacts between different rock types (Stoner, 1983, p. 130). Hydraulic conductivity estimated from 20 slug tests at 12 wells in bedrock ranged from 2×10^{-4} to 8×10^{-1} ft/d, and the median was 9.5×10^{-3} ft/d (table 6).

Up to six basal sandstone members of cyclothems (repetitive cycles of deposition) are important aquifers in the study area (Cable and others, 1971, p. 5; Cable and Robison, 1973, p. 9). The sandstone aquifers are either widespread, thin but discontinuous beds associated with deltaic deposits or narrow, thick beds associated with channel deposits. Channel sandstones offer greater potential for ground-water yield because of their greater thickness, although yields of either type can be less than 1 gal/min. Average yields of the various sandstone aquifers range from approximately 3 to 9 gal/min; yields rarely exceed 20 gal/min (Cable and others, 1971, table 2, fig. 3). Average hydraulic conductivities range from 0.6 to 3.5 ft/d (Cable and others, 1971, table 2).

The values of hydraulic conductivity reported by Cable and others (1971) are greater than those estimated for bedrock in this study. The differences in hydraulic conductivity may be attributed to differences in the methods and (or) types of wells used to determine hydraulic conductivity. Cable and others (1971) did not report their methods but hydraulic conductivity was probably estimated by specific-capacity tests, whereas slug tests (Bouwer and Rice, 1976) were used in this study. Cable and others (1971) used water-supply wells to determine hydraulic conductivity whereas observation wells were used in this study. Water-supply wells are typically cased to the surface of the bedrock but casing for observation wells typically extends into the bedrock. If fractures are more common at shallow depths, water-supply wells would intercept more fractures than observation wells. Finally, because of use, water-supply wells usually are developed to a greater degree than observation wells.

In addition to basal sandstones, coal seams have been identified as aquifers in sections of the cyclothem lacking more permeable strata. Flow in the coal seam is along cleats that have developed in the seam. Banaszak (1980, p. 236 and 239) discussed the importance of stratigraphy in determining the water-bearing potential of shallow coals. To be an aquifer, coal seams must be (1) hydrologically connected (at some point) to permeable strata that recharges the seam, and (2) associated with a plastic underclay that perches ground water in the seam. Both stratigraphic conditions are necessary for the development of shallow, perched aquifers in coal seams. If the coal seam is part of a deeper, saturated section of the bedrock, the presence of a plastic underclay is not necessary. Because coal seams are usually underlain by a relatively homogeneous underclay (Whitlatch, 1933, p. 63; Banaszak, 1980,

p. 236), the presence or absence of a recharging unit is critical in producing coal aquifers. Yields of wells in coal seams range from 1 to 10 gal/min (Banaszak, 1980, p. 235).


Hydrogeology of the bedrock aquifers is complex and the occurrence of perched, unconfined, and confined bedrock aquifers in the same section is possible (Banaszak, 1985, p. 52-53). Perched bedrock aquifers occur at shallow depths where underclays inhibit the downward flow of water. If recharge through the underclay is less than discharge from the underlying formation, unsaturated areas result. Unconfined bedrock aquifers occur at the outcrop or at the subcrop where they are hydrologically connected to the water table in permeable unconsolidated deposits. Where the unconsolidated deposits are much less permeable than the underlying bedrock, the shallow bedrock aquifers are confined. At depth, the bedrock aquifers are confined. Underclay is the principal confining strata.

The bedrock aquifers are recharged by direct infiltration and percolation of precipitation at the outcrop or through drift or mine spoil at the subcrop or by percolation of surface water in upland lakes or depressions. Flow in the shallow bedrock is primarily local, with topography controlling the local flow systems. Flow paths are relatively short with recharge occurring in the uplands and flow discharging to streams that cut near the surface of the bedrock. Flow deeper in the bedrock is primarily regional and follows the southwest dip of the strata to points of discharge along the Wabash and Eel Rivers (fig. 1).

Description of Ground-Water Systems in the Study Watersheds

Big Slough

Information on lithology and stratigraphy at and near Big Slough watershed was obtained from shallow test holes drilled to bedrock. Approximately 15 to 45 ft of silty clay till overlies shale and sandstone of the Pennsylvanian Linton Formation (Martin and others, 1987, fig. 14, p. 36). Fourteen observation wells were installed in till and three wells were installed in bedrock (fig. 10). Hydraulic conductivity of till measured at eight wells ranged from 4×10^{-4} to 2×10^{-1} ft/d (table 6).

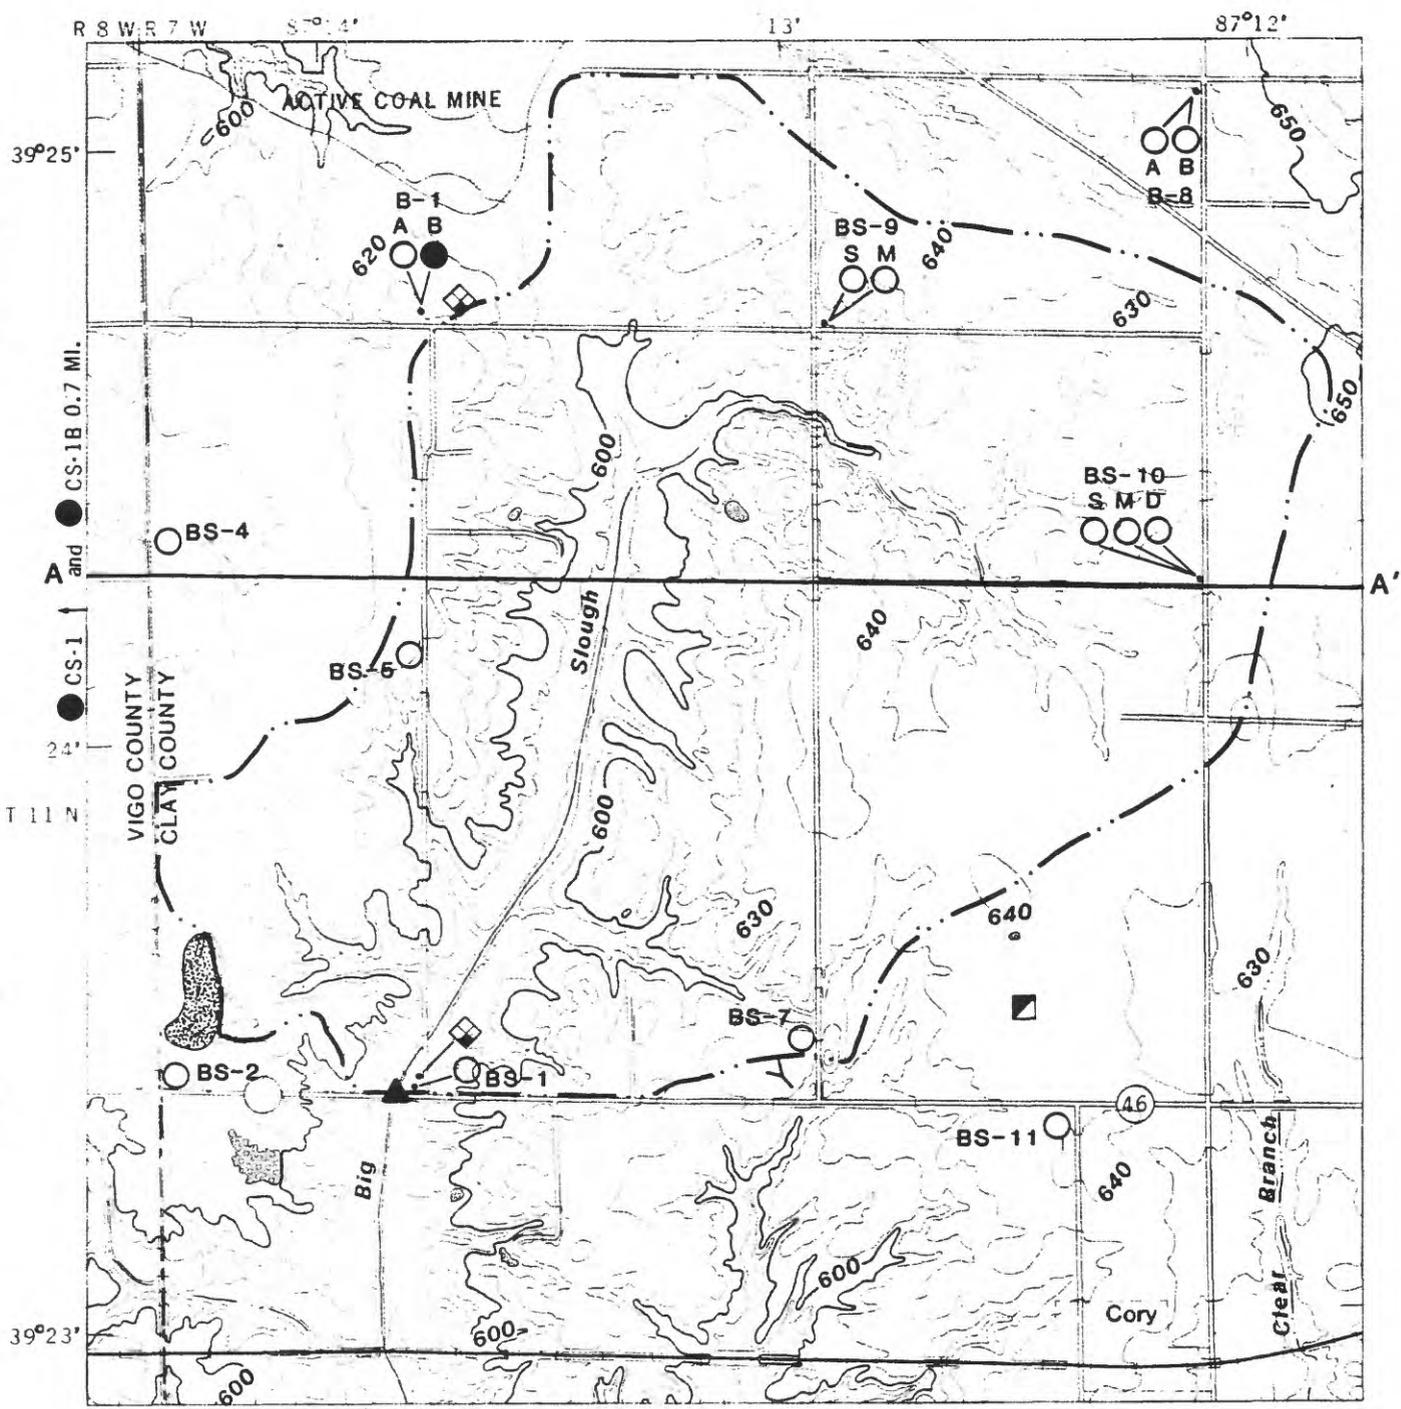

- NATIONAL DATUM OF 1929
- EXPLANATION**
- Unreclaimed mine spoil
 - Streamflow-gaging station
 - Precipitation-gaging station
 - B-1B Observation well in bedrock
 - BS-2 Observation well in till of Illinoian age and older
 - Abandoned shaft mine
 - Abandoned slope mine
 - A—A' Trace of section-- see section on figure 14
 - Watershed boundary

Figure 10.-- Big Slough watershed and data-collection sites.
-55-

Aquifer tests indicated that till near land surface had greater hydraulic conductivity than till near bedrock. The majority of horizontal flow probably occurs in the upper part of the till because of the greater conductivity of this zone. Flow is horizontal in zones of greater permeability toward points of discharge but is vertical in zones of lesser permeability toward a zone that provides a more permeable pathway to a discharge area. Water-level data at a site with multiple wells also indicate greater conductivity in the upper till. The distribution of head in the nest of wells at BS-10 (fig. 11) shows that most head loss is in the lower zone, whereas little head loss is in the upper zone. This pattern of head loss indicates the dominance of the horizontal component of flow in the upper till and of the vertical component of flow in the lower till.

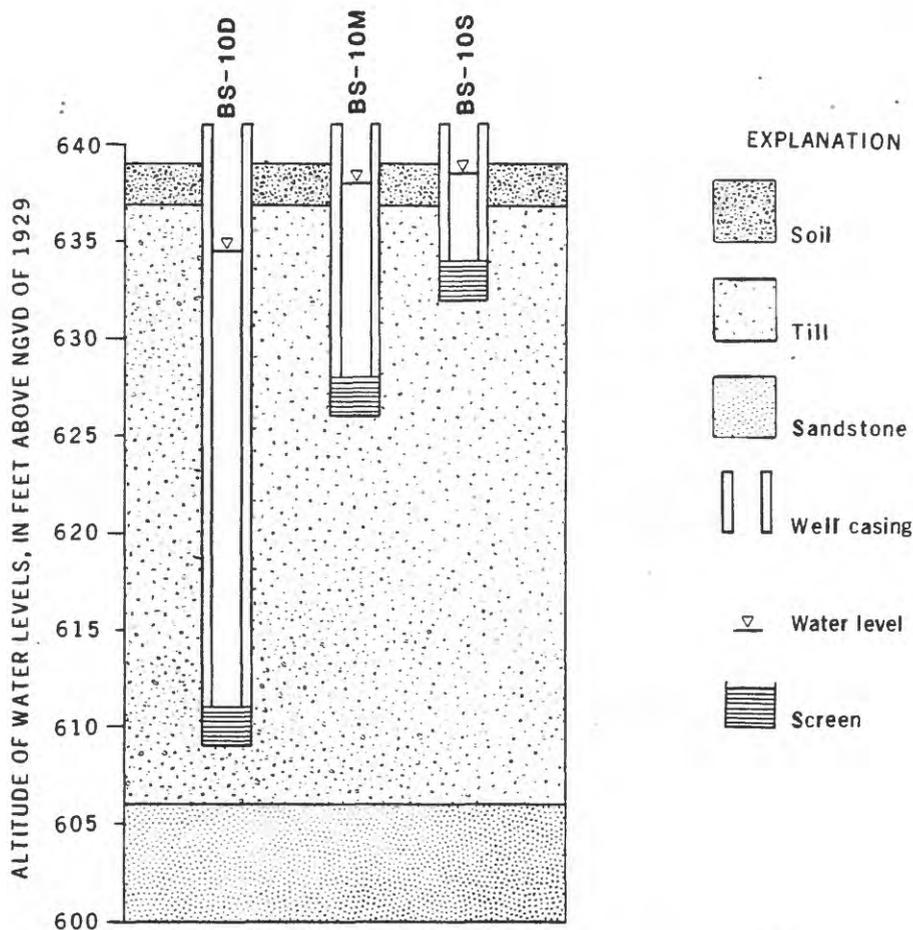



Figure 11.-- Distribution of water levels in a nest of wells finished in till at Big Slough, June 17, 1982.

The till is recharged by direct infiltration of precipitation to the water table, which is usually within 2 to 6 ft of land surface (fig. 12). The hydrograph of an upland well, BS-4 (fig. 13), shows a seasonally fluctuating water table that is generally recharged in winter and spring when crops and other vegetation are dormant and declines in summer and fall when evapotranspiration is high. Wells finished in till in the upland recharge areas generally have similar hydrographs and show water-level fluctuations of 2 to 6 ft. The deepest well finished in till (BS-10D) exhibited the least fluctuation in water levels (fig. 13). Shallow ground water is discharged into Big Slough or may move downward into the bedrock (fig. 14).


The surface- and shallow ground-water systems are well connected in the flood plain of Big Slough. Daily mean water levels in BS-1 (a shallow well approximately 200 ft from the streamflow-gaging station) are closely associated with peak and low streamflows. The elevation of the water level in BS-1 is generally 2.5 to 5.5 ft above the elevation of the stream, indicating that water typically flows from the shallow system into Big Slough (fig. 13).

The Pennsylvanian bedrock underlying the till at Big Slough is an erosional surface cut into the Linton Formation and consists mainly of shale and sandstone. The Seelyville Coal Member (III) marks the top of the underlying Staunton Formation (Martin and others, 1987, fig. 14, p. 36). Water levels in a bedrock well open to the Linton Formation (CS-1) and a bedrock well open to the Staunton Formation (CS-1B) indicate confined aquifer conditions in both formations (fig. 15). Water levels in CS-1 rise to within 1 ft of land surface and suggest upward movement of water in the shallow bedrock towards points of surface discharge. Water levels in CS-1B are much deeper, about 90 ft below land surface, indicating little hydraulic connection between formations. Underclay below the Seelyville Coal Member (III) probably provides a barrier to hydraulic continuity between aquifers and acts as a confining layer for water in the Staunton Formation (fig. 15). Yearly fluctuations of the water levels in both wells are small, about 2.5 ft in CS-1 and about 1 ft in CS-1B. Water levels are generally highest in spring and lowest in fall.

The bedrock is recharged by downward movement of water from the overlying till (fig. 14). The direction of shallow flow in the bedrock is controlled by topography of the land and bedrock. Shallow flow in the bedrock probably discharges to Big Slough because (1) the stream has cut into the till and is near the bedrock surface, (2) the elevation of the stream is below the elevation of the bedrock, and (3) the surface of the bedrock to the east of Big Slough is sandstone. The quantity and direction of flow deep in the bedrock are controlled primarily by the extent of fracturing and the structure and lithology of the rock. Underclay impedes the vertical flow of water between formations, predominantly in the downward direction at Big Slough (fig. 14). Regional flow follows the southwest dip of the bedrock and probably discharges to the Wabash and Eel Rivers. If confining layers (underclay and unfractured shale) are thin or absent, water deep in the bedrock may discharge to the surface.

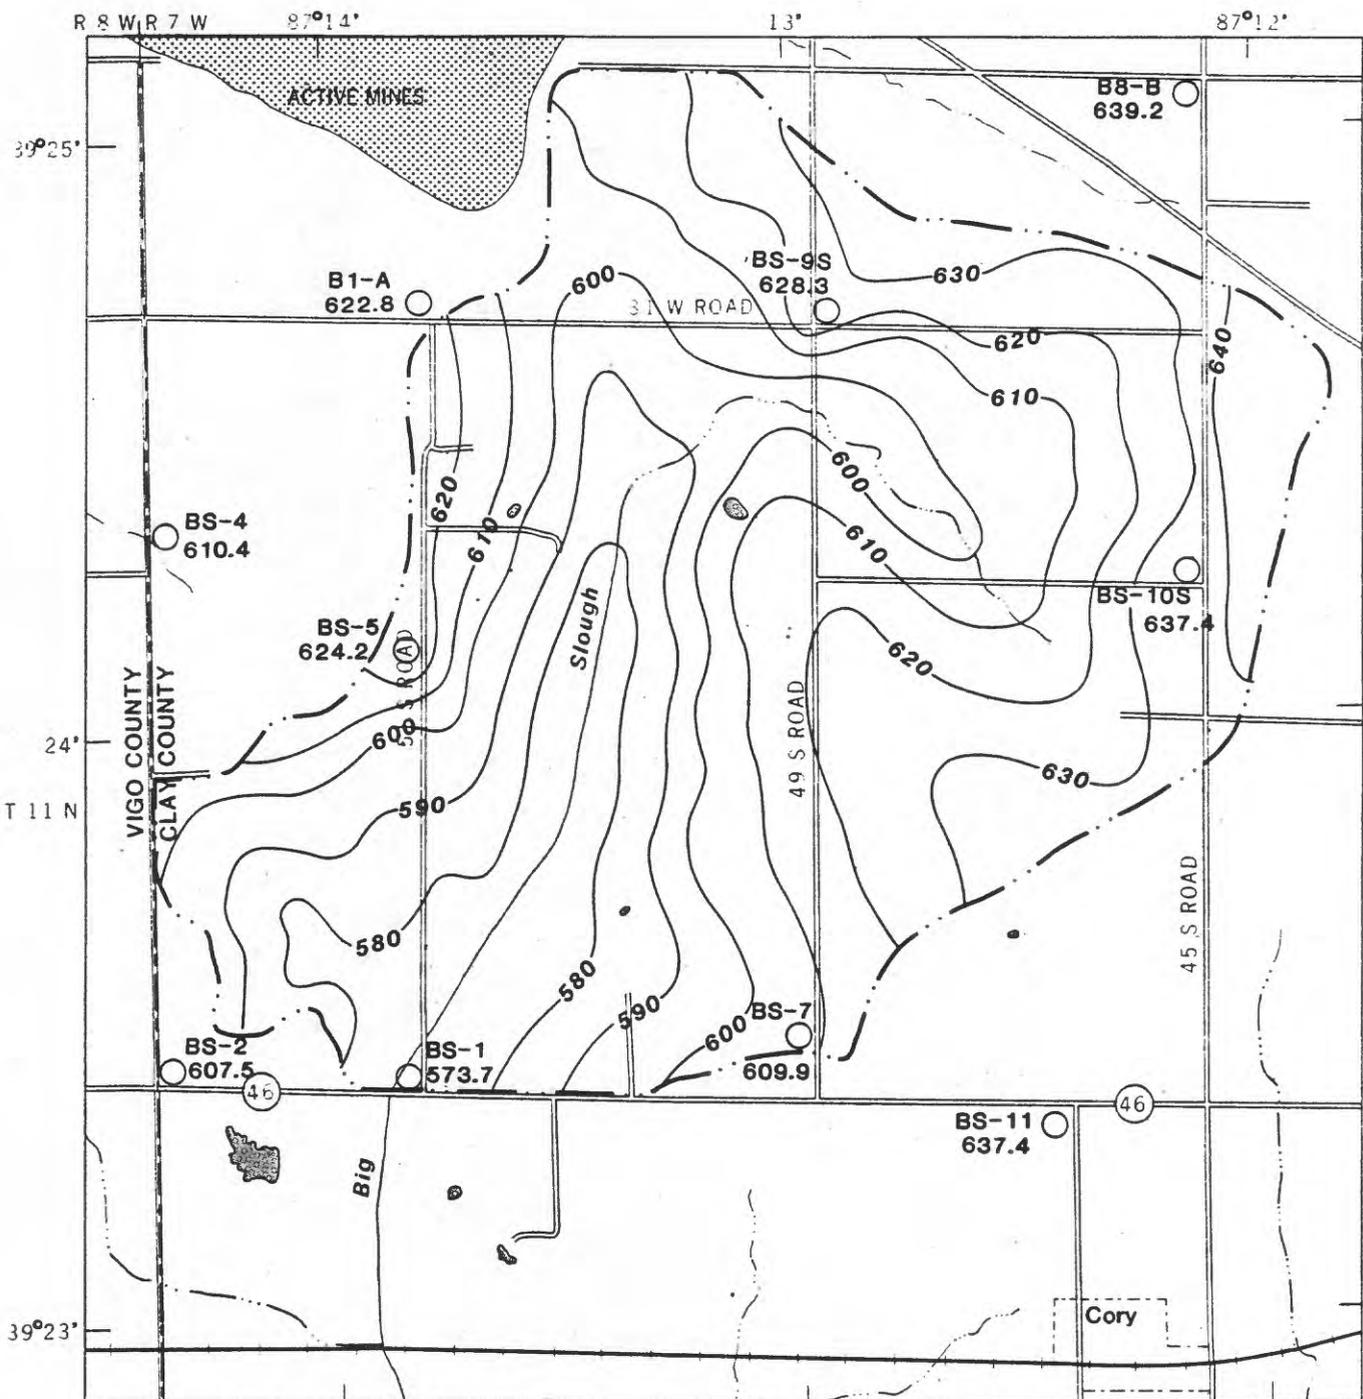

Base from U.S. Geological Survey
 Staunton 1:24 000, 1958,
 photorevised 1980.



EXPLANATION

- 590 Line of equal water altitude, in feet above NGVD of 1929. Interval 10 feet
- Observation well
- BS-7 Well number
- Watershed boundary
- 609.9 Altitude of water table, in feet above NGVD of 1929

Figure 12.-- Altitude of the water table at Big Slough, May 18, 1982.

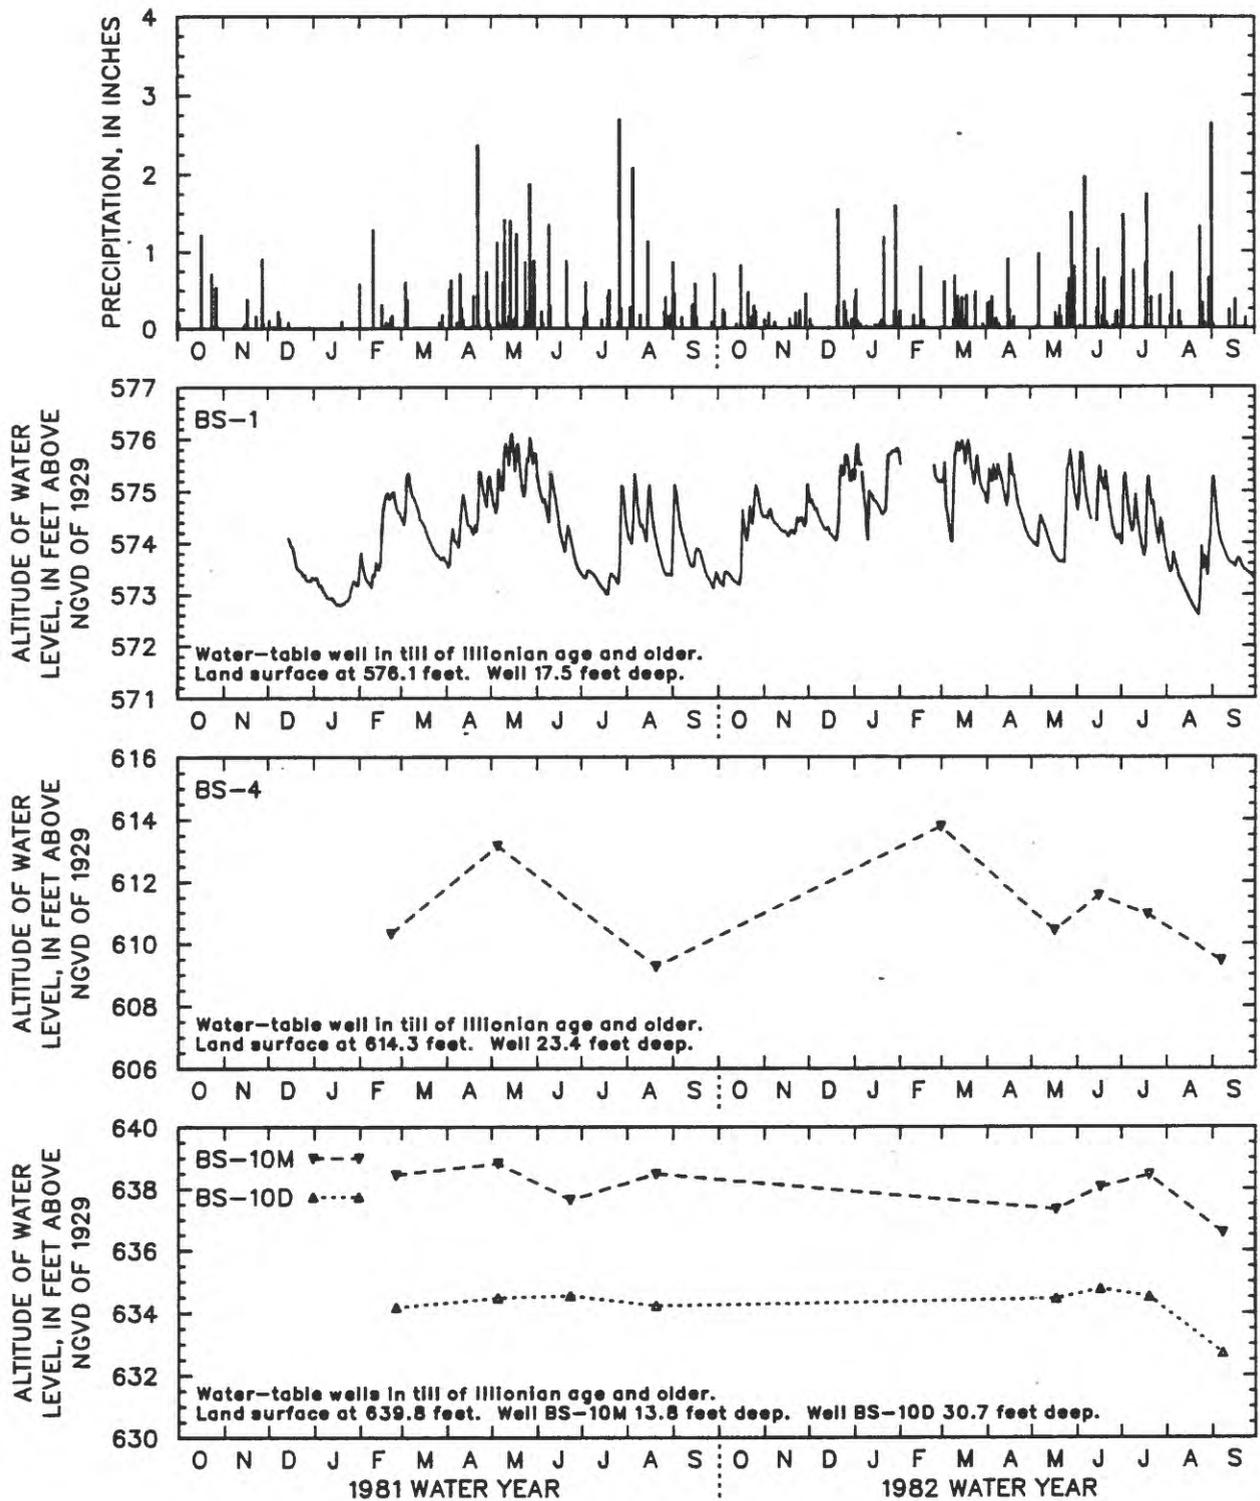


Figure 13. -- Daily precipitation and ground-water levels at Big Slough, 1981 and 1982 water years.

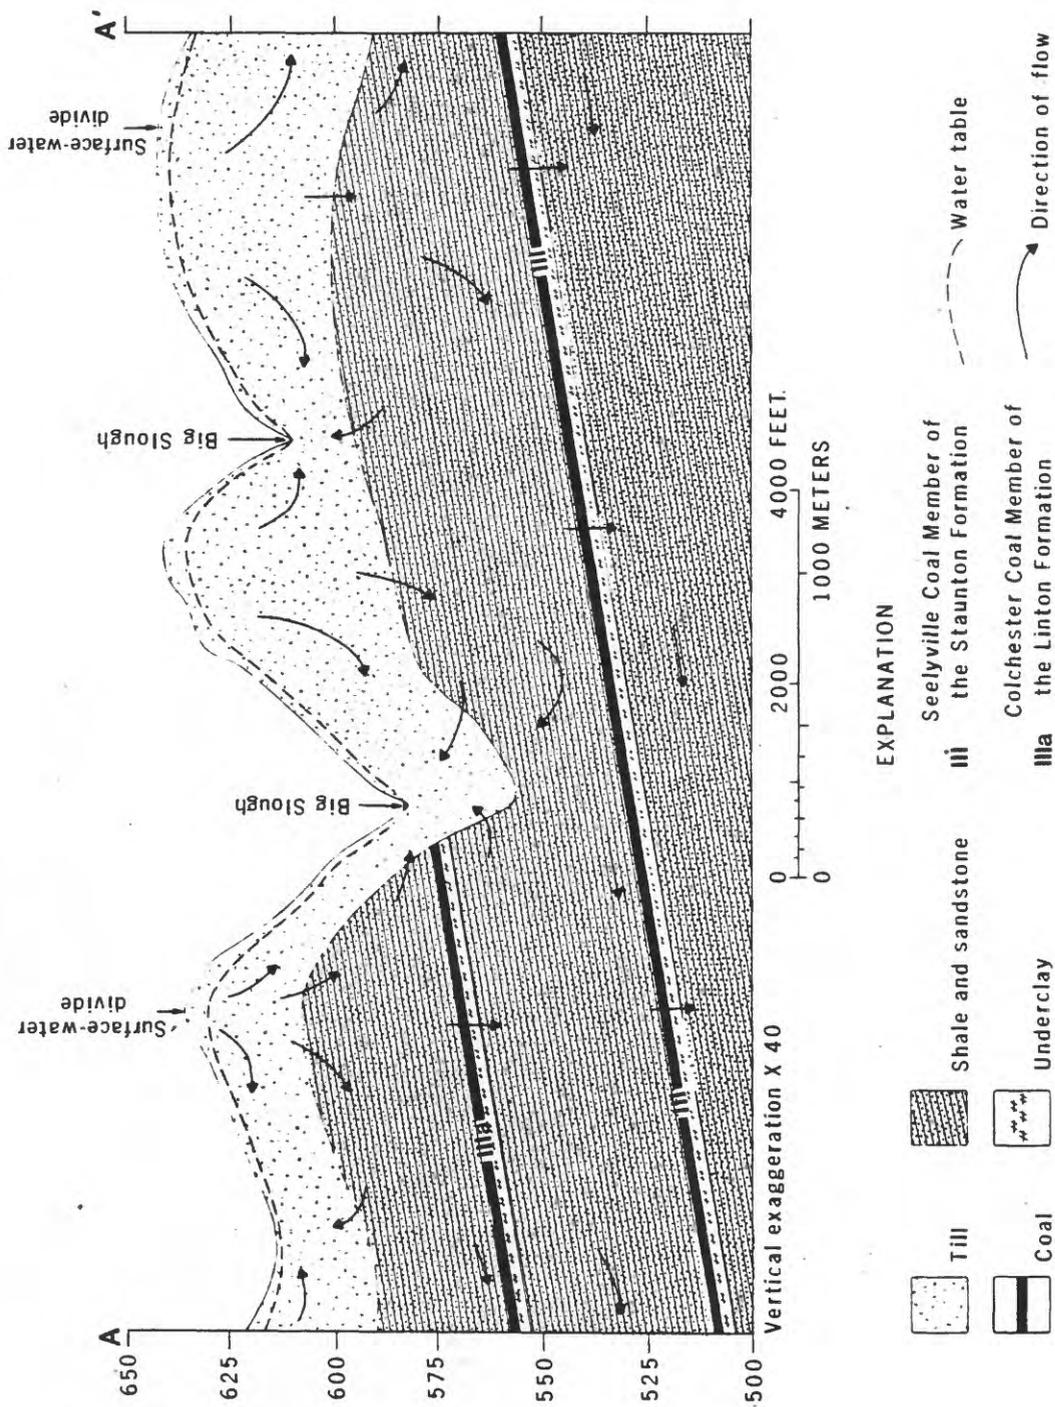


Figure 14.-- Generalized stratigraphy and direction of ground-water flow at Big Slough. Location of trace A-A' shown in figure 10.

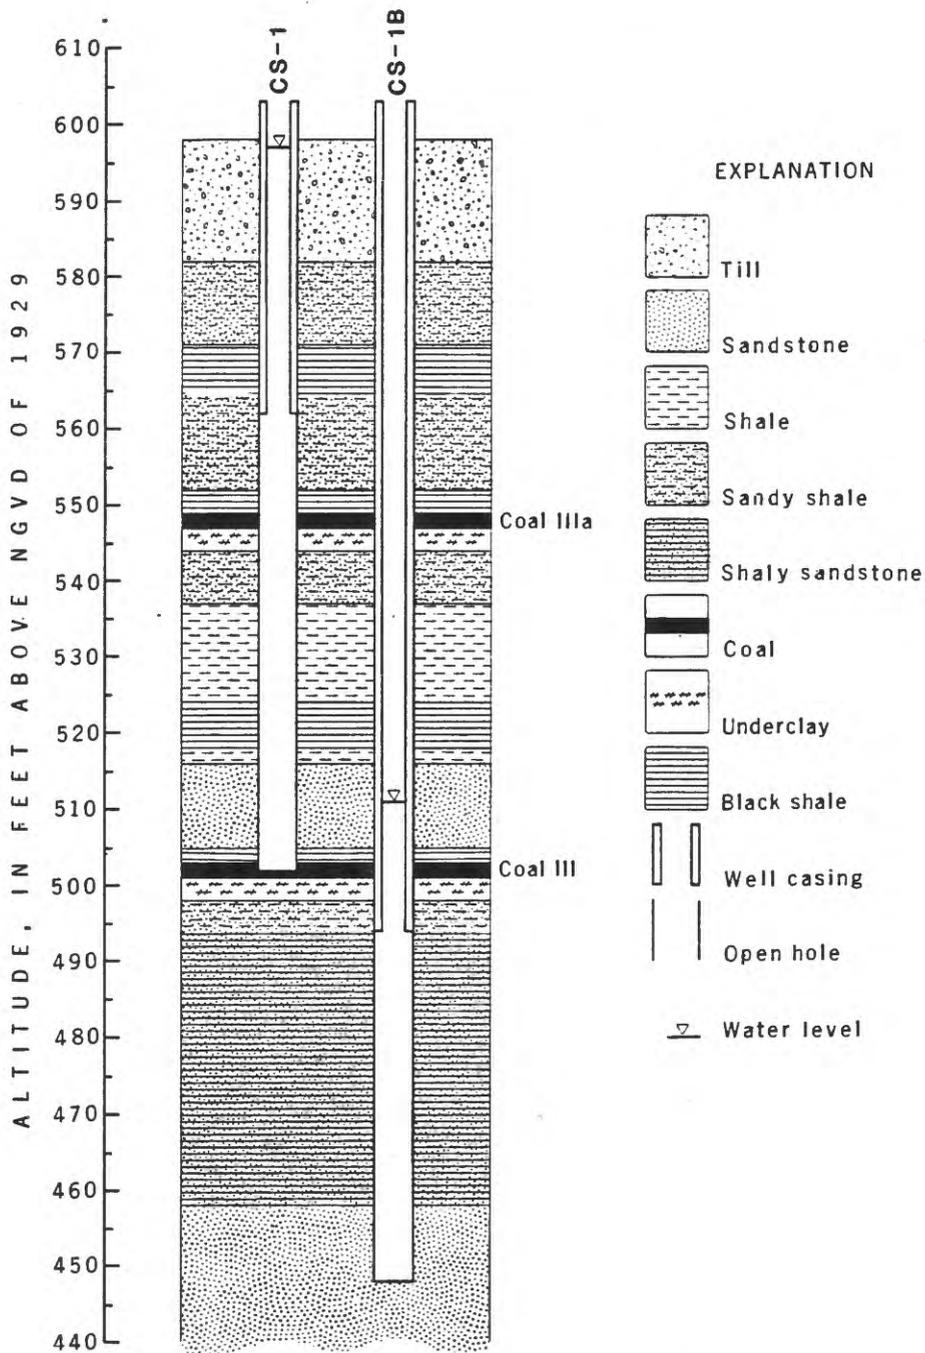


Figure 15.-- Distribution of water levels in a well open to the Linton Formation (CS-1) and a well open to the Staunton Formation (CB-1B) near Big Slough, June 17, 1982.

Hooker Creek

Test drilling and domestic well logs at Hooker Creek watershed show 10 to 100 ft of glacial drift covering shale and sandstone of the Dugger Formation (Martin and others, 1987, fig. 16, p. 41). The drift is predominantly a silty clay till containing small amounts of sand and gravel, although some loess is present. Well logs indicate a buried bedrock valley trending north-south beneath Hooker Creek watershed. A bedrock well (HC-2) drilled west of the watershed boundary encountered approximately 15 ft of sand and gravel in the buried valley at a depth of about 60 ft. Three observation wells were installed in till and four wells were installed in bedrock (fig. 16).

Water levels in the till are generally within 1 to 6 ft of the land surface and fluctuate only about 1 to 2 ft. The till is recharged by infiltration of precipitation and discharge is to Hooker Creek, although some water probably moves downward into the bedrock.

The surface- and ground-water systems at Hooker Creek are not well connected. A shallow well (HC-1B) within 20 ft of Hooker Creek maintained a water level approximately 1 ft above stream level except during peak flows. Water levels in the well fluctuated much less than those in the stream, probably because of the low hydraulic conductivity of the till.

Beneath the till, Pennsylvanian bedrock of the Dugger Formation is dominated by shale in the upper part with about 25 ft of sandstone at the base. Many local wells are drilled through the Dugger Formation into the underlying Petersburg Formation, indicating an insufficient supply of water in the Dugger Formation. Hydraulic conductivities calculated for four wells open to the Dugger, Petersburg, and (or) Staunton Formations ranged from 1×10^{-2} to 8×10^{-1} ft/d (table 6). Although the bedrock wells were open to different formations or combinations of formations, fluctuations of water levels in these wells were similar, about 1.5 ft. Water levels in all of the bedrock wells indicated confined conditions with underclay and unfractured shale acting as confining layers.

The bedrock is recharged by water in the overlying till. Some water in the shallow bedrock probably discharges to Hooker Creek and some probably moves downward to become part of the regional flow system. Water deep in the bedrock (beneath the shallowest underclay) probably flows southwest, the direction of the structural dip, to discharge areas along the Wabash River.

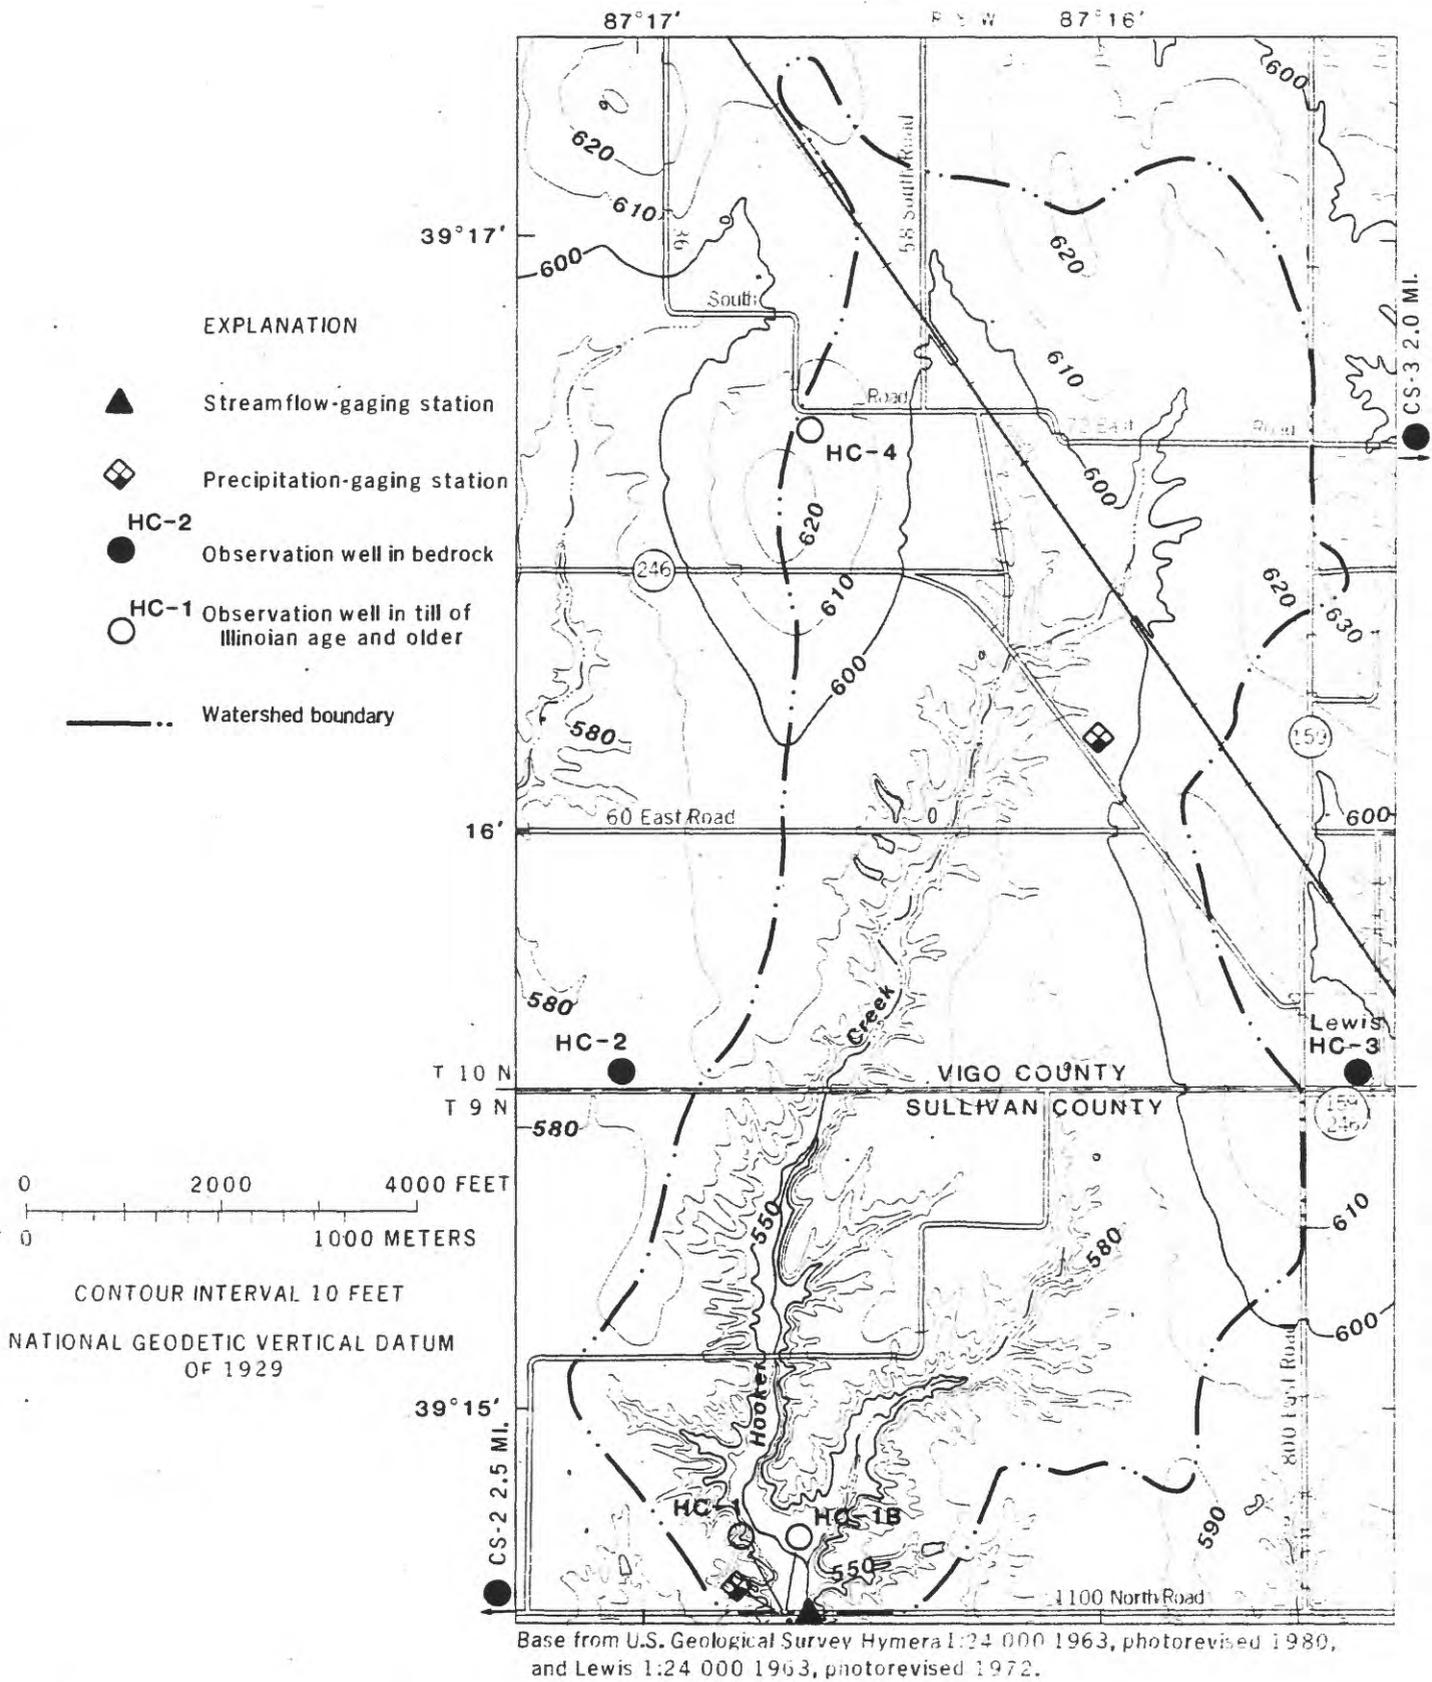


Figure 16.-- Hooker Creek watershed and data-collection sites.

Unnamed tributary to Honey Creek

Observation wells were installed in nine test holes drilled in or near Honey Creek tributary watershed. Eight observation wells were finished in reclaimed mine spoil and one well was finished in bedrock (fig. 17). Well logs showed 60 to 95 ft of mine spoil overlying underclay, shale, sandstone, limestone, and an unnamed coal of the Staunton Formation (Martin and others, 1987, fig. 18, p. 44).


Hydraulic conductivity calculated from four slug tests at three wells in spoil ranged from 7×10^{-3} to 3×10^{-1} ft/d (table 6). Slug tests from a previous study at this mine indicate hydraulic conductivities as great as 130 ft/d in the spoil (L. L. Bobo and S. E. Eikenberry, U.S. Geological Survey, written commun., 1980). The large variation in hydraulic conductivity is probably related to methods used in placing and compacting the spoil.

Prior to August 1981, water levels in the spoil were primarily controlled by the water level in a final-cut lake immediately south of the watershed (fig. 17). A mining company maintained the lake level at an altitude¹ of 540 ± 10 ft above the National Geodetic Vertical Datum of 1929 (NGVD of 1929) by pumping from the lake. Water levels in CR-1 were above lake levels and fluctuated with lake levels and periods of pumping (fig. 18). Ground-water levels at R-7A did not fluctuate with lake levels (fig. 18) but may have been associated with water levels in the impoundment created by a road 100 ft northeast of R-7A (fig. 17). Fluctuations in ground-water levels in the spoil were about 10 ft and the water table was generally 25 to 45 ft below land surface (fig. 19).

In August 1981, pumping from the final-cut lake was discontinued and lake levels began to rise. Lake levels rose about 40 ft and reached equilibrium in March 1982. Water levels in wells finished in spoil rose 6 to 40 ft in association with rising lake levels, with the amount of rise decreasing away from the lake (figs. 17 and 18). After lake and ground-water levels reached equilibrium, fluctuations in ground-water levels in the spoil ranged from about 1 to 4.5 ft. The smallest fluctuations were at wells near the lake and the largest fluctuations were at wells away from the lake. Although ground-water levels rose 6 to 40 ft throughout the watershed (fig. 20), the water table remained at least 4.5 ft below the stream channel and did not affect flow in the ephemeral stream.

Rising lake levels appear to have altered the location of the ground-water divide. Prior to August 1981, the ground-water divide was north of CR-6 (fig. 19). After March 1982, the ground-water divide was between CR-5 and CR-6 (fig. 20). Inward migration of the ground-water divide is a response to rising lake levels which decrease the hydraulic gradient and the amount of flow to the lake.

¹ Altitude in this report refers to the distance above or below the NGVD of 1929.

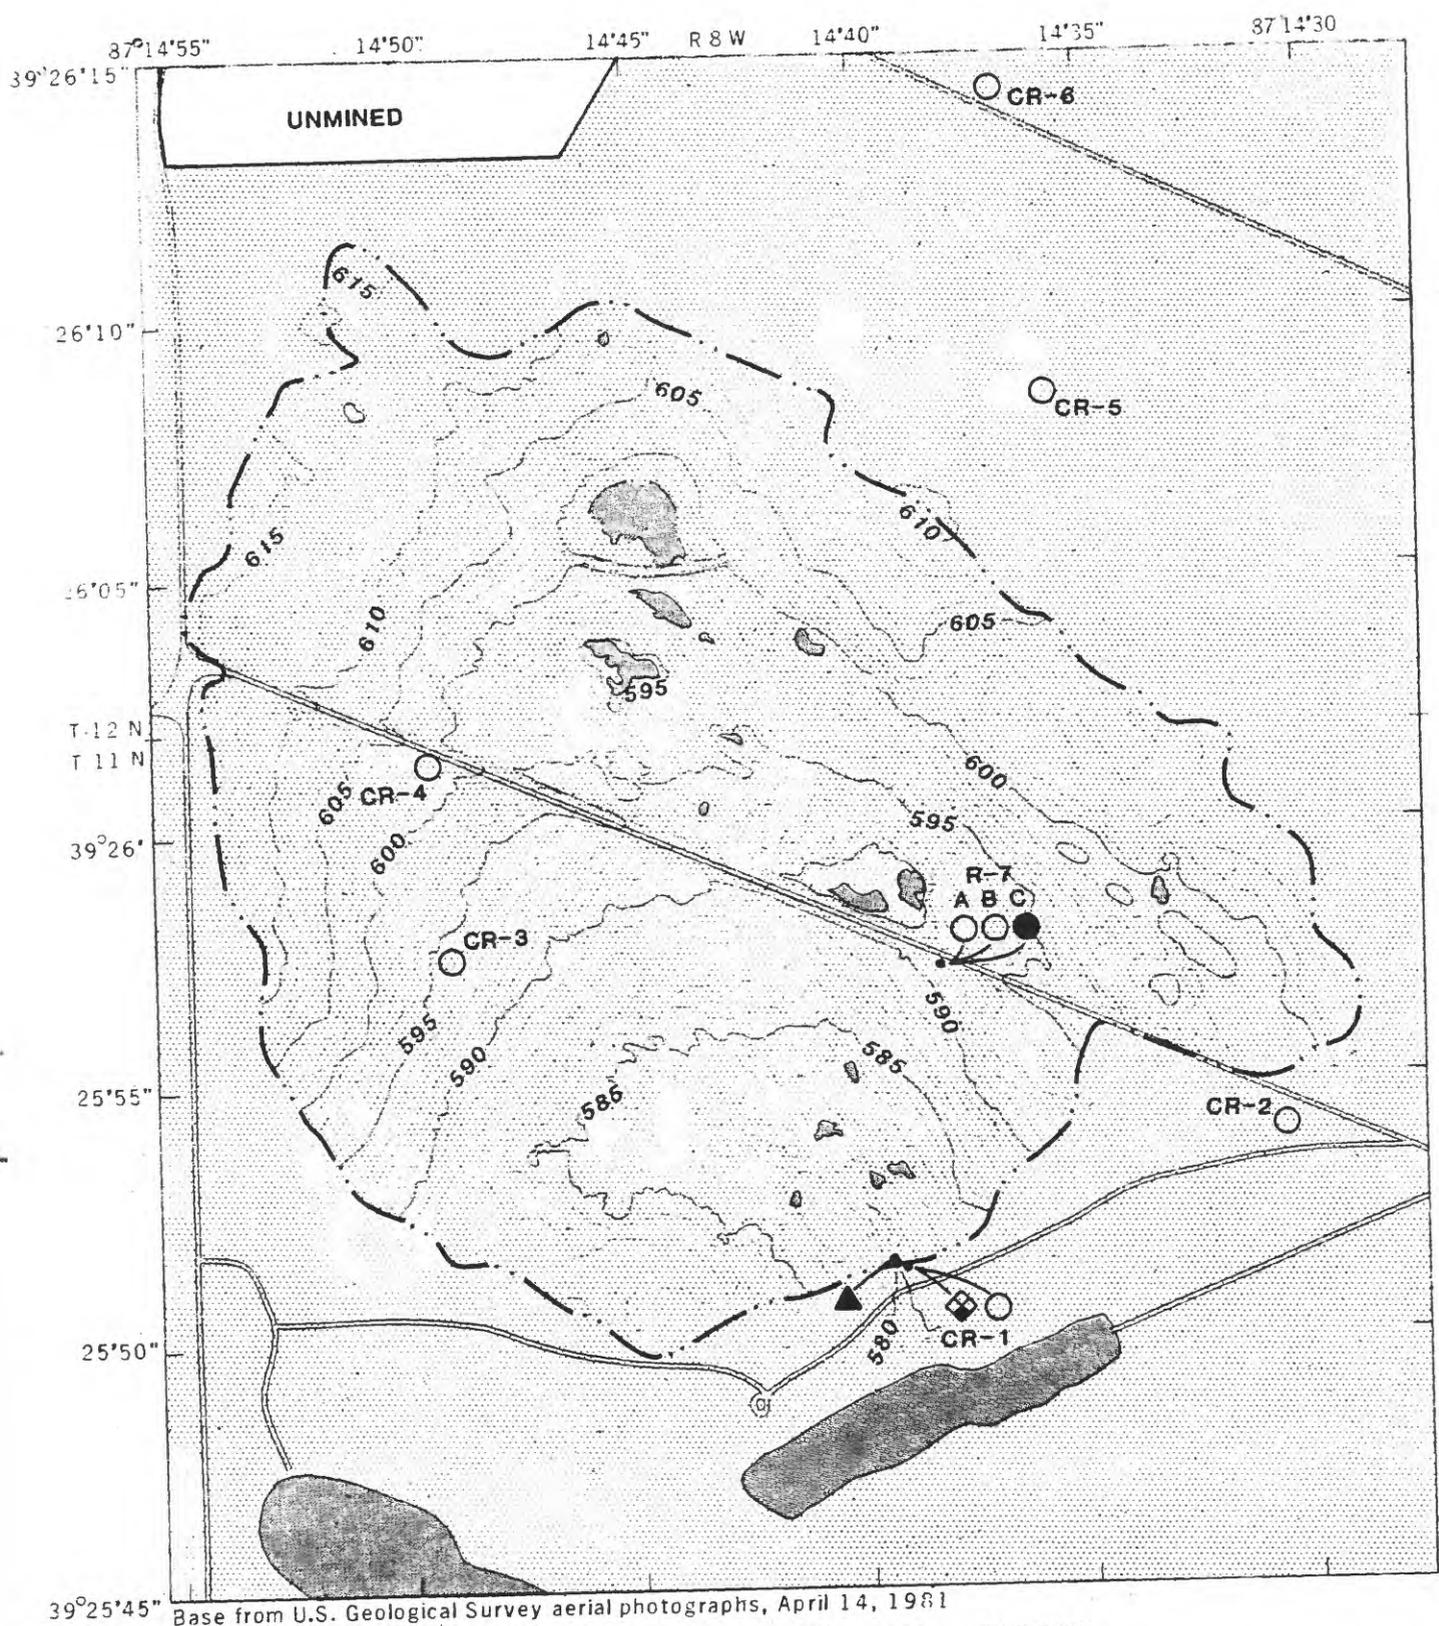

Base from U.S. Geological Survey aerial photographs, April 14, 1981

0 200 400 600 800 FEET
 0 50 100 150 200 METERS

CONTOUR INTERVAL 1 FOOT
 NATIONAL GEODETIC VERTICAL DATUM OF 1929

EXPLANATION

- Reclaimed mine spoil
- Watershed boundary
- Streamflow-gaging station
- Precipitation-gaging station
- CR-2
- CR-1
- CR-3
- CR-4
- CR-5
- CR-6
- R-7C
- Observation well in bedrock
- Observation well in mine spoil

Figure 17.- Unnamed tributary to Honey Creek watershed, and data-collection sites.


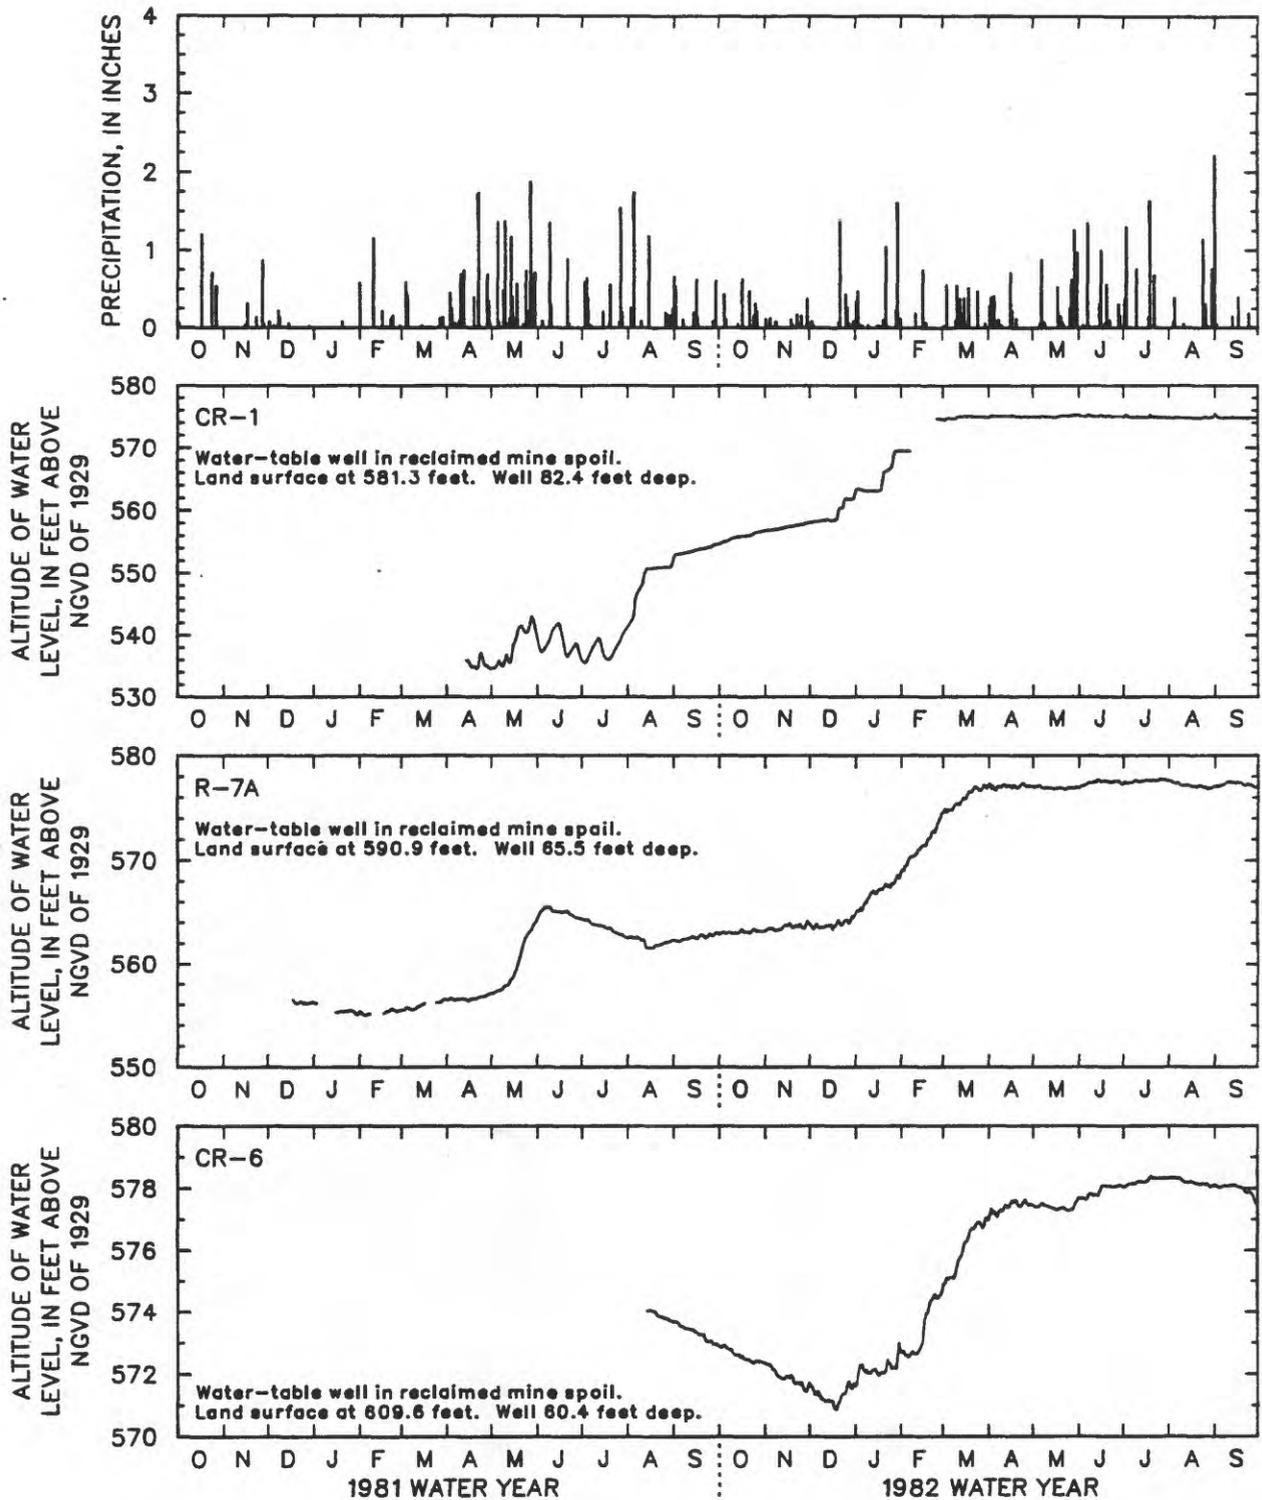


Figure 18. -- Daily precipitation and daily mean ground-water levels at unnamed tributary to Honey Creek, 1981 and 1982 water years.

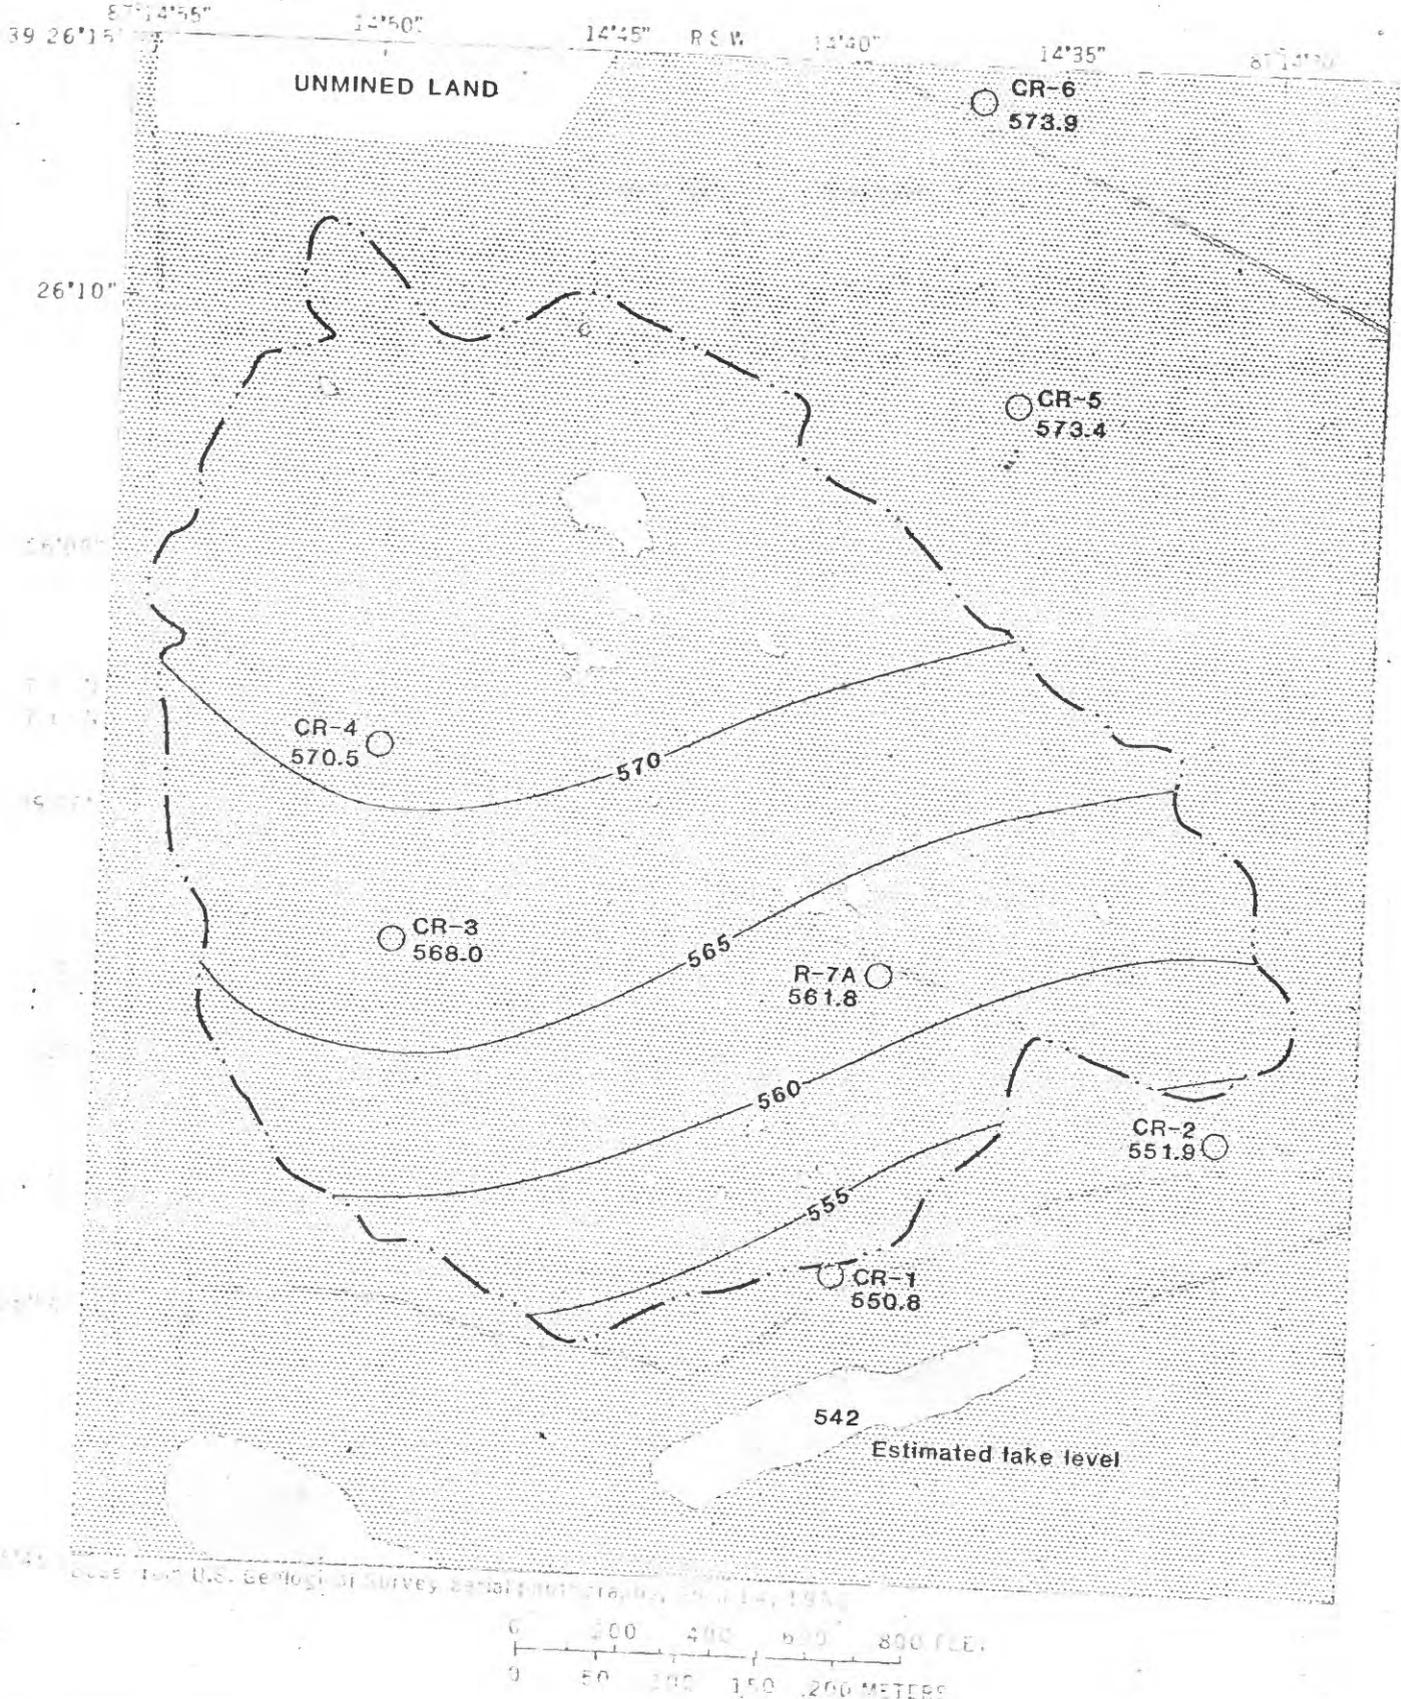

UNMINED LAND

○ CR-6
573.9

○ CR-5
573.4

○ CR-4
570.5


○ CR-3
568.0

○ R-7A
561.8

○ CR-2
551.9

○ CR-1
550.8

542
Estimated lake level

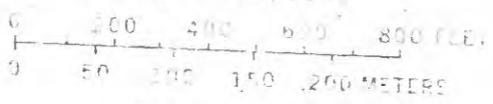

EXPLANATION

Reclaimed mine spoil

○ Observation well

CR-2 Well number

551.9 Altitude of water table, in feet above NGVD of 1929

--- Watershed boundary

—560— Line of equal water altitude, in feet above NGVD of 1929. Interval 5 feet

Figure 19.-- Altitude of the water table at unnamed tributary to Honey Creek, August 20, 1981.

The spoil is recharged by infiltration of precipitation or by percolation of surface water that has collected in depressions. The shallow ground water flows toward and through the final-cut lakes south of the watershed to points of discharge at an active mine about 1 mi (mile) south-southeast of the watershed.


Bedrock of the Staunton Formation is separated from the mine spoil by 2 to 6 ft of underclay. Water levels in a well set in spoil just below the water table (R-7A) are about 2 ft higher than those in a well set in spoil just above the underclay (R-7B), indicating a downward component of flow in the spoil (Bobo and Eikenberry, 1982, p. 39). Water levels in a well set in the Staunton Formation (R-7C) are generally 20 to 30 ft below those in the spoil but rise above the bedrock. The underclay confines water in the bedrock and impedes downward flow. Water in the bedrock beneath Honey Creek tributary probably discharges to the active mine pit south-southeast of the watershed.

Unnamed tributary to Sulphur Creek


Test drilling in and near Sulphur Creek tributary watershed showed 20 to 60 ft of unconsolidated material overlying rocks of the Dugger and Petersburg Formations (Martin and others, 1987, fig. 20, p. 48). The unconsolidated material is primarily comprised of 0 to 60 ft of mine spoil or 0 to 30 ft of till. Over 90 percent of the watershed is covered by mine spoil. The bedrock is typical of Pennsylvanian strata, mostly shale and sandstone with smaller amounts of coal, underclay, and limestone. Eleven wells were installed in mine spoil, one well in till, and six wells in bedrock (fig. 21).

The water table in the spoil is generally about 10 ft below land surface, but because of areas of high relief and the effect of impounded water, depths to water vary from less than 1 to 25 ft (fig. 22). Shallow ground water flows from the headwaters toward the lake. Flow in the vicinity of the lake is mostly toward the lake except near the outlet, where flow is to the north (fig. 23). Ground-water inflow results in sustained surface-water flow in Sulphur Creek tributary in all but a few months of the year.

Water levels in wells finished in spoil fluctuate from 2 to 6 ft. Water levels in at least one well near the lake (MR-1) correlate well with lake levels and indicate good hydraulic connection between the surface-water system and the ground-water system (fig. 24). The degree of surface-water/ground-water interaction in the vicinity of the other wells cannot be readily determined from intermittent ground-water measurements. Interaction is probably good where wells are finished in zones of high hydraulic conductivity and is probably poor in zones of low hydraulic conductivity.

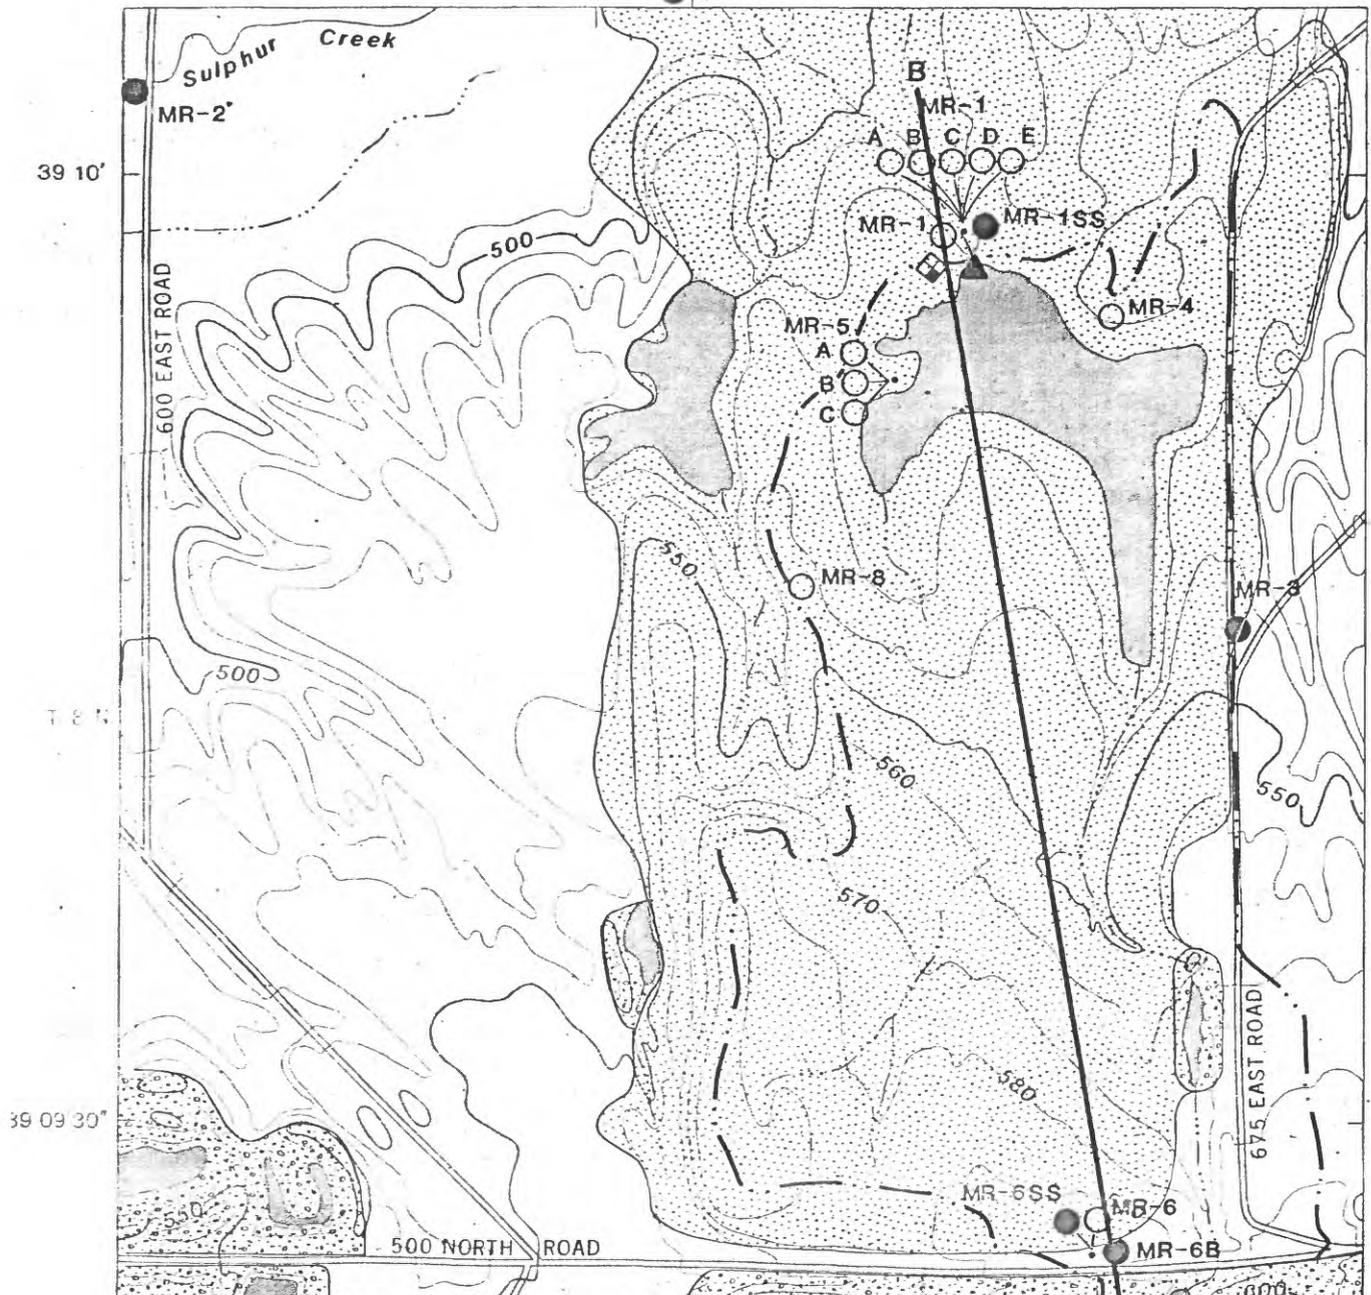

Base from U.S. Geological Survey Hymera 1:24 000, 1963, photorevised 1980

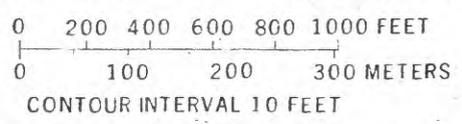

NATIONAL GEODETIC VERTICAL DATUM OF 1929

EXPLANATION

- Reclaimed mine spoil
- Unreclaimed mine spoil
- Streamflow-gaging station
- Precipitation-gaging station
- MR-6B Observation well in bedrock
- MR-6 Observation well in unconsolidated deposits
- Watershed boundary
- Trace of section. See section figure 22



Figure 21.- Unnamed tributary to Sulphur Creek watershed, and data-collection sites.

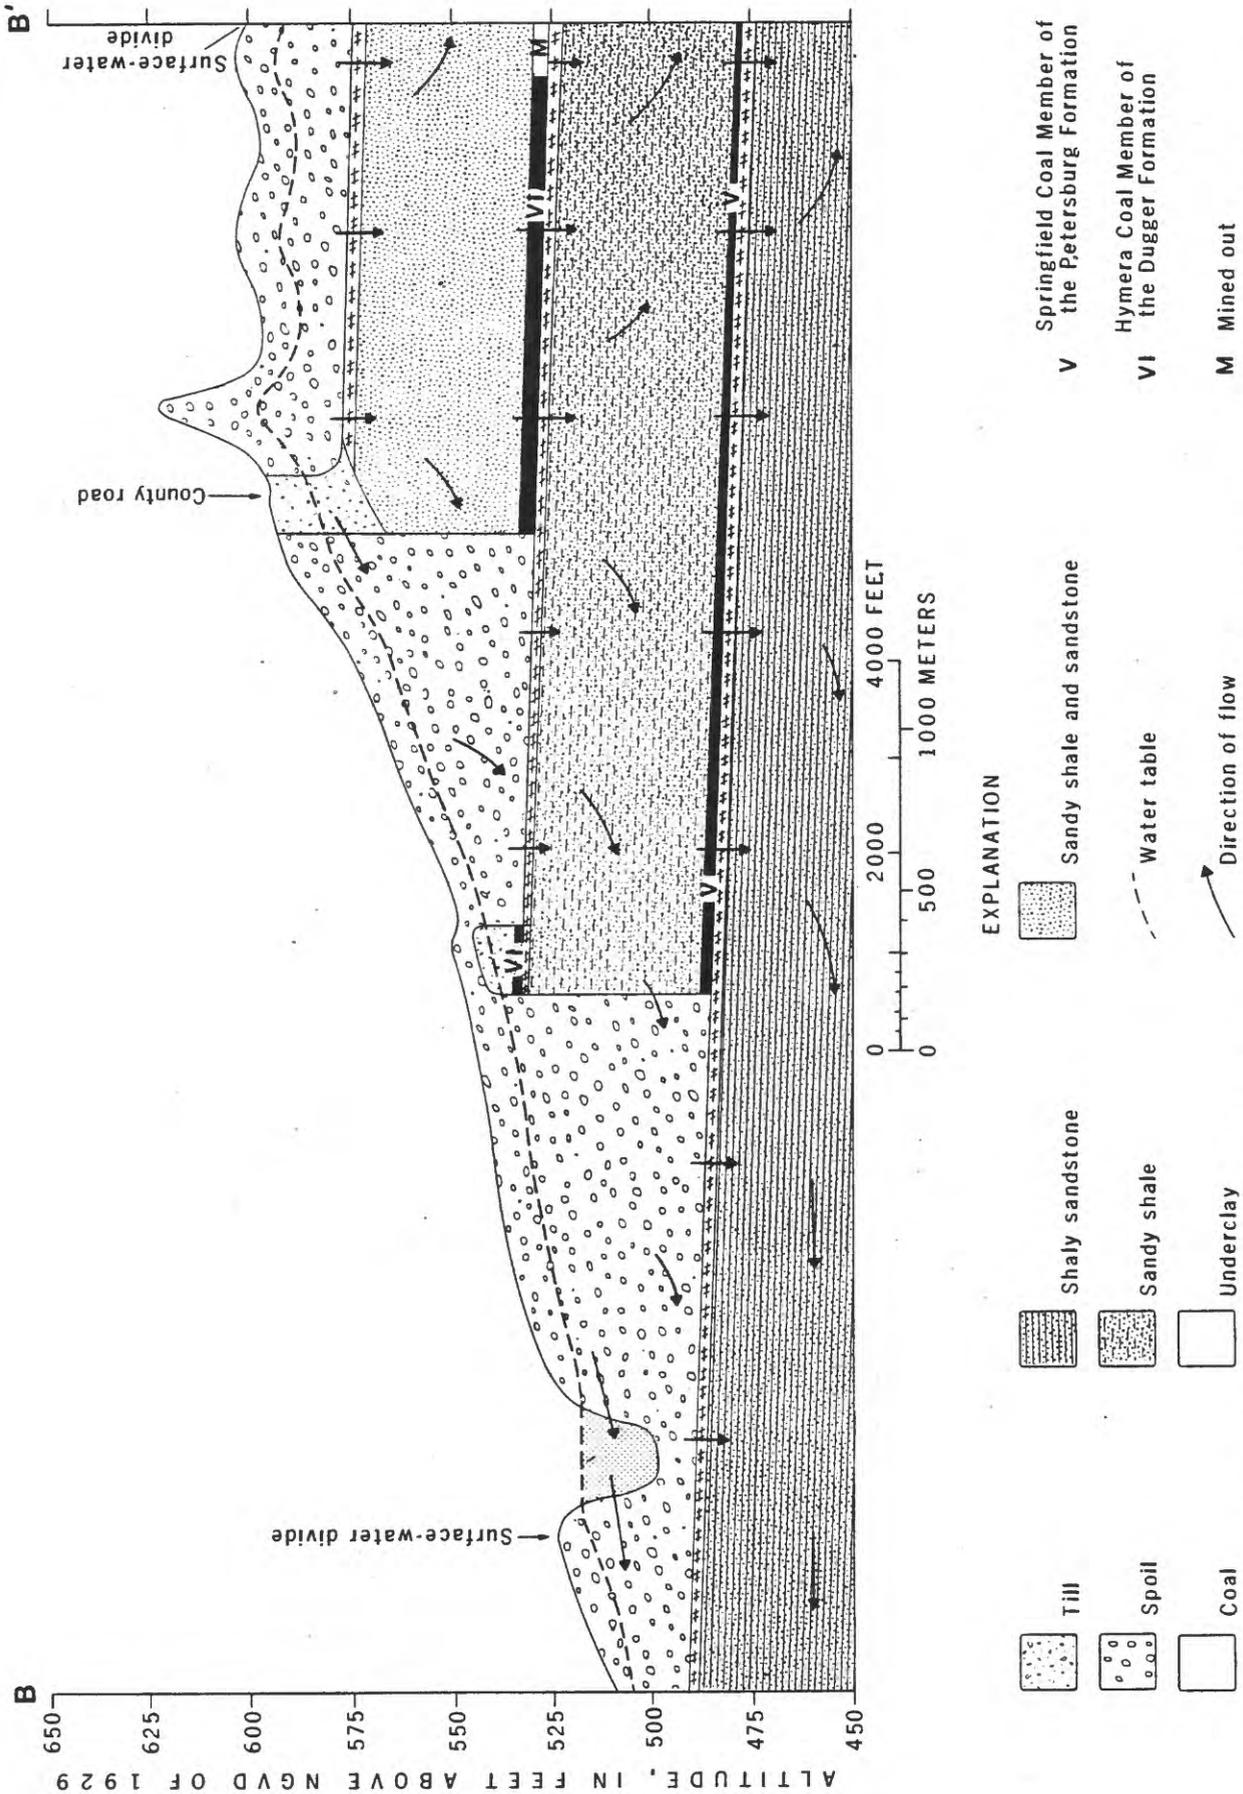


Figure 22.-- Generalized stratigraphy and direction of ground-water flow at unnamed tributary to Sulphur Creek. Location of trace B-B' shown in figure 21.

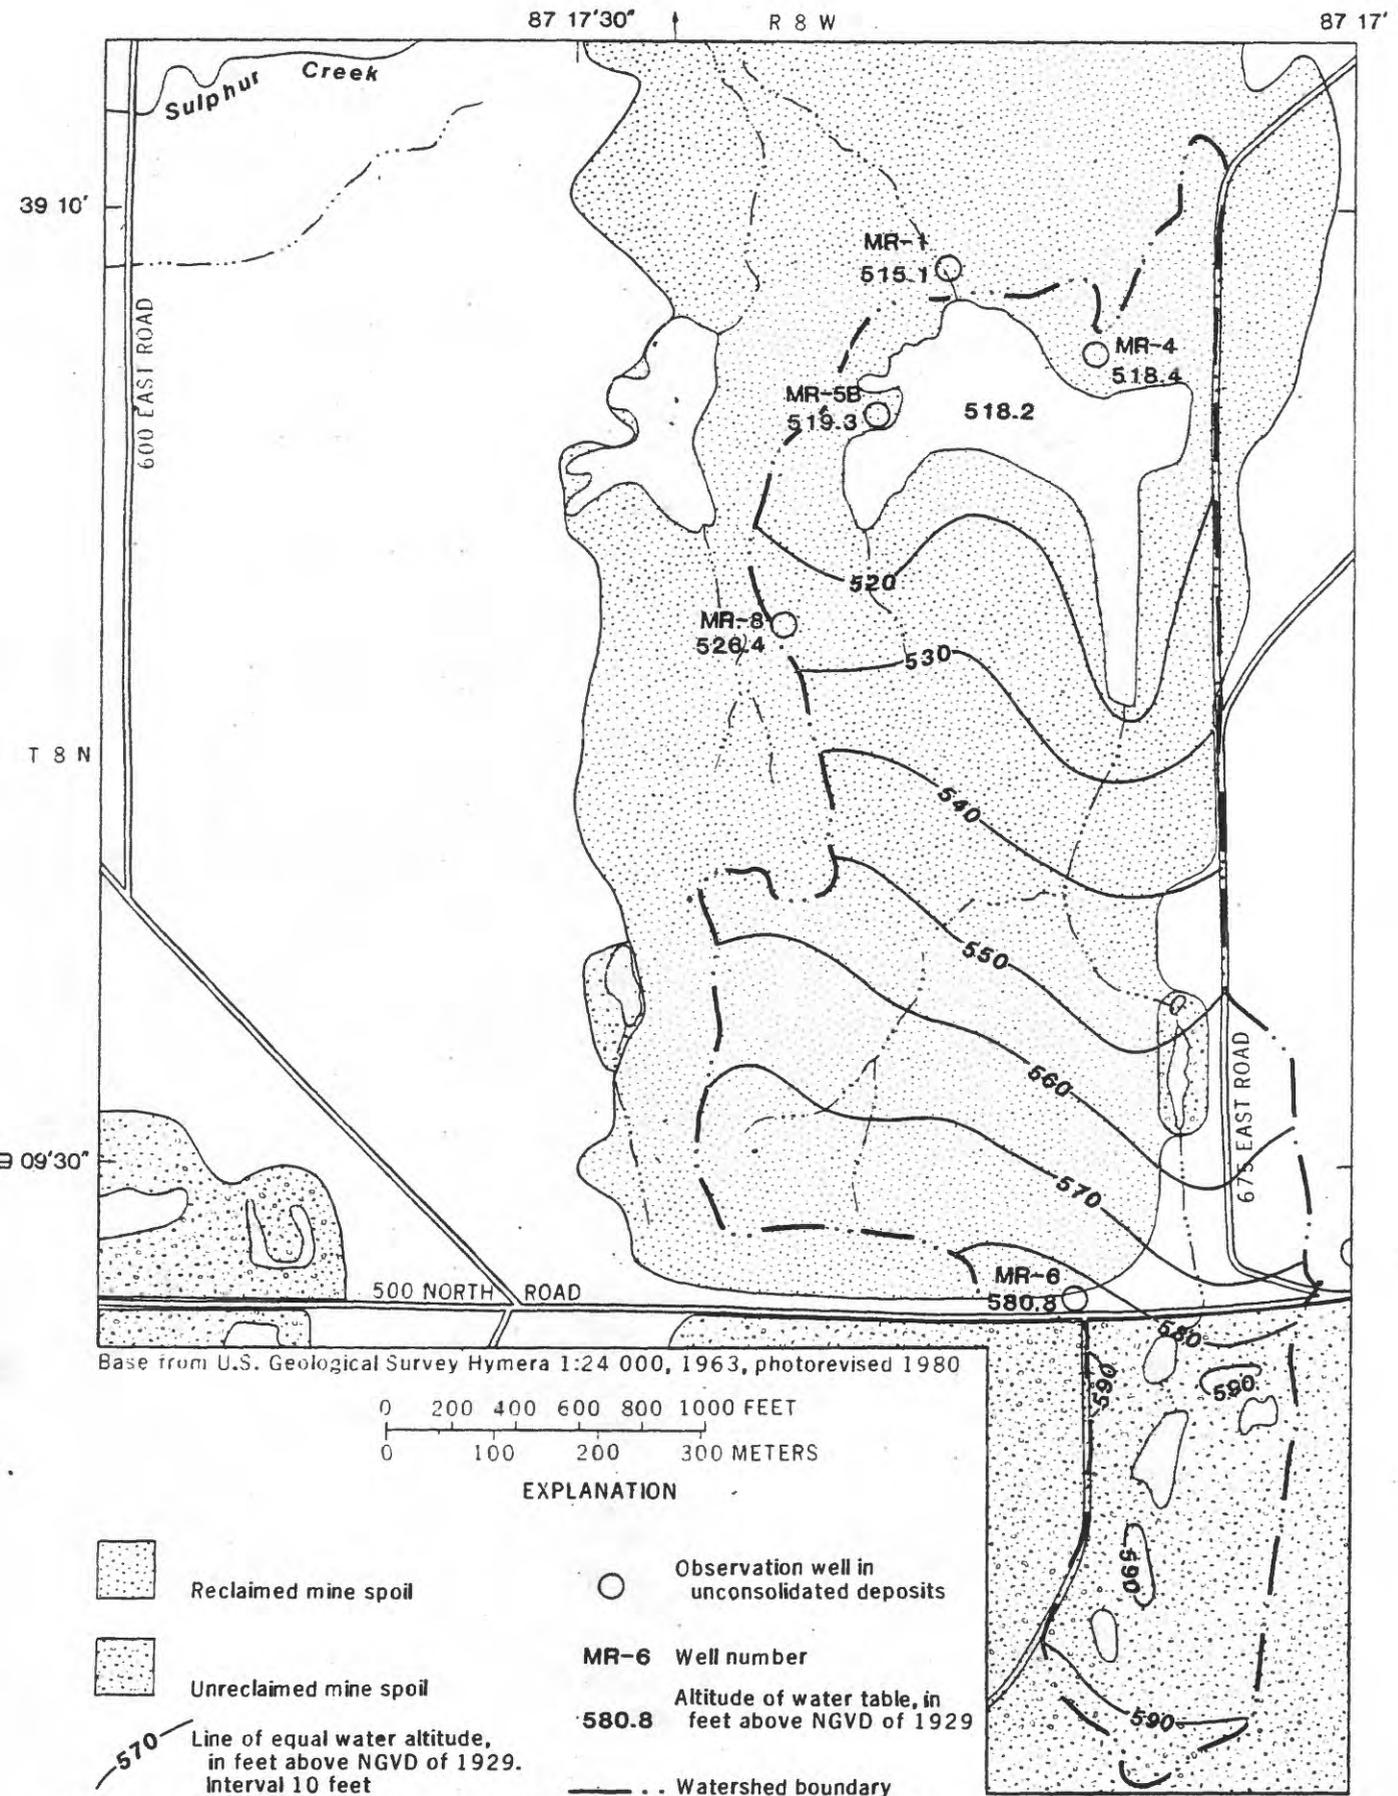


Figure 23.- Altitude of the water table at unnamed tributary to Sulphur Creek, July 15, 1982.

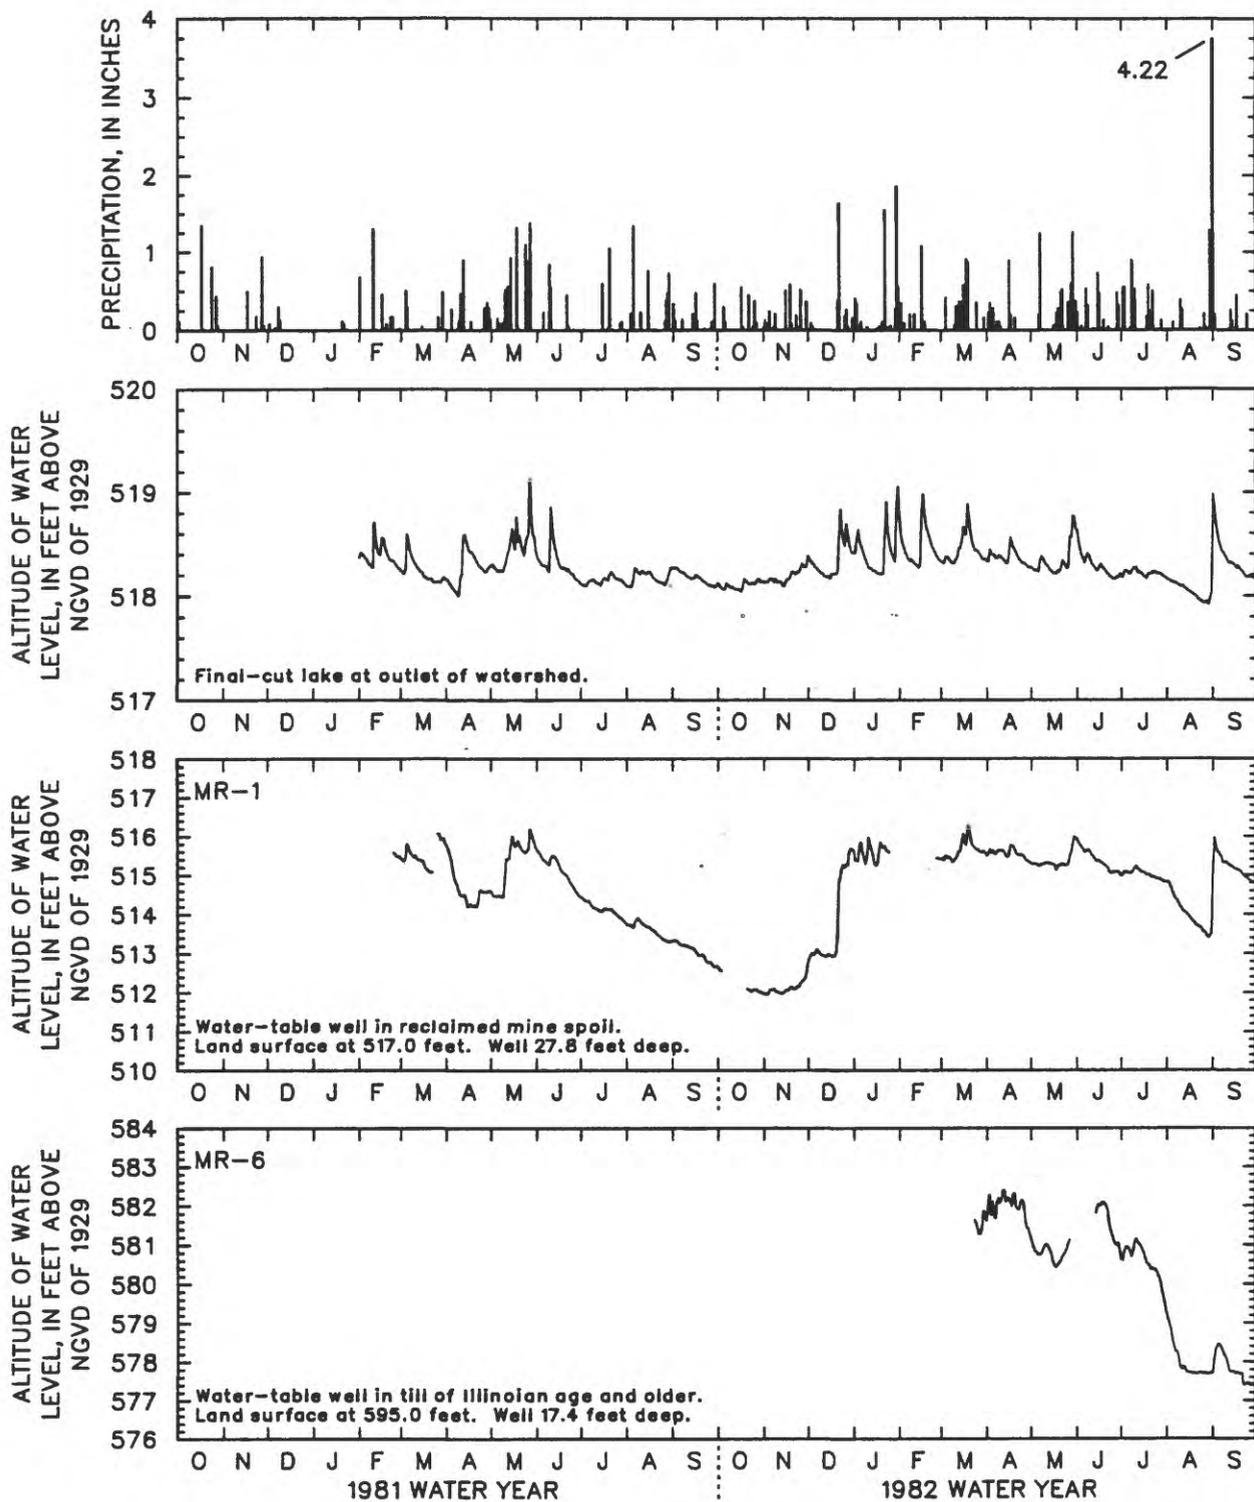



Figure 24. -- Daily precipitation and daily mean lake and ground-water levels at unnamed tributary to Sulphur Creek, 1981 and 1982 water years.

A nest of seven wells was installed at different depths in the spoil to determine flow patterns near the lake (fig. 21). Well MR-1D (14.0 ft deep) appeared to have a plugged screen and was not used in the analysis. The pattern of head loss in the nest of wells does not show a predominant direction of movement but usually shows higher heads in the middle of the spoil than near the surface or the bottom of the spoil (fig. 25). Lack of a consistent pattern of head loss probably reflects the great variability of hydraulic conductivity of the spoil and (or) hydrologic connection with the lake or the discharge area. Differing degrees of hydraulic conductivity and hydrologic connection result in a flow system near the lake that is likely composed of many small, relatively isolated flow systems which follow torturous flow paths. Water levels in MR-1B (finished in spoil just above the underclay at the base of the spoil) are consistently above those in MR-1SS (open to bedrock below the underclay), indicating a downward component of flow from the spoil to the bedrock. The pattern of water levels in all six wells is not consistent for the six dates of measurement and is not clearly associated with precipitation events (figs. 24 and 25).

Water-level fluctuations show a seasonal pattern typical of ground-water recharge in Indiana. Most of the recharge follows periods of snowmelt or prolonged precipitation during winter and spring when vegetation is dormant (fig. 24). The spoil is recharged by infiltration of precipitation and by infiltration of water in impoundments and depressions. Shallow ground water moves toward the final-cut lake where some water is discharged. Water in the lake reenters the spoil to the north and flows north to points of discharge along Sulphur Creek. Some water in the spoil moves downward into the bedrock (fig. 22).

Hydraulic conductivity of five wells open to the Digger, Petersburg, and (or) Linton Formations ranged from 2×10^{-4} to 4×10^{-2} ft/d (table 6). Water-level fluctuations in the bedrock ranged from 2.6 to 4.9 ft and decreased in the deeper formations. Water levels in two wells finished in bedrock (MR-6B and MR-6SS) and one well finished in till (MR-6) near the southern part of the watershed show decreasing water-level elevations with depth and indicate a downward component of flow (fig. 26). Shallow ground water in the sandstone tapped by MR-6B was unconfined. Water in the other bedrock wells was confined by underclay or by underclay and shale.

Water in the bedrock beneath much of Sulphur Creek tributary follows a local flow path to points of discharge at a final-cut lake approximately 1,000 ft north of the watershed. This final-cut lake forms the channel of Sulphur Creek and is at a much lower elevation than the water levels in the bedrock at Sulphur Creek tributary. Water in the bedrock beneath the headwaters of Sulphur Creek tributary probably is part of a regional flow system that follows the southwest structural dip and discharges along the Wabash River (fig. 1).

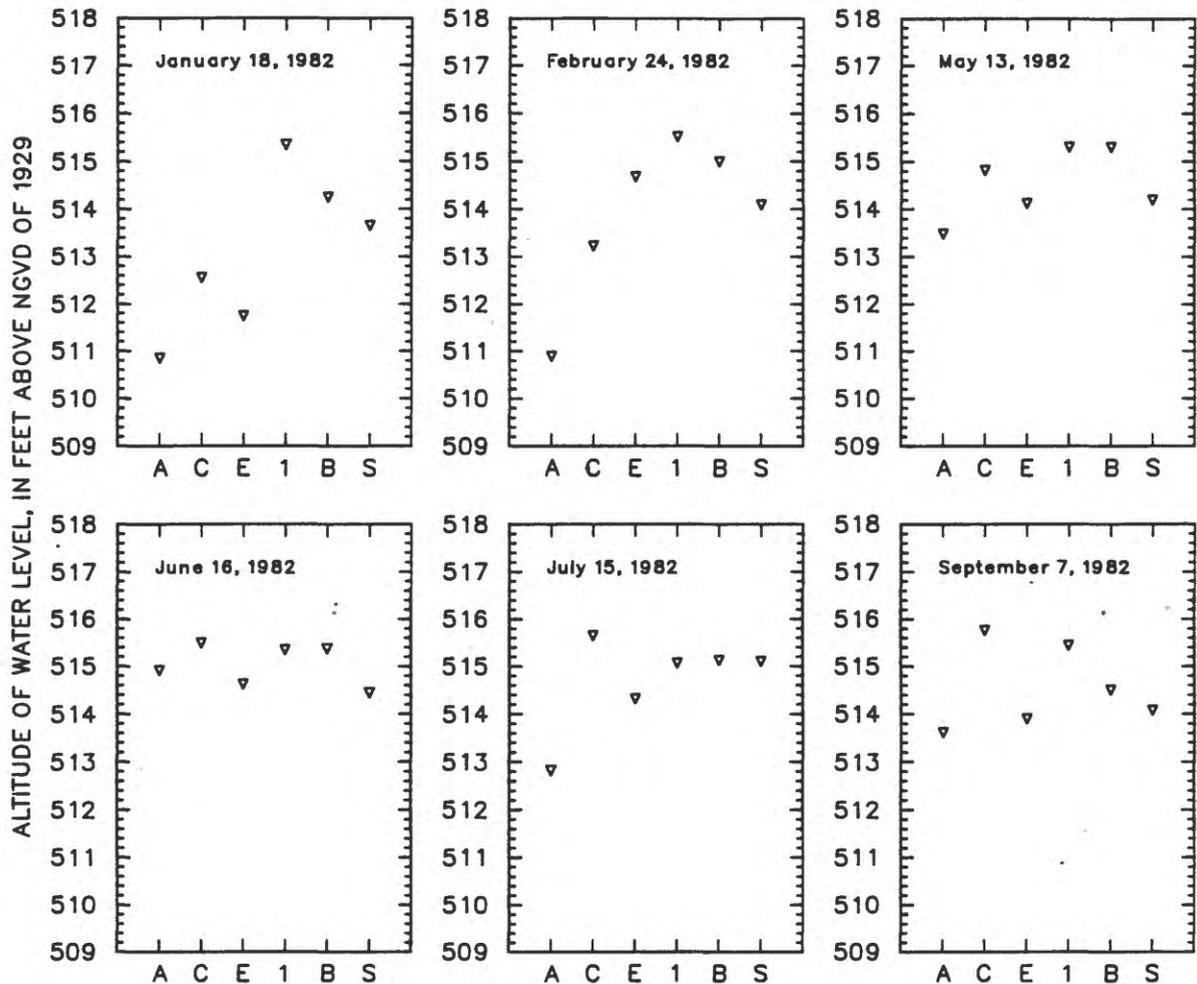

EXPLANATION

- A - Well MR-1A, 9.2 feet deep, land surface at 518.4 feet above NGVD of 1929.
- C - Well MR-1C, 19.0 feet deep, land surface at 518.6 feet above NGVD of 1929.
- E - Well MR-1E, 23.4 feet deep, land surface at 518.6 feet above NGVD of 1929.
- 1 - Well MR-1, 27.8 feet deep, land surface at 517.0 feet above NGVD of 1929.
- B - Well MR-1B, 43.8 feet deep, land surface at 518.5 feet above NGVD of 1929.
- S - Well MR-1SS, 101.1 feet deep, land surface at 518.6 feet above NGVD of 1929.

Figure 25. -- Distributions of water levels in a nest of wells finished in reclaimed mine spoil or bedrock at unnamed tributary to Sulphur Creek. Wells MR-1A, MR-1B, MR-1C, and MR-1E are finished in spoil, have 2-foot screens, and are cased to land surface. Well MR-1 is finished in spoil, has a 5-foot screen, and is cased to land surface. Well MR-1SS is finished in bedrock, predominantly shale, with 53 feet of casing and 48 feet of open hole. Altitude of the water level in the final-cut lake ranged from 518.1 to 518.4 feet above NGVD of 1929 on these dates.

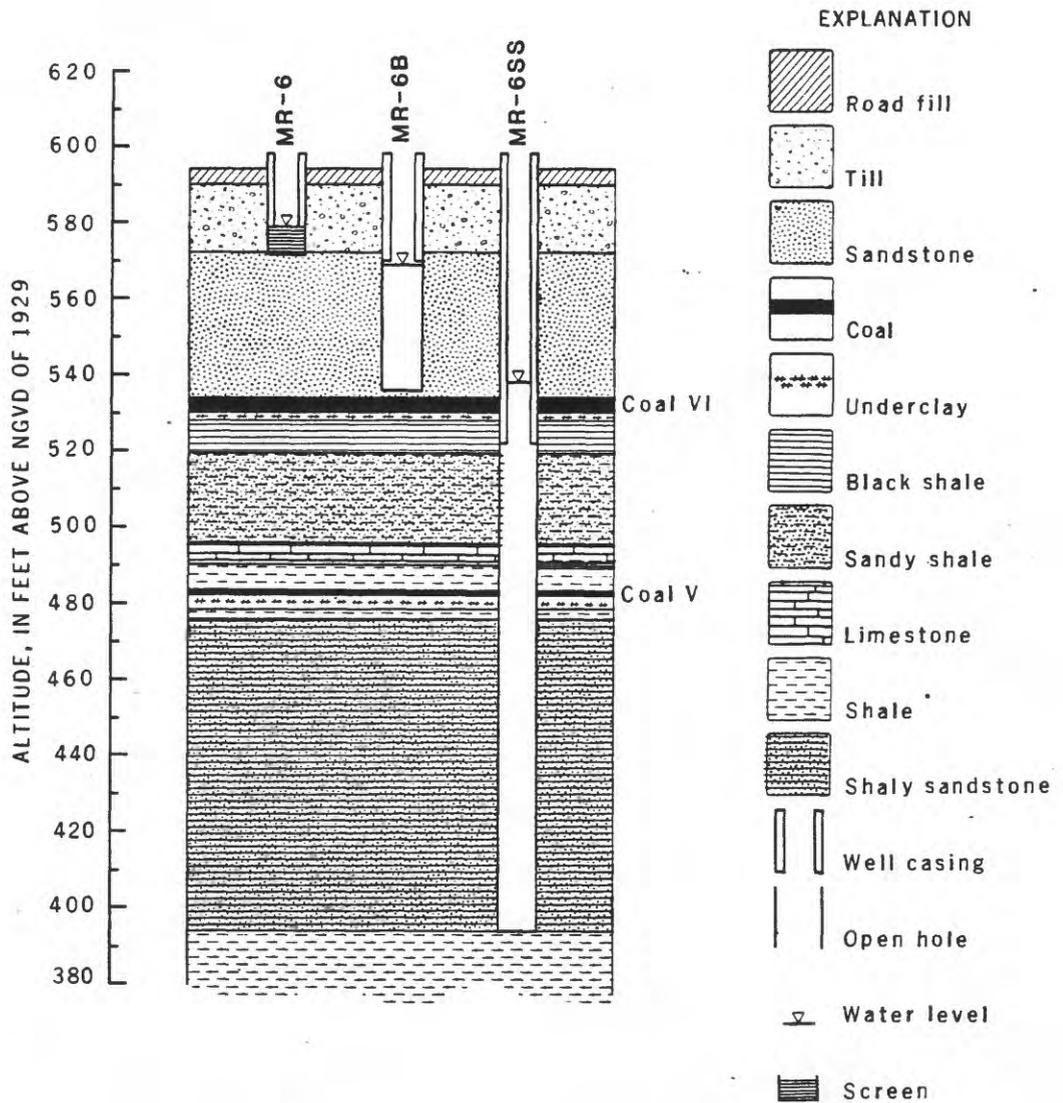


Figure 26.-- Distribution of water levels in a well screened in till (MR-6), a well open to the Dugger Formation (MR-6B), and a well open to the Dugger and Petersburg Formations (MR-6SS), at unnamed tributary to Sulphur Creek , September 7, 1982.

Pond Creek

Fifteen wells were installed in or near Pond Creek watershed. Analysis of the well logs showed 10 to 25 ft of sandy clay till near the edges of the watershed and about 65 ft of unreclaimed mine spoil near the center (Martin and others, 1987, fig. 22, p. 52). These unconsolidated deposits are underlain by sandstone, shale, coal, and underclay of the Brazil Formation. Beneath the Brazil Formation are sandstone and shale of the Mansfield Formation. Six observation wells were finished in bedrock, three in coal-mine spoil, five in till, and one in alluvium (fig. 27).

Till in the uplands of Pond Creek watershed can have greater hydraulic conductivity than spoil or bedrock. Hydraulic conductivities estimated from slug tests at three wells in till ranged from 7×10^{-3} to 9×10^{-1} ft/d (table 6). Hydraulic conductivities at three wells in spoil ranged from 1×10^{-3} to 6×10^{-2} ft/d, whereas hydraulic conductivities at three bedrock wells open to the Brazil and (or) Mansfield Formations ranged from 5×10^{-3} to 2×10^{-1} ft/d (table 6).

Water levels in wells finished in till fluctuated 2 to 6 ft whereas the water level in the well finished in alluvium fluctuated about 2 ft. Fluctuations of the water levels in PC-2S and PC-2M (the shallow and medium wells in the nest of wells finished in spoil) were less than 1 ft, whereas fluctuation in PC-2D (the deep well) was greater than 3 ft. Water levels in PC-2S were slightly higher than those in PC-2M, indicating predominantly horizontal flow in this part of the spoil. Water levels in PC-2D were 4 to 6 ft higher than those in shallower wells, suggesting confined conditions and an upward component of flow at depth.

Water levels in the nest of wells finished in till show a different pattern of head loss. Wells PC-6S, PC-6M, and PC-6D are 6, 8, and 10 ft deep with 2-ft screens. Water levels in PC-6S were generally the highest whereas water levels in PC-6M were generally the lowest. This pattern of head loss could result from confined conditions near PC-6D or from a layer of more permeable till near PC-6M that is well connected to a discharge area. Complexities in the flow system at small scales illustrates the importance of structure, composition, and hydraulic properties of the glacial deposits. Although the general direction of flow may be lateral with some downward movement, some upward flow may occur, even in recharge areas.

The water table in the till is generally within 0.5 to 10 ft of land surface but in the spoil the water table is generally deeper, about 20 to 30 ft below land surface (fig. 28). The surface- and shallow ground-water systems near the gage and well PC-1 are closely related (fig. 29). Water levels in PC-1 were generally 1 to 2 ft above stream levels, indicating discharge of shallow ground water to Pond Creek. Water levels in all of the wells finished in unconsolidated deposits were above the elevation of Pond Creek.

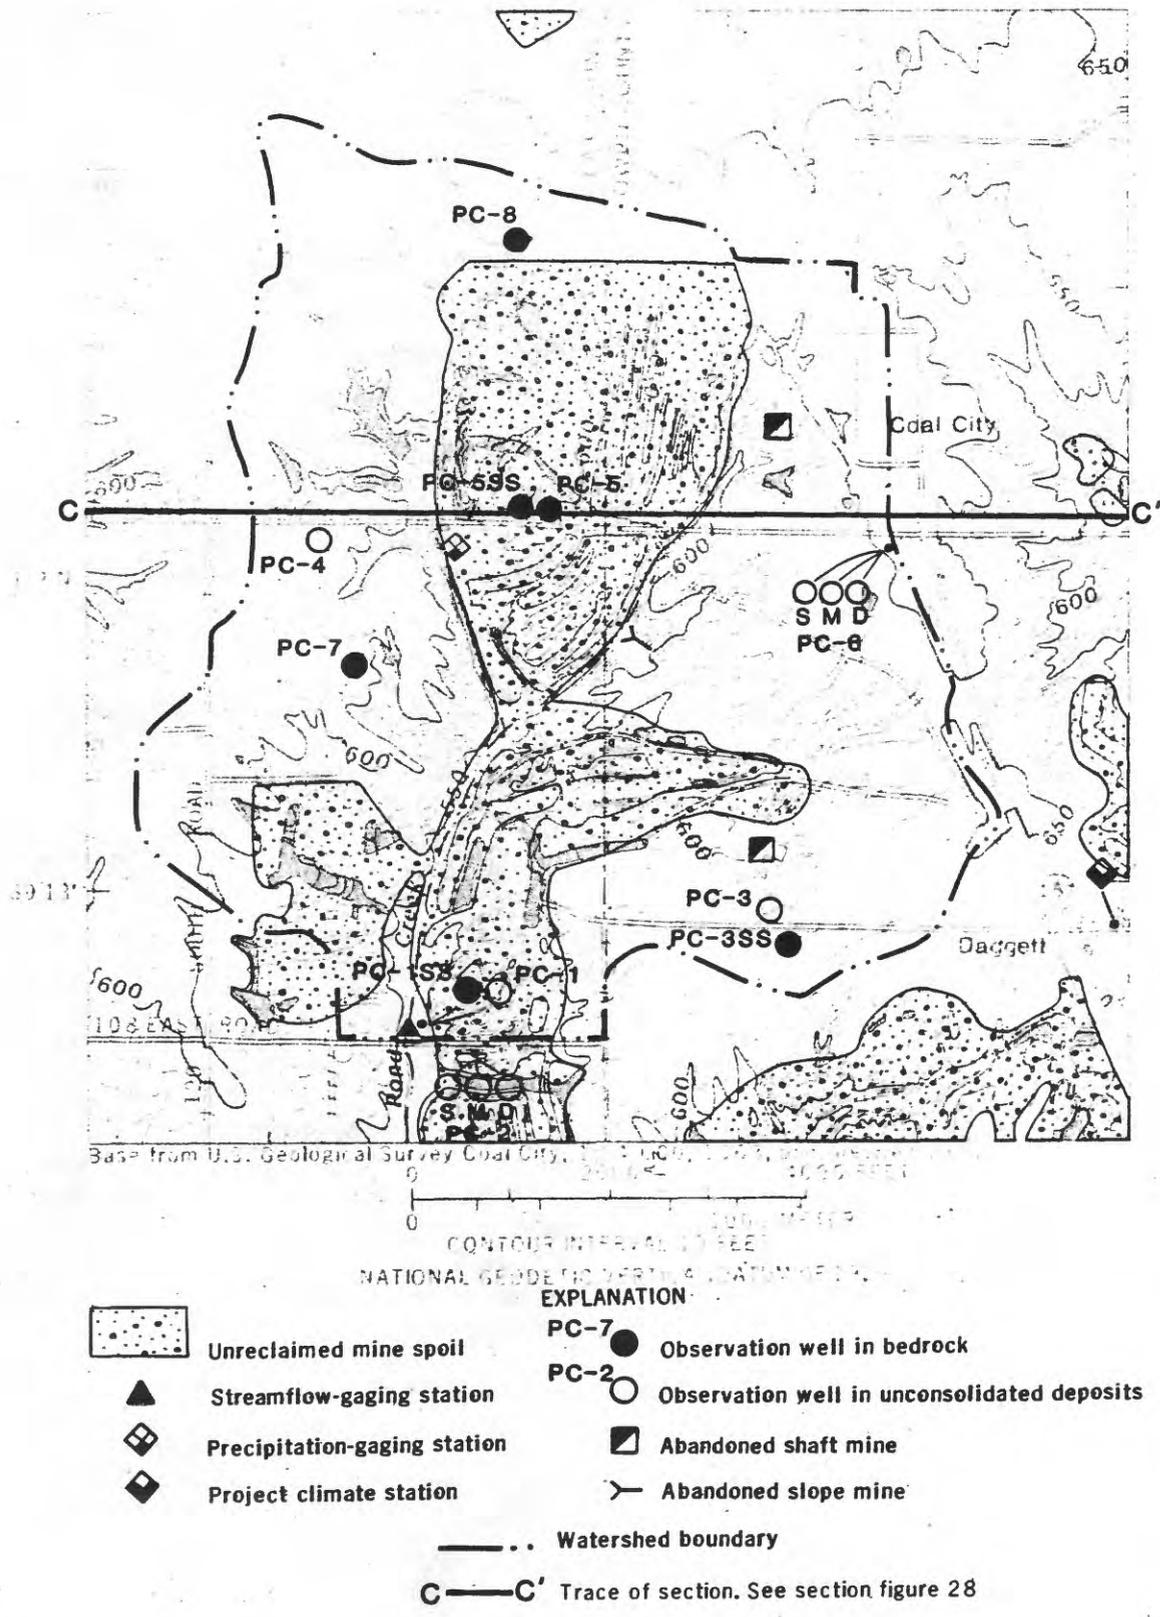


Figure 27.-- Pond Creek watershed and data-collection sites.

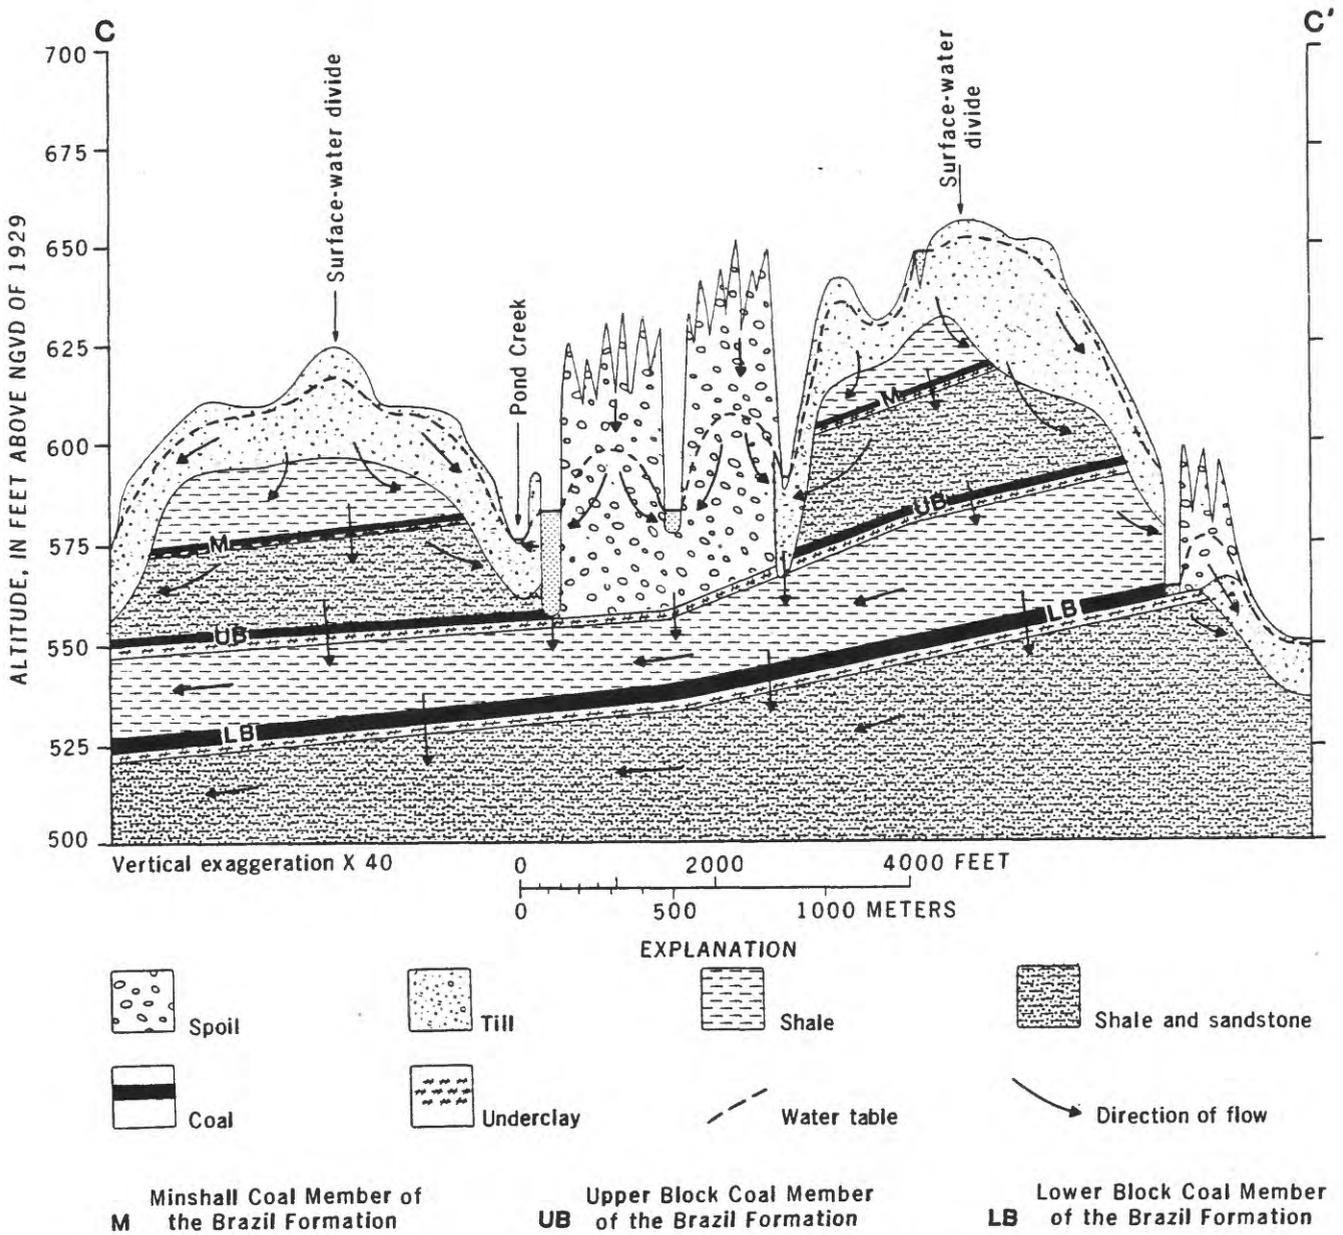


Figure 28.-- Generalized stratigraphy and direction of ground-water flow at Pond Creek. Location of trace C-C' shown in figure 27.

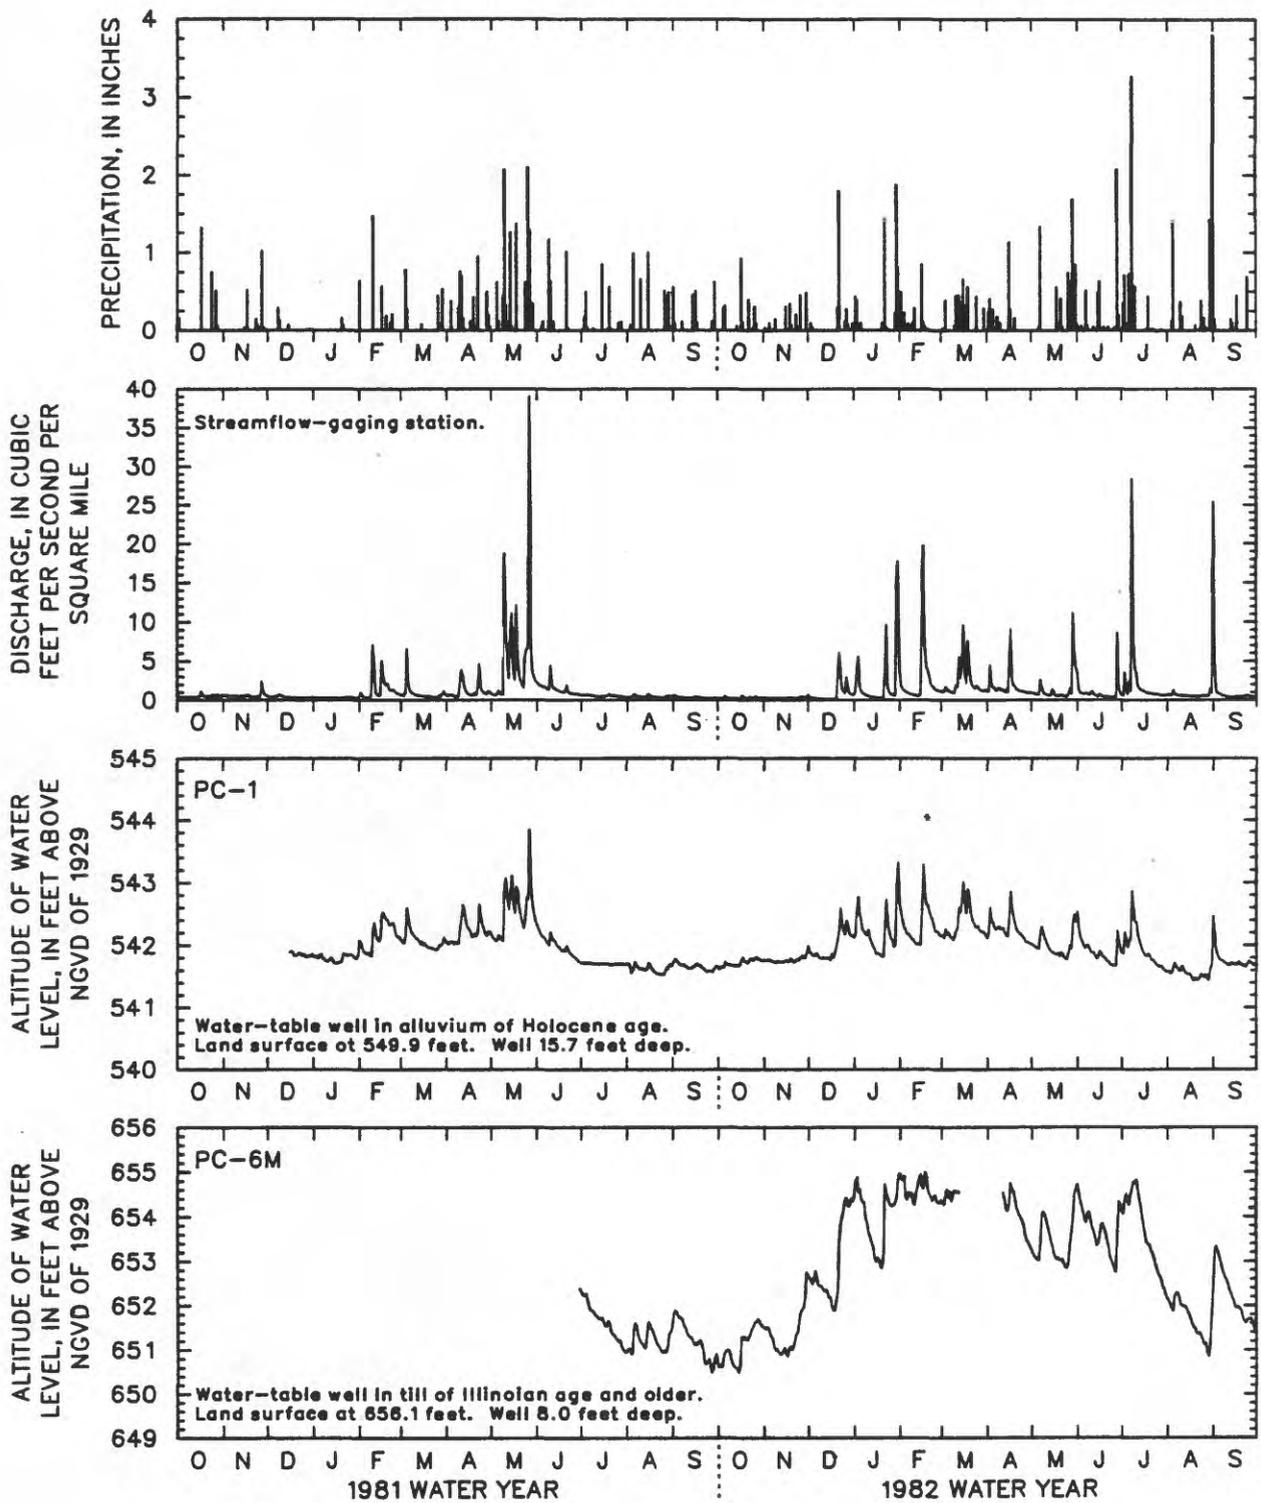


Figure 29. -- Daily precipitation and daily mean discharge and ground-water levels at Pond Creek, 1981 and 1982 water years.

Hydrographs of PC-1 and PC-6M illustrate the seasonal pattern of recharge to the unconsolidated deposits (fig. 29). The uplands are recharged by infiltration of precipitation through till. In the center of the watershed, recharge occurs by infiltration of precipitation through spoil and by seepage of water that has collected in depressions above the water table. Water in the till discharges to Pond Creek or flows into the spoil; water in the spoil discharges to Pond Creek or to lakes in the spoil. Some of the water in the unconsolidated deposits and lakes moves downward to recharge the shallow bedrock (fig. 28).


Water in the wells finished in bedrock is confined by underclay or shale. Water levels in the bedrock fluctuated from less than 1 to 4 ft, and the amount of fluctuation was not associated with the depth of the formation. The bedrock is recharged by the downward movement of water in till, spoil, and lakes. Water in the shallow bedrock moves laterally to discharge areas near streams and mines, but some water moves downward to deeper bedrock aquifers (fig. 28). Water in the deeper bedrock aquifers flows southwest, approximately 5 mi, to areas of discharge along the Eel River (fig. 1).

Unnamed tributary to Big Branch

One well was drilled in Big Branch tributary watershed. This well (MU-1) is screened in unreclaimed mine spoil just above underclay and black shale bedrock. The well is between the lake that contains the gage at the mouth of the watershed and an impoundment outside of the surface drainage divide that is about 20 ft higher in altitude (fig. 30). Hydraulic conductivity estimated for spoil near this well is 2×10^{-2} ft/d (table 6). The Dugger and Petersburg Formations underlie the spoil and are composed of shale, sandstone, coal, and underclay (Martin and others, 1987, fig. 24, p. 56).

MU-1 is a flowing artesian well where artesian conditions are controlled by topography (fig. 31). The small impoundment approximately 200 ft southwest of well MU-1 is at a higher altitude than the well and serves as a recharge area. The well is downgradient of the recharge area and is screened at a depth where the water level is less than 1 to 4 ft above land surface. An example of a flowing artesian well that is topographically controlled is given in Freeze and Cherry (1979, p. 199).

Peak water levels in MU-1 correlated with large precipitation events and peak water levels in the lake containing the gaging station (fig. 31). Peak water levels were not as well correlated from August to December 1981, when precipitation events were smaller. Water levels in MU-1 fluctuated about 3.5 ft whereas those at the gage fluctuated only about 1 ft. The difference in fluctuation and response to precipitation suggests that the surface-water/ground-water interaction may be greater between MU-1 and the lake that serves as the recharge area than between MU-1 and lake that serves as the discharge area and contains the gage. Additional evidence of greater interaction between MU-1 and the recharge lake is provided by the construction of a V-notch weir on the discharge lake from April 24 to May 8, 1981. Water levels in the discharge lake rose by about 2 ft but water levels in MU-1 did not show an associated rise after construction of the weir (fig. 31).

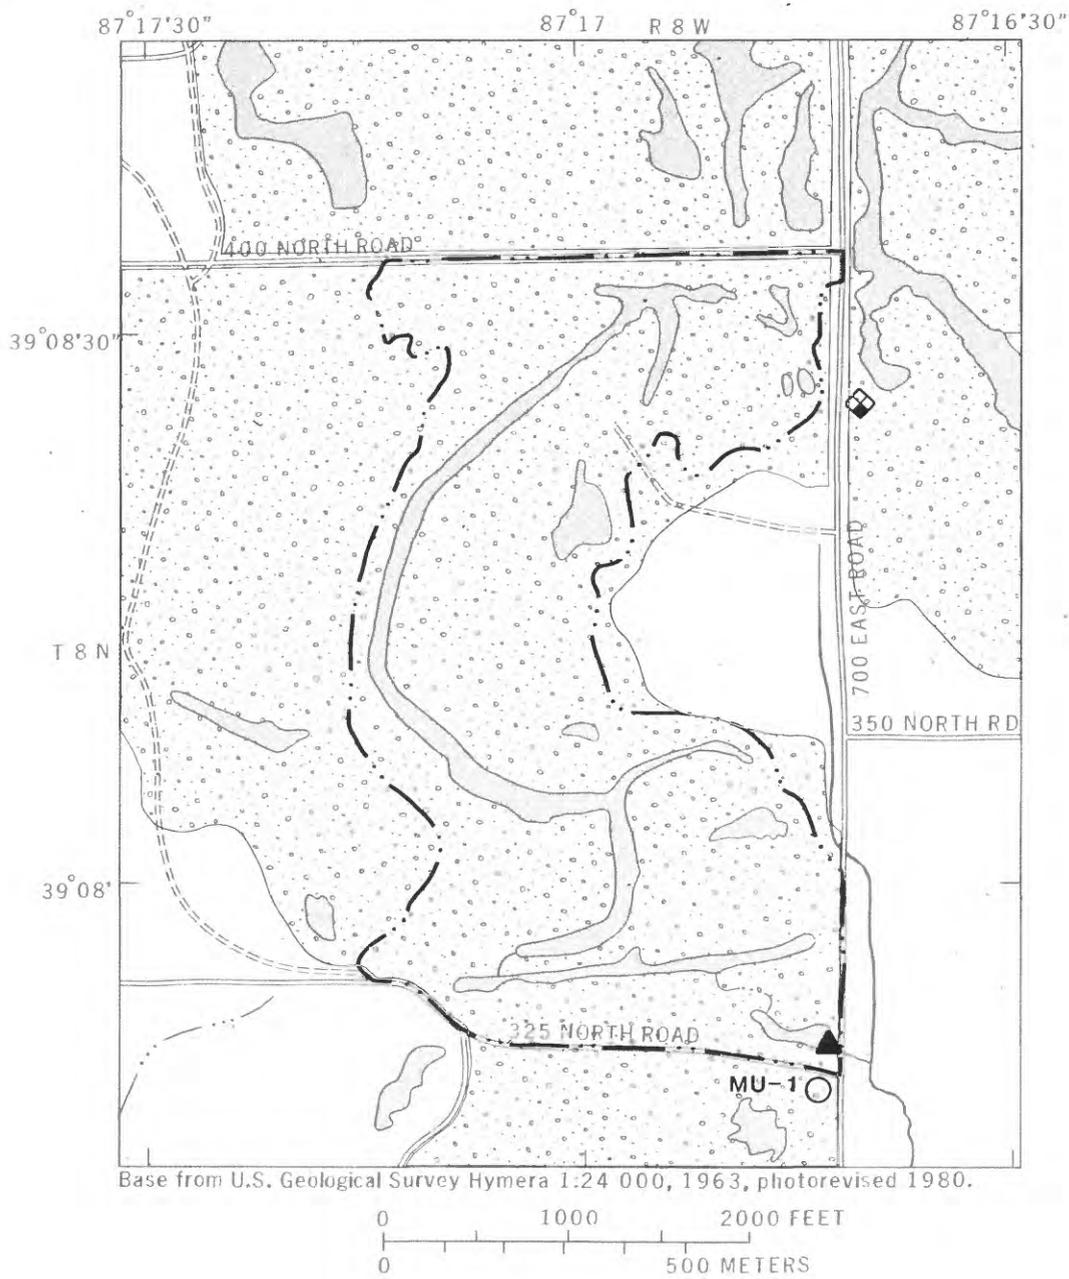

EXPLANATION

- | | |
|---|--|
|  Unreclaimed mine spoil |  Precipitation-gaging station |
|  Streamflow-gaging station | MU-1  Observation well in spoil |
|  Watershed boundary | |

Figure 30.-- Unnamed tributary to Big Branch watershed, and data-collection sites.

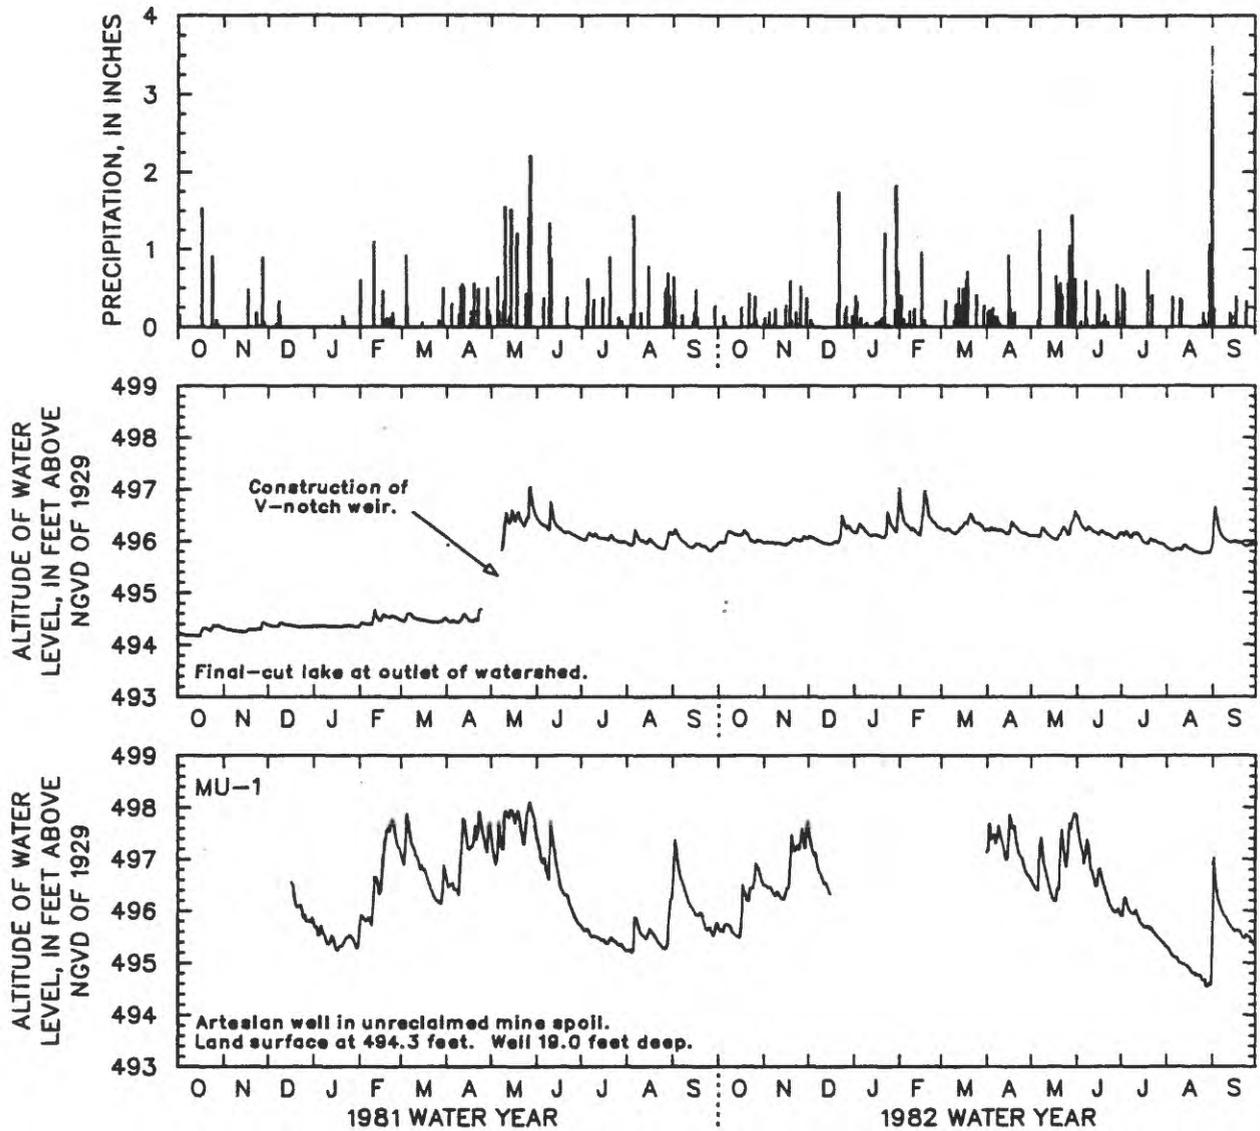


Figure 31. -- Daily precipitation and daily mean lake and ground-water levels at unnamed tributary to Big Branch, 1981 and 1982 water years.

The shallow ground-water flow system in Big Branch tributary is composed of numerous local flow systems. The local flow systems are created by the steep, ridge-and-swale topography and multiple lakes and impoundments in and near the watershed. Recharge is by infiltration of precipitation through spoil or by percolation of water that has collected in depressions or impoundments above the water table. Impoundments at high elevations in the spoil are the major recharge areas. Impoundments at low elevations, such as the one containing the gage, are the major discharge areas. Some of the water in the spoil and deep lakes may move downward through the underclay and recharge the shallow bedrock.

The same characteristics that created local flow systems also created surface- and ground-water drainage basins that do not coincide in the vicinity of MU-1. Shallow ground water from the small recharge lake southwest of MU-1 flows beneath the surface-water divide toward the gage and contributes to perennial flow in Big Branch tributary. The surface- and ground-water divides probably do not coincide near the northeastern surface-water divide. Lakes immediately outside of the watershed are 20 to 40 ft above the large lake that forms the main channel of Big Branch tributary (fig. 30). Ground water probably flows into the watershed from these lakes that are outside of the surface-water divide.

Water in the shallow bedrock flows southwestward along the structural dip of the rocks to areas of discharge about 3 mi away along Busseron Creek (fig. 1). Water in the shallow bedrock does not discharge in the vicinity of the watershed because the surface of the bedrock beneath the spoil is relatively flat and no streams or lakes cut into the bedrock. Water in the deeper bedrock follows the structural dip of the rocks to discharge areas about 15 mi away along the Wabash River.

EFFECTS OF SURFACE COAL MINING AND RECLAMATION ON THE GEOHYDROLOGY OF SMALL WATERSHEDS IN WEST-CENTRAL INDIANA

Hydrologic effects of surface coal mining and reclamation can be determined by studying watershed hydrology before mining began, during mining, and after reclamation (Curtis, 1973; Emerson, 1981; U.S. Department of Agriculture, Agricultural Research Service and Ohio State University, 1983; Weiss and Razem, 1984); by comparing nearby mined and unmined watersheds (Corbett, 1965; Collier and others, 1970; Grubb and Ryder, 1972; Zogorski and others, 1981; Brabets, 1984); or by simulation (Wilson and Hamilton, 1978; Meadows and Blandford, 1983; Scott, 1984). For this study, effects of surface coal mining were identified by comparing hydrologic characteristics of mined and unreclaimed watersheds with those of unmined, agricultural watersheds (Big Slough and Hooker Creek). Effects of reclamation were identified by comparing mined and reclaimed watersheds (Honey Creek tributary and Sulphur Creek tributary) with mined and unreclaimed watersheds (Pond Creek and Big Branch tributary). The overall effects of mining and reclamation were identified by comparing mined and reclaimed watersheds with unmined, agricultural watersheds.

The success of a comparative approach rests on a basic assumption--that surface- and ground-water systems at mined watersheds would have been similar to those at unmined, agricultural watersheds if surface mining had not occurred. This assumption is probably valid for these six watersheds because (1) all are small, upland watersheds in a region of similar soils, geology, and geomorphology; (2) all are within a 12-mi radius and are exposed to similar weather conditions; and (3) row-crop agriculture is the major land use in the region and probably was the major premining land use in the mined watersheds.

The surface- and ground-water systems at Big Slough and Hooker Creek are similar and are representative of the hydrologic systems at the other watersheds before mining. The unmined, agricultural watersheds have well-developed, integrated drainage systems, and ground-water divides generally coincide with surface-water divides. Streamflow in both agricultural watersheds is highly variable, with similar magnitudes and patterns of low and high flows (figs. 6a, 6b, 7, and table 2). Both Big Slough and Hooker Creek respond rapidly to thunderstorms and have high peak flows (tables 4, 5a-h, and figs. 9a-h). Both agricultural watersheds have similar total runoff and similar distributions and amounts of monthly runoff (table 3 and fig. 8). Shallow ground water at both watersheds is recharged by precipitation through till in the uplands between streams and is predominantly discharged to streams that cut into the till.

Another assumption is often made when comparing watersheds to determine effects of mining and reclamation. The assumption that unreclaimed watersheds have similar hydrologic systems and that reclaimed watersheds have similar systems is tenuous and often incorrect. For example, both Honey Creek tributary and Sulphur Creek tributary are reclaimed watersheds. However, the gage at Honey Creek tributary is immediately upstream of a final-cut lake, whereas the gage at Sulphur Creek tributary is at the outlet of a final-cut lake. Clearly the hydrologic characteristics of these watersheds, as measured by the gages, are different. The hydrologic effects of mining and reclamation identified by comparing watersheds in this study must be viewed in relation to differences between Honey Creek tributary and Sulphur Creek tributary and to differences between Pond Creek and Big Branch tributary. Moreover, the hydrologic effects identified at these four watersheds must be considered potential effects of mining and reclamation at other watersheds. Extrapolation of the results of this study to other areas must be done with caution and judgment.

Hydrologic effects of surface mining and reclamation are discussed in sections relating to physical characteristics of the watersheds and various components of the hydrologic cycle. Discussion may be repetitive because of interactions and interdependencies of characteristics and components.

Watershed Morphology, Surface Runoff, and Detention Storage

Surface coal mining creates watersheds with complex morphologic features that are drastically different than those of unmined watersheds. Spoil created by mining at Pond Creek and Big Branch tributary was deposited in bands or

banks with high relief, narrow ridges, and steep slopes. As mining progressed, new spoil banks were placed next to old spoil banks, forming a ridge-and-swale topography that contained numerous depressions and impoundments of water. A complicated pattern of spoil banks and depressions was created when the direction of mining changed or when roads used to haul coal were moved. Deep, final-cut lakes were created when mining ceased and the open pits filled with water. The diverse topography of Pond Creek and Big Branch tributary is characterized by complex, discontinuous drainage systems with many areas enclosed by spoil banks incapable of contributing surface runoff to streams (figs. 27 and 30). Parts of the surface drainage systems include depressions or lakes instead of stream channels and include water-filled impoundments that contribute to surface runoff only at high stages.

The capacity of Pond Creek watershed and Big Branch tributary watershed to delay or store surface runoff has been greatly increased by surface mining. Water stored in the numerous depressions, impoundments, and lakes can be prevented from contributing to surface runoff or can be slowly released. Water held in depressions above the water table recharges the ground water. The hydrologic effects of mining have been to (1) increase base flow and create perennial flow from these unreclaimed watersheds (fig. 7 and table 2), (2) increase the total runoff (table 3), (3) reduce peak flows and variation in flows (fig. 7 and table 4), (4) decrease monthly runoff during wet months and increase runoff during dry months (fig. 8), (5) lengthen watershed response times to thunderstorms (tables 5a-h and figs. 9a-h), (6) change the relation of surface- and ground-water divides resulting in ground-water inflow from adjacent watersheds (at Big Branch tributary), (7) create more local, shallow ground-water flow systems, (8) lower the water table in upland areas not influenced by water impoundments, and (9) increase recharge to the ground-water system in the bedrock. Pond Creek has higher peak flows and quicker watershed response than Big Branch tributary because the gage at Pond Creek is on a stream channel whereas the gage at Big Branch tributary is at the outlet of a lake. Additionally, all of Big Branch tributary has been mined but only about 40 percent of Pond Creek has been mined.

The primary objective of reclamation is to change the topography, hydrology, soils, and vegetation of recently mined land to those that would be most beneficial for the intended postmining land use. Common postmining land uses in Indiana are pasture, hay, row-crop agriculture, wildlife habitat, forest, and recreation. The intended postmining land uses for Honey Creek tributary and Sulphur Creek tributary are not known but are probably for pasture or hay. Activities used to reclaim these watersheds included (1) grading the spoil to a level or gently undulating topography that minimizes depressions and approximates the premining topography and drainage system, (2) replacing 6 to 12 in. of soil over graded spoil, (3) seeding and fertilizing grasses and legumes to achieve a vegetative cover, and (4) mulching and other practices to control erosion. The final cuts were allowed to fill with water.

The principal effects of reclamation on the morphology of Honey Creek tributary and Sulphur Creek tributary have been to eliminate the ridge-and-swale topography of unreclaimed mines and make the surface drainage systems more simple and continuous. Reclamation at Sulphur Creek tributary has removed nearly all of the depressions and water impoundments created by mining, except for the final-cut lake and the unreclaimed area in the headwaters. The surface drainage system can be easily identified and all reclaimed areas

contribute to surface runoff. The capacity of the mined land to store surface runoff by detention storage has been reduced although substantial capacity still exists because of the final-cut lake, two impoundments located along the stream, and several impoundments in the headwaters (fig. 21).

The capacity to store surface runoff at Honey Creek tributary has also been reduced by reclamation. However, the capacity is still much greater than it could have been if not for impoundments created for livestock and by building a road. Approximately 15 percent of the watershed drains into the livestock impoundment and does not contribute to surface runoff. Approximately 42 percent of the watershed (not including the drainage area of the livestock pond) drains into an impoundment created by the road (fig. 17). This impoundment can hold approximately 0.33 acre-ft (acre-feet) of water (the volume of water from 0.15 in. of precipitation, assuming an impervious surface) before flow through a culvert will occur. Although the detention storage capacity of the reclaimed watersheds is much less than that of the unreclaimed watersheds, it is much greater than that of the agricultural watersheds.

The hydrologic effects of reclamation differed between watersheds, probably because of the effect of the final-cut lake at Sulphur Creek tributary. The final-cut lake at Sulphur Creek tributary serves as the mouth of the watershed and has a gage at the outlet (fig. 21) whereas the final-cut lake at Honey Creek tributary is immediately downstream from the gage (fig. 17). The hydrologic effects of reclamation at Sulphur Creek tributary have been to make discharge intermittent and more variable and to decrease the total amount of runoff (fig. 7, tables 2 and 3). The increase in flow variation and no flow was probably caused by the elimination of depressions (which previously enhanced ground-water recharge that sustained streamflow) and the reconstructed drainage system. Peak discharges increased (table 4), probably because surface runoff reached the final-cut lake much more rapidly than at unreclaimed watersheds and opportunity for ground-water recharge was diminished.

Reclamation at Honey Creek tributary has made discharge ephemeral and therefore highly variable and responsive to thunderstorms (figs. 7 and 9a-h). Peak discharge and the number of no-flow days have increased in reclaimed watersheds in comparison to unreclaimed watersheds (tables 2 and 4). Ephemeral discharge also results in the lowest annual runoff at Honey Creek tributary (table 3). The lack of base flow at Honey Creek tributary is primarily caused by the topographic relation of the stream channel and the final-cut lake but is partly caused by the elimination of water bodies in the watershed which had provided detention storage and opportunity for ground-water recharge.

Some of the overall effects of mining and reclamation on watershed morphology, surface runoff, and detention storage were also influenced by the final-cut lake in the Sulphur Creek tributary watershed. Annual runoff at the reclaimed watersheds was less than that at the agricultural watersheds (table 3), but the monthly distribution of runoff was not noticeably different (fig. 8). At Sulphur Creek tributary, the duration and magnitude of base flows and flow variation have not been noticeably affected (figs. 7, 8, and table 2), but peak flows have been reduced and the response time of the watershed to thunderstorms has been lengthened (tables 4, 5a-h). At Honey Creek tributary, peak flows and the response time of the watershed to thunderstorms have not been noticeably affected, but the magnitude and duration of base flow

have decreased and flow has become more variable. Elimination of detention storage provided by the water impoundments created for livestock and by the haul road would probably increase peak discharge to a magnitude comparable to or greater than that at the unmined, agricultural watersheds.

Soils, Vegetation, Infiltration, and Evapotranspiration

Soils, vegetation, and the processes of infiltration and evapotranspiration are components of a complex hydrologic system that controls the movement and distribution of water. Each of these components influences and is influenced by the others through feedback mechanisms typical of hydrologic systems. Infiltration is the process whereby water at land surface enters the soil. Soil water-holding capacity, soil texture and structure, and surface conditions are characteristics of the soil that influence infiltration. Evapotranspiration is the process that removes water from near the surface of the soil by evaporation and removes water in the rooting zone by transpiring vegetation. Soil moisture, soil water-holding capacity, and the type and extent of vegetation influence evapotranspiration.

Surface mining changes the soils and vegetation of agricultural lands in a variety of ways. Surface mining destroys soil structure and horizons by mixing the soil with till and fragments of bedrock. Spoil created by mining is classified as the Fairpoint soil series and generally has greater moist bulk density, slope, and large fragments; but lower available water capacity and organic matter than soils in agricultural watersheds (McCarter, 1982, table 17, p. 145-147; Wells and others, 1983, table 1, p. 16). The permeability of the top 2 to 3 ft of thoroughly wet Fairpoint soils is usually less than that of most agricultural soils (McCarter, 1982, table 17, p. 145-147). However, some agricultural soils in the study area have a fragipan or other impermeable layer at a depth of 2 to 3 ft (Martin and others, 1987, table 10). The permeability of Fairpoint soils at this depth is usually greater than that of agricultural soils containing an impermeable layer but is usually less than or equal to that of agricultural soils lacking an impermeable layer.

Most of the land surface mined for coal in Indiana is agricultural land, either row crop, pasture, or hay. Vegetation characteristic of these land uses includes corn, soybeans, alfalfa, clover, grasses, and oaks and hickories in small woodlots. Surface mining results in a change of vegetation from agricultural crops to trees and other plants that can tolerate the harsh, inhospitable conditions of bare mine spoil. Typical tree species found on unreclaimed spoil include black locust, ash, silver maple, cottonwood, Virginia pine, and jack pine. Early-successional plants (including grasses, weeds, and trees) usually invade and recolonize most spoil banks, but many unreclaimed spoil banks are covered with trees planted by man. The extent of vegetative cover on unreclaimed mines varies greatly; at Pond Creek and Big Branch tributary trees planted by man generally cover the spoil banks but the surface of the spoil is usually bare.

Modern reclamation techniques require grading spoil to a rolling topography, replacement of topsoil, and seeding and mulching to produce vegetative cover and reduce erosion. Approximately 6 to 12 in. of topsoil was placed over graded spoil at Honey Creek tributary and Sulphur Creek tributary. Grasses and legumes were sown and have developed in both watersheds. Vegetative cover is dense at Sulphur Creek tributary but is sparse at Honey Creek tributary. The topsoil was distinguished from the underlying spoil by its brown color and relative absence of stones and boulders. The topsoil contained an extensive mass of fine to very fine roots and some roots extended into the spoil (U.S. Soil Conservation Service, written commun., 1982).

Infiltration and evapotranspiration were not measured during this study. As a consequence, the effects of mining and reclamation on these components of the hydrologic cycle could not be directly evaluated. Indirect methods of evaluating infiltration and evapotranspiration (such as analysis of precipitation-runoff hydrographs and calculation of annual water loss) were hampered by a short period of record and different detention-storage characteristics and ground-water systems. Analysis of runoff coefficients for the storm hydrographs (tables 5a-h) may indicate a smaller infiltration capacity at Hooker Creek than at Honey Creek tributary. However, differences in runoff coefficients are more likely influenced by detention storage and inferences regarding infiltration are largely speculative.

Annual water loss (table 3) indicates that the combined effects of evapotranspiration and subsurface flow out of the watershed were greater at Honey Creek tributary than at the other watersheds. Recharge of water detained in impoundments and subsurface outflow or evaporation from impoundments are more likely causes of high water loss than high transpiration. Low water loss at Big Branch tributary is probably caused by subsurface inflow of water from lakes outside of the watershed rather than by reduced evapotranspiration. Assuming that surface- and ground-water divides coincide and that ground-water flow beneath the gages is negligible, average annual evapotranspiration estimated from annual water loss for the 1981 and 1982 water years is about 26 to 27 in. for Big Slough, Hooker Creek, Sulphur Creek tributary, and Pond Creek (table 3). Estimates of evapotranspiration at Honey Creek tributary and Big Branch tributary are more uncertain because of uncertainty about the amount of subsurface outflow or inflow.

Ground-Water Systems

Surface mining can change the relation between surface- and shallow ground-water divides, especially in watersheds that have been extensively mined. Shallow ground-water divides generally coincide with surface-water divides in the unmined, agricultural watersheds. The placement of spoil can create several small watersheds in the same location as the original, larger watershed. Ground-water basins can be larger than surface-water basins if the surface drainage systems created by mining is abruptly truncated by spoil banks or altered by haul roads. Ground-water basins can be smaller than surface-water basins if topography and surface-mine impoundments create numerous local, shallow ground-water flow cells.

Hydrologic effects caused by changing the size of the ground-water basin in relation to that of the surface-water basin are primarily a potential increase in both the magnitude and duration of base flow if the ground-water basin is larger than the surface-water basin, or a potential decrease in base flow if the ground-water basin is smaller. Increased base flow at Big Branch tributary has resulted from a larger ground-water basin, but base flow from this source is probably less important than that from numerous water impoundments within the watershed. The relation between surface- and shallow ground-water divides at Pond Creek does not appear to have been significantly affected by mining, probably because mining has occurred near the center of the watershed. The ground-water divide may have moved outward if shallow ground-water flow to the mined area increased or inward if ground-water flow to the mined area decreased from premining conditions.

The effect of reclamation on the relation between surface-water and ground-water divides largely depends on the extent that grading eliminates depressions and produces surface-water divides that incorporate the local upland areas where ground-water divides occur. The mine that formed Sulphur Creek tributary watershed was small and much of the surrounding upland area is unmined. Grading has restored the approximate premining topography and surface- and ground-water divides probably coincide. Duration and magnitude of base flow at Sulphur Creek tributary is similar to that at the agricultural watersheds (fig. 7 and table 2). The mine that formed Honey Creek tributary watershed is much more extensive than the mine that formed Sulphur Creek tributary watershed. The relation between premining and postmining topography has been changed. Several small watersheds have been formed by grading the land to allow drainage into large impoundments. Much of the local upland areas are north of the surface-water divide. The ground-water basin at Honey Creek tributary is much larger than the surface-water basin, but since the surface- and ground-water systems are not connected, an increase in base flow was not observed.

In association with altered surface- and ground-water divides, surface mining can change ground-water flow systems. Shallow ground-water flow in agricultural watersheds is predominantly from recharge areas in the uplands between streams towards discharge areas along the stream. The diverse topography and scattered impoundments of water at Pond Creek and Big Branch tributary have created patterns of ground-water flow that are more localized than those at Big Slough and Hooker Creek. Recharge is from infiltration of precipitation through spoil and percolation from water-filled depressions above the water table. Ground water commonly flows to areas of discharge along streams or lakes that are at lower altitudes but not necessarily within the watershed. In watersheds that have been completely mined, such as Big Branch tributary, ground water recharged in one watershed may flow beneath surface-water divides to points of discharge in another watershed. Clearly, the effects of mining on flow systems must be determined individually for each mine.

Reclamation has simplified ground-water flow paths at Honey Creek tributary and Sulphur Creek tributary by removing impoundments above the water table and by grading the spoil banks to a more level topography. Recharge from spoil flows toward and through the final-cut lakes where some water is discharged (figs. 19, 20, 22, and 23). The water table beneath Honey Creek tributary is below the elevation of the stream near the gage, consequently

ground water does not contribute to streamflow in the watershed. At Sulphur Creek tributary, ground water probably does not contribute to streamflow in the reaches of the stream that flow over graded spoil but does contribute to streamflow in the unreclaimed headwaters and the unmined reach north of the headwaters.

Shallow water levels in spoil, except in areas influenced by impoundments or final-cut lakes, generally are farther below land surface than those in till. In upland areas, water levels in till are generally within 1 to 8 ft of land surface whereas those in spoil are usually within 10 to 30 ft (figs. 20, 22, and 28). Lower water levels in spoil may be caused by greater hydraulic conductivity of spoil than till. Water may move through spoil at a greater rate than through till, and the water table in spoil may not rise to levels found in unmined watersheds. However, the greater hydraulic conductivity of spoil was not confirmed by slug tests (table 6). A lower water table in spoil is not likely caused by nonsteady-state conditions because of slow resaturation of the spoil. The relatively fast rate at which the water table can rise is demonstrated by the time required for ground-water levels at Honey Creek tributary to equilibrate after pumping was terminated in the final-cut lake. Water levels reached equilibrium in less than one year (fig. 18).

Flow in the bedrock aquifers can be affected by mining and reclamation. If spoil has a greater vertical hydraulic conductivity than till, increased recharge to the bedrock may result. Coal mining can increase the hydraulic connection between flow systems in the unconsolidated deposits and the shallow bedrock by destroying the confining effect of underclay and shale or by creating lakes in direct contact with the bedrock. Underclay and shale may be fractured by blasting or drilling, and sump pumps and drains are often installed in holes dug into or through the underclay during mining. Water levels in the unconsolidated deposits are usually higher than those in the bedrock, consequently, lakes in contact with the bedrock and fractures and holes in confining layers provide pathways for increased recharge to the flow system in the bedrock. Reclamation may reduce recharge to the bedrock to the extent that lakes that cut in or near the surface of the bedrock are often eliminated.

SUMMARY AND CONCLUSIONS

Six small watersheds in west-central Indiana were selected for study of the hydrologic effects of surface coal mining and reclamation. The purposes of this report were to (1) describe and compare the hydrologic systems of the six watersheds, (2) identify and discuss the geohydrologic effects of mining and reclamation on these watersheds, and (3) discuss potential effects of mining and reclamation on the geohydrology of small watersheds in west-central Indiana. The six watersheds include mined and reclaimed (Honey Creek tributary and Sulphur Creek tributary); mined and unreclaimed (Pond Creek and Big Branch tributary); and unmined, agricultural land uses (Big Slough and Hooker Creek) and are each less than 3 mi² in area. A gaging station, at least one precipitation gage, and at least one ground-water well were installed in each watershed. Hydrologic and climatologic data for the 1981 and 1982 water years were analyzed in this report.

Annual mean temperatures for the 1981 and 1982 water years were cooler than the 30-year average (1951-80), and the 1982 water year was cooler than the 1981 water year. Annual precipitation was generally less than the 30-year average (about 41 in.) during the 1981 water year but was generally greater than the 30-year average during the 1982 water year. Monthly precipitation was greatest during May and least during January for the 1981 water year and was generally greatest during May and least during October or November for the 1982 water year. The study area was covered with a substantial amount of snow during the winter of the 1982 water year.

Total runoff was greatest at mined and unreclaimed watersheds, intermediate at unmined, agricultural watersheds, and least at mined and reclaimed watersheds. Annual runoff expressed as a percentage of annual precipitation averaged 55.5 percent at Big Branch tributary, 39.5 percent at Pond Creek, 35.5 percent at Big Slough, 35.3 percent at Hooker Creek, 29.2 percent at Sulphur Creek tributary, and 16.6 percent at Honey Creek tributary.

Discharge at the mined and unreclaimed watersheds is continuous and less variable than discharge at either the mined and reclaimed or the unmined, agricultural watersheds. Periods of no flow occurred about 2 and 24 percent of the time at Big Slough and Hooker Creek, respectively, and about 21 and 76 percent of the time at Sulphur Creek tributary and Honey Creek tributary, respectively.

Peak discharges were greatest at the agricultural watersheds and, to a lesser degree, at Honey Creek tributary. Peak discharges were smaller at the unreclaimed watersheds because of lakes, impoundments, and discontinuous drainage systems. Some areas of the unreclaimed watersheds do not contribute to surface runoff. Some lakes store and slowly release surface runoff. Small peak discharges at Sulphur Creek tributary were attributed to the dampening effect of the large final-cut lake at the mouth of the watershed.

The relations between precipitation and runoff were examined for eight storms during the 1981 and 1982 water years. No consistent pattern was apparent among watersheds in the volumes of runoff generated from these eight storms. Big Slough, Hooker Creek, and Honey Creek tributary responded more rapidly to thunderstorms than did the other watersheds, probably because of well-integrated drainage systems and low detention storage in these watersheds.

Till and spoil are the primary unconsolidated aquifers in the watersheds, whereas coal seams and fractured shale and sandstone are the primary consolidated aquifers. Underclays beneath coal seams and unfractured shale and siltstone act as confining layers for most of the bedrock aquifers. In the agricultural watersheds, recharge percolates through till overlying bedrock and flow is generally from the uplands to points of discharge along streams. Bedrock is mostly recharged by downward movement of water from the water-table aquifer in the till. Flow in the bedrock is primarily regional, toward discharge areas along the Wabash and Eel Rivers, although some water in the shallow bedrock discharges to streams in and near the watershed.

Recharge to the spoil in the unreclaimed watersheds is from infiltration of precipitation in the spoil and from percolation of surface water stored in lakes above the water table. Shallow flow systems are more local than those

in agricultural or reclaimed watersheds and ground water may discharge to lakes in adjacent watersheds. Because water in some final-cut lakes is in direct contact with bedrock, the potential for recharge to the bedrock aquifers is increased. Recharge in reclaimed watersheds is from infiltration through spoil and flow is toward points of discharge at lakes and streams. To the extent that reclamation eliminates impoundments and final-cut lakes in direct contact with the bedrock, the potential for recharge to the bedrock aquifers is reduced.

Hydrologic effects of mining were identified by comparing the hydrologic systems at mined and unreclaimed watersheds with those at unmined, agricultural watersheds. Surface coal mining at Big Branch tributary and at Pond Creek has (1) increased annual runoff; (2) increased base flow and created perennial flow; (3) reduced peak flow rates and variation in flow; (4) decreased monthly runoff during wet months and increased runoff during dry months; (5) decreased the response to thunderstorms; (6) changed the relation of surface- and ground-water divides resulting in ground-water inflow from adjacent watersheds at Big Branch tributary; (7) created numerous, local flow systems in the shallow ground water; (8) lowered the water table in upland areas not influenced by water impoundments; and (9) increased recharge to the ground-water system in the bedrock.

Hydrologic effects of reclamation were identified by comparing the hydrologic systems at mined and reclaimed watersheds with those at mined and unreclaimed watersheds. Some of the hydrologic effects of reclamation are different at Honey Creek tributary than at Sulphur Creek tributary, primarily because of a final-cut lake at the mouth of the Sulphur Creek tributary watershed. Reclamation at Honey Creek tributary and Sulphur Creek tributary has (1) decreased annual runoff, (2) decreased base flow and created intermittent or ephemeral discharge, (3) increased peak flow rates at Honey Creek tributary and increased variation in flow, (4) increased monthly runoff during wet months and decreased runoff during dry months, (5) increased the response to thunderstorms at Honey Creek tributary, (6) reestablished the premining relation between surface- and ground-water divides at Sulphur Creek tributary, (7) created less local flow systems in the shallow ground water, and (8) decreased recharge to bedrock aquifer by eliminating or backfilling final-cut lakes.

The overall hydrologic effects of mining and reclamation were identified by comparing the hydrologic systems at the mined and reclaimed watersheds with those at the unmined, agricultural watersheds. As with the effects of reclamation, the overall effects of mining and reclamation were influenced by the presence or absence of a final-cut lake; consequently, some major differences between Honey Creek tributary and Sulphur Creek tributary are evident. Surface coal mining and reclamation at Honey Creek tributary and Sulphur Creek tributary has (1) decreased annual runoff, (2) decreased base flow and created ephemeral discharge at Honey Creek tributary, (3) decreased peak flow rates at Sulphur Creek tributary, (4) decreased the response to thunderstorms at Sulphur Creek tributary, (5) changed the relation between surface- and ground-water divides at Honey Creek tributary, (6) increased recharge to bedrock, and (7) lowered the water table in upland areas.

REFERENCES CITED

- Agnew, A.F., and Corbett, D.M., 1973, Hydrology of a watershed containing flood-control reservoirs and coal surface-mining activity, in Huntnik, R.J., and Davis, Grant, eds., Ecology and reclamation of devastated land, Volume 1: New York, N.Y., Gordon and Breach, p. 159-173.
- Banaszak, K.J., 1980, Coals as aquifers in the eastern United States, in Graves, D.H., ed., 1980 symposium on surface mining hydrology, sedimentology, and reclamation, Lexington, Ky., December 1-5, 1980, Proceedings: University of Kentucky, Office of Engineering Services, p. 235-241.
- _____, 1985, Potential effects on ground water of a hypothetical surface mine in Indiana: Ground Water Monitoring Review, v. 5, no. 1, p. 51-57.
- Bobo, L.L., and Eikenberry, S.E., 1982, Water-quality and other hydrologic data collected in and around a surface coal mine, Clay and Vigo Counties, Indiana, 1977-80: U.S. Geological Survey Open-File Report 82-639, 117 p.
- Bouwer, Herman, and Rice, R.C., 1976, A slug test for determining hydraulic conductivity of unconfined aquifers with completely or partially penetrating wells: Water Resources Research, v. 12, no. 3, p. 423-428.
- Brabets, T.P., 1984, Runoff and water-quality characteristics of surface-mined lands in Illinois: U.S. Geological Survey Water-Resources Investigations Report 83-4265, 78 p.
- Cable, L.W., and Robison, T.M., 1973, Hydrogeology of the principal aquifers in Sullivan and Greene Counties, Indiana: Indiana Department of Natural Resources, Division of Water, Bulletin no. 35, 26 p.
- Cable, L.W., Watkins, F.A., Jr., and Robison, T.M., 1971, Hydrogeology of the principal aquifers in Vigo and Clay Counties, Indiana: Indiana Department of Natural Resources, Division of Water, Bulletin no. 34, 34 p.
- Cartwright, Keros, and Hunt, C.S., 1981, Hydrogeologic aspects of coal mining in Illinois: an overview: Illinois Institute of Natural Resources, State Geological Survey Division, Environmental Geology Notes 90, 19 p.
- Collier, C.R., Pickering, R.J., and Musser, J.J., eds., 1970, Influences of strip mining on the hydrologic environment of parts of Beaver Creek basin, Kentucky, 1955-66: U.S. Geological Survey Professional Paper 427-C, 80 p.
- Cooper, H.H., Jr., Bredehoeft, J.D., and Papadopoulos, L.S., 1967, Response of a finite diameter well to an instantaneous charge of water: Water Resources Research, v. 3, no. 2, p. 263-269.

REFERENCES CITED--Continued

- Corbett, D.M., 1965, Water supplied by coal surface mines, Pike County, Indiana: Indiana University, Water Resources Research Center, Report of Investigations no. 1, 67 p.
- _____ 1969, Acid mine-drainage problem of the Patoka River watershed, southwestern Indiana: Indiana University, Water Resources Research Center, Report of Investigations no. 4, 173 p.
- Corbett, D.M., and Agnew, A.F., 1968, Coal mining effect on Busseron Creek watershed, Sullivan County, Indiana: Indiana University, Water Resources Research Center, Report of Investigations no. 2, 187 p.
- Curtis, W.R., 1973, Effects of strip mining on the hydrology of small mountain watersheds in Appalachia, in Huntnik, R. J., and Davis, Grant, eds., Ecology and reclamation of devastated land, Volume 1: New York, N.Y., Gordon and Breach, p. 145-157.
- _____ 1977, Hydrologic aspects of surface mining in the East: Society of American Foresters, Proceedings, Berea, Ky., p. 152-157 (reprint).
- _____ 1978, Effects of surface mining on hydrology, erosion, and sedimentation in eastern Kentucky, in Fourth Kentucky Coal Refuse Disposal and Utilization Seminar, Lexington, Ky., June 6-7, 1978: University of Kentucky, Institute for Mining and Minerals Research, p. 17-19 (reprint).
- Emerson, D.G., 1981, Progress report on the effects of surface mining on the surface-water hydrology of selected basins in the Fort Union Coal Region, North Dakota and Montana: U.S. Geological Survey Open-File Report 81-678, 28 p.
- Freeze, R.A., and Cherry, J.A., 1979, Groundwater: Englewood Cliffs, N.J., Prentice-Hall, 604 p.
- Gregory, K.J., and Walling, D.E., 1973, Drainage basin form and process, a geomorphological approach: New York, N.Y., Halsted Press, 458 p.
- Grubb, H.F., and Ryder, P.D., 1972, Effects of coal mining on the water resources of the Tradewater River basin, Kentucky: U.S. Geological Survey Water-Supply Paper 1940, 83 p.
- Heath, R.C., 1984, Ground-water regions of the United States: U.S. Geological Survey Water-Supply Paper 2242, 78 p.
- Hoyt, W.G., and others, 1936, Studies of relations of rainfall and runoff in the United States: U.S. Geological Survey Water-Supply Paper 772, 301 p.
- Langbein, W.B., and Iseri, K.T., 1960, General surface-water techniques; General introduction and hydrologic definitions, Manual of hydrology: Part 1: U.S. Geological Survey Water-Supply Paper 1541-A, 29 p.

REFERENCES CITED--Continued

- Lindorff, D.E., 1980, Hydrogeology of surface coal mines in Illinois, in Graves, D.H., ed., 1980 symposium on surface mining hydrology, sedimentology, and reclamation, Lexington, Ky., December 1-5, 1980, Proceedings: University of Kentucky, Office of Engineering Services, p. 33-46.
- Martin, J.D., Crawford, C.G., Duwelius, R.F., and Renn, D.E., 1987, Description of the physical environment and coal-mining history of west-central Indiana, with emphasis on six small watersheds: U.S. Geological Survey Open-File Report 87-212, 62 p.
- McCarter, Paul, Jr., 1982, Soil survey of Clay County, Indiana: U.S. Department of Agriculture, Soil Conservation Service, and Purdue University Agricultural Experiment Station, 152 p., 56 maps.
- Meadows, M.E., and Blandford, G.E., 1983, Improved methods and guidelines for modeling stormwater runoff from surface coal mine lands: University of Kentucky, Water Resources Research Institute, Research Report no. 147, 133 p.
- Peters, J.G., 1981, Effects of surface mining on water quality in a small watershed, Sullivan County, Indiana: U.S. Geological Survey Open-File Report 81-543, 61 p.
- Razem, A.C., 1984, Ground-water hydrology and quality before and after strip mining of a small watershed in Jefferson County, Ohio: U.S. Geological Survey Water-Resources Investigations Report 83-4215, 39 p.
- Renn, D.E., Duwelius, R.F., Keeton, C.R., and Tyler, J.W., Jr., 1985, Hydrologic data in small watersheds, coal-mining region, west-central Indiana, October 1980 to June 1983, and instrumentation and methods of collecting the data: U.S. Geological Survey Open-File Report 85-402, 177 p.
- Schubert, J.P., 1980, Fracture flow of groundwater in coal-bearing strata, in Graves, D.H., ed., 1980 symposium on surface mining hydrology, sedimentology, and reclamation, Lexington, Ky., December 1-5, 1980, Proceedings: University of Kentucky, Office of Engineering Services, p. 61-73.
- Scott, A.G., 1984, Analysis of characteristics of simulated flows from small surface-mined and undisturbed Appalachian watersheds in the Tug Fork basin of Kentucky, Virginia, and West Virginia: U.S. Geological Survey Water-Resources Investigations Report 84-4151, 169 p.
- Skibitzke, H.E., 1958, An equation for potential distribution about a well being bailed: U.S. Geological Survey Open-File Report 58-96, 11 p.
- Stoner, J.D., 1983, Probable hydrologic effects of subsurface mining: Ground Water Monitoring Review, v. 3, no. 1, p. 128-137.

REFERENCES CITED--Continued

- U.S. Department of Agriculture, Agricultural Research Service and Ohio State University, 1983, Results in Jefferson County, Ohio: Research on the hydrology and water quality of watersheds subjected to surface mining: U.S. Department of the Interior, Bureau of Mines, Mining Research Contract Nos. J0166054 and J0166055 Report, 177 p.
- U.S. Department of Commerce, 1980-82, Climatological data, annual summary, Indiana: U.S. Department of Commerce, National Oceanic and Atmospheric Administration, vols. 85-87, nos. 13, variable pagination.
- _____ 1982a, Climatology of the United States no. 81 (by state), monthly normals of temperature, precipitation, and heating and cooling degree days, 1951-80, Indiana: U.S. Department of Commerce, National Oceanic and Atmospheric Administration, variable pagination.
- _____ 1982b, Local climatological data, annual summary with comparative data, 1982, Indianapolis, Indiana: U.S. Department of Commerce, National Oceanic and Atmospheric Administration, variable pagination.
- U.S. Geological Survey, 1977, National handbook of recommended methods for water-data acquisition: U.S. Geological Survey, Office of Water Data Coordination, variable pagination.
- Wangsness, D.J., 1982, Reconnaissance of stream biota and physical and chemical water quality in areas of selected land use in the coal-mining region, southwestern Indiana, 1979-80: U.S. Geological Survey Open-File Report 82-566, 43 p.
- Wangsness, D.J., and others, 1981a, Hydrology of area 32, eastern region, Interior Coal Province, Indiana: U.S. Geological Survey Water-Resources Investigations/Open-File Report 81-498, 76 p.
- _____ 1981b, Hydrology of area 33, eastern region, Interior Coal Province, Indiana and Kentucky: U.S. Geological Survey Water-Resources Investigations/Open-File Report 81-423, 84 p.
- _____ 1983, Hydrology of area 30, eastern region, Interior Coal Province, Illinois and Indiana: U.S. Geological Survey Water-Resources Investigations/Open-File Report 82-1005, 82 p.
- Watkins, F.A., Jr., and Jordan, D.G., 1962a, Ground-water resources of west-central Indiana, preliminary report: Clay County: Indiana Department of Conservation, Division of Water Resources, Bulletin no. 16, 309 p.
- _____ 1962b, Ground-water resources of west-central Indiana, preliminary report: Sullivan County: Indiana Department of Conservation, Division of Water Resources, Bulletin no. 14, 345 p.

REFERENCES CITED--Continued

- _____, 1963, Ground-water resources of west-central Indiana, preliminary report: Vigo County: Indiana Department of Conservation, Division of Water Resources, Bulletin no. 17, 358 p.
- Weiss, J.S., and Razem, A.C., 1984, Simulation of ground-water flow in a mined watershed in eastern Ohio: *Ground Water*, v. 22, no. 5, p. 549-560.
- Wells, L.G., Ward, A.D., and Phillips, R.E., 1983, Predicting infiltration and surface runoff from reconstructed spoils and soils: University of Kentucky, Water Resources Research Institute, Research Report no. 143, 44 p.
- Whitlatch, G.I., 1933, The clay resources of Indiana: Indiana Department of Conservation, Division of Geology, Publication no. 123, 298 p.
- Wilber, W.G., and Boje, R.R., 1982, Reconnaissance for determining effects of land use and surficial geology on concentrations of selected elements on streambed materials from the coal-mining region, southwestern Indiana, October 1979 to March 1980: U.S. Geological Survey Water-Resources Investigations Report 82-4013, 39 p.
- Wilber, W.G., Crawford, C.G., Renn, D.E., Ragone, S.E., and Wangsness, D.J., 1980, Preliminary assessment of the factors affecting water quality in the coal-mining region, southwestern Indiana, March to October 1979, in Warner, R.E., and Clark, P.E., eds., *Water resources and land-use management in Indiana, a symposium*, Marshall, Indiana, June 12-14, 1980, Proceedings: Indiana Water Resources Association, p. 215-234.
- Wilber, W.G., Renn, D.E., and Crawford, C.G., 1985, Effects of land use and surficial geology on flow and water quality of streams in the coal-mining region of southwestern Indiana, October 1979 through September 1980: U.S. Geological Survey Water-Resources Investigations Report 85-4234, 49 p.
- Williams, G.R., and others, 1940, Natural water loss in selected drainage basins: U.S. Geological Survey Water-Supply Paper 846, 62 p.
- Wilson, J.L., and Hamilton, D.A., 1978, Influence of strip mines on regional ground-water flow: *Journal of the Hydraulics Division, Proceedings of the American Society of Civil Engineers*, v. 104, no. HY9, p. 1213-1223.
- Zogorski, J.S., Ramey, D.S., Lambert, P.W., Martin, J.D., and Warner, R.E., 1981, Hydrologic evaluation of a hypothetical coal-mining site near Chrisney, Spencer County, Indiana: U.S. Geological Survey Open-File Report 80-1107, 133 p.