USERNAME: HARDING PLOT JOBID: 24 G: 1 C: 1 DATE: 29-DEC-88 15:39

RMS = 0.36865E+01 GAIN = 1.00000 LINE L10
PROJECT :PUGET JOB NO. 26
POLARITY NORMAL - POSITIVE DATA(1000MS @ 1. SAMPLES)
SECOND AVERAGE USING 4 WINDOWS OVER ENTIRE TRACE INCLUDING ZERO SAMPLES

PUGET SOUND SEISMIC-REFLECTION SURVEY
1987

UNITED STATES GEOLOGICAL SURVEY
STRAIT OF JUAN DE FUCA
LINE: 10B
FINAL STACK

NORTH

PROCESSED BY: USGS
BRANCH OF GEOLOGIC RISK ASSESSMENT
LINE 10B
MC CURDY POINT TO POINT PARTRIDGE

RECORDING PARAMETERS

RECORDED BY:	USGS	DATE RECORDED:	APRIL-1987
VESSEL:	M/V REDOUBT		
PRIMARY NAV.:	LORAN C	SECONDARY NAV.:	GPS
INSTRUMENT TYPE:	DFS-V	SAMPLE RATE:	1.0 MS
TYPE OF SOURCE:	WATER GUN	GUN OPERATING DEPTH:	3 METERS
TOT. GUN VOL.:	15 CU. INCHES		
TAPE FORMAT:	SEG-B 1600 BPI		
NO. OF CHANNELS:	24	SOURCE INTERVAL:	6.25 METERS
RECORD LENGTH:	2.0 SECONDS	TRACE INTERVAL:	6.25 METERS
RECORD FILTER:		CABLE TYPE:	24 CH TELEDYNE
LOCUT:	45 HZ.		
SLOPE:	18 DB/OCTAVE		
HICUT:	256 HZ.	NEAR TRACE #:	24
SLOPE:	72 DB/OCTAVE		
60 HZ NOTCH:	OUT	FOLD:	12

SPREAD CONFIGURATION:



PROCESSING SEQUENCE
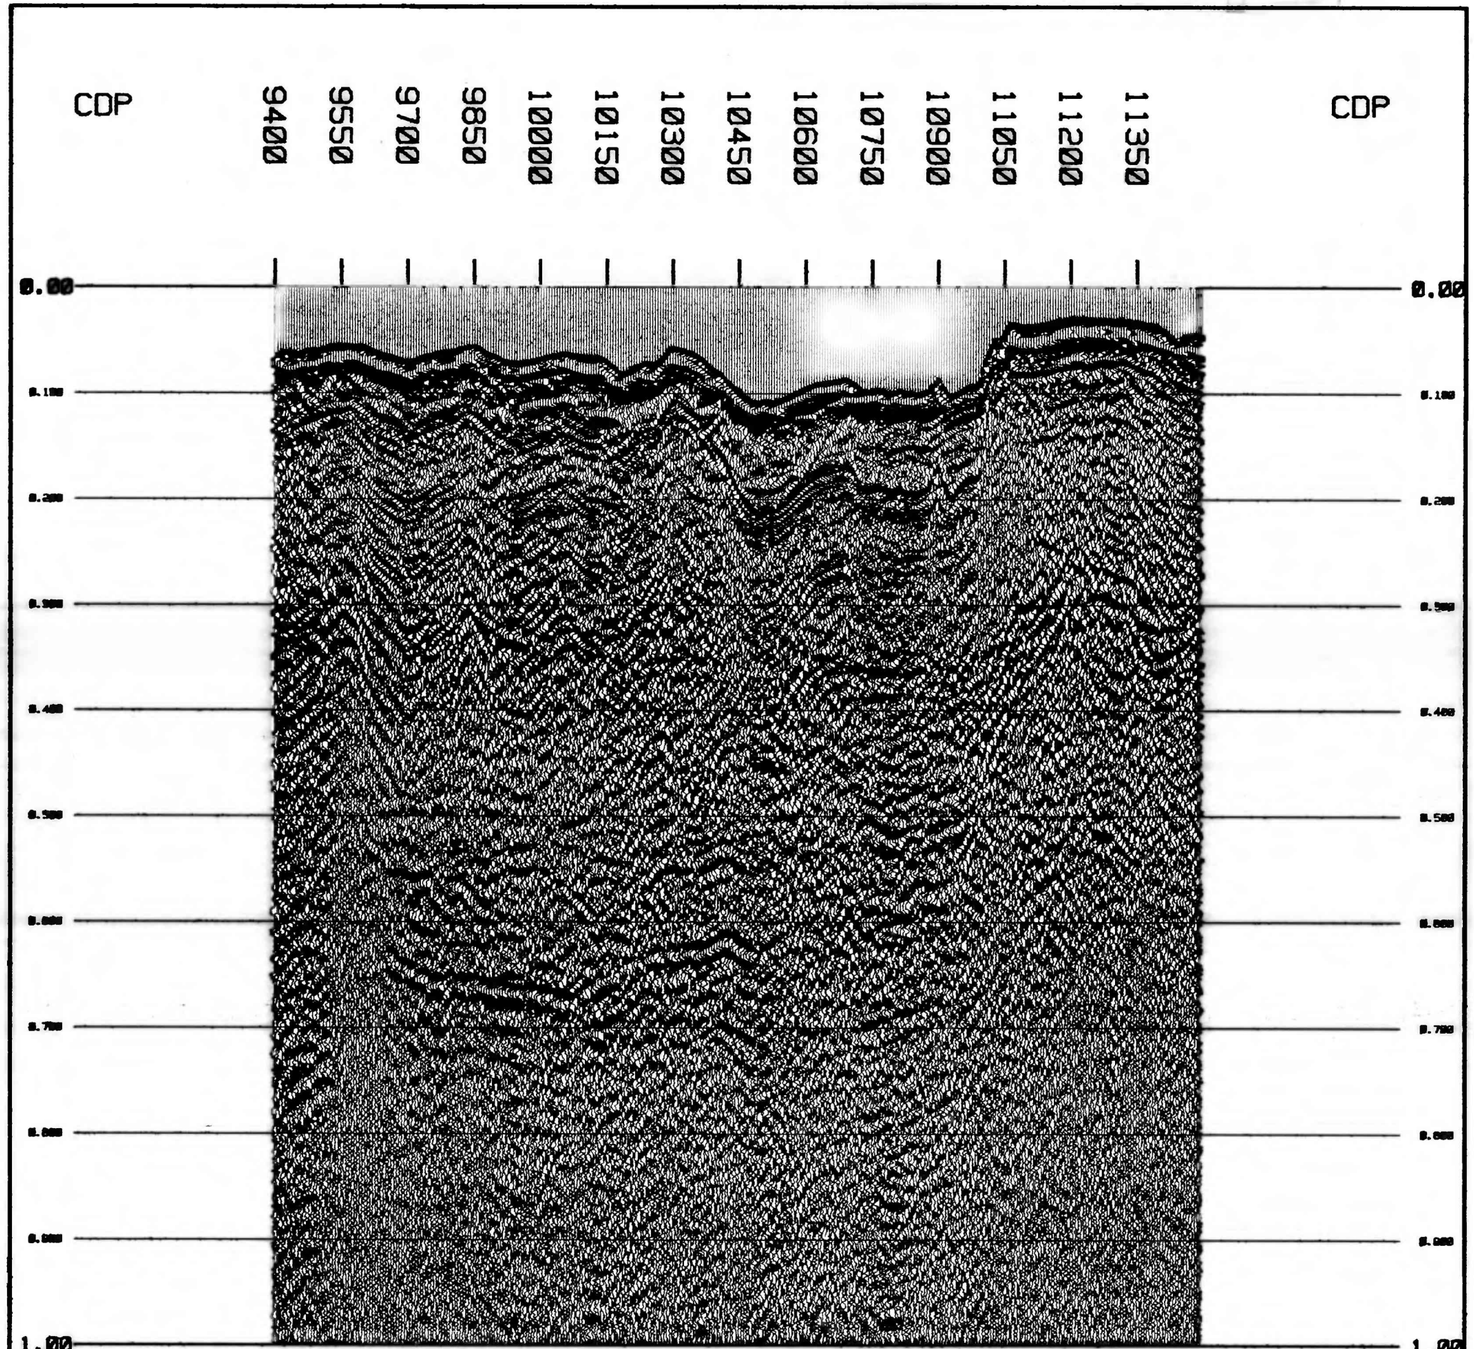
1	DEMULTIPLEX
2	RECORDING GAIN REMOVAL
3	GEOMETRY DEFINITION
4	TRACE EDITING
5	CDP SORT
5A	AGC 200 MS GATE
5B	SPECTRAL WHITENING
6	VELOCITY ANALYSIS
7	PRELIMINARY STACK
8	NORMAL MOVEOUT CORRECTION
9	STACK 12 FOLD
11	GAP DECONVOLUTION GAP WATER DEPTH
12	MUTE AT WATER DEPTH
13	BANDPASS FILTER
	TIME: — BANDPASS:
	0 - 2000 MS — 30/45 -180/200
14	VERTICAL STACK 6 TO 1
16	DISPLAY
	TRACES PER INCH: 50
	VERTICAL SCALE: 8 INCHES / SEC
	DISPLAY DATE: OCTOBER, 1988