



# WATER FACT SHEET

## U.S. GEOLOGICAL SURVEY, DEPARTMENT OF THE INTERIOR GROUND-WATER QUALITY AT THE MANAGEMENT SYSTEMS EVALUATION AREA NEAR PRINCETON, MINNESOTA, 1991-92

### INTRODUCTION


The northern cornbelt sand-plains Management Systems Evaluation Area (MSEA) program is a multiagency, multistate initiative to evaluate the effects of modified and prevailing farming systems on water quality in a sand-plain area in Minnesota and at satellite areas in North and South Dakota, and Wisconsin. The primary objective of Minnesota MSEA is to evaluate the effects of ridge-tillage practices in a corn and soybean farming system on ground-water quality. The Minnesota MSEA program is a cooperative study primarily between the U.S. Department of Agriculture-Agricultural Research Service, the University of Minnesota Soil Science Department, and the U.S. Geological Survey. The Minnesota Pollution Control Agency and the Department of Geology and Geophysics at the University of Minnesota are also cooperating in the evaluation of ground-water quality at the MSEA.

### DESCRIPTION OF THE PRINCETON, MINNESOTA MSEA

The Minnesota research area is located in the Anoka Sand Plain near the town of Princeton. Topographic relief at the 160-acre Princeton MSEA is less than 10 feet. Generally, the unsaturated zone consists of fine-to-medium-grained sand and the saturated zone consists of medium-to-coarse-grained sand. There are discontinuous layers of silt and very-fine-grained sand as thick as 8 inches in both the unsaturated and saturated zones. A predominantly clayey till underlies the surficial aquifer (the till is less permeable than the aquifer). During 1991, the average depth to the water table was about 12 feet below land surface and the saturated thickness ranged from 13 to 53 feet. The direction of ground-water flow generally is from west to east at about 3 inches per day. Ground-water recharge rates generally range from 4 to 8 inches per year.

Five 4.5- to 6.5-acre cropped areas are aligned with the predominant direction of ground-water movement at the Princeton MSEA (fig. 1) where three farming systems are being evaluated: (1) a corn-soybean rotation under ridge (conservation) tillage, split nitrogen (N) application, N credit for legumes, and banding of herbicides (application of herbicide only over row; banded application amount is one-third of broadcast application amount) (cropped areas A and C), (2) a sweet corn-potato rotation with conventional full-width (disk or chisel) tillage and banding of herbicides for sweet corn and conventional full-width tillage and broadcast application of herbicides for potatoes (cropped areas B and D), and (3) corn in consecutive years under conventional full-width tillage and broadcast application of herbicides (cropped area E). The buffer area around the cropped areas (fig. 1) was planted with a mixture of timothy and smooth brome grass where agricultural chemicals were not applied. Before the implementation of the MSEA farming systems in spring 1991, the entire 160-acre field was planted in alfalfa from 1981 to 1989 and in corn during 1990.

The ground-water-quality sampling network at the Princeton MSEA consists of 29 observation wells and 22 multilevel piezometers (fig. 1). The observation wells were used to measure water levels and to determine background concentrations of agricultural chemicals. The multilevel piezometers are located 70 feet upgradient, in the middle, immediately

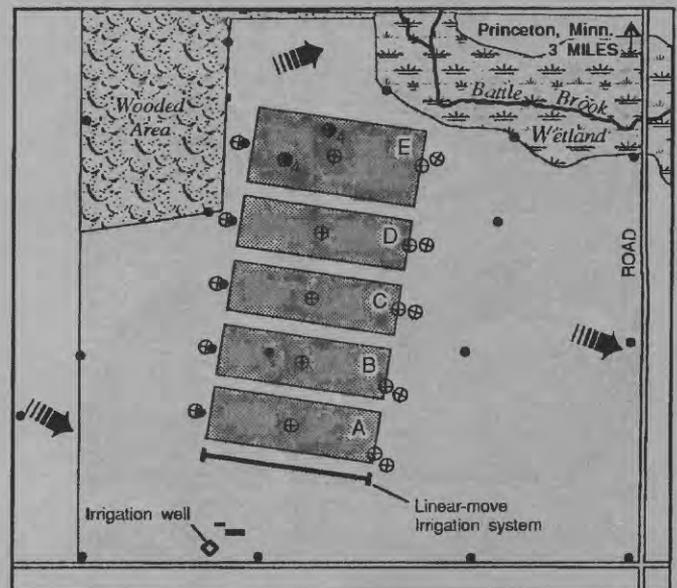

Base from U.S. Geological Survey  
Princeton 1:24,000 quadrangle, 1982

### EXPLANATION

- Cropped area and identifier
- Research area
- Direction of ground-water flow, January 1991
- Observation well, number indicates number of wells at site
- Multilevel Piezometer
- Building

The research area is located in the northeast quarter of section 18, township T35N, range R26W.

Figure 1.--Layout of the Princeton, Minnesota Management Systems Evaluation Area.

downgradient, and 80 feet downgradient (which approximates the distance ground water travels in 1 year) of each cropped area (fig. 1).

### GROUND-WATER QUALITY -- 1991

During 1991, water samples were collected from all multilevel piezometers, selected on-site observation wells, and Battle Brook (fig. 1) four times: once before agricultural chemicals were applied (April), twice during the growing season (May-June and August), and once during late fall after crops were harvested (December). The samples were analyzed for dissolved major cations and anions, nutrients, and selected herbicides and herbicide metabolites.

**CHLORIDE** — Potassium chloride (potash) fertilizer (0-0-60) was applied to the cropped areas during late April 1991 to provide potassium for

the crops. The application rate was 450 pounds per acre (lb/ac) on the potatoes (cropped area A) and 100 lb/ac on the other cropped areas (corn, sweet corn, and soybeans). Chloride was used as a tracer for water recharging through the MSEA cropped areas because the potash fertilizer was applied only to the cropped areas and chloride moves conservatively with ground water.

Chloride concentrations greater than background were first detected during the August 1991 sampling period beneath the potatoes (cropped area A) and soybeans (cropped area B). By the December 1991 sampling period, chloride concentrations greater than background were detected beneath all of the cropped areas. It is likely that water with chloride concentrations greater than background reached the water table during a 1-inch recharge event that occurred from late October to early November. Additional inputs of chloride and the continued spread of chloride through the aquifer occurred during spring 1992; during this time there was approximately 2.5 inches of recharge to the aquifer.

Chloride concentrations in the upper 3 feet of the saturated zone beneath the cropped areas during April 1992 ranged from 20 to 50 milligrams per liter (mg/L) compared with concentrations of less than 20 mg/L in areas up-gradient of the cropped areas and deeper in the saturated zone. Results from April 1992 show the effects of agricultural practices prior to 1992 because application of agricultural chemicals and planting for the 1992 growing season had not occurred prior to April 1992. Chloride concentrations were greatest beneath the potatoes (cropped area A) because the potassium chloride application rate on the potatoes was greater than on any other crop.

**NITRATE-NITROGEN** — Nitrogen was applied during April to June 1991 at a rate of 200 lb/ac on the potatoes (cropped area A) and 140 lb/ac on the corn (cropped areas C, D, and E). None was applied on the soybeans (cropped area B). Nitrate-nitrogen (nitrate-N) concentrations greater than those measured upgradient and 3 to 6 feet below the water table were first detected at the water table beneath the potatoes (cropped area A) in December 1991. Nitrate-N concentrations in the ground water increased beneath the potatoes during spring 1992. Although relatively small amounts of recharge occurred during fall 1991 (1 inch) and spring 1992 (2.5 inches), concentrations of chloride and nitrate in the ground water increased. Concentrations of these chemicals during early summer 1991 appeared to be diluted by large amounts of recharge (5 to 8 inches). Nitrate-N concentrations were similar upgradient, beneath, and downgradient of the other cropped areas such that additions of nitrate as a result of MSEA activity were difficult to distinguish above background levels. Nitrate-N concentrations were greatest beneath the potatoes (cropped area A) because the nitrogen application rate on the potatoes was greater than on any other crop.

Nitrate-N concentrations decreased from 15 to 25 mg/L near the water table to 5 to 10 mg/L at 6 feet below the water table upgradient, beneath, and downgradient of the cropped areas. Concentrations of nitrate-N at 23 feet below the water table were less than 0.2 mg/L, indicating that the vertical gradient in nitrate-N concentrations continued between 6 and 23 feet below the water table. Nitrate-N concentrations typically were 15 to 25 mg/L at the water table beneath the buffer areas upgradient and downgradient of the cropped areas throughout the year. Because nitrogen fertilizer was not applied to these buffer areas it is likely that the nitrate-N in the ground water was the result of nitrogen fixation by the legume alfalfa that was grown on the MSEA from 1981 through 1989. Nitrate-N concentrations in ground water beneath and immediately downgradient of the woodlands (fig. 1) were generally less than 1 mg/L as compared with average concentrations of about 15 mg/L at the water table beneath agricultural areas. Because nitrate-N concentrations in ground water decreased along the edge of the wetlands near Battle Brook and were less than 0.2 mg/L in Battle Brook, nitrate-N in ground water discharging into the wetlands/stream system appears to have been retained or consumed in the wetlands/stream sediments.

**HERBICIDES** — Atrazine and its metabolites de-ethylatrazine and de-isopropylatrazine were detected in ground-water samples collected from observation wells throughout the 160-acre MSEA during April 1991 (be-

fore implementation of the MSEA farming systems). Atrazine and alachlor were applied in bands (banded) to the sweet corn and field corn (cropped areas C and D) and broadcast on the continuous corn (cropped area E) during May 1991 at broadcast rates of 1.5 lb/ac and 2.0 lb/ac, respectively. During May 1991, metribuzin and metolachlor were broadcast on the potatoes (cropped area A) at rates of 0.5 lb/ac and 1.0 lb/ac, respectively. During May 1991, metribuzin and alachlor were banded on the soybeans (cropped area B) at broadcast rates of 0.5 lb/ac and 2.0 lb/ac, respectively.

Atrazine was detected above the quantitative reporting limit of 0.04 micrograms per liter (mg/L) in 21 percent of the 322 samples collected during the May-June 1991, August 1991, December 1991, and April 1992, sampling periods. Atrazine was detected at trace levels (concentrations between the quantitative reporting limit and qualitative detection limit of 0.01 mg/L) in 31 percent of the samples. The median atrazine concentration was 0.01 mg/L. Detections of atrazine and atrazine metabolites beneath the buffer areas and beneath the cropped areas where the atrazine was not applied (the potatoes and soybeans) indicate that there are persistent background levels of these compounds which are unrelated to the MSEA farming practices.

De-ethylatrazine was the most frequently detected of either the herbicides or the herbicide metabolites. It was detected above the quantitative reporting limit of 0.06 mg/L in 62 percent of the 322 samples and at trace levels (concentrations between the reporting limit and the qualitative detection limit of 0.03 mg/L) in 12 percent of the samples. The median concentration of de-ethylatrazine was 0.08 mg/L. During the April 1992 sampling period, de-ethylatrazine concentrations were at trace levels (or not detected) near the water table and at 0.08 to 0.30 mg/L between 3 and 6 feet below the water table. This vertical zonation, which was not evident before the April 1992 sampling period, likely indicates that water recharged through the MSEA cropped areas during 1991 had lower de-ethylatrazine concentrations compared with older ground water. De-isopropylatrazine was detected above the quantitative reporting limit of 0.08 mg/L in 8 percent of the samples and at trace levels (above 0.06 mg/L) in 2 percent of the samples.

Alachlor and its metabolites chloralachlor and 2,6-diethylaniline, were detected above the qualitative detection limits of 0.01, 0.06, and 0.01 mg/L, respectively, in 3, 2, and 0 percent of the samples, respectively. Metolachlor and metribuzin were detected above their qualitative detection limits of 0.01 and 0.03 mg/L, respectively, in 1 percent of the samples. None of the detections of herbicides or herbicide metabolites can be clearly linked to the MSEA farming systems.

#### SELECTED REFERENCES

- Anderson, J.L., Dowdy, R.H., and Delin, G.N., 1991, Ground water impacts from irrigated ridge-tillage: in Ritter, W.F., ed., Proceedings of the American Society of Civil Engineers, 1991 National Conference on Irrigation and Drainage Engineering, Honolulu, Hawaii, July 23-26, p. 604-610.
- Delin, G.N., Landon, M.K., Anderson, J.L., and Dowdy, R.H., 1992, Hydrologic research at the Princeton, Minnesota Management Systems Evaluation Area, U.S. Geological Survey Open-File Report 92-107, 2 p.

For additional information write to:

District Chief  
Water Resources Division  
U.S. Geological Survey  
2280 Wooddale Drive  
Mounds View, Minnesota 55112

University of Minnesota  
Department of Soil Science  
1991 Upper Buford Circle  
329 Borlaug Hall  
St. Paul, Minnesota 55108

M.K. Landon  
G.N. Delin  
J.A. Lamb  
L. Guo, 1993

Open-File Report 93-80