

**U.S. Department of the Interior  
U.S. Geological Survey**

# **Estimated Hydraulic Properties for the Surficial- and Bedrock-Aquifer System, Meddybemps, Maine**

**Open-File Report 99-199**

Prepared in cooperation with the  
U.S. ENVIRONMENTAL PROTECTION AGENCY



## ESTIMATION OF HYDRAULIC PROPERTIES USING NUMERICAL METHODS

Numerical methods of analysis were used to simulate conditions in the surficial and bedrock aquifers underlying the study area. Numerical methods have advantages over analytical methods because boundary and initial conditions, along with aquifer properties, can be varied across the area of interest, increasing the degree to which the models represent the conditions found in the aquifer systems. The numerical method used in these analyses is the MODFLOW model, a three-dimensional finite-difference simulator originally documented by McDonald and Harbaugh (1988) and updated by Harbaugh and McDonald (1996).


The use of MODFLOW assumes that ground-water flow in the fractured bedrock underlying the study area can be analyzed (modeled) using a continuum approach. (See Freeze and Cherry, 1979, p. 73, for a discussion of this approach.) This approach involves a representation of the fracture system such that values of hydraulic head and hydraulic conductivity are continuous within the aquifer system and that ground-water flow follows Darcy's Law (that is, flow is proportional to the hydraulic gradient). This approach has been found to be valid and useful in those cases in which a number of open, hydraulically connected fractures are available for ground-water flow at the scale of the model simulation (Domenico and Schwartz, 1990, p. 83–88).

Although it is difficult to assess the degree to which the continuum assumption is valid in the study area, it is clear from borehole-geophysical logs (Hansen and others, 1999) that many water-yielding fractures are present with a spacing between 20 and 50 ft, depending on the orientation of the fracture sets. With this spacing of fractures, it is likely that ground water flows in interconnected sets of fractures across the study area and thus can be simulated as a continuous ground-water-flow system. It should be noted, however, that the hydraulic properties estimated for the bedrock by the continuum approach are average values for blocks of the bedrock, and not of individual fractures or of the non-fractured block. In addition, because of the discrete nature of fractures and their distribution, the hydraulic characteristics of the bedrock system will vary widely, and the local movement of water could deviate from the average movement simulated by the continuum model.

The numerical analysis involved a two-step process, the first of which was to create a simulation of flow in the aquifers at the Meddybemps site under long-term conditions (that is, a steady-state condition). The result from the steady-state simulation then provided a stable initial condition for the second step, which involved transient simulation of the MW-11B aquifer test. These steps were repeated as calibration of the aquifer properties proceeded, with the goal of improving the degree of agreement of simulated heads with measured aquifer heads after each set of changes in aquifer properties made during model calibration. Aquifer properties were changed during model calibration to produce simulated head conditions similar to the heads measured in the aquifer both before the aquifer test (steady-state simulations) and during the aquifer test at well MW-11B (transient simulations).

### Model Design and Hydraulic Properties

The design of the Meddybemps numerical model closely follows the description of the ground-water system (conceptual model) presented by Lyford and others (1998) and in the description of the study area in this report. The principal area of interest is the south end of the study area, which includes the southern contaminant plume (fig. 2). The extent of the model (figs. 1 and 8) is much larger than the area of interest so as to minimize the effect of relatively unknown boundary conditions on simulations in the area of interest. To simulate ground-water flow, it was necessary to assign initial conditions, boundary conditions, aquifer properties, and internal sources and sinks of water across the modeled area. A rectangular grid of aquifer blocks was laid out horizontally across the modeled area, and the ground-water flow system was subdivided vertically into layers. The horizontal extent of the grid across the site is shown in figure 8. The modeled area is 40 blocks long along the column direction (northwest to southeast) and 35 blocks wide along the row direction (northeast to southwest). As each block is 50 ft square, the extent of the modeled area is 2,000 ft (column direction) by 1,750 ft (row direction). By convention, the origin in all MODFLOW models is the upper left-hand corner block (column 1, row 1), which in the Meddybemps model is the northernmost corner (fig. 8).

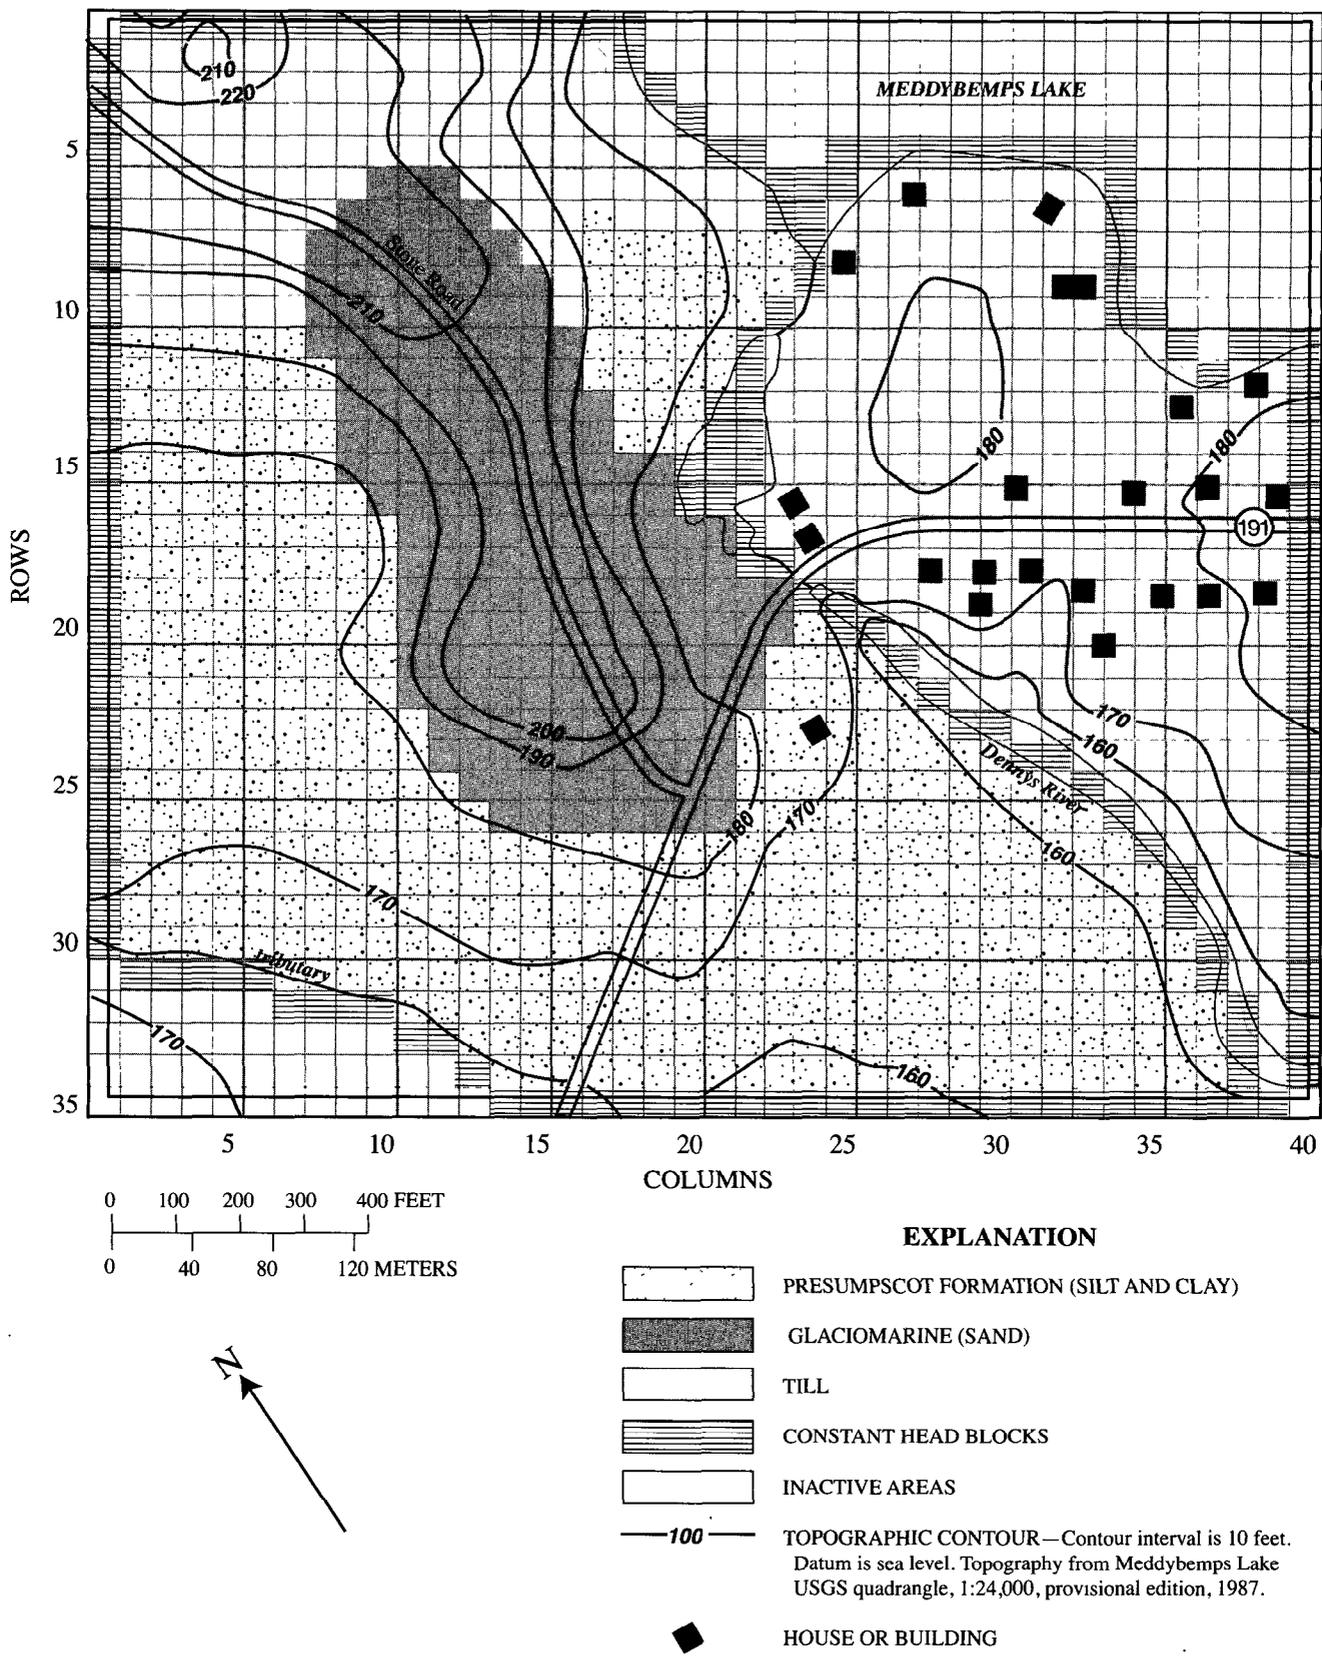

**Figure 8.** Finite-difference grid, surficial geology of modeled area, and constant-head boundaries, Meddybemps, Maine.

The vertical distribution along section B-B' (line of section shown on fig. 2) of the four layers used in the Meddybemps model is shown in figure 9. The upper two layers represent the surficial (glacial) materials, with the top layer (model layer 1) representing the uppermost saturated materials. The bottom of layer 1 was established as 5 ft above the bedrock surface. Because most of the surficial aquifer is unconfined, the thickness of layer 1 varied across the modeled area and this layer was inactive in those areas where the saturated thickness of the surficial materials was less

than 5 ft. Surficial materials vary across the modeled area as shown in figure 8 and include coarse-grained (sand) glaciomarine deposits on the bedrock ridge to the west of the Dennys River, till, and fine-grained glaciomarine deposits of the Presumpscot Formation west of the river. The hydraulic conductivity of layer 1 varied with the type of surficial material and ranged from 30 ft/d for coarse-grained glaciomarine material, 0.1–0.5 ft/d for till, to 0.001–0.01 ft/d for fine-grained (Presumpscot Formation) material.

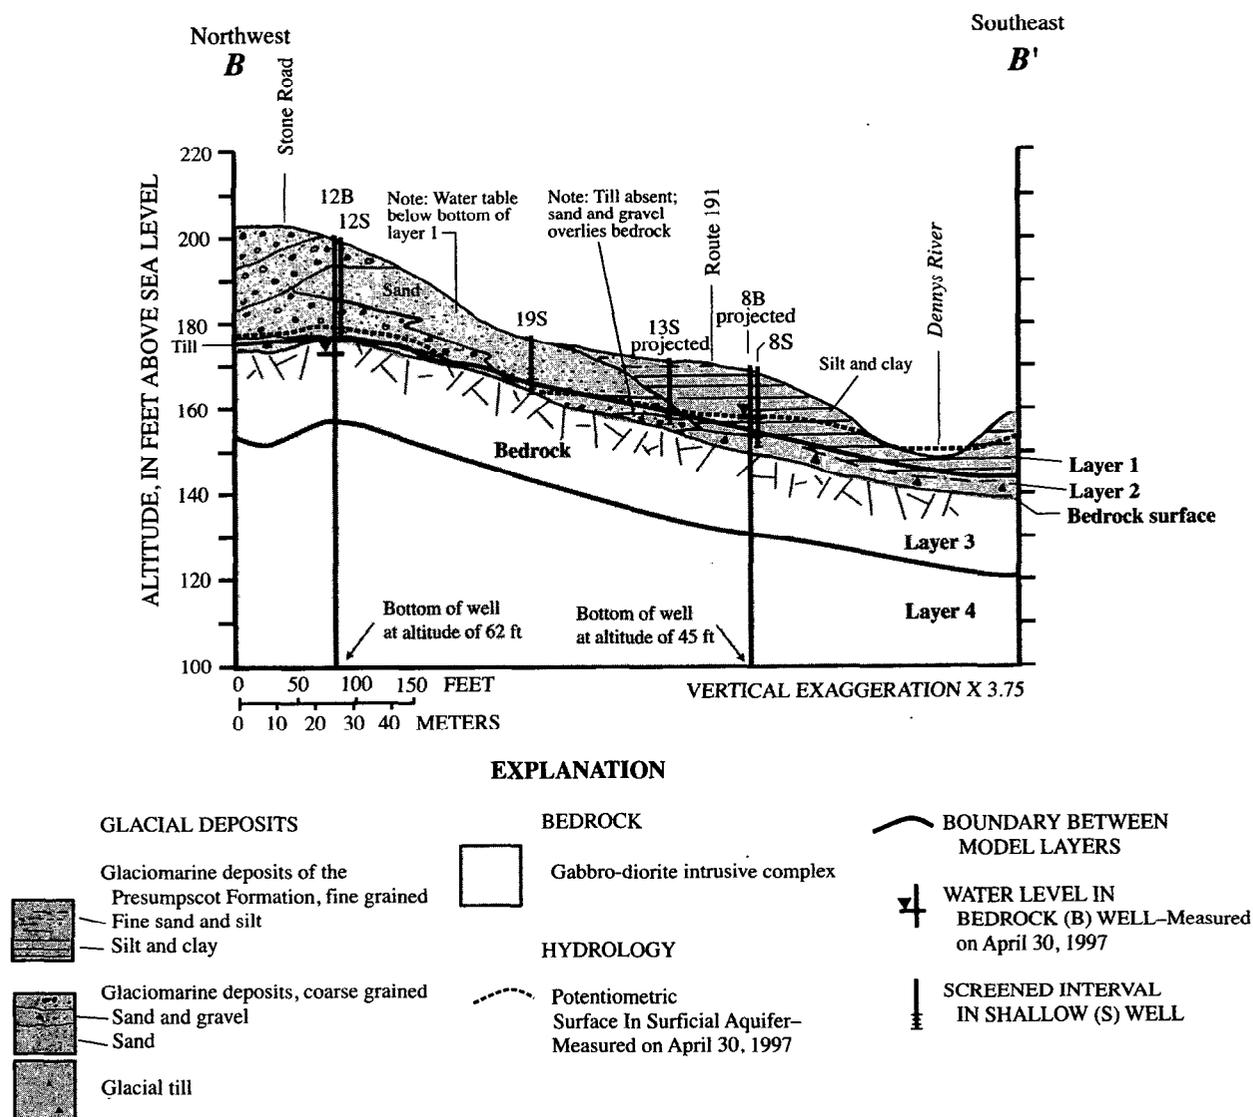


Figure 9. Geologic section B-B' showing layers used in numerical model, Meddybemps, Maine.

Model layer 2 represents the till that mantles most of the bedrock across the modeled area, although there are significant absences in areas across and adjacent to the bedrock ridge (fig. 9). Layer 2 in those areas represents the lower 5 ft of coarse-grained deposits and was the uppermost active layer in several blocks where the saturated thickness of surficial material was less than 5 ft. The bottom of layer 2 is the bedrock surface across the modeled area. Hydraulic conductivity in layer 2 ranged from 10–30 ft/d for sandy material to 1.0 ft/d for till.

The lower two model layers represent the fractured bedrock aquifer (fig. 9). Layer 3 represents the upper part of the fractured bedrock aquifer, and the bottom of this layer was established at 20 ft below the bedrock surface. Hydraulic conductivity of layer 3 was set almost uniformly to 0.003 ft/d but was increased to 0.5–1.5 ft/d in the area between wells MW-10B and MW-11B because a highly transmissive, high-angle fracture (or fracture set) hydraulically connects these two wells. Layer 4 represents the deeper bedrock aquifer. Because the depth of active ground-water flow in this part of the system in the study area is not well known, the hydraulic properties of this layer were represented using variable transmissivity values. Transmissivity values for layer 4 generally were 0.24 ft<sup>2</sup>/d but increased to 40–120 ft<sup>2</sup>/d for that area between wells MW-10B and MW-11B with the highly transmissive (high-angle) fracture or fracture set. The combined transmissivity of the two bedrock layers ranged from 0.03 to 150 ft<sup>2</sup>/d across the model area, and the majority of the combined bedrock transmissivities were set at 0.3 ft<sup>2</sup>/d. A value of 0.3 ft<sup>2</sup>/d is consistent with values estimated using specific-capacity data for low-yielding wells (table 2).

Vertical leakage between model layers in MODFLOW is controlled by the VCONT parameter, which is defined as the vertical hydraulic conductivity divided by the distance between vertically adjacent model blocks (thickness); thus VCONT has units of inverse time (day<sup>-1</sup>). Generally, VCONT values were calculated using equation 51 in the report by McDonald and Harbaugh (1988), which uses the hydraulic conductivity and thickness of the two vertically adjacent blocks. Isotropic conditions were assumed for these calculations (that is, vertical hydraulic conductivity values were held equal to horizontal values). VCONT values between layers 1 and 2 ranged from 4x10<sup>-4</sup> days<sup>-1</sup> for fine-grained material to 0.39 days<sup>-1</sup> for coarse-grained material. VCONT

values between layers 2 and 3 were almost uniformly 3x10<sup>-4</sup> days<sup>-1</sup>. VCONT values between layers 3 and 4 were generally 6x10<sup>-5</sup> days<sup>-1</sup>. During calibration, VCONT values were increased to 0.005 days<sup>-1</sup> between layers 2 and 3 and 1.0 days<sup>-1</sup> between layers 3 and 4 in the region of the high-angle fracture between wells MW-10B and MW-11B, creating a highly transmissive vertical-flow condition in this area of the ground-water flow system. It was also found during model calibration that it was necessary to significantly decrease VCONT values between layers 3 and 4 in the area around the Smith well to match the observed drawdowns in head around this well; VCONT values in this area were 1x10<sup>-9</sup> days<sup>-1</sup>.

## Boundary Conditions

Model boundary conditions include constant-head blocks around the exterior of the modeled area, along the shore of Meddybemps Lake, and along the Dennys River and its unnamed tributary to the south (fig. 8). Head conditions around the model exterior were estimated from surface topography, assuming a 5- to 10-foot depth to ground water. Head conditions for Meddybemps Lake and the Dennys River were based on values reported by Lyford and others (1998) for April 30, 1997. Head conditions along the unnamed tributary to the Dennys River were estimated from surface topography. The constant-head boundary conditions on the exterior of the model, in addition to those on the lake shore and the unnamed tributary on the southern edge of the model, were used in model layers 1 to 4. Constant-head conditions along the Dennys River, transversing the central part of the model, were used only in layers 1 and 2 of the model because the surficial material is absent from most of the streambed.

## Recharge and Wells

The source of most ground water underlying the Meddybemps site is recharge from precipitation. Because the rate of infiltration of precipitation is generally controlled by soil permeability, the recharge rates across the study area were varied by the type of material at the surface. An estimated recharge rate of 10 in/yr was used in areas with till at the surface, a rate of 20 in/yr was used in areas with sandy material, and 0.5 in/yr was used in areas underlain by silt and clay

(Presumpscot Formation). The estimates for till and sandy material are consistent with rates reported for similar geologic settings in Connecticut (Mazzaferro and others, 1979). The recharge rate of 20 in/yr that was used in the model is somewhat lower than potential rates of 24 to 26 in/yr (Lyford and Cohen, 1988) to allow for some surface runoff from fairly steep slopes. The value for silt and clay was assumed to be very low, but supporting information is not available.

Two domestic wells were included in the simulation, the Smith well (row 17, column 25) and the Van Wart well (row 18, column 31) (figs. 2 and 8). Both domestic wells were estimated to pump 100 gal/d from the deeper bedrock layer (layer 4) on the basis of steady water-level recovery rates between pumping periods in the Smith well (fig. 5) and a single occupant in the Van Wart residence.



## Steady-State Calibration and Simulation

Model simulations of the long-term, steady-state head conditions in the ground-water-flow system underlying the Meddybemps site were conducted to match the geologic and hydrologic observations (calibration), and to provide a stable initial condition for the transient simulations of the MW-11B aquifer test. However, it was found that MODFLOW was highly unstable in the steady-state mode. This instability was the result of the nonlinear nature of the unconfined flow conditions in the model, in which the saturated thickness of the aquifer depends on the head in the model block. This inherently nonlinear situation was made even more unstable in the region of the bedrock ridge near Stone Road (fig. 2) by the large contrast in hydraulic conductivities between the overlying sand and the fractured bedrock below. It was not uncommon during the iterative-solution procedure for the steady-state simulations for wide swings to occur in calculated heads in the region of the bedrock ridge. These swings created high heads in one iteration immediately followed by low heads in a second iteration—an oscillation of calculated head that never allowed the model to converge to a final solution. This model instability occurred in an area of the ground-water system where field measurements indicated that wells that penetrate the surficial

materials become dry during some periods of the year, indicating a thin, saturated thickness of the surficial aquifer as an average condition (fig. 9).


The model oscillation problem could not be resolved by adjusting model-solver parameters but was overcome by using a transient simulation that converged to a steady-state condition over a 1,000-day period. The changes in head during the iterative-solution procedure were slow because of the dampening effect of the storage coefficients used in the transient simulation to keep the model solution stable at each time step (0.5 days). The result, after 2,000 time steps, is a condition in which the change in head, with respect to time, has slowed to the point at which the amount of water from storage represents only 1 percent of the total flux through the system, and inputs minus outputs equal the change in storage. The resulting steady-state head solution included several blocks in layer 1 along the bedrock ridge that became inactive (dry) during the simulation, reflecting the small saturated thickness of the surficial material in this part of the ground-water system (fig. 9).

The results of the steady-state simulation are shown in figures 10 and 11. The distribution of simulated head in the uppermost active layer across the modeled area is shown in figure 10; in some areas the uppermost active layer is layer 2, because the calculated head is below the bottom of layer 1. The contoured distribution of head observed in wells also is shown in figure 10; these head contours are modified from Lyford and others (1998, fig. 9). A comparison of the two sets of contours, although limited in areal extent, shows good agreement in absolute magnitude of head and in the direction of ground-water flow. Generally, the primary control on head in the surficial material in the area of interest (that is, the central part of the model) is the movement of ground water from recharge areas in topographically high areas to discharge areas along the Dennys River. To achieve a suitable calibration, the hydraulic conductivity for layer 2 near wells MW-8S, MW-10S, and MW-11S (fig. 2) was increased to a value representative of coarse-grained materials. Low hydraulic conductivity values representative of till were initially assumed because of the low yields observed from wells MW-8S and MW-11S. These wells may not fully penetrate coarse materials, or the coarse materials may not be present near these wells.

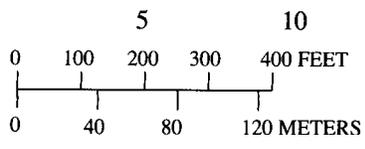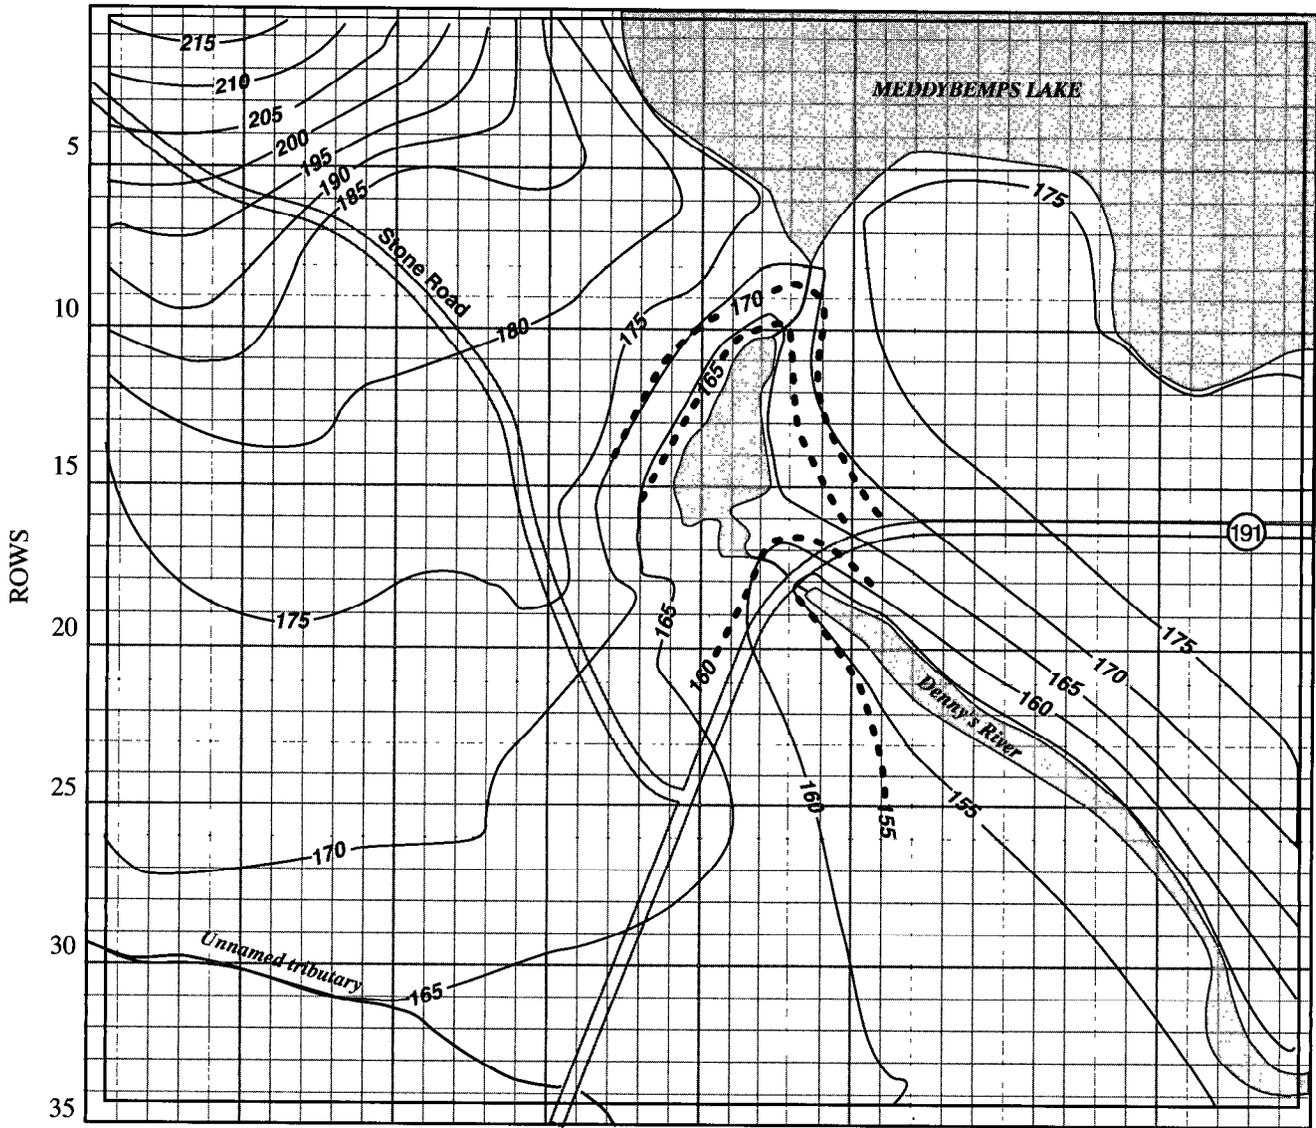

- 160** HEAD CONTOUR BASED ON WATER-LEVEL MEASUREMENT—Contour interval is 5 feet. Datum is sea level. (Data from Lyford and others, 1998)
- 100** HEAD CONTOUR BASED ON MODEL SIMULATION—Contour interval is 5 feet. Datum is sea level.
- FINITE-DIFFERENCE GRID

**Figure 10.** Observed head contours for the surficial aquifer and simulated head contours for the uppermost active layer, Meddybemps, Maine.

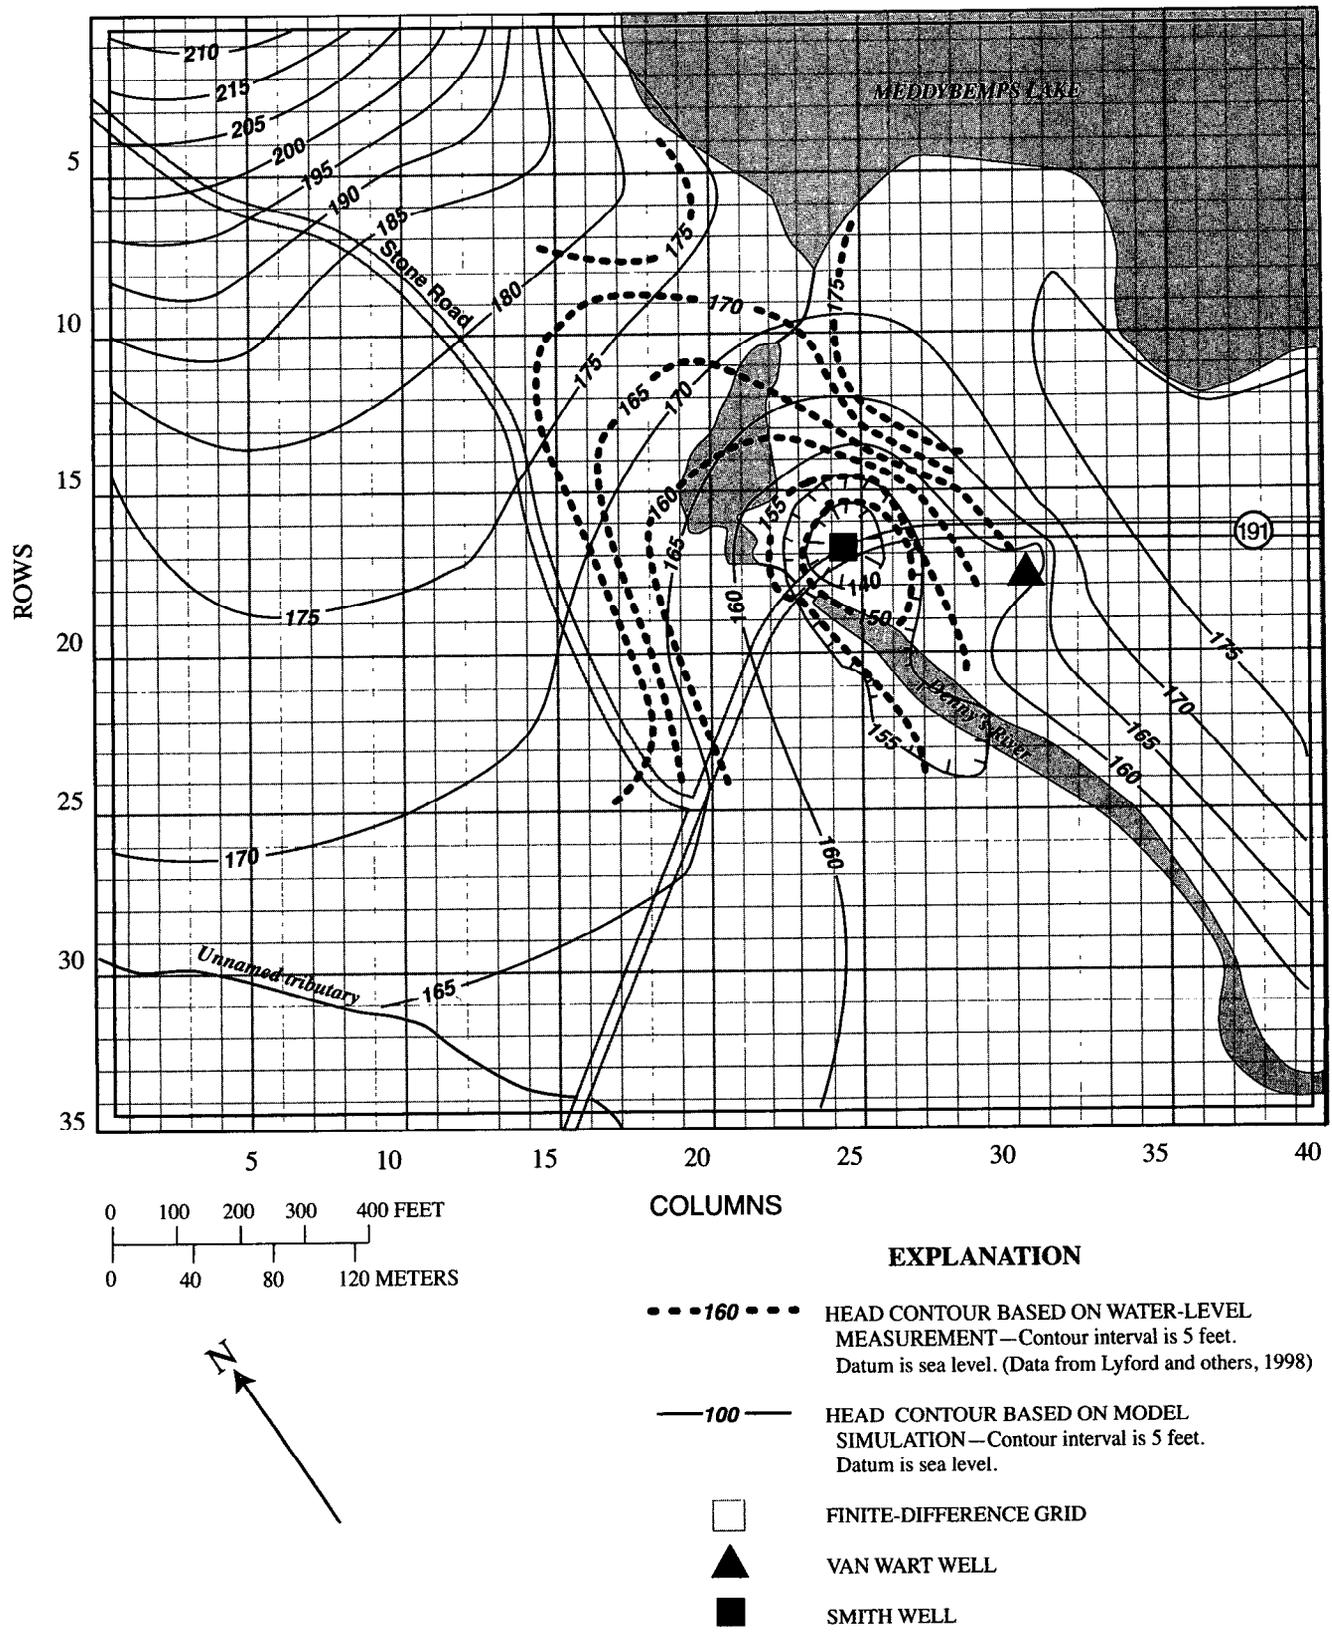

**Figure 11.** Observed head contours for the bedrock aquifer and simulated head contours for model layer 4, Meddybemps, Maine.

In contrast to conditions found in the surficial aquifer, the primary factor affecting the head in the deeper bedrock (layer 4) in the area of interest appears to be pumping from the Smith well (fig. 11). A well-developed cone of depression is simulated around the Smith well, with a smaller cone developed around the Van Wart well. These simulated head patterns reasonably match the observed head patterns (modified from fig. 11 in Lyford and others, 1998). It should be noted that the vertical leakage parameter, VCONT, was decreased significantly between layers 3 and 4 in the area around the Smith well to simulate the magnitude and extent of the observed head pattern as shown by Lyford and others (1998, fig. 11).

The average difference between the measured and simulated heads (table 4) was about 1 ft, and the standard deviation of those differences was about 4 ft. The largest difference in head was for well MW-1B (fig. 2), a bedrock well on the edge of the area of interest. Most of the differences were small; 85 percent of the differences in head were between -5 and 5 ft. A comparison of well pairs (S-shallow, B-bedrock) indicates that the proper direction of head change with depth was simulated for five of the eight pairs (fig. 2 and table 4). In fact, the largest head difference with depth, measured at wells MW-15S and MW-15B, was closely matched by the simulated head difference with depth at that location. Two well pairs (MW-4S and 4B and MW-7S and 7B) show that measured heads decrease with depth near the Dennys River, whereas the simulated heads increase with depth. This situation may indicate that the effect of drawdown from the Smith well pumpage on heads on the opposite side of the river may be stronger than is simulated by the model.

### Transient Calibration and Simulation of Well MW-11B Aquifer Test

Calibration of model parameters during the transient phase of simulations primarily involved the estimation of aquifer storage properties and changes to aquifer hydraulic properties in the region around wells MW-11B and MW-10B. The type of layer in MODFLOW determines the storage coefficient applied during a simulation. Layer 1 (the uppermost surficial material) was set as a type 1, and an unconfined storage coefficient (specific yield) was used. Layer 2 (surficial material, primarily till) was set as a type 3, or as a

**Table 4.** Observed and simulated steady-state heads for wells, Meddybemps, Maine


[Measured head values are water levels, in feet above sea level, on April 30, 1997 (Lyford and others, 1998, table 3)]

Well name	Measured head (h <sub>m</sub> )	Simulated head (h <sub>s</sub> )	Difference (h <sub>s</sub> -h <sub>m</sub> )
MW-1B	169.57	179.77	10.20
MW-3B	173.63	170.94	-2.69
MW-4S	165.93	166.01	.08
MW-4B	162.76	169.27	6.51
MW-5S	174.41	175.78	1.37
MW-6S	175.40	179.29	3.89
MW-7S	163.61	163.79	.18
MW-7B	158.79	166.27	7.48
MW-8S	157.93	157.37	-.56
MW-8B	157.01	156.65	-.36
MW-9S	158.43	161.73	3.30
MW-10S	158.90	161.97	3.07
MW-10B	157.90	161.04	3.14
MW-11S	154.99	155.18	.19
MW-11B	155.49	154.95	-.54
MW-12S	177.60	174.90	-2.70
MW-12B	174.22	169.49	-4.73
MW-13S	159.71	159.52	-.19
MW-14B	178.13	183.02	4.89
MW-15S	166.07	168.50	2.43
MW-15B	155.62	158.70	3.08
MW-16S	178.16	172.61	-5.55
MW-16B	176.54	172.53	-4.01
MW-17S	160.57	160.76	.19
MW-18S	160.02	161.79	1.77
MW-20S	175.44	173.36	-2.08
MW-22B	158.36	159.11	.75
Average .....			1.08
Standard deviation .....			3.67

convertible layer. If a block in layer 1 is active, the storage coefficient used for the underlying layer 2 is a confined storage coefficient. When the head in a block in layer 1 drops below the bottom of the block, the storage coefficient in the underlying layer 2 block converts to an unconfined storage coefficient. Layers 3 and 4 (bedrock) were set as confined units, and confined storage coefficients were used. Specific yield (unconfined storage) values used in layers 1 and 2 were set at 20 percent. The confined storage coefficient was set at  $1 \times 10^{-5}$  for layer 2 and  $1 \times 10^{-4}$  for layers 3 and 4. The confined storage coefficient for layer 2 was set

lower than that of layers 3 and 4 because layer 2 is thinner (5 ft) than either layers 3 (20 ft) or 4 (unknown, but several tens of feet at a minimum).

The results of the simulation of the aquifer test are presented in figures 12–14, and table 5. The observed and simulated drawdown over time at observation well MW-10B during the 24-hour test conducted at well MW-11B is shown in figure 12. Simulation time steps ranged logarithmically from 1 to 200 minutes. The shape of the simulated drawdown generally matches the observed drawdown curve. Major features of the observed response in well MW-10B are the rapid increase in drawdown and the equally rapid stabilization of drawdown. To simulate the rapid increase in drawdown over time in the observation well, which is 205 ft from the pumped well, it was necessary to greatly increase the transmissivity of the bedrock aquifer (layers 3 and 4) between these two wells. This change in aquifer properties in the model is supported by geophysical evidence (Hansen and others, 1999), which indicates that a high-angle fracture (or fracture set) hydraulically connects these two wells. In addition to the increase in transmissivity between the two wells, it was also necessary to decrease the transmissivity of the bedrock immediately around the high-transmissivity zone (to

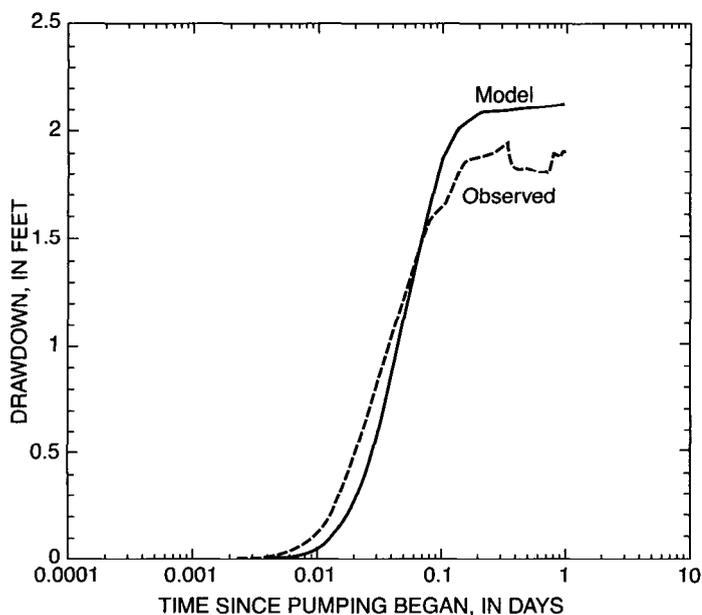


**Figure 12.** Observed and simulated drawdown at well MW-10B while pumping well MW-11B, Meddybemps, Maine.

0.03 ft<sup>2</sup>/d, corresponding to a hydraulic conductivity of  $3 \times 10^{-4}$  ft/d) to reduce the drawdown response observed in bedrock wells outside this zone. (See, for example, well MW-22B in table 5.) Although the model was calibrated to simulate the response in MW-22B as if it were open solely to the bedrock system, the low drawdown in this well may be due to vertical flow from the surficial aquifer through a local vertical fracture or a broken casing seal. Therefore, the calibration result of a low hydraulic conductivity zone around the highly transmissive fracture may be an artifact of the questionable observed drawdown at well MW-22B.

The stabilization of the drawdown response in MW-10B (fig. 12) required sources of water to sustain the pumping at MW-11B; the model simulations indicate that the likely sources of water were leakage from the overlying surficial materials and flow from the Dennys River into the bedrock aquifer. A comparison of drawdowns in layer 4 (fig. 13) and layer 2 (fig. 14) shows the effects of these two sources on the drawdown patterns around the pumping well. The steep, elongated cone of depression after 1 day of pumping shown in figure 13 is shortened in the direction of the overlying constant head block in layer 2, indicating the simulated downward leakage of water from the Dennys River into the bedrock fracture that was assumed to extend to the river. The surficial materials are thin along this segment of the Dennys River, providing a potential hydraulic connection between the river and the bedrock fracture, if it underlies the river. In addition to leakage from the river, the model simulations also indicated that water leaking downward from the overlying surficial material into the fracture was needed to stabilize drawdown induced by pumping of MW-11B. Because the dip angle of the fracture is high (>45 degrees), the outcrop of the fracture at the bedrock surface is expected to be present near the pumping and observation wells, and the vertical leakage parameter VCONT was increased to 0.005 days<sup>-1</sup> between layers 2 and 3 and 1.0 days<sup>-1</sup> between layers 3 and 4 to simulate this ability to move water vertically.

The drawdown pattern in the surficial aquifer (layer 2) after 1 day of pumping is shown in figure 14. Although the drawdowns in layer 2 were significantly less than those in the fracture (fig. 13), they are areally extensive and indicate that water was moving through the overlying materials toward and into the fracture, providing another source of water for drawdown stabilization. As noted earlier, the hydraulic

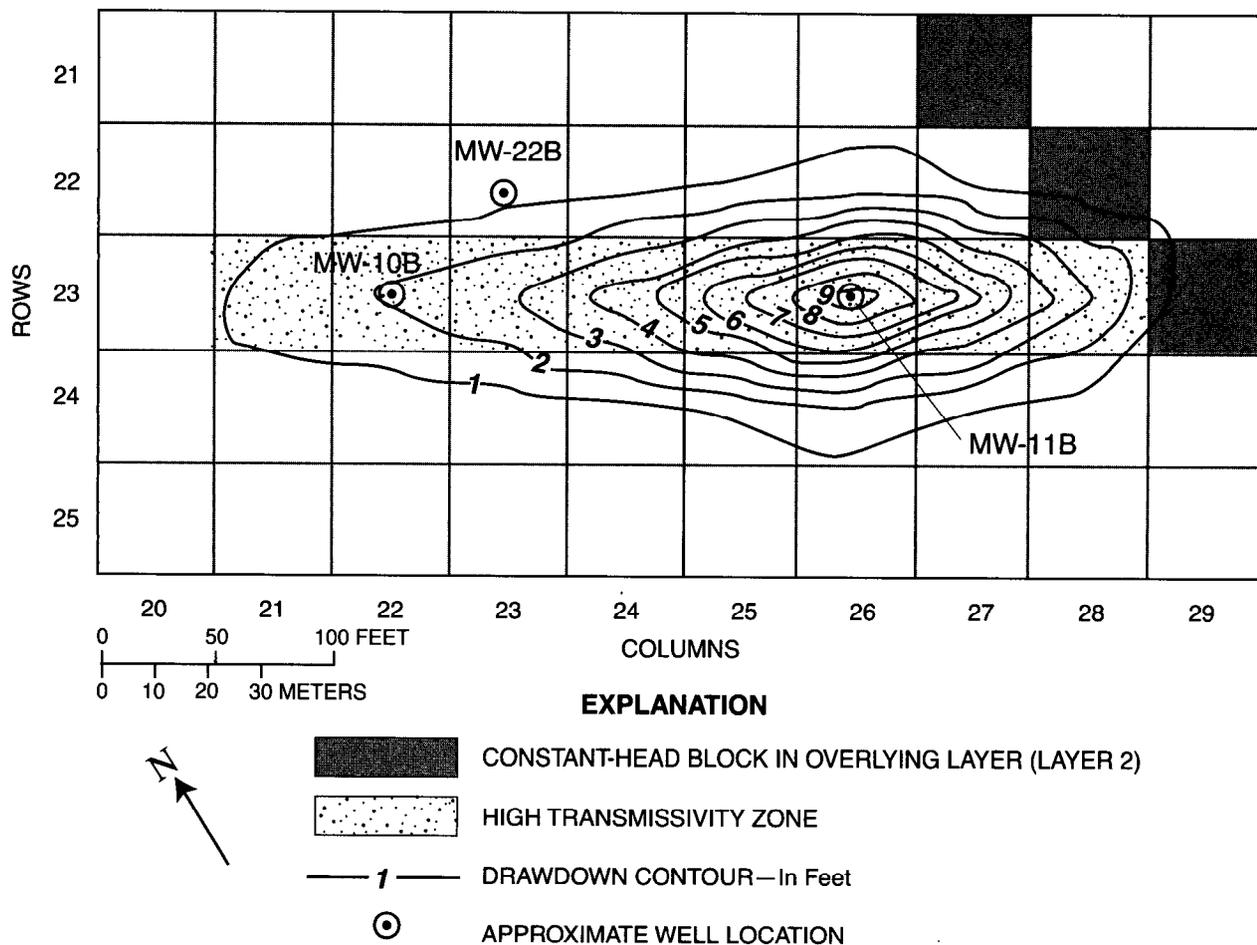


**Figure 13.** Simulated drawdown in model layer 4 after pumping MW-11B for 1 day, Meddybemps, Maine.

conductivity of the surficial aquifer in this area (layer 2) was increased from initial estimates to simulate the drawdowns observed in these wells (table 5) and to improve the steady-state head results with respect to pre-test conditions.

The overall magnitude of simulated drawdown values was reasonable for the five observation wells and the pumped well at the end of the aquifer test (table 5). Differences between observed and simulated drawdowns at the observation wells can be explained, to some degree, by differences in the distances between observed and simulated wells (table 5). Additionally, it should also be recognized that the drawdown value in the pumped well (MW-11B) is expected to be larger than that of the simulated drawdown in the block containing the pumped well, because the numerical model assumes a distributed pumping source (that is, the water is pumped from all of the 50-ft square block).

Head losses at the open well bore (also called entry losses) are considered to be negligible at the pumping rate of 4.5 gal/min. It is particularly interesting to note the greatly reduced drawdown in well MW-22B relative to MW-10B, although it is significantly closer to the pumped well than MW-10B (fig. 2). However, water levels in MW-22B may not be suitable for comparison to modeling results for reasons stated earlier. In addition, although not shown in table 5, it should be noted that no drawdown was observable in bedrock well MW-8B during the aquifer test, even though 0.04 ft of drawdown was recorded in the shallow well at that location. These observations support the view that the major control on the flow of water in this region of the bedrock system is the highly transmissive fracture set between wells MW-11B and MW-10B.

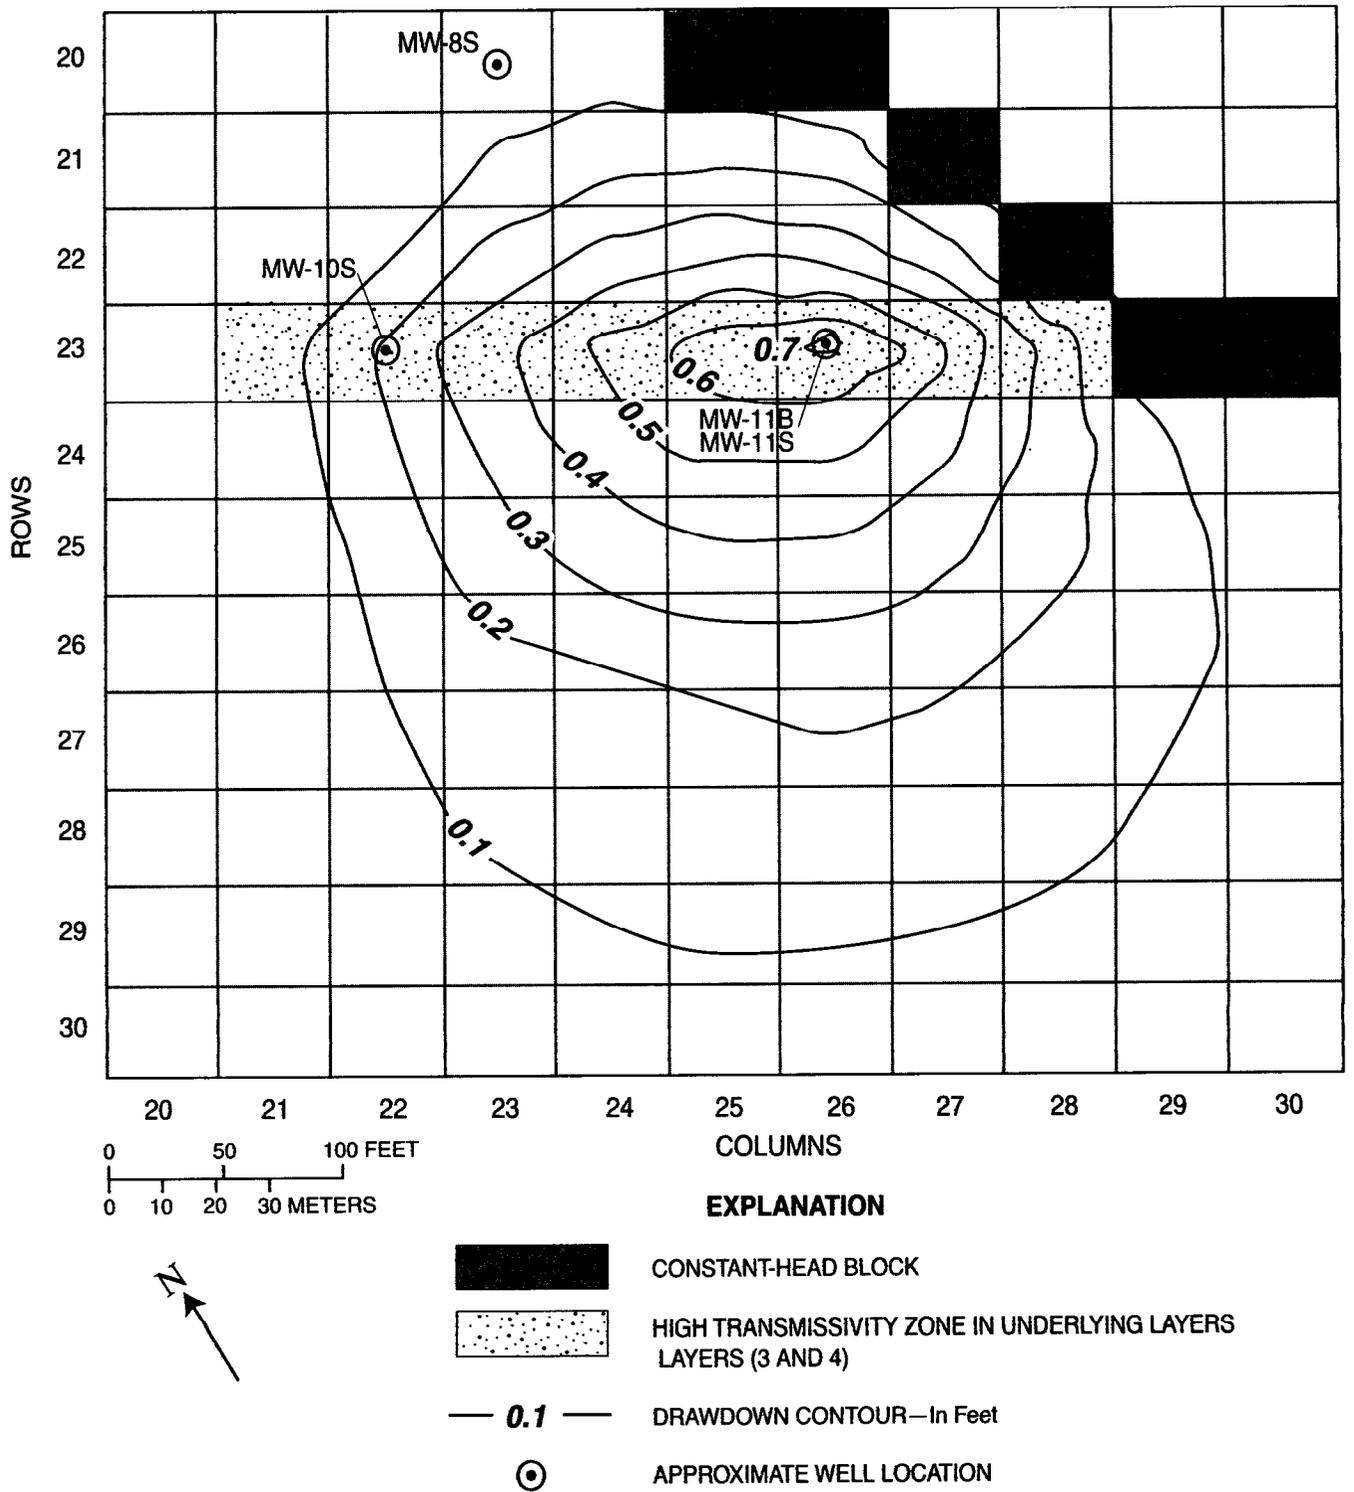

**Figure 14.** Simulated drawdown in model layer 2 after pumping MW-11B for 1 day, Meddybemps, Maine.

**Table 5.** Observed and simulated drawdown in the pumped well and observation wells after pumping well MW-11B for 24 hours, Meddybemps, Maine

Well name	Distance to pumped well (feet)	Observed drawdown (feet)	Simulation distance (feet)	Simulated drawdown (feet)	Difference (simulated-observed) (feet)
MW-8S.....	202	0.04	212	0.03	-0.01
MW-10S.....	210	.16	200	.22	.06
MW-10B .....	205	1.90	200	2.12	.22
MW-11S.....	15	1.12	12	.71	-.41
MW-11B .....	0	11.78	12	9.91	-1.87
MW-22B .....	169	.10	158	.45	.35

## SUMMARY AND CONCLUSIONS

The hydraulic conductivity of surficial materials near the Eastern Surplus Superfund Site in Meddybemps, Maine, determined from specific-capacity tests, ranges from 17 to 78 ft/d for wells completed in coarse-grained glaciomarine sediments and from about 0.1 to 1.0 ft/d for wells completed in till. The transmissivity of fractured bedrock determined from specific-capacity tests and an aquifer test in bedrock ranges from about 0.09 to 130 ft<sup>2</sup>/d. Relatively high values of transmissivity at the southern end of the study area appear to be associated with a high-angle fracture or fracture zone that hydraulically connects two wells completed in bedrock. Transmissivities at six low-yielding (less than 0.5 gal/min) wells, which appear to lie within a poorly transmissive block of the bedrock, were consistently in a range of about 0.09 to 0.5 ft<sup>2</sup>/d.

The estimates of hydraulic conductivity and transmissivity in the southern half of the study area were supported by steady-state calibration of a numerical model and simulation of a 24-hour aquifer test at a well completed in bedrock. Model calibration indicated an extension of a relatively transmissive zone in the surficial aquifer beyond the mapped extent of coarse-grained sediments eastward to the Dennys River. It was necessary to use high values of vertical hydraulic conductivity along the fracture or fracture zone that connects the pumped well and an observation well to match drawdowns during model calibration to the aquifer tests. In addition, modeling results indicated that a very low vertical hydraulic conductivity was

needed to simulate a persistent cone of depression near a residential well that may lie within the poorly transmissive block of bedrock.

Considerable uncertainty is attached to estimates of transmissivity and hydraulic conductivity determined by analytical methods because of the many simplifying assumptions. Nevertheless, calibration of a numerical model yielded values of the hydraulic properties of the surficial- and bedrock-aquifer system that were similar to those determined by analytical methods for wells at the Meddybemps site. Numerical modeling also yielded estimates of vertical hydraulic conductivity that would be difficult to determine analytically from available data. Generally, the numerical modeling results support the conceptual model of ground-water flow. The following observations were based on numerical modeling:

- Hydraulic properties within the surficial materials and the fractured bedrock are quite variable. Hydraulic conductivities range between 0.001 to 30 ft/d for surficial materials, and transmissivities range from 0.03 to 150 ft<sup>2</sup>/d for fractured bedrock. The high contrast in values in hydraulic properties indicate the presence of preferential pathways for water flow in the Meddybemps site that could affect the direction and rate of contaminant transport at the site.
- Although low yields in wells MW-8S and MW-11S indicate that the transmissivity of surficial materials decreases eastward and southeastward toward the Dennys River, model calibration indicated that the surficial materials in this area are relatively transmissive.

- The rapid stabilization of the drawdown response to pumping at well MW-11B indicates that likely sources of water are leakage from the overlying surficial materials and flow from the Dennys River into the bedrock aquifer. Simulation of downward movement of water from surficial materials and lateral movement from the Dennys River to the principal fracture zone yielding water in well MW-11B produced asymmetric and elliptical drawdown patterns in bedrock and surficial aquifers.
- Model simulations indicate that the vertical leakage to the deeper bedrock around the Smith residential well must be very low to maintain the depressed water levels that are observed in nearby bedrock wells and in the Smith well itself. The low vertical leakage and the low transmissivity of the deeper bedrock in this part of the study area is supported by the specific-capacity data and head observations for wells open to this part of the bedrock. The inferred low vertical leakage, in combination with the low transmissivity of the bedrock in this part of the study area, could constrain contaminant transport. VOCs had not been detected in the Smith well prior to the spring of 1998. The high degree of variability in aquifer hydraulic properties, however, must be taken into consideration to achieve an accurate assessment of the vulnerability of an individual well to contamination.

The estimates of hydraulic properties presented in this report were determined on the basis of available specific-capacity data, aquifer tests, and numerical modeling done within the time and budgetary constraints of the project. Additional aquifer testing and further refinement of the model through additional

calibration might narrow the range of hydraulic property values and refine the conceptual flow model for the aquifer system; however, the degree of refinement needed will depend on the intended use of the information. The information presented in this report could be used to estimate ground-water-flow patterns and flow rates of water through the aquifer system and to assess remediation approaches. Design of a ground-water remediation system and simulation of solute transport might require additional information, particularly the hydraulic properties of fractures.

The numerical model described in this report was designed to analyze aquifer tests, evaluate the conceptual model of ground-water flow, and refine estimates of hydraulic properties for the aquifer system. Other uses, such as a design of a ground-water remediation system or as a basis for solute-transport modeling, may not be appropriate because fracture distribution and properties have been characterized only in some areas and other conceptual models of ground-water flow may be possible. The preponderance of evidence, however, indicates that the conceptual model is the most likely interpretation of information collected thus far at the Meddybemps site.

## REFERENCES

- Cooper, H.H., Jr., and Jacob, C.E., 1946, A generalized graphical method for evaluating formation constants and summarizing well-field history: *American Geophysics Union Transactions*, v. 27, no. 4, p. 526-534.
- Domenico, P.A., and Schwartz, F.W., 1990, *Physical and chemical hydrogeology*: New York, John Wiley & Sons, 824 p.

- Fetter, C.W., 1994, Applied hydrogeology, 3d edition: Englewood Cliffs, N.J., Prentice-Hall, Inc., 691 p., 1 diskette.
- Freeze, R.A., and Cherry, J.A., 1979, Groundwater: Englewood Cliffs, N.J., Prentice-Hall, Inc., 604 p.
- Hansen, B.P., Stone, J.R., and Lane, J.W., Jr., 1999, Characteristics of fractures in crystalline bedrock determined by surface and borehole geophysical surveys, Eastern Surplus Superfund Site, Meddybemps, Maine: U.S. Geological Survey Water-Resources Investigations Report 99-4050, 27 p.
- Harbaugh, A.W., and McDonald, M.G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey modular finite-difference ground-water flow model: U.S. Geological Survey Open-File Report 96-485, 56 p.
- Jacob, C.E., and Lohman, S.W., 1952, Nonsteady flow to a well of constant drawdown in an extensive aquifer: American Geophysics Union Transactions, v. 33, p. 559-569.
- Lohman, S.W., 1972, Ground-water hydraulics: U.S. Geological Survey Professional Paper 708, 70 p.
- Lyford, F.P., and Cohen, A.J., 1988, Estimation of water available for recharge to sand and gravel aquifers in the Glaciated Northeastern United States, in Randall, A.D., and Johnson, A.I., eds., Regional aquifer systems of the United States—the northeast glacial aquifers: American Water Resources Association Monograph Series 11, p. 37-61.
- Lyford, F.P., Stone, J.R., Nielsen, J.P., and Hansen, B.P., 1998, Geohydrology and ground-water quality, Eastern Surplus Superfund Site, Meddybemps, Maine: U.S. Geological Survey Water-Resources Investigation Report 98-4174, 68 p.
- Mazzaferro, D.L., Handman, E.H., and Thomas, M.P., 1979, Water resources inventory of Connecticut, part 8, Quinnipiac River Basin: Connecticut Water Resources Bulletin 27, 88 p.
- McDonald, M.W., and Harbaugh, A.W., 1988, A modular three-dimensional finite-difference ground-water flow model: U.S. Geological Survey Techniques of Water-Resources Investigations, book 6, chap. A1, 586 p.
- Melvin, R.L., deLima, V.A., and Stone, B.D., 1992, Stratigraphy and hydraulic properties of tills in southern New England: U.S. Geological Survey Open-File Report 91-481, 53 p.
- Pietras, T.W., 1981, Leaching of nutrients in two watersheds under different land uses in eastern Connecticut: Storrs, Conn., University of Connecticut, unpublished master's thesis, 302 p.
- Roy F. Weston, Inc., 1997, Groundwater monitoring well sampling summary report, Eastern Surplus Company Superfund Site, Meddybemps, Maine: Burlington, Mass., 70 p., 2 app.
- \_\_\_\_\_, 1998a, Remedial investigation groundwater monitoring well sampling summary report, Eastern Surplus Company Superfund Site, Meddybemps, Maine: Burlington, Mass., 104 p., 7 attachments.
- \_\_\_\_\_, 1998b, Remedial investigation residential well sampling summary report, Eastern Surplus Company Superfund Site, Meddybemps, Maine: Burlington, Mass., 56 p., 3 attachments.
- Tiedeman, C.R., Goode, D.J., and Hsieh, P.A., 1997, Numerical simulation of ground-water flow through glacial deposits and crystalline bedrock in the Mirror Lake area, Grafton County, New Hampshire: U.S. Geological Survey Professional Paper 1572, 50 p.
- Torak, L.J., 1979, Determination of hydrologic parameters for glacial tills in Connecticut: Storrs, Conn., University of Connecticut, unpublished master's thesis, 161 p.