

Figure 1. Composite potentiometric surface of the intermediate aquifer system.

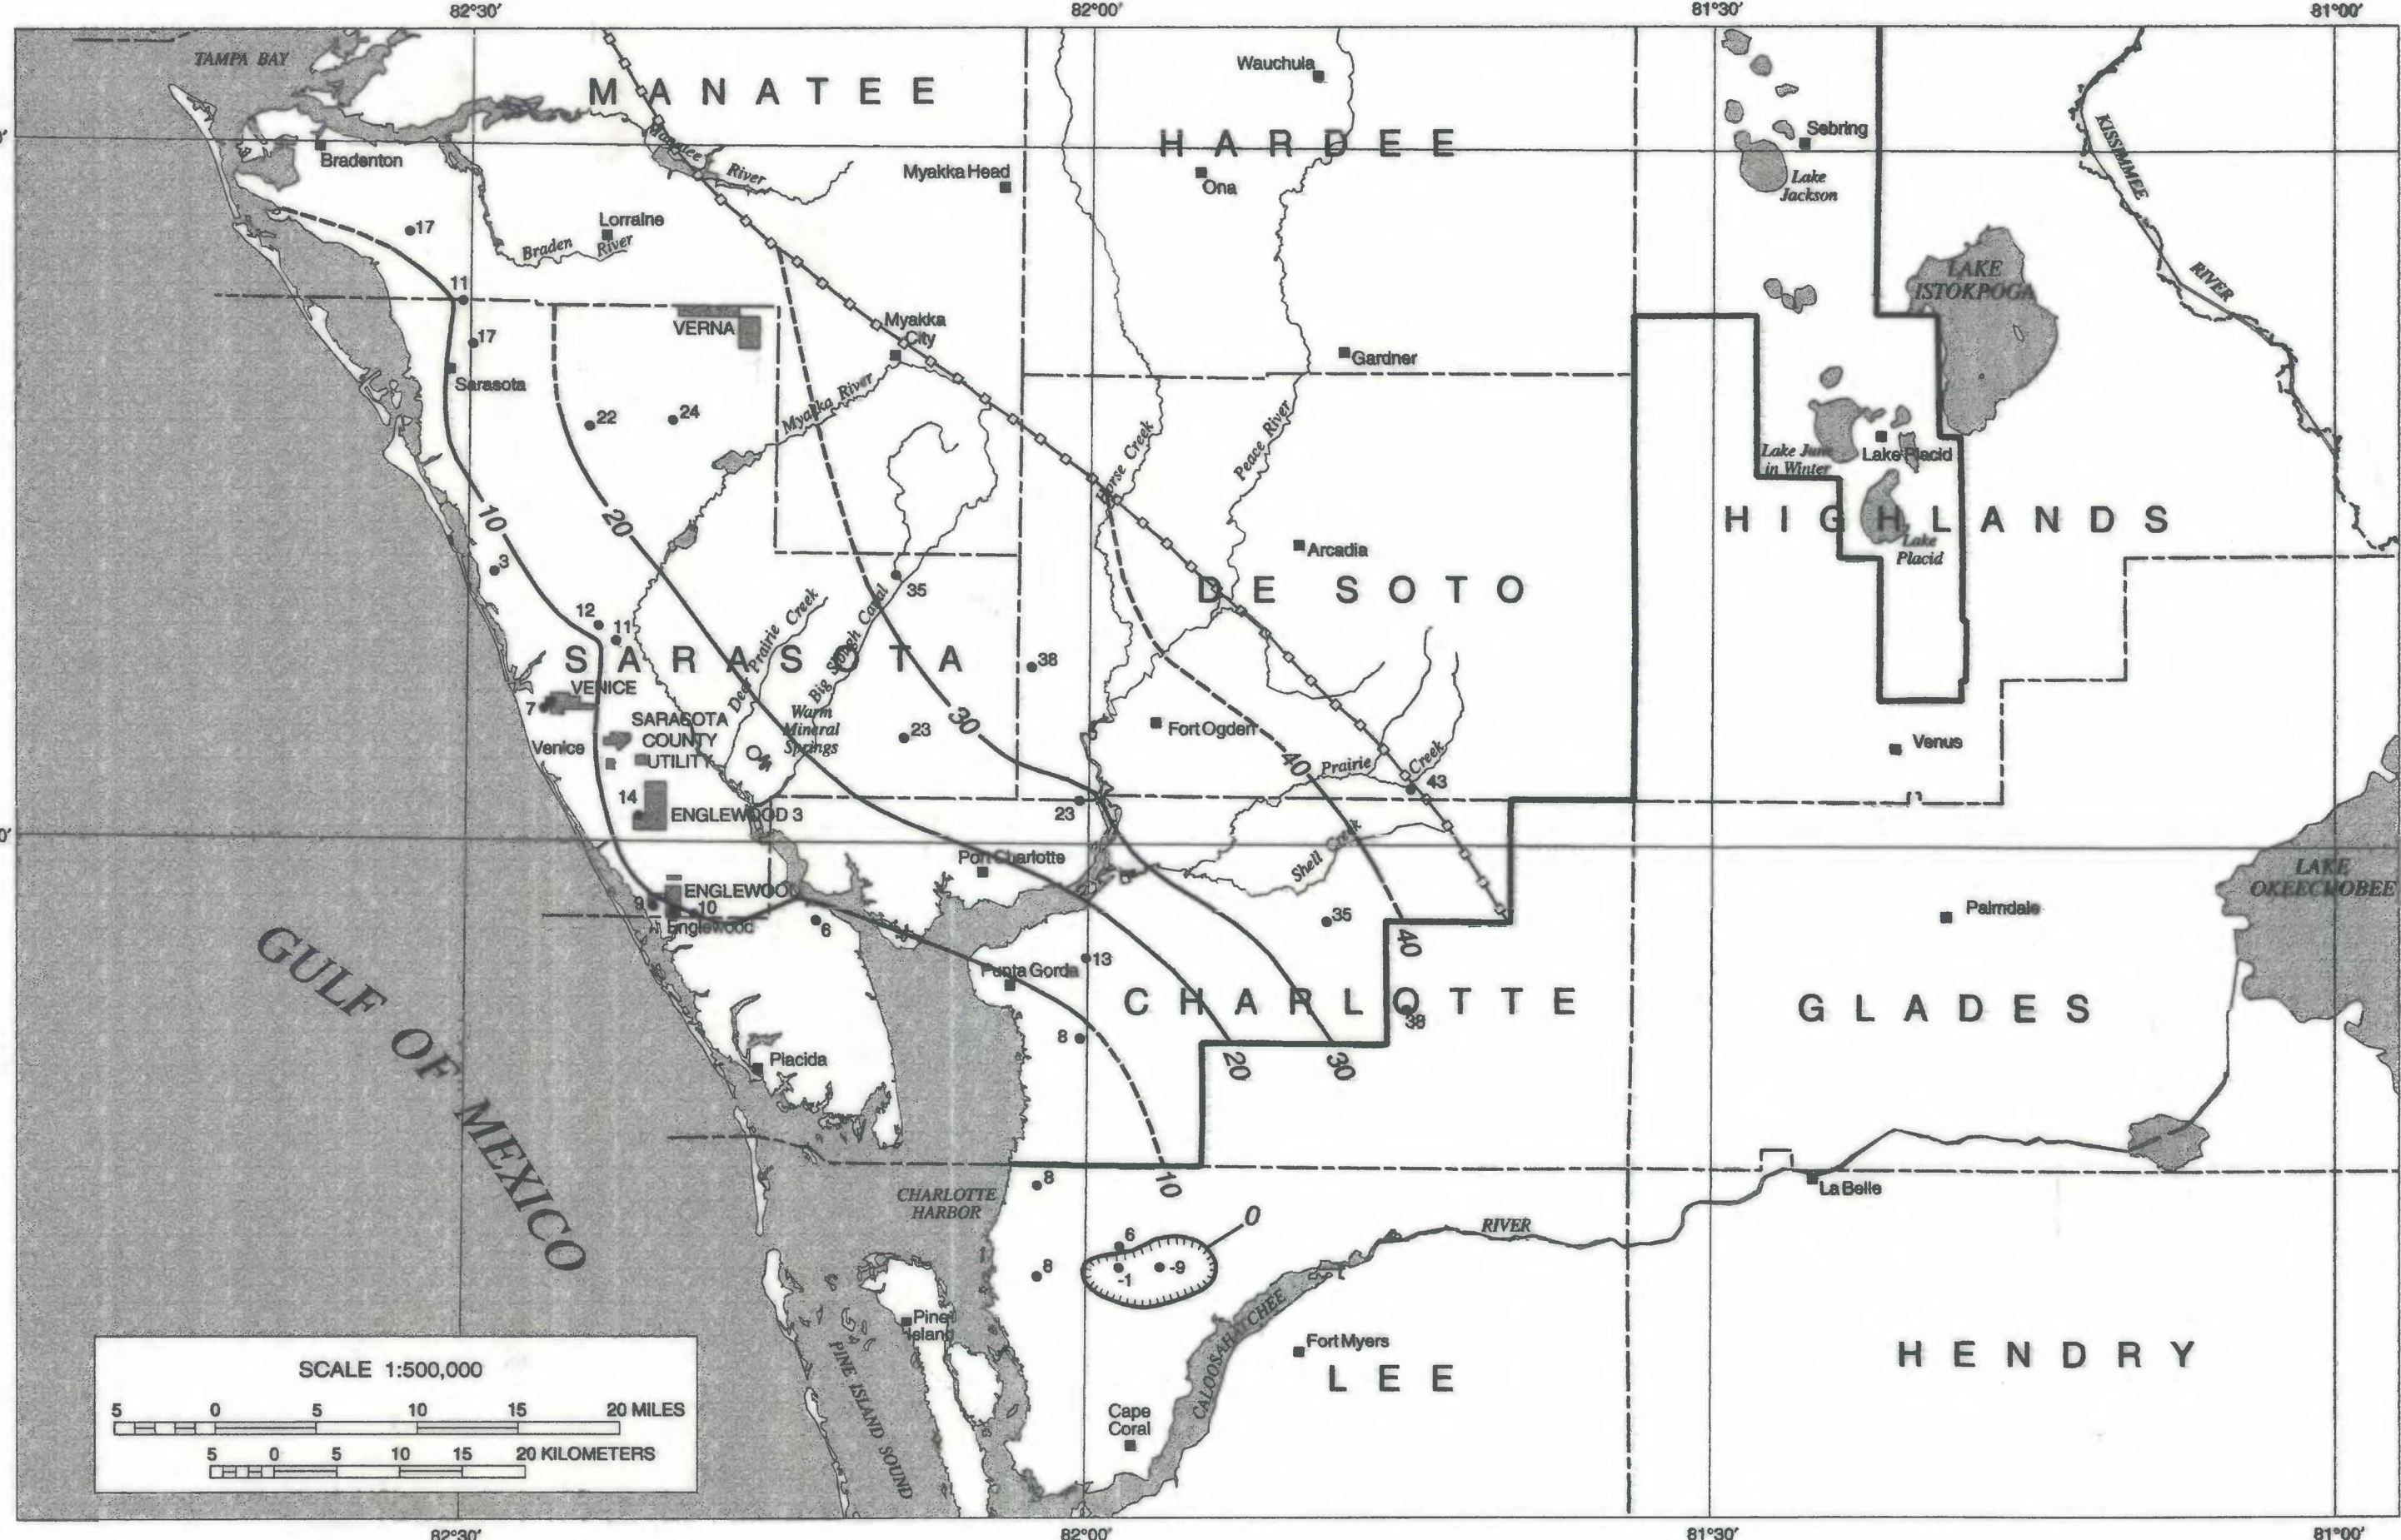


Figure 2. Potentiometric surface of the Tamiami-upper Hawthorn aquifer.

INTRODUCTION

The intermediate aquifer system underlies a 5,000-square-mile area within the Southwest Florida Water Management District including De Soto, Sarasota, Hardee, Manatee, and parts of Charlotte, Hillsborough, Highlands, Polk, and Lee Counties. The intermediate aquifer system is overlain by the surficial aquifer system and is underlain by the Floridan aquifer system. The intermediate aquifer system consists of layers of sand, shell, clay, calcareous clay, limestone, and dolomite of the Tamiami Formation and Hawthorn Group of Oligocene to Pleistocene age (Wingard and others, 1995). The intermediate aquifer system contains one or more water-bearing units separated by discontinuous confining units. The intermediate aquifer system is the principal source of potable water in the southwestern part of the study area and is widely used as a source of water where wells are open to the intermediate aquifer system or to both the intermediate and Floridan aquifer systems. Yields of individual wells open to the intermediate aquifer system vary from a few gallons to several hundred gallons per minute. The volume of water withdrawn from the intermediate aquifer system is considerably less than that withdrawn from the Floridan aquifer system in the study area (Duerr and others, 1988).

In areas where multiple water-bearing units exist in the system, the U.S. Geological Survey selected wells open to individual units for water-level measurements wherever possible. The water levels along the northern boundary of the intermediate aquifer system generally are similar to water levels in the underlying Upper Floridan aquifer. This similarity is because the confining unit that separates the two aquifers is either absent or discontinuous in that area, permitting direct hydraulic connection between the two aquifer systems. In the southwestern part of the study area, the intermediate aquifer system is composed of two units: the Tamiami-upper Hawthorn aquifer and the underlying lower Hawthorn-upper Tampa aquifer (Wolansky, 1983). Lateral boundaries for the Tamiami-upper Hawthorn aquifer are approximate because of limited hydrogeologic data.

This report shows the potentiometric surfaces of the intermediate aquifer system in September 2001 (figs. 1 and 2). The potentiometric surface represents the level to which water will rise in tightly-cased wells that tap a confined aquifer system. The surface is mapped by measuring the altitude of water levels in a network of wells, and is represented on maps by contours that connect points of equal water-level altitude. These maps represent water-level conditions near the end of the wet season, when ground-water levels usually are at an annual high and withdrawals for agricultural use usually are low. From October 2000 through September 2001, the cumulative average rainfall for the central (46.76 inches) and southern (53.04 inches) regions within the Southwest Florida Water Management District was below and above the historical means of 52.50 and 52.59 inches, respectively (Southwest Florida Water Management District, September 2001).

This report, prepared by the U.S. Geological Survey in cooperation with the Southwest Florida Water Management District, is one of a series of semi-annual intermediate aquifer system potentiometric-surface map reports prepared for west-central Florida since September 1985. Water-level data are collected in May and September each year to show the near annual low and high water-level conditions, respectively. Most of the water-level data for the two maps were collected by the U.S. Geological Survey during the period September 24-28, 2001. Supplemental water-level data were collected by other agencies and companies. Because most water-level measurements were made during a 5-day period, measurements may not represent a "snapshot" of conditions at a specific time, nor do they necessarily coincide with the seasonal high water-level condition.

The composite potentiometric surface of all water-bearing units within the intermediate aquifer system is shown in figure 1. The potentiometric surface of the Tamiami-upper Hawthorn aquifer is shown in figure 2 and is based on water levels from wells open only to this aquifer.

WATER-LEVEL CHANGES FROM SEPTEMBER 2000 TO SEPTEMBER 2001

Water levels in about 90 percent of wells measured in September 2001 for the composite potentiometric surface of the intermediate aquifer system were higher than the September 2000 water levels (Duerr, 2001b). In 113 wells with previous measurements, the September 2001 levels ranged from about 4 feet below to about 18 feet above the September 2000 levels. The largest decrease in water levels was

in northeastern Lee County and the largest increase in water levels was in central Polk County.

In 19 wells with previous measurements in the Tamiami-upper Hawthorn aquifer, the September 2001 levels ranged from about 3 feet below to about 4 feet above the September 2000 levels. Water levels were higher in about 90 percent of the wells in September 2001. The largest decrease in water levels was in central Charlotte County and the largest increase in water levels was in northern Sarasota County.

WATER-LEVEL CHANGES FROM MAY 2001 TO SEPTEMBER 2001

Water levels in about 99 percent of wells measured in September 2001 for the composite potentiometric surface of the intermediate aquifer system were higher than the May 2001 water levels (Duerr, 2001c). In 111 wells with previous measurements, the September 2001 levels ranged from about 6 feet below to about 43 feet above the May 2001 levels. The only decrease in water levels was in northeastern Lee County and the largest increase in water levels was in east-central Hardee County.

In 25 wells with previous measurements in the Tamiami-upper Hawthorn aquifer, the September 2001 levels ranged from about 3 feet above to about 20 feet above the May 2001 levels. Water levels were higher in all measured wells in September 2001. The largest increase in water levels was in northern Sarasota County. Pumping from the well field that supplies Fort Myers has resulted in a cone of depression in the potentiometric surface of the Tamiami-upper Hawthorn aquifer in northern Lee County.

ACKNOWLEDGMENTS

The author thanks David McCulloch (GIS Specialist) and Annette Seidenfeld (Scientific Illustrator) of the Tampa USGS office for their assistance with the design and preparation of the graphics presented in this report.

SELECTED REFERENCES

Duerr, A.D., 2001a, Potentiometric surfaces of the intermediate aquifer system, west-central Florida, May 2000: U.S. Geological Survey Open-File Report 01-19, 1 sheet.

_____, 2001b, Potentiometric surfaces of the intermediate aquifer system, west-central Florida, September 2000: U.S. Geological Survey Open-File Report 01-114, 1 sheet.

_____, 2001c, Potentiometric surfaces of the intermediate aquifer system, west-central Florida, May 2001: U.S. Geological Survey Open-File Report 01-309, 1 sheet.

Duerr, A.D., Hunn, J.D., Lewelling, B.R., and Trommer, J.T., 1988, Geohydrology and 1985 water withdrawals of the aquifer systems in southwest Florida, with emphasis on the intermediate aquifer system: U.S. Geological Survey Water-Resources Investigations Report 87-4259, 115 p.

Duerr, A.D., and Torres, A.E., 2000, Potentiometric surfaces of the intermediate aquifer system, west-central Florida, September 1999: U.S. Geological Survey Open-File Report 00-225, 1 sheet.

Southwest Florida Water Management District, 2001, Hydrologic conditions for the month of September 2001, 74 p.

Wingard, G.L., Weedman, S.D., Scott, T.M., Edwards, L.E., and Green, R.C., 1995, Preliminary analysis of integrated stratigraphic data from the south Venice corohole, Sarasota County, Florida: U.S. Geological Survey Open-File Report 95-3, 129 p.

Wolansky, R.M., 1983, Hydrogeology of the Sarasota-Port Charlotte area, Florida: U.S. Geological Survey Water-Resources Investigations Report 82-4069, 48 p.

- EXPLANATION**
- VERNA MUNICIPAL WELL FIELD
 - POTENTIOMETRIC CONTOUR - - Shows altitude at which water would have stood in tightly-cased wells. Contour interval is 10 feet. National Geodetic Vertical Datum of 1929. Hachures indicate depressions. Dashed where approximately located.
 - BOUNDARY OF SOUTHWEST FLORIDA WATER MANAGEMENT DISTRICT
 - APPROXIMATE NORTHERN BOUNDARY OF THE INTERMEDIATE AQUIFER SYSTEM
 - APPROXIMATE EASTERN BOUNDARY OF THE TAMIAHI-UPPER HAWTHORN AQUIFER
 - OBSERVATION WELL - - Number is altitude of water level in feet above or below National Geodetic Vertical Datum of 1929.
 - SPRING
 - CITY OR TOWN
- NOTE: The potentiometric contours are generalized to synoptically portray the head in a dynamic hydrologic system, taking due account of the variations in hydrogeologic conditions, such as differing depths of wells, nonsimultaneous measurements of water levels, variable effects of pumping, and changing climatic influence. The potentiometric contours may not conform exactly with the individual measurements of water level.