


# USER GUIDE FOR THE DRAWDOWN-LIMITED, MULTI-NODE WELL (MNW) PACKAGE FOR THE U.S. GEOLOGICAL SURVEY'S MODULAR THREE-DIMENSIONAL FINITE-DIFFERENCE GROUND-WATER FLOW MODEL, VERSIONS *MODFLOW-96* AND *MODFLOW-2000*

Open-File Report 02-293





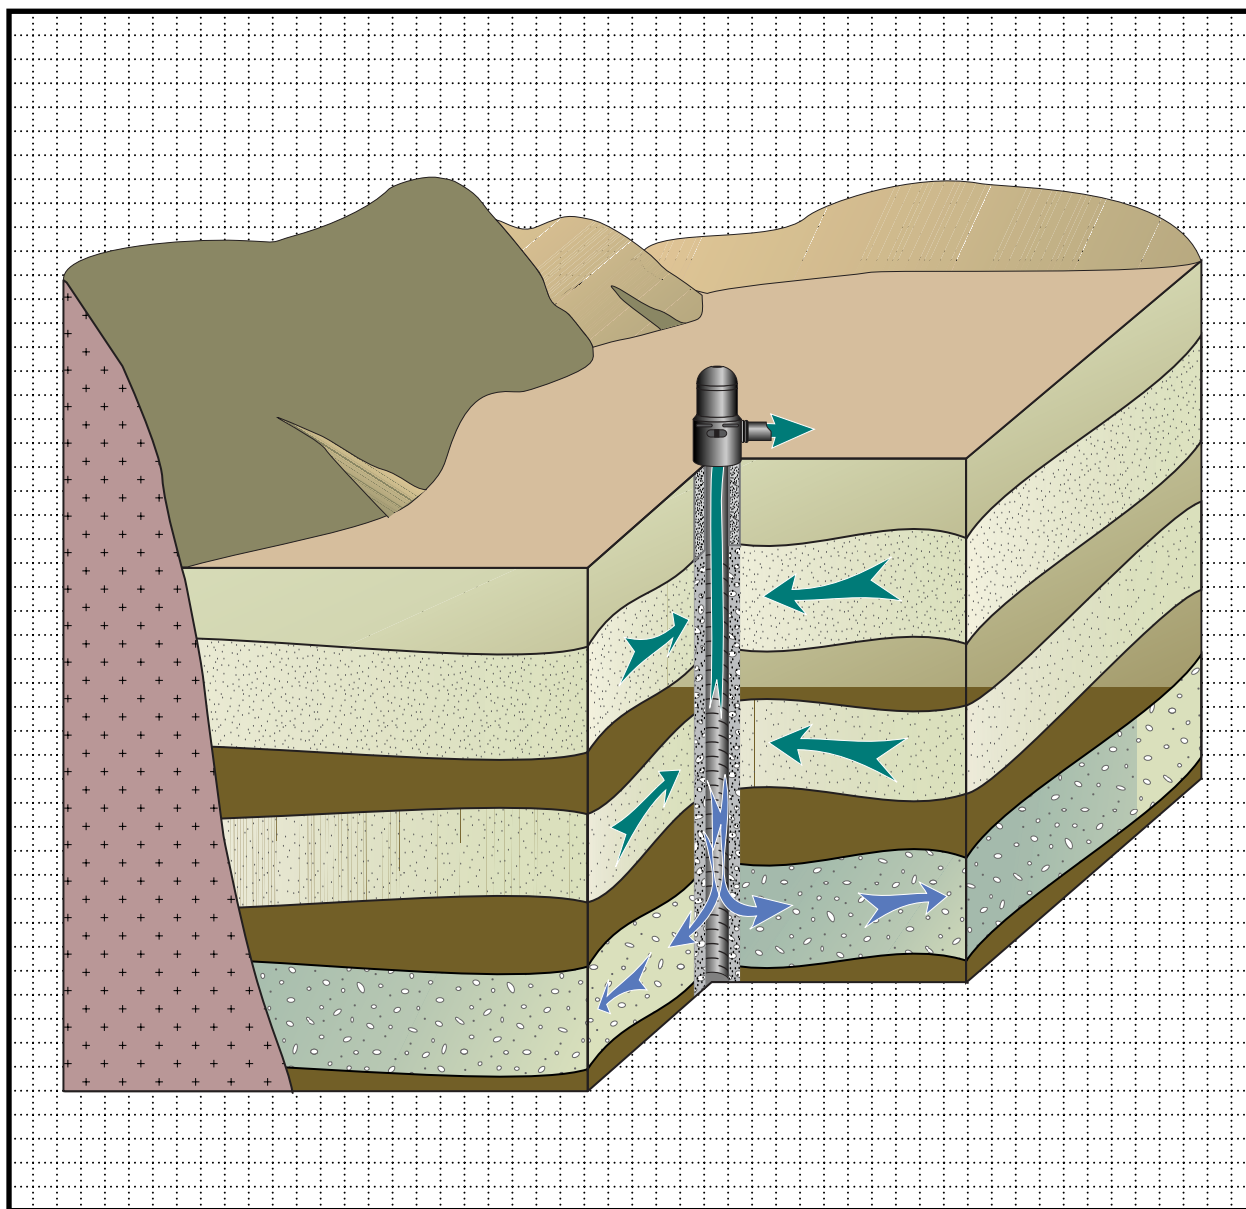



## FIGURES

Figure 1.	Diagram showing flow patterns that can be induced by a multi-aquifer well and simulated by the MNW Package .....	5
Figure 2.	Diagram showing limitations on well discharge rates owing to aquifer characteristics, well construction, and influence of other wells .....	6
Figure 3.	Diagram showing approximate relation between cell size and effective external radius ( $r_0$ ) .....	7
Figure 4.	Schematic of a multi-node well completed in three producing zones and a resistor network approximation of the multi-node well.....	9
Figure 5.	Graph showing total discharge or recharge from a single node of a multi-node well as a function of head in the cell.....	11
Figure 6.	Graph showing total discharge or recharge from a single node of a multi-node well as a function of head in the cell with constrained pumping or injection rates .....	11
Figure 7.	Diagram showing results from example problem for MNW Package.....	16
Figure 8.	Diagram showing simulated discharges and water levels for the multi-node wells .....	17
Figure 9.	Diagram showing net discharge and node-by-node discharge from well A .....	18
Figure 10.	Diagram showing volumetric budget at the end of stress period 5 for the example problem .....	19











































































