

HYDROLOGY OF THE MISSISSIPPI RIVER VALLEY ALLUVIAL AQUIFER, SOUTH-CENTRAL UNITED STATES

AN APPRAISAL OF THE AQUIFER ANALYSIS



AVAILABILITY OF BOOKS AND MAPS OF THE U.S. GEOLOGICAL SURVEY

Instructions on ordering publications of the U.S. Geological Survey, along with prices of the last offerings, are given in the current-year issues of the monthly catalog "New Publications of the U.S. Geological Survey." Prices of available U.S. Geological Survey publications released prior to the current year are listed in the most recent annual "Price and Availability List." Publications that may be listed in various U.S. Geological Survey catalogs (see **back inside cover**) but not listed in the most recent annual "Price and Availability List" may no longer be available.

Reports released through the NTIS may be obtained by writing to the National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161; please include NTIS report number with inquiry.

Order U.S. Geological Survey publications **by mail** or **over the counter** from the offices listed below.

BY MAIL

Books

Professional Papers, Bulletins, Water-Supply Papers, Techniques of Water-Resources Investigations, Circulars, publications of general interest (such as leaflets, pamphlets, booklets), single copies of Earthquakes & Volcanoes, Preliminary Determination of Epicenters, and some miscellaneous reports, including some of the foregoing series that have gone out of print at the Superintendent of Documents, are obtainable by mail from

U.S. Geological Survey, Information Services
Box 25286, Federal Center
Denver, CO 80225

Subscriptions to periodicals (Earthquakes & Volcanoes and Preliminary Determination of Epicenters) can be obtained **ONLY** from the

Superintendent of Documents
Government Printing Office
Washington, DC 20402

(Check or money order must be payable to Superintendent of Documents.)

Maps

For maps, address mail orders to

U.S. Geological Survey, Information Services
Box 25286, Federal Center
Denver, CO 80225

Residents of Alaska may order maps from

U.S. Geological Survey, Earth Science Information Center
101 Twelfth Ave., Box 12
Fairbanks, AK 99701

OVER THE COUNTER

Books and Maps

Books and maps of the U.S. Geological Survey are available over the counter at the following U.S. Geological Survey offices, all of which are authorized agents of the Superintendent of Documents.

- **ANCHORAGE, Alaska**—Rm. 101, 4230 University Dr.
- **LAKEWOOD, Colorado**—Federal Center, Bldg. 810
- **MENLO PARK, California**—Bldg. 3, Rm. 3128, 345 Middlefield Rd.
- **RESTON, Virginia**—USGS National Center, Rm. 1C402, 12201 Sunrise Valley Dr.
- **SALT LAKE CITY, Utah**—Federal Bldg., Rm. 8105, 125 South State St.
- **SPOKANE, Washington**—U.S. Post Office Bldg., Rm. 135, West 904 Riverside Ave.
- **WASHINGTON, D.C.**—Main Interior Bldg., Rm. 2650, 18th and C Sts., NW.

Maps Only

Maps may be purchased over the counter at the following U.S. Geological Survey offices:

- **FAIRBANKS, Alaska**—New Federal Bldg, 101 Twelfth Ave.
- **ROLLA, Missouri**—1400 Independence Rd.
- **STENNIS SPACE CENTER, Mississippi**—Bldg. 3101

Hydrology of the Mississippi River Valley Alluvial Aquifer, South-Central United States

By D.J. ACKERMAN

REGIONAL AQUIFER-SYSTEM ANALYSIS—GULF COASTAL PLAIN

U.S. GEOLOGICAL SURVEY PROFESSIONAL PAPER 1416-D



UNITED STATES GOVERNMENT PRINTING OFFICE, WASHINGTON : 1996

U.S. DEPARTMENT OF THE INTERIOR

BRUCE BABBITT, *Secretary*

U.S. GEOLOGICAL SURVEY

Gordon P. Eaton, *Director*

Any use of trade, product, or firm names in this publication is for
descriptive purposes only and does not imply endorsement by the
U.S. Government

Library of Congress Cataloging-in-Publication Data

Ackerman, D.J.

Hydrology of the Mississippi River Valley alluvial aquifer, South-Central United States / by D.J. Ackerman.

p. cm. — (Regional aquifer-system analysis—Gulf coastal plain) (U.S. Geological Survey professional paper ; 1416-D)

Includes bibliographical references.

1. Aquifers—Mississippi embayment. I. Title. II. Series. III. Series: U.S. Geological Survey professional paper ; 1416-D.

GB1199.3.M7A25

551.49'0977—dc20

91-41415
CIP

For sale by U.S. Geological Survey, Information Services
Box 25286, Federal Center
Denver, CO 80225

FOREWORD

THE REGIONAL AQUIFER-SYSTEM ANALYSIS PROGRAM

The Regional Aquifer-System Analysis (RASA) Program was started in 1978 following a congressional mandate to develop quantitative appraisals of the major ground-water systems of the United States. The RASA Program represents a systematic effort to study a number of the Nation's most important aquifer systems, which in aggregate underlie much of the country and which represent an important component of the Nation's total water supply. In general, the boundaries of these studies are identified by the hydrologic extent of each system and accordingly transcend the political subdivisions to which investigations have often arbitrarily been limited in the past. The broad objective for each study is to assemble geologic, hydrologic, and geochemical information, to analyze and develop an understanding of the system, and to develop predictive capabilities that will contribute to the effective management of the system. The use of computer simulation is an important element of the RASA studies, both to develop an understanding of the natural, undisturbed hydrologic system and the changes brought about in it by human activities, and to provide a means of predicting the regional effects of future pumping or other stresses.

The final interpretive results of the RASA Program are presented in a series of U.S. Geological Survey Professional Papers that describe the geology, hydrology, and geochemistry of each regional aquifer system. Each study within the RASA Program is assigned a single Professional Paper number, and where the volume of interpretive material warrants, separate topical chapters that consider the principal elements of the investigation may be published. The series of RASA interpretive reports begins with Professional Paper 1400 and thereafter will continue in numerical sequence as the interpretive products of subsequent studies become available.



Gordon P. Eaton
Director

CONTENTS

	Page		Page
Foreword	III	Regional flow system—Continued	
Abstract.....	D1	Ground-water development and changes in water levels in the alluvial aquifer—Continued	
Introduction	2	Water-level change due to development	D24
Purpose and scope	4	Areas with long-term regional declines in water levels	26
Geography	4	Areas with limited regional declines in water levels	26
Previous investigations	4	Areas with no regional declines in water levels....	28
Hydrogeologic setting.....	6	Changes in saturated thickness due to development..	28
Framework and hydraulic properties of the alluvial aquifer	9	Changes in regional flow due to development.....	30
Relation of the alluvial aquifer to adjacent units	11	Hydrologic budget.....	31
Mississippi River Valley confining unit.....	11	Distribution of flow components.....	35
Underlying units	12	Direction of flow	36
Lateral units	12	Ground-water development potential	38
Relation of the alluvial aquifer to rivers	12	Projected aquifer response to current and additional development	39
Quality of water in the alluvial aquifer	13	Potential for additional development	39
Regional flow system	16	Summary.....	40
Predevelopment steady-state flow in the alluvial aquifer..	17	References	44
Hydrologic budget	18	Digital model analysis of postdevelopment regional flow	48
Predevelopment potentiometric surface	19	Changes to preliminary model.....	48
Distribution of flow components	21	Calibration.....	49
Ground-water development and changes in water levels in the alluvial aquifer	22		
History of the development of the alluvial aquifer	22		

ILLUSTRATIONS

[Plates are in pocket]

PLATES 1–8. Maps and diagrams showing:

1. Thickness of the Mississippi River Valley alluvial aquifer, hydrogeologic units adjacent to and subcropping below the aquifer, and thickness of the Mississippi River Valley confining unit.
2. Topography in and near the study area and simulated predevelopment potentiometric surface of the Mississippi River Valley alluvial aquifer.
3. Simulated predevelopment inflow and outflow to the top and bottom of the Mississippi River Valley alluvial aquifer.
4. Distribution of pumpage in the Mississippi River Valley alluvial aquifer, 1940, 1960, and 1980.
5. Simulated potentiometric surface and drawdown from predevelopment conditions, Mississippi River Valley alluvial aquifer, 1942, 1962, and 1982.
6. Predevelopment saturated thickness and change in saturated thickness from predevelopment to 1962, and 1982 saturated thickness and change in saturated thickness from predevelopment to 1982, Mississippi River Valley alluvial aquifer.
7. Net change in simulated inflow and outflow to the top of the aquifer and to the bottom of the aquifer, and net loss in storage, Mississippi River Valley alluvial aquifer, predevelopment to 1982.
8. Potential for sustaining current ground-water pumpage and for additional ground-water pumpage, and difference between observed and simulated 1982 hydraulic head, Mississippi River Valley alluvial aquifer.

FIGURE	1. Map showing location of subregional study areas	D3
	2. Diagram showing relation of hydrogeologic units.....	8
	3. Generalized hydrogeologic section A-A'.....	10
	4. Generalized hydrogeologic section B-B'.....	11
	5. Hydrographs showing water levels for selected wells and nearby rivers	14
	6. Graph showing water-level profiles in the Mississippi River Valley alluvial aquifer across northwestern Mississippi.....	15
	7. Diagram showing conceptual and digital model of head-dependent boundaries.....	17
	8. Graph showing hydrologic budget for simulated predevelopment regional flow in the Mississippi River Valley alluvial aquifer	18
	9. Graphs showing acreage of rice planted for selected States and counties in the study area and trends in pumpage for the Mississippi River Valley alluvial aquifer	23
	10. Hydrographs showing water levels in selected wells in the Mississippi River Valley alluvial aquifer.....	27
	11. Graphs showing change in saturated thickness of the Mississippi River Valley alluvial aquifer, predevelopment to 1982, from simulated heads.....	30
12-17.	Graphs showing hydrologic budget for simulated regional flow in the Mississippi River Valley alluvial aquifer:	
	12. The entire Mississippi River Valley alluvial aquifer	31
	13. Grand Prairie area	33
	14. Cache area.....	34
	15. Delta area.....	35
	16. Boeuf area	36
	17. St. Francis area.....	37
	18. Graph showing calibration results for a model of transient flow in the Mississippi River Valley alluvial aquifer	51
	19. Graph showing percentiles of difference between observed and simulated hydraulic head for the Mississippi River Valley alluvial aquifer.....	52
	20. Hydrographs showing observed and simulated water levels for selected wells in the Mississippi River Valley alluvial aquifer	53
	21. Graphs showing sensitivity of regional models to changes in calibration values	55
	22. Graph showing sensitivity of cumulative flux from rivers to changes in calibration values	56

TABLES

TABLE	1. Hydrogeologic nomenclature used in the Gulf Coast Regional Aquifer-System Analysis	D5
	2. Nature of boundary treatments used in models of the Mississippi River Valley alluvial aquifer	7
	3. Hydrologic budget for predevelopment regional flow in the Mississippi River Valley alluvial aquifer.....	19
	4. Hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer, by area	20
	5. Acreage of rice in the Grand Prairie region of Arkansas.....	22
	6. Pumpage periods used for the analysis of transient regional flow in the Mississippi River Valley alluvial aquifer.....	25
	7. Hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer in the study area	32
	8. Numbers of hydraulic-head observations used for calibration of transient flow in the Mississippi River Valley alluvial aquifer.....	49
	9. Calibration values for individual areas of the Mississippi River Valley alluvial aquifer	54
	10. Sensitivity values for individual areas of the Mississippi River Valley alluvial aquifer	54

METRIC CONVERSION FACTORS

For readers who prefer to use metric units, conversion factors for terms used in this report are listed below:

<i>Multiply inch- pound units-</i>	<i>By</i>	<i>To obtain metric units</i>
inch (in.)	25.40	millimeter
foot (ft)	0.3048	meter
mile (mi)	1.609	kilometer
square mile (mi ²)	2.590	square kilometer
inch per year (in/yr)	25.40	millimeter per year
foot per day (ft/d)	0.3048	meter per day
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second
gallon per minute (gal/min)	0.06309	liter per second
million gallons per day (Mgal/d)	0.04381	cubic meter per second
acre-foot per year (acre-ft/yr)	0.001233	cubic hectometer per year

Degrees Fahrenheit (°F) are converted to degrees Celsius (°C) by using the following formula:

$$^{\circ}\text{C} = 5 (^{\circ}\text{F} - 32) / 9$$

Sea level: In this report "sea level" refers to the National Geodetic Vertical Datum of 1929 (NGVD of 1929)—a geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, formerly called Sea Level Datum of 1929.

HYDROLOGY OF THE MISSISSIPPI RIVER VALLEY ALLUVIAL AQUIFER, SOUTH-CENTRAL UNITED STATES

By D.J. Ackerman

ABSTRACT

A quantitative analysis of the regional ground-water flow in the Mississippi River Valley alluvial aquifer was made using observations of changes in water levels and simulation (computer modeling) of aquifer response between 1906 and 1987. The analysis includes an evaluation of the effects of additional ground-water development on the flow system. The boundary of the computer model and of the study area correspond to the physical limits of the Mississippi River Valley alluvial aquifer except that the southern limit is designated where the alluvial aquifer crosses the subcrop of the top of the Vicksburg-Jackson confining unit.

The Mississippi River Valley alluvial aquifer underlies a vast low, flat plain that extends from the apex of the Mississippi embayment southward to the Gulf of Mexico and is the upper aquifer of the Mississippi embayment aquifer system. The aquifer consists of 60 to 140 feet of Quaternary sand and gravel that grades from gravel at the bottom to fine sand near the top, and underlies 32,000 square miles in parts of Arkansas, Illinois, Kentucky, Louisiana, Mississippi, Missouri, and Tennessee. The alluvial aquifer is in hydraulic connection with many rivers and drains. Hydraulic conductivity of the aquifer is about 200 feet per day, and storage coefficients vary from 0.0001 to 0.30 for confined and unconfined conditions, respectively. Throughout most of the area the alluvial aquifer is overlain by the Mississippi River Valley confining unit—10 to 50 feet of silt, clay, and fine-grained sand. It is underlain by the less permeable aquifers and confining units of the Mississippi embayment aquifer system, the McNairy-Nacatoch aquifer, and undifferentiated Paleozoic rocks.

Predevelopment flow (prior to large pumpage) in the Mississippi River Valley alluvial aquifer consisted of inflow through the overlying Mississippi River Valley confining unit, inflow from underlying aquifers, and outflow to rivers. Most inflow, about 74 percent, was through the confining unit at an average net rate of 0.8 inch per year. Individual areas differed in the relative contribution from underlying units. The simulated predevelopment potentiometric surface shows movement down the Mississippi River Valley and following the slope of land surface toward major rivers near the axes of the St. Francis, White, Arkansas, Yazoo, and Boeuf basins.

Development of the Mississippi River Valley alluvial aquifer started in the early 1900's in central Arkansas, and water use has been primarily for agriculture, particularly the irrigation of rice. Large withdrawals in other areas generally began about 1950. The largest increases in withdrawals occurred in all areas between

1973 and 1982. Maximum withdrawals before 1988 are estimated at 7,800 cubic feet per second (5,000 million gallons per day).

Pumpage from the alluvial aquifer has caused a decrease in outflow to rivers, an increase of inflow from rivers, and an increase of inflow through the overlying Mississippi River Valley confining unit. In some areas the decrease in outflow to rivers and increase in inflow have not been sufficient to meet the demands of pumpage. The long-term excess of pumpage over net inflow has resulted in regional declines in water levels, reduction of water in storage, and decreases in well yields for some parts of the aquifer. The response of water levels in the alluvial aquifer to pumpage has followed the temporal and areal trend of development. Water levels in the Mississippi River Valley alluvial aquifer have shown long-term drawdown of as much as 90 feet.

Only parts of the aquifer north of the Arkansas River and west of Crowley's Ridge show appreciable decreases in saturated thickness. Decreases in saturated thickness through 1982 generally were 20 to 60 feet. Only the area between the Arkansas and White Rivers, where saturated thickness has decreased to less than 50 feet, may be considered to be in danger of being depleted for rice irrigation. Parts of the aquifer north of the Arkansas River and west of Crowley's Ridge, where saturated thickness has decreased to less than 75 feet throughout large areas, may be considered as not currently in danger but trending toward depletion. One percent or less of all other areas underlain by the aquifer has a decrease in saturated thickness to less than 75 feet.

In some areas the direction of flow has changed compared to the predevelopment flow system. Two areas north of the Arkansas River and west of Crowley's Ridge have large depressions in the potentiometric surface and pronounced changes in the direction of flow. Pumpage has not resulted in large-scale regional changes in direction of flow in other areas underlain by the aquifer. Most of the aquifer has only a general lowering of 5 to 15 feet in the potentiometric surface. The contours of the potentiometric head have shifted upgradient (usually north), indicating an even lowering of the potentiometric surface, resulting in only minor or local changes in direction of flow.

Regional flow in the Mississippi River Valley alluvial aquifer has steadily changed since large-scale pumpage began in the early 1900's. By the mid-1970's rivers became a source of more than 30 percent of total flow rather than the sink of net outflow as they were during predevelopment. Inflow through the Mississippi River

Valley confining unit increased from a rate of 0.8 inch per year for predevelopment to 1.3 inches per year by 1982. Net inflow from underlying aquifers has varied slightly in amount but has decreased as a proportion of total flow. The alluvial aquifer has had continuous net losses of storage representing about 10 to 25 percent of pumpage. Current rates of loss of water from storage range from 1 to 8 inches per year in the Grand Prairie area, from 5 to 14 inches per year in parts of the Cache area, and are generally less than 1 inch per year elsewhere.

To assess response of the regional flow system to continued development and to evaluate the potential of the aquifer to support additional development, two flow-model simulations were made to the year 2022. The effect of continued or increased development and the ability to support development were evaluated by the change in head in the aquifer and decreases in saturated thickness. Simulation results after 40 years of pumping at 1985 rates indicated a moderate effect (a decrease to less than 75 feet of saturated thickness) in the area north of the Arkansas River and west of Crowleys Ridge. Some parts of this area were unable to sustain current development (a decrease to less than 25 feet of saturated thickness). Simulation of additional pumpage over all the aquifer at the rate of 1.2 million gallons per day per 25-square-mile area above 1985 rates for 35 years resulted in a severe effect (less than 50 feet of remaining saturated thickness) for most of the area between the Arkansas and White Rivers and a large part of the area immediately west of Crowleys Ridge. Drawdowns from 1982 conditions were greater than 10 feet in small scattered locations throughout the rest of the area. None of these small areas coincided with decreases in saturated thickness to less than 70 feet for an area greater than 25 square miles.

The areas with greatest potential for development of additional pumpage are in the central part of the delta (northwestern Mississippi), the northern part of the area east of Crowleys Ridge (southeast Missouri), and small parts of the area south of the Arkansas River. These areas coincide with thick parts of the aquifer except where drawdown in excess of 10 feet is indicated. In general, areas with more than 100 feet of saturated thickness have the greatest potential for further development of ground water. However, other areas where additional inflow can be induced probably will be able to support additional pumpage with less saturated thickness. Sustained yields from the Mississippi River Valley alluvial aquifer are historically greatest where inflow is induced from larger rivers and, to a limited extent, through the Mississippi River Valley confining unit. Therefore, locations where rivers are near and in good hydraulic connection with the alluvial aquifer or locations where the Mississippi River Valley confining unit is thin, sandy, or absent would have the greatest potential for further development. Conversely, locations distant from areas where inflow could be induced have less potential for development even if saturated thickness is great. Predevelopment saturated thickness was more than 100 feet in the area west of Crowleys Ridge and less than 75 feet in the center of the area between the Arkansas and White Rivers. The additional saturated thickness in the area west of Crowleys Ridge is apparently only delaying an inevitable decrease in yield and reduction in use.

INTRODUCTION

The Gulf Coast regional aquifer-system analysis began in 1980 and includes aquifer systems in

Cenozoic deposits underlying the Coastal Plain in the south-central United States. In the northern part of the study area an aquifer system in upper Cretaceous sediments also is included. This study is one of about 30 similar projects in the Regional Aquifer-System Analysis (RASA) program conducted by the U.S. Geological Survey in support of Federal and State needs for information to support better ground-water management (Sun, 1986, p. 4). The total Gulf Coast RASA study area is about 290,000 mi² and consists of all or parts of Alabama, Arkansas, Florida, Illinois, Kentucky, Louisiana, Mississippi, Missouri, Tennessee, and Texas (fig. 1). About 60,000 mi² of offshore area in the Gulf of Mexico is included in the total. The major objectives of the Gulf Coast RASA are to define the geohydrologic framework in which the aquifers exist, describe the chemistry of the ground water, and analyze the regional ground-water flow patterns in the flow system (Grubb, 1984, p. 6).

Three regional aquifer systems are delineated in the Gulf Coast RASA study area: the Mississippi embayment aquifer system, the Texas coastal uplands aquifer system, and the coastal lowlands aquifer system (fig. 1). The three systems were delineated based on differences in geologic framework, regional ground-water flow patterns, and distribution of fine-grained sediments.

The definition of the conceptual geohydrologic framework (Grubb, 1986) allowed the division of most detailed work on the ground-water flow system into five subregional studies (fig. 1). These studies included two regional aquifers, the Mississippi River Valley alluvial aquifer (this study) and the McNairy-Nacatoch aquifer, and the three regional aquifer systems noted above. Preliminary results of the regional study and the subregional studies have been published in many reports (Weeks and Sun, 1987, p. 49; Williamson and others, 1990). Final reports, of both regional and subregional scope, that describe the geohydrologic framework, ground-water flow, or geochemistry, are released in Professional Paper 1416 as companion chapters of this report as the interpretive results of the studies become available.

This study analyzes regional flow in the Mississippi River Valley alluvial aquifer, which is the uppermost aquifer of the Mississippi embayment aquifer system in the central part of the Gulf Coast RASA study area (fig. 1). The study area of the aquifer is about 32,000 mi² in parts of Arkansas, Illinois, Kentucky, Louisiana, Mississippi, Missouri, and Tennessee. The alluvial aquifer was selected for a detailed study because it provides large quantities of water for agriculture, it has been partly

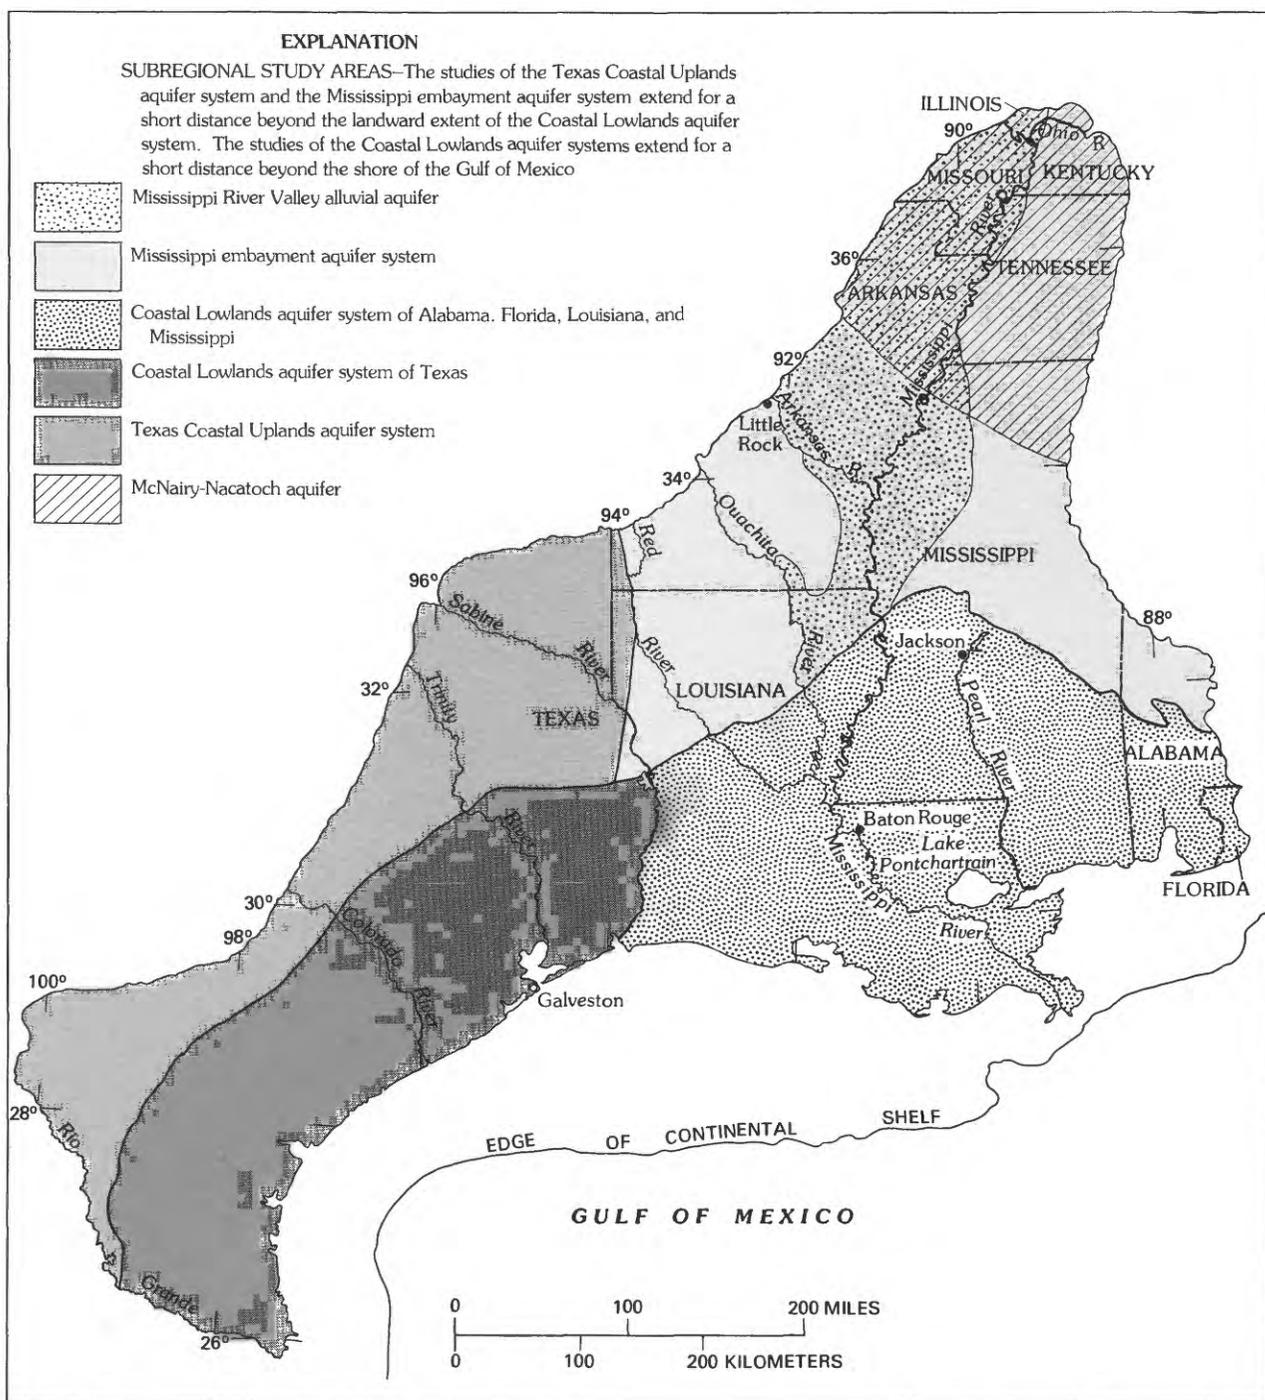


FIGURE 1.—Location of subregional study areas, Gulf Coast Regional Aquifer-System Analysis. From Grubb (1986, fig. 94).

dewatered locally, and it is hydraulically connected with the many streams that cross the Mississippi Alluvial Plain.

The alluvial aquifer is laterally equivalent to the upper part of the coastal lowlands aquifer system in east-central Louisiana (Hosman and Weiss, in press).

Along the northwestern margin of the study area the alluvial aquifer directly overlies the McNairy-Nacatoch aquifer. In this narrow band of a few miles width the McNairy-Nacatoch aquifer extends beyond Tertiary age rocks that compose the bulk of the Mississippi embayment aquifer system.

PURPOSE AND SCOPE

The objectives of this study were to analyze the regional ground-water flow patterns in the Mississippi River Valley alluvial aquifer and to provide a framework of background information that can be used for regional assessment of ground-water resources in support of more detailed studies. This report presents a quantitative analysis of regional ground-water flow in the Mississippi River Valley alluvial aquifer. Specifically, the predevelopment flow system, historical changes in the flow system, and the potential for future development are discussed in terms of flow components; stress on the aquifer due to development of large-scale pumpage for agricultural water use; direction, distribution, and quantity of flow; and changes in saturated thickness. Flow simulation (computer modeling) was used to analyze ground-water flow patterns and to provide a method to evaluate the effects of development on ground-water resources. The geohydrologic framework of the Mississippi River Valley alluvial aquifer, the conceptual model, and the digital model of regional flow in the aquifer are detailed in a previous report of this study (Ackerman, 1989a). The study-area boundary (pl. 1) is the extent of the Mississippi River Valley alluvial aquifer north of the subcrop of Miocene and younger rocks and the southern limit of the subcrop of the Vicksburg-Jackson confining unit. The Vicksburg-Jackson confining unit (table 1) separates the Mississippi embayment aquifer system (to the north) from the coastal lowlands aquifer system (to the south). The data compiled and analyzed for the study were collected from about 1900 through 1985.

GEOGRAPHY

The Mississippi River Valley alluvial aquifer occupies a vast low, flat alluvial plain with one significant interruption, Crowleys Ridge (pl. 1). The land surface slopes generally southward from an altitude of about 330 ft above sea level in the northern end of the study area to about 50 ft above sea level near Vicksburg, Mississippi, at the southern end. A few river basins (notably the St. Francis, Yazoo, and Tensas basins) generally are lower in altitude than the Mississippi River.

Crowleys Ridge trends north, bisecting the northern half of the alluvial plain. The southern half of the ridge averages about 3 mi wide, and the land surface is 100 to 150 ft above the plain. The northern half of the ridge averages about 10 mi wide, and the maximum land-surface altitude is about 250 ft above the plain.

The major rivers draining the alluvial plain are the Mississippi, St. Francis, White, Arkansas, Yazoo, Ouachita, and Boeuf. Modern engineering has changed the character of the rivers and of the drainage basins in the alluvial plain. The rivers have been extensively channelized, and their flood plains have intricate drainage, transportation, and flood-control systems.

The climate of the study area is mild and humid. Mean annual air temperature ranges from 14 °C in the north to about 19 °C near Vicksburg. Annual precipitation ranges from about 47 in. in the north to 52 in. near Vicksburg. Rainfall is not evenly distributed throughout the year, and the least rainfall occurs during late summer and early fall. Agriculture is a vital part of the economy and uses most of the ground water withdrawn in the study area. Crops grown in the region that require continuous or intermittent irrigation include rice, soybeans, cotton, and some others to a smaller degree. Aquaculture also requires large withdrawals of ground water.

PREVIOUS INVESTIGATIONS

The first regional studies of ground water in the study area (Crider and Johnson, 1906; Glenn, 1906; Veatch, 1906; and Shepard, 1907) gave the first evaluations of the ground-water resources of the Mississippi River Valley alluvial aquifer. However, most early studies neglected or dismissed the alluvial aquifer as an important source of water for water quality or sanitation reasons. Purdue (1904, p. 375) said that the water was so charged with iron and other minerals to be of little value. Crider and Johnson (1906, p. 5) described the waters as unwholesome. Glenn (1906, p. 105) said that wells in the alluvium give poor water. Veatch (1906, p. 87) described the water as mineral in character and like Glenn (1906) and others of their time, concentrated on deeper artesian aquifers, which were believed to be less susceptible to pollution. Veatch (1906, p. 89–91) compiled several examples of dramatic reductions in sickness when shallow wells were abandoned in favor of deeper wells. Parts of the Mississippi River Valley alluvial aquifer were described in a more detailed inventory of ground-water resources of northeastern Arkansas by Stephenson and Crider (1916) and of northwestern Mississippi by Stephenson and others (1928).

The first report covering the whole study area, which made a comprehensive contribution to the understanding of the hydrogeologic framework of the alluvial aquifer, was that of Fisk (1944). Krinitzsky

and Wire (1964), in the first report with a comprehensive treatment of ground-water conditions throughout the study area as the major purpose, expanded on the hydrogeologic work of Fisk. Boswell and others (1968) named the Mississippi River Valley alluvial aquifer and presented an overview of the alluvial aquifer in the context of ground-water availability from all aquifers in the Mississippi embayment. These two reports (Krinitzsky and Wire, 1964; Boswell and others, 1968) contain references to many of the reports describing local ground-water conditions in the study area.

More recent investigations of the Mississippi River Valley alluvial aquifer have described the results of simulating ground-water flow to predict the response of the head in the aquifer to development. Reed and Broom (1979) modeled the part of the alluvial aquifer in Arkansas south of the Arkansas River for the period 1953–70. Broom and Lyford (1981) modeled the alluvial aquifer in Arkansas northeast of the White River and generally west of Crowleys Ridge for the period 1911–78 with projections through the year 2000. Sumner and Wasson (1984) modeled the alluvial aquifer in Mississippi for the period April 1981 through September 1983 with projections through 2003. Peralta and others (1985) modeled part of the alluvial aquifer in Arkansas approximately between the White River and Bayou Meto for the period 1972–82 with projections to 1993. Due to limitations in scope, these models contained boundary assumptions that are not necessary in the large model used in this study (table 2). Where natural boundaries are too far from the modeled area to be included, the common practice is to place assumed boundaries far enough from the area of interest so that errors in assumed boundary conditions will not be significant (Wang and Anderson, 1982, p. 108). All previous models considered the bottom of the Mississippi River Valley alluvial aquifer as a no-flow boundary.

The alluvial aquifer extends beyond the modeled area in all of the studies noted above. The aquifer extends beyond the lateral boundary of the model along 4 percent of the boundary length in this study and along 72 to 100 percent of the boundary length of previous studies. In some models 57 to 83 percent of the boundary blocks, representing a continuation of the aquifer, contained rivers. In only two of the models was the boundary of the active modeled area coincident with the physical boundary of the aquifer for more than 25 percent of the model perimeter.

The model boundaries (table 2) also differ in the degree to which they constrain the simulated flow system. The most specific and most constraining boundaries are those specifying constant head or

constant flux. These include the boundaries listed on table 2 as constant head, variable specified head, constant flux, and no-flow. The constant-head and variable-specified-head boundaries sometimes cause modeled aquifer systems to become insensitive to changes in hydraulic conductivity (Franke and Reilly, 1987, p. 8). The use of constant flux to simulate inflow (recharge) to the top of the aquifer in transient models of a ground-water system undergoing extensive development is also too constraining. Bredehoeft and Young (1970) indicated that major ground-water development may significantly change recharge-discharge relations with time. Freeze (1971) gave an example of how a ground-water system may show increases in the rate of recharge with time as a response to increased withdrawals. A head-dependent flux boundary, a combination or mixed-condition boundary, can be used to describe flux to an active block described as a function of the head gradient between the active area and the area outside the modeled area and of the conductance of the material outside the active area. The description of head-dependent boundaries used in this study is in Ackerman (1989a, fig. 20).

The use of the less constraining head-dependent flux boundaries and the location of the model boundary at the aquifer boundary should make the model analysis described in this report useful for evaluating boundaries used in previous models and for selecting boundary conditions in future studies. The quantitative description of the development of the ground-water flow system contained in this report should increase the understanding of the regional flow and aid more detailed local studies. An analysis of the components of the flow budget and changes in head as a result of simulated development may show some more constrained choices of boundary conditions to be reasonable compromises for certain models.

HYDROGEOLOGIC SETTING

The Mississippi River Valley alluvial aquifer (Boswell and others, 1968) (figs. 1, 2), is a part of the Mississippi embayment aquifer system (Grubb, 1984). The regional hydrogeologic framework and nomenclature of the Mississippi embayment aquifer system as used in this study is described in Professional Paper 1416-B (Hosman and Weiss, 1991).

The study area of the alluvial aquifer was divided into five areas (pl. 1). The primary basis for the division was the existence of lateral boundaries that controlled regional flow patterns. Those boundaries are Crowleys Ridge, the Mississippi River, the Arkansas

TABLE 2.—*Nature of boundary treatments used in models of the Mississippi River Valley alluvial aquifer*

[CH, constant head; HDF, head-dependent flux; CF, constant flux; VF, variable flux; VSH, variable specified head (time-variable constant head); ---, not applicable]

	Reed and Broom (1979)	Broom and Lyford (1982)	Sumner and Wasson (1984)	Peralta and others (1985)	Ackerman (1989a)
Approximate model area, in square miles	3,200	9,000 (5,300) ¹	7,000	1,900	38,400
Block size, in square miles	1.778	9.000	6.180	9.000	25.000
BOUNDARY-CONDITION TREATMENTS					
Bottom	No-flow	No-flow	No-flow	No-flow	HDF
Top (recharge).....	VF ²	CF	CF	No-flow	HDF
Rivers.....	VSH, HDF	CH	HDF, VSH	None	HDF
Adjacent aquifer beyond active model area.....	HDF	No-flow	VSH	CH	HDF
Adjacent nonaquifer material.....	No-flow	No-flow	None	None	HDF
LATERAL BOUNDARY, IN PERCENT					
Adjacent aquifer:					
No-flow	---	14	---	---	---
CH.....	---	---	---	100	---
VSH	---	---	43	---	---
HDF	14	---	---	---	4
Adjacent aquifer under river:					
CH.....	---	83	---	---	---
VSH	45	---	57	---	---
HDF	13	---	---	---	---
Adjacent nonaquifer material:					
No-flow	28	4	---	---	---
HDF	---	---	---	---	96

¹Actual area simulated with pumpage less than total model area.²A function of precipitation and pan evaporation.

River, and the White and Little Red Rivers (pl. 1). Large simulated flux through the alluvial aquifer between underlying units and rivers in the subcrop of Cretaceous and older rocks tended to obscure interpretations in the remainder of the study area (Ackerman, 1989a, p. 56). Therefore, the edge of the subcrop of the McNairy-Nacatoch aquifer (updip limit of the subcrop of the Midway confining unit) also was used as an area boundary. The names of each area were derived from local physiographic names or from the name of a river near the axis of the area. The names and extent of the areas are:

Grand Prairie. The area north and east of the Arkansas River and south and west of the White and Little Red Rivers. This area is named for an

informal physiographic name in common use. The extent of this area is not consistent between authors (Engler and others, 1945, fig. 1; Krinitzsky and Wire, 1964, fig. 2), but their areas lie within this area.

Cache. The area west of Crowleys Ridge, north and east of the White River, and south and east of the subcrop of the McNairy-Nacatoch aquifer.

Delta. The area east of the Mississippi River in Mississippi. This area corresponds to the drainage of the Yazoo River and is locally called "the Delta" (Sumner and Wasson, 1984, p. 2).

Boeuf. The area south of the Arkansas River and west of the Mississippi River.

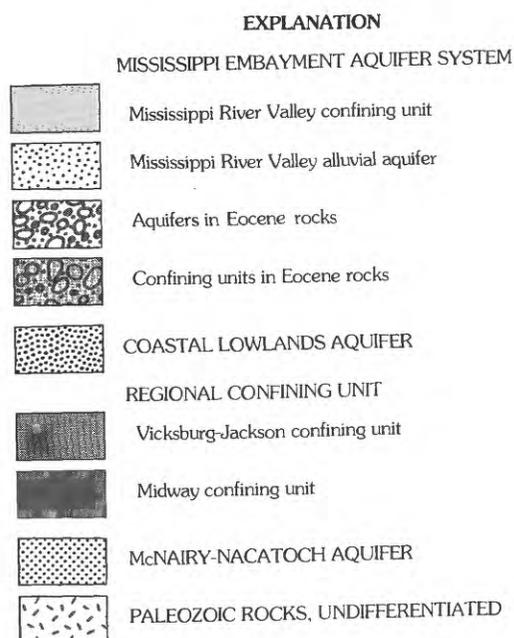
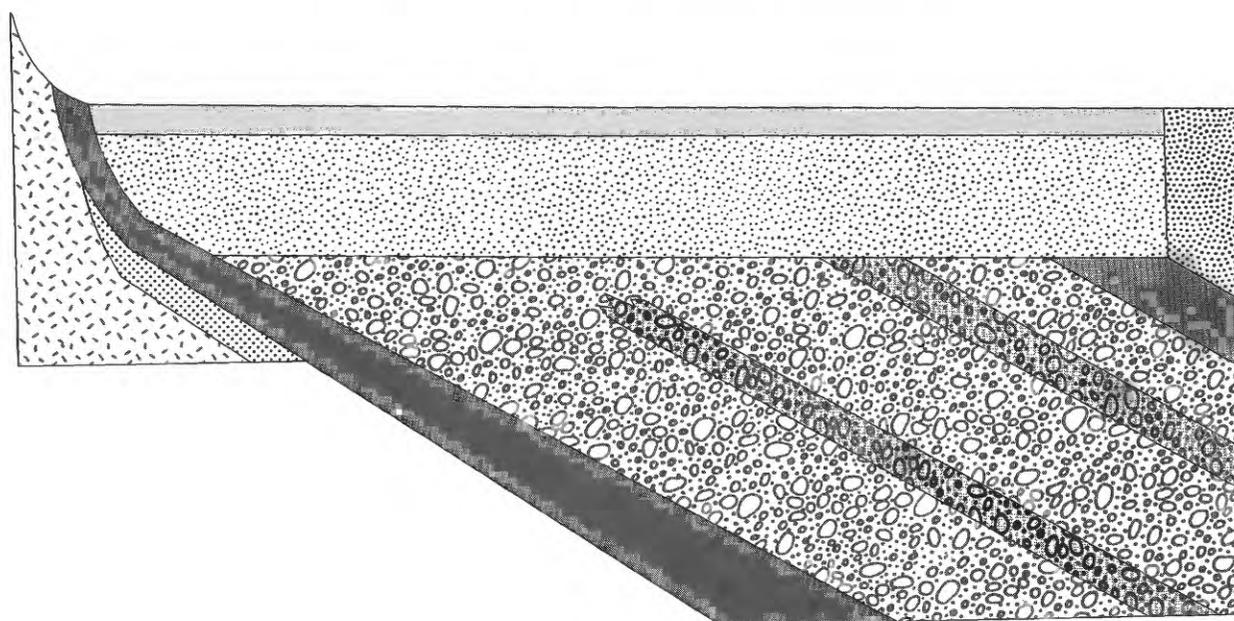


FIGURE 2.—Relation of hydrogeologic units in the Mississippi River Valley alluvial aquifer. Modified from Grubb (1986, fig. 93).

St. Francis. The area west of the Mississippi River, east of Crowleys Ridge, and south and east of the subcrop of the McNairy-Nacatoch aquifer.

Most of the following description of the hydrogeologic setting of the aquifer is derived from a preliminary report of this study (Ackerman, 1989a). In turn,

much of the preliminary report is a synthesis of the regional and local studies of the Mississippi River Valley alluvial aquifer since about 1900. Reference to many of the local studies also can be found in Ackerman (1989a). In this report the Mississippi River Valley alluvial aquifer is often referred to as the alluvial aquifer or simply the aquifer.

FRAMEWORK AND HYDRAULIC PROPERTIES OF THE ALLUVIAL AQUIFER

The hydrogeology of the alluvial aquifer is relatively simple when considered at a regional scale. The Quaternary alluvium overlies and is laterally adjacent to aquifers and confining beds in older rock units. The Quaternary alluvium has two distinct but gradational lithologies; clay and silt overlie coarse sand and gravel. These different lithologies form the hydrogeologic framework of the alluvial aquifer.

The base of the alluvial aquifer is a sub-Quaternary eroded bedrock surface (Fisk, 1944). During Quaternary time the ancestral Mississippi and Ohio Rivers and their tributaries filled the valleys with sediment to the present level. In some places modern rivers have rearranged the upper part of the alluvial fill materials. The texture of the fill material gradually changes from the predominantly coarse-grained aquifer materials at the bottom to the predominantly fine-grained confining-unit materials at the top.

Three components of contrasting hydraulic conductivity make up the Mississippi River Valley alluvial aquifer system (fig. 2). These are (1) the alluvial aquifer, (2) an overlying unit, the Mississippi River Valley confining unit, and (3) the underlying or adjacent older strata. The silt and clay of the overlying unit confine the alluvial aquifer in most places. Some of the underlying or adjacent strata are considered as confining units that provide varying degrees of hydraulic connection with underlying deeper aquifers over much of the area. Even where aquifers directly underlie the alluvial aquifer, the contrast between the higher hydraulic conductivity of the coarse lower part of the alluvial aquifer and the lower hydraulic conductivity of underlying aquifers is sufficient to differentiate the aquifers.

The Mississippi River Valley alluvial aquifer consists of an extensive deposit of unconsolidated sand and gravel in alluvium and terrace deposits. The alluvium has long been recognized as consisting of two distinct lithologies (Fisk, 1944, p. 17; Boswell and others, 1968, p. 4). The formal differentiation of the aquifer from its overlying confining unit was first proposed (Ackerman, 1989a, p. 14) as a part of this study. Descriptions of the alluvial aquifer in this report may be somewhat more specific or limited in terms of thickness than in some previous reports that considered the total thickness of alluvium.

The areal distribution of the underlying and adjacent hydrogeologic units is shown on plate 1. Section A-A' (fig. 3) crosses Crowley's Ridge and shows the relation of overlying and underlying units in the

north. Section B-B' (fig. 4) crosses the midsection of the study area and the subcrop of most of the hydrogeologic units.

The Mississippi River Valley alluvial aquifer consists predominately of sands and gravels that are coarser northward and with depth. Maximum grain sizes grade from about 8 in. in the north to 3 in. in the south (Fisk, 1947, p. 21). The lower part of the aquifer generally is a coarse sand matrix with varying amounts of coarse gravel. In places, the base of the aquifer is predominately gravel. The gravelly sand is overlain by a medium to fine-grained non-gravelly sand commonly referred to as the "clean" sand. Lenses of clay, silt, or sandy silt occur at many places in the aquifer.

Although the alluvial aquifer extends from the apex of the Mississippi embayment near the confluence of the Mississippi and Ohio Rivers southward under the Mississippi Alluvial Plain to the Gulf of Mexico, this study concentrates on the part of the aquifer north of the southern limit of the subcrop of the Vicksburg-Jackson confining unit (pl. 1), a distance of nearly 400 mi. The aquifer has an average width of about 80 mi in the study area, a maximum width of 125 mi at Helena, Arkansas, and a minimum width of 25 mi south of the study area near Natchez, Mississippi. The lateral limits of the aquifer generally are the outcrops of Eocene and older rocks. The alluvial aquifer does not exist on Crowley's Ridge, an erosional remnant of Tertiary strata. In some places the lateral contact of the alluvial aquifer with older strata is masked by a thin covering of older terrace deposits. The lateral boundaries shown in the hydrogeologic section (fig. 3) are modified from a map in Hosman and Weiss (1991) and agree with the many local studies that in turn are based on many logs of test holes and locations of high-capacity wells. However, the boundary is not certain in the western Ashley County, Arkansas, area due to a lack of detailed information.

The thickness of aquifer materials generally ranges from 60 to 140 ft, averages 100 ft, and decreases to the south (pl. 1). Local extremes of thickness of the alluvial aquifer occur where the Mississippi River Valley confining unit is absent or very thick. Except in areas where cones of depression have developed, the potentiometric surface of the alluvial aquifer is above or near the top of the aquifer. Therefore, saturated thickness is usually equal to the thickness of aquifer materials.

Hydraulic conductivity values for 51 aquifer tests in the alluvial aquifer generally ranged from 120 to 330 ft/d and had a geometric mean of 205 ft/d (A.K.

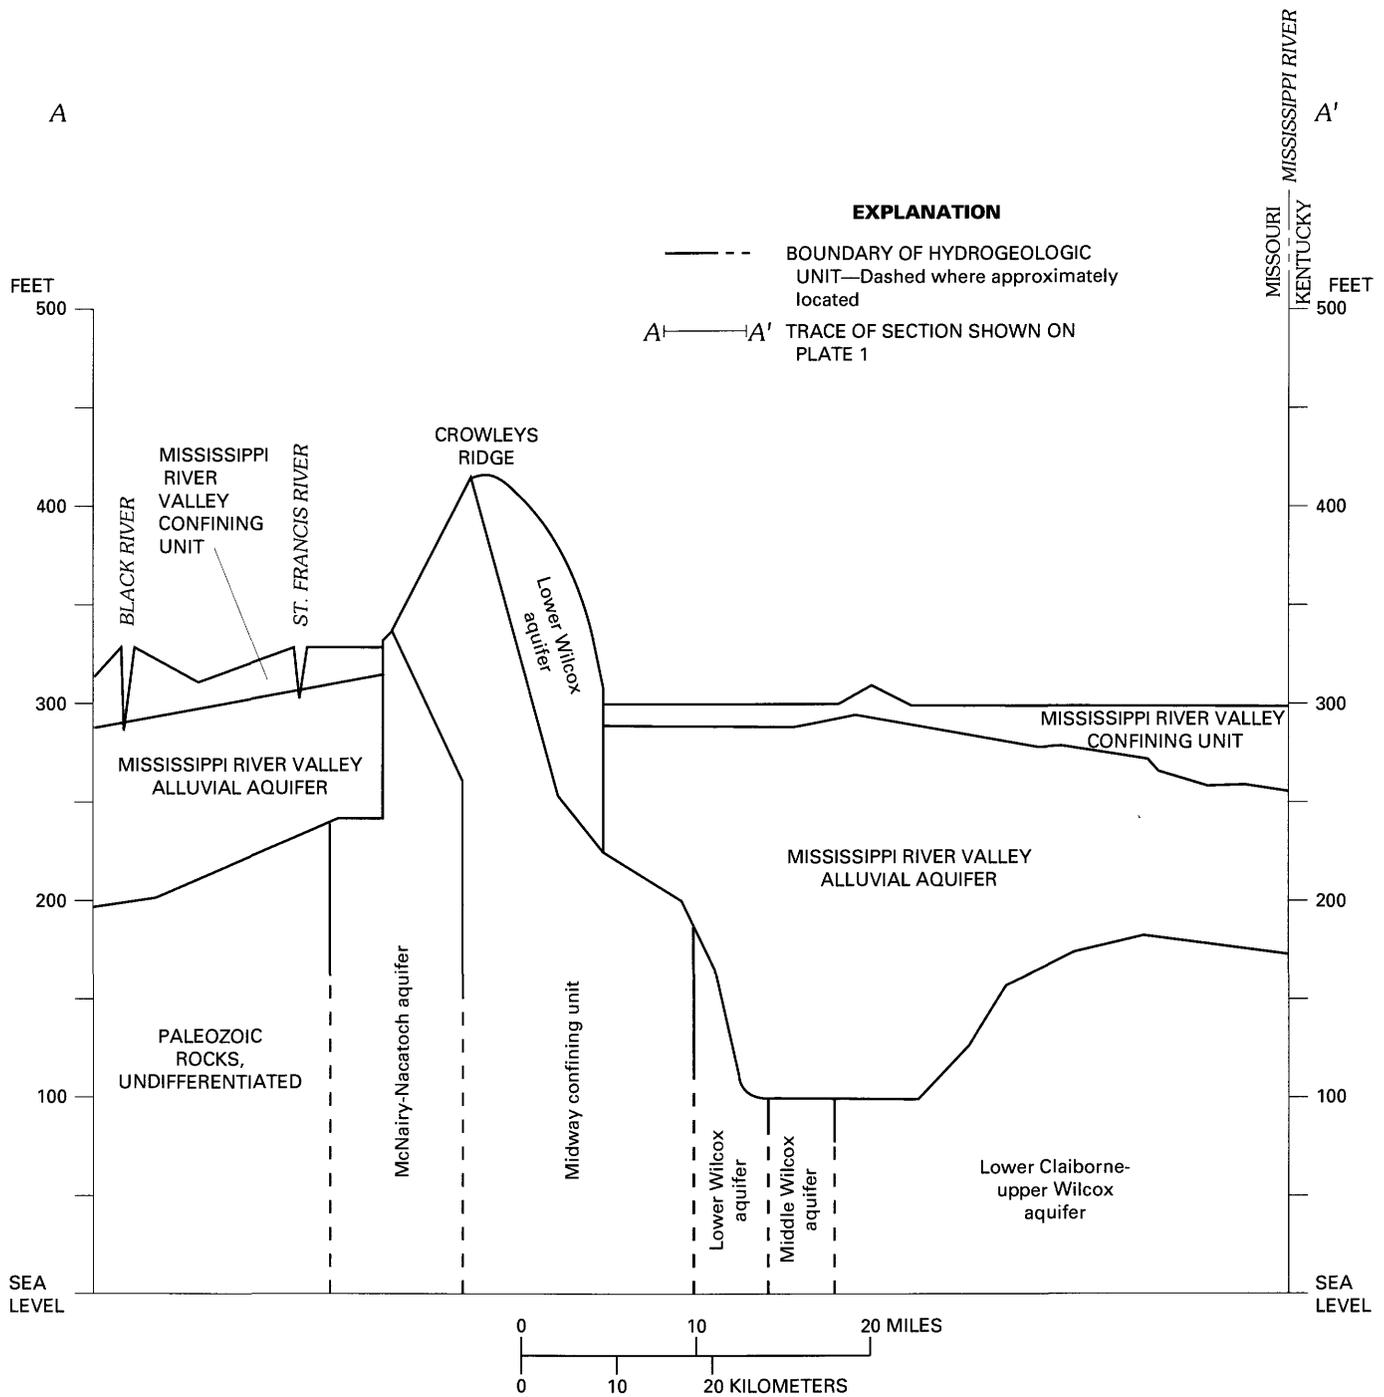


FIGURE 3.—Generalized hydrogeologic section A-A', Mississippi River Valley alluvial aquifer area. From Ackerman (1989a, fig. 16). Vertical scale is greatly exaggerated.

Williamson, U.S. Geological Survey, written commun., 1985). These values agree with 38 hydraulic conductivity values given by Krinitzsky and Wire (1964, table 2). Their reported values generally were between 120 and 390 ft/d and had a geometric mean of 210 ft/d. Newcome (1971) reported an average

hydraulic conductivity of 200 ft/d and a range of 90 to 400 ft/d for the alluvial aquifer in Mississippi.

Storage coefficients of the alluvial aquifer generally are between values of specific yield, indicating unconfined conditions, and values of about 0.0001, representing confined conditions. Of 75 storage-coefficient

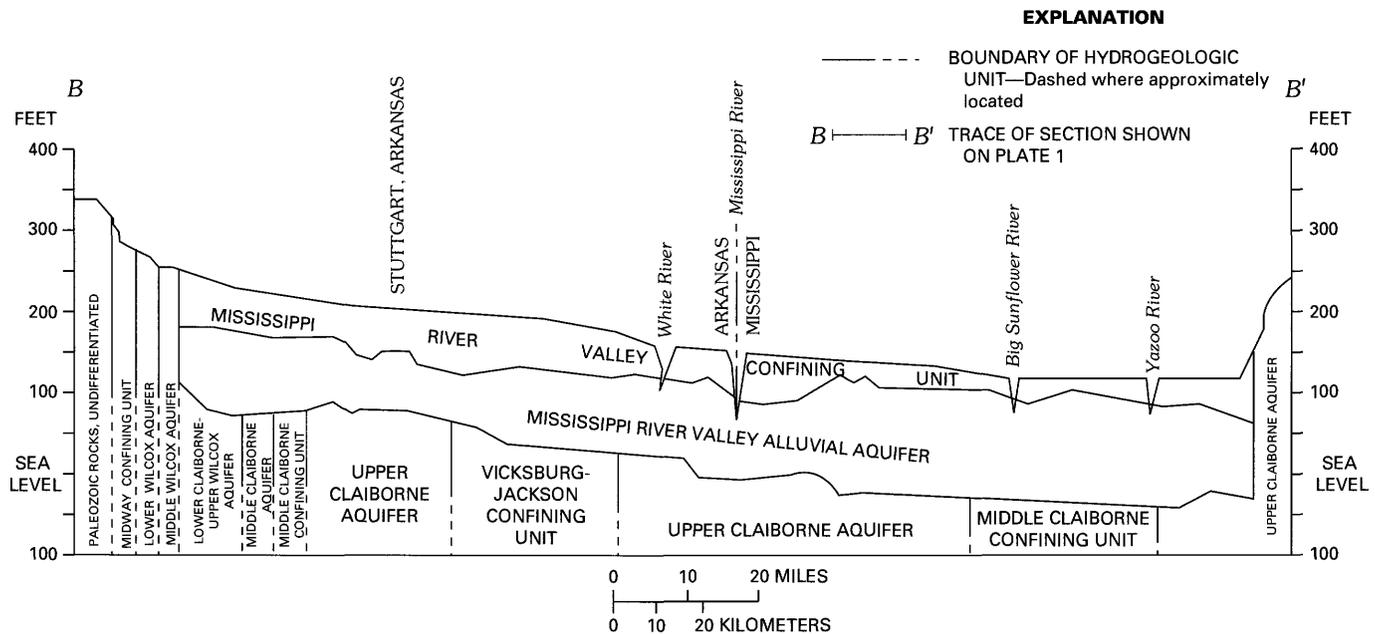


FIGURE 4.—Generalized hydrogeologic section B-B', Mississippi River Valley alluvial aquifer area. From Ackerman (1989a, fig. 17). Vertical scale is greatly exaggerated.

observations, mostly from Arkansas, 16 were between 0.02 and 0.15; 34 between 0.001 and 0.01; and 25 between 0.0001 and 0.0009 (A.K. Williamson, U.S. Geological Survey, written commun., 1985). Specific yield from laboratory tests on repacked samples from Arkansas County, Arkansas, ranged from 0.27 to 0.38 (Johnson and others, 1966, p. 23). Values of 0.31 to 0.38 were determined for samples from the bottom of the aquifer, and a value of 0.27 was estimated for material near the top. Results of long-term aquifer tests at the same site indicated a storage coefficient of 0.28 after 4 days of pumping (Sniegocki and others, 1965, p. 5). A storage coefficient of 0.30 was reached after 9 days of recharge tests at the same location (Sniegocki and others, 1965, p. 8). Data for hydraulic conductivity and storage coefficient were insufficient to describe the areal distribution of these aquifer properties.

RELATION OF THE ALLUVIAL AQUIFER TO ADJACENT UNITS

The Mississippi River Valley alluvial aquifer is bounded on the top by the Mississippi River Valley confining unit and on the bottom and sides by other units in the Mississippi embayment aquifer system, the McNairy-Nacatoch aquifer, and by undifferentiated Paleozoic rocks (figs. 2-4, pl. 1). The adjacent units have lower hydraulic conductivities and

different lithologic characteristics sufficient to distinguish them from the alluvial aquifer. The only exception is a short segment of the southern boundary in Louisiana where the alluvial aquifer extends to the south.

The southern boundary (subcrop of the Vicksburg-Jackson confining unit, pl. 1) is about perpendicular to the contours of the alluvial-aquifer potentiometric surface as shown by Whitfield (1975, fig. 2). Although the southern boundary does not represent a hydraulic conductivity contrast, it is a definable hydrologic boundary that can be considered no-flow so long as there are no pumping wells near the boundary.

MISSISSIPPI RIVER VALLEY CONFINING UNIT

Throughout most of the study area clay, silt, and fine-grained sand overlie and confine the Mississippi River Valley alluvial aquifer and impede inflow (Krinitzsky and Wire, 1964, p. 90). The overlying beds of fine-grained material were named the "Mississippi River Valley confining unit" by Ackerman (1989a, p. 14). For this report the term "confining unit" (singular) will refer to the Mississippi River Valley confining unit that overlies the Mississippi River Valley alluvial aquifer. Although the confining unit is locally absent, it generally ranges from 10 ft to 50 ft in thickness (pl. 1) and averages 30 ft.

Locally it can be as much as 150 ft in thickness. The confining unit is thinnest in the north and near the margins of the aquifer (Fisk, 1944, 1947). Although confining-unit thickness is highly variable, thickness increases from north to south (Ackerman, 1989a, fig. 9). The confining unit is thickest beneath the Grand Prairie near Stuttgart, Arkansas, where it is consistently greater than 50 ft.

In the study area three major types of depositional environments can be described for the confining unit: (1) braided stream, (2) meander belt, and (3) backswamp (Fisk, 1944, 1947; Krinitzsky and Wire, 1964). Deposition in all three environments was dominated by silt and clay or lenticular clay and sand. Only the braided-stream deposits contain any significant amount of sand (Fisk, 1947, pl. 70). More recent work by geologists studying the confining unit describes the "braided stream" deposits of Fisk (1944, 1947) as "valley outwash plain" deposits (L.W. Smith, U.S. Army Corps of Engineers, oral commun., 1986).

Laboratory determinations of hydraulic conductivity for samples of the confining unit in the clay to silty sand textures ranged from 0.0001 to 0.5 ft/d (M.S. Bedinger, U.S. Geological Survey, written commun., 1960). These values are reasonable for the grain sizes of the samples (Freeze and Cherry, 1979, p. 29).

UNDERLYING UNITS

Nomenclature for aquifers and confining units subcropping the Mississippi River Valley alluvial aquifer is shown in table 1, and the subcrop patterns are shown on plate 1. Paleozoic units are the oldest strata underlying the alluvial aquifer (table 1). The Paleozoic rocks consist of shale, limestone, dolomite, and quartzite of uncertain but probably very low hydraulic conductivity (Brahana and Mesko, 1988, p. 4). The remaining subcropping aquifers and confining units, which correspond to hydrologic units of the Mississippi embayment aquifer system and the McNairy-Nacatoch aquifer, are alternating beds of sand and clay with some interbedded silt, lignite, and limestone (Grubb, 1984).

The continuous sands of the Mississippi embayment aquifer system that underlie the alluvial aquifer are regional aquifers. Horizontal hydraulic conductivities of these underlying aquifers generally range from 10 to 172 ft/d (Brahana and Mesko, 1988, p. 21; Arthur and Taylor, 1990, table 2).

Underlying confining units of the Mississippi embayment aquifer system generally range from 60 to 600 ft in thickness and are composed of shale, clay,

and silty clay (Cushing and others, 1964). Data are not available on the hydraulic conductivity of these materials, but similar materials would range from 10^{-7} to 10^{-3} ft/d (Freeze and Cherry, 1979, p. 29).

For a more complete discussion of the hydrogeologic framework of aquifer systems underlying the alluvial aquifer the reader is referred to Boswell and others (1965), Hosman and others (1968), Brahana and Mesko (1988), and Arthur and Taylor (1990). These aquifers and confining units also are discussed in other chapters of Professional Paper 1416.

LATERAL UNITS

The lateral boundary of the Mississippi River Valley alluvial aquifer is the contact with the same hydrogeologic units as those underlying the aquifer. Much of the boundary is a contact with Paleozoic rocks and various confining units of very low hydraulic conductivity. The remainder of the boundary consists of the contact with other aquifers of the Mississippi embayment aquifer system that generally have a distinctly lower hydraulic conductivity than the alluvial aquifer. In the study area, Crowleys Ridge interrupts the continuity of lithology and ground-water flow of the aquifer. The rocks of the ridge have a lower hydraulic conductivity (Hines and others, 1972, sheet 2) and consequently restrict flow. The effects of the restriction are seen in the steep potentiometric gradients and drawdowns in the alluvial aquifer at the west edge of the ridge. Wells constructed in the ridge have water levels higher than those in the surrounding alluvium. At the least, Crowleys Ridge would be the site of a drainage divide and, therefore, a barrier for the alluvial flow system.

The concept of Crowleys Ridge as a barrier or restriction to flow in the alluvial aquifer conflicts with the treatment used by Broom and Lyford (1981, p. 35). They treated Crowleys Ridge as a continuation of the alluvial aquifer but with a lower hydraulic conductivity. The treatment of this boundary will be discussed further in the section on the predevelopment potentiometric surface.

RELATION OF THE ALLUVIAL AQUIFER TO RIVERS

The Mississippi River Valley alluvial aquifer is penetrated by numerous rivers. The rivers received most of the outflow from the aquifer before modern development of the aquifer and have become the

source of much inflow since development of the aquifer (Ackerman, 1989a). The rivers may or may not be in good hydraulic connection with the alluvial aquifer depending on the nature of riverbed materials and the depth to which the rivers penetrate the confining unit and the aquifer. The effect and degree of hydraulic connection between the alluvial aquifer and rivers can be seen in the hydrographs of four rivers and nearby wells (fig. 5). These hydrographs of shallow wells (all within 500 ft of the river-stage gage) show differing degrees of correlation with river-stage hydrographs. Hydrographs from sites *A* and *B* show good connection between the aquifer and the rivers. Sites *C* and *D* show little or no correlation. Sites *A*, *B*, and *C* are classified as perennial streams with a 7-day, 10-year low flow of about 6,000, 16, and 7 ft³/s, respectively (Hunrichs, 1983). For site *D* the recurrence interval of 7-day zero flow is 3 years (Hunrichs, 1983). Site *D* is a location where the top of the aquifer is below the bottom of the river. Site *C* is a location where the potentiometric surface has declined below the riverbed.

In some areas the potentiometric surface in the alluvial aquifer has declined sufficiently to remain below the streambed of rivers. Examples are some reaches of: the Big Sunflower River (Sumner and Wasson, 1984, p. 10); the Cache River (fig. 5); and Bayou Meto, currently not a perennial stream for most of its length (Hunrichs, 1983).

This analysis of the exchange of water between rivers and the alluvial aquifer only considers net regional flow over time spans of years and does not consider seasonal or local changes in flow. The flow between the aquifer and a river varies and may be either inflow or outflow at different times during the year, depending on fluctuations in the direction of the head gradient. Fluctuations in river stage generally are greater than aquifer water-level changes. As the rivers change in stage, water moves in and out of aquifer storage near the river. The most striking example of this relation is found near the Mississippi River. The stage range on the Mississippi River is much greater than other rivers in the study area (Ackerman, 1989a, fig. 13). Water stored in the aquifer within a few miles of the river during a spring high stage is released to the river during lower stage in the late summer (fig. 6). Even during this release to the river in late summer, water in the aquifer continues to move toward a low on the potentiometric surface near the Big Sunflower River. A large part of the water moving away from the Mississippi River is inflow to the aquifer from the river (Sumner and Wasson, 1984, p. 47). Most of the ground water being discharged to the river is probably bank storage.

The Mississippi River is the widest, deepest, and largest river in the study area and has the largest sustained flow. The average discharge at Memphis is 485,000 ft³/s and the 7-day, 10-year low flow is 119,000 ft³/s (Hunrichs, 1983). During most of the year the river is a drain to the alluvial aquifer (Ryling, 1960, p. 26; Plebuch, 1961, p. 37; Luckey, 1985, p. 24). The Mississippi River is a hydrologic flow boundary in the alluvial aquifer because it commonly cuts through the entire thickness of the aquifer (Whitfield, 1975, p. 6; Ackerman, 1989a, fig. 10), and its stage controls ground-water flow on both sides of the river. The areas where water levels are most affected by the Mississippi River are relatively small west of the river as compared to areas affected by other rivers and drains that are of lower altitude (Luckey, 1985, p. 24; Ackerman, 1989a).

The White and Arkansas Rivers penetrate the alluvial aquifer and have large perennial discharges. They are effective hydrologic boundaries in the alluvial aquifer. These rivers border areas where large withdrawals have increased head gradients in the alluvial aquifer. The steep head gradients approach but do not extend beyond these rivers. There is no evidence of long-term decline in potentiometric head in the vicinity of the rivers, only short-term changes correlated with river stage.

QUALITY OF WATER IN THE ALLUVIAL AQUIFER

Water from the Mississippi River Valley alluvial aquifer is suitable for most uses and is used extensively for irrigation and industry. It is used for public supply, usually with treatment, only where an adequate supply of water of better quality is not available from deeper aquifers (Boswell and others, 1968, p. 13). The two water characteristics cited most frequently that limit the usefulness of water for public supply from the alluvial aquifer are excessive hardness and high concentrations of iron and manganese. Median concentrations for hardness as calcium carbonate and iron given by Jeffery (Boswell and others, 1968, p. 12) were about 250 and 5 mg/L (milligrams per liter), respectively. Most analyses of water from the alluvial aquifer indicate either a calcium bicarbonate or calcium-magnesium bicarbonate type water with less than 250 mg/L total dissolved solids.

In isolated areas the alluvial aquifer contains water with more than 250 mg/L of chloride. Areas of the aquifer ranging from 25 to 75 mi² yielding water with more than 250 mg/L of chloride have been described by Whitfield (1975, p. 12), Fitzpatrick (1985), and Morris and Bush (1986). A source of

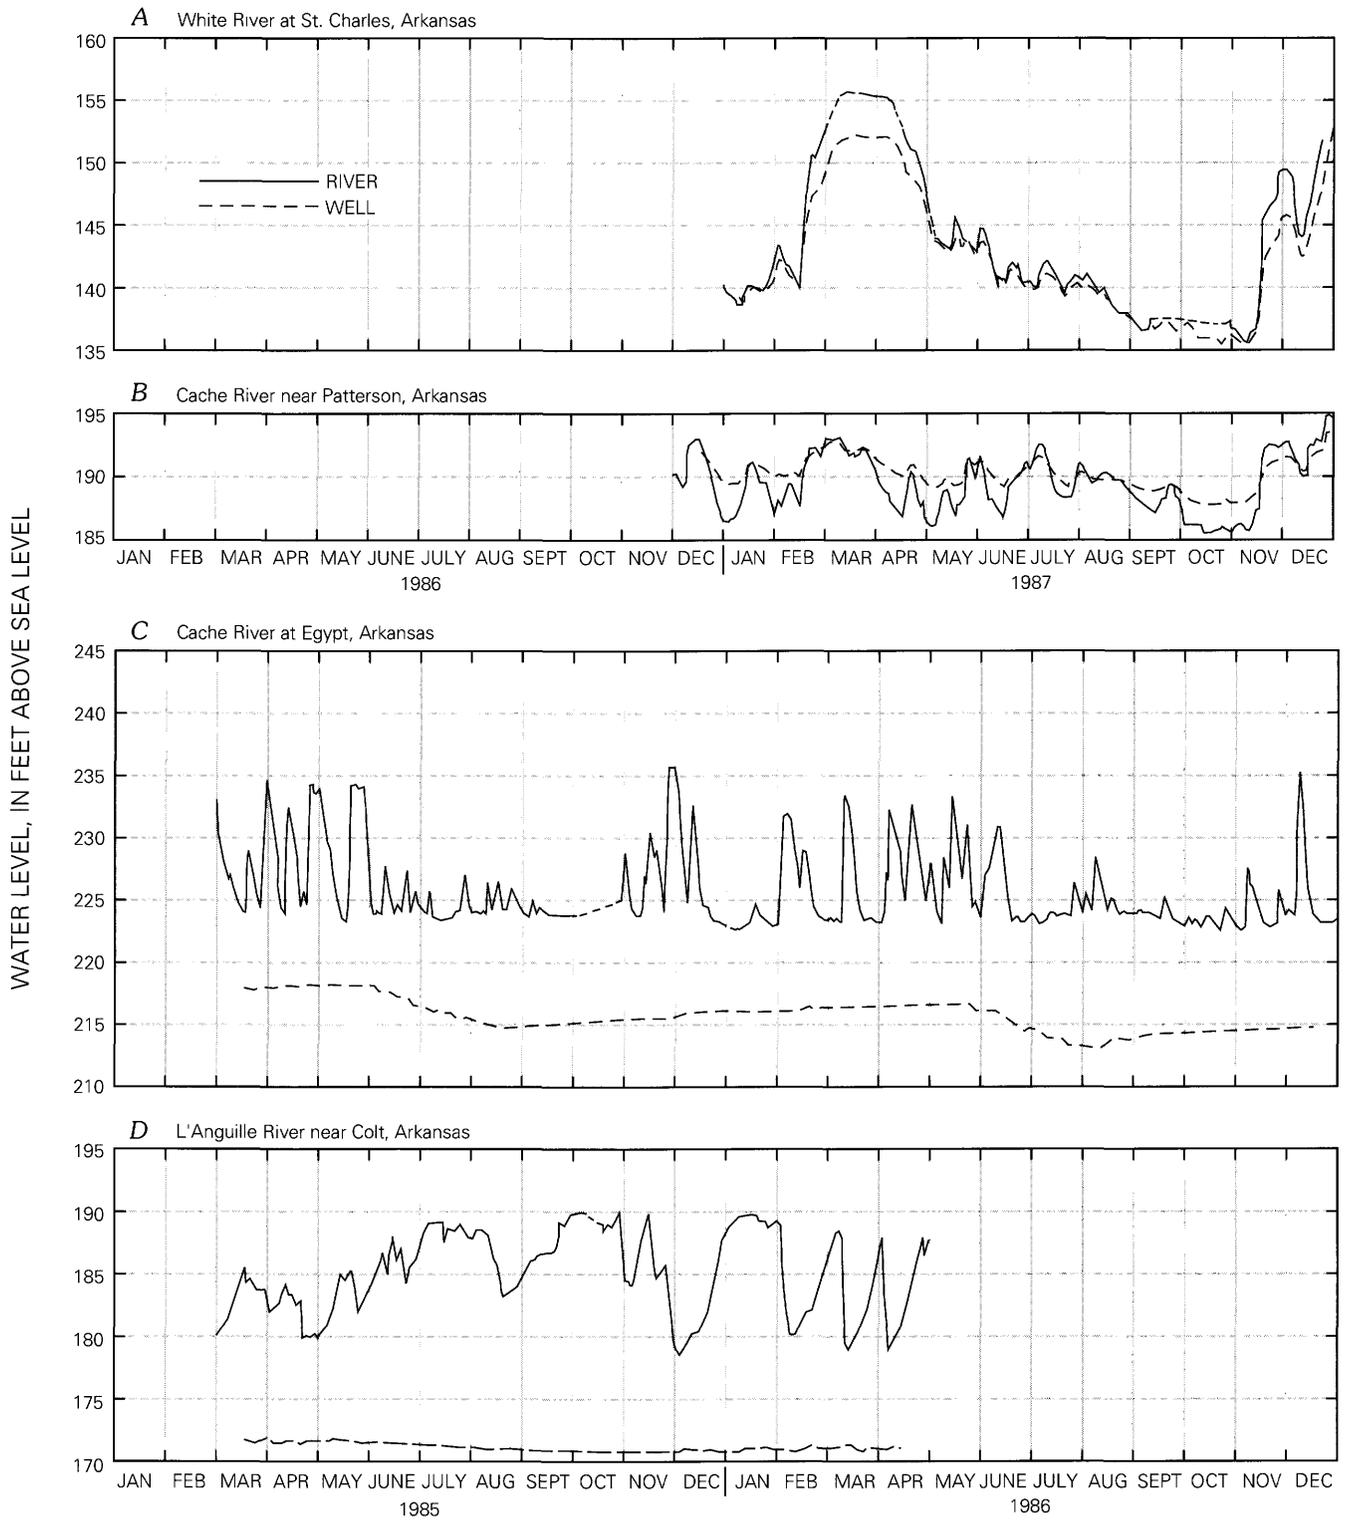


FIGURE 5.—Hydrographs showing water levels for selected wells in the Mississippi River Valley alluvial aquifer and nearby rivers. Hydrographs dashed where data are missing.

saline water below the alluvial aquifer is suspected, but no avenue of movement of saline water to the aquifer has been proven conclusively.

Because water in the alluvial aquifer generally has such uniform and dilute chemistry (Pettijohn and others, 1988), little knowledge of regional flow can be determined from the geochemistry of water, using available data. Because of the low total dissolved solids, density of the water as a function of salinity is not a consideration in the regional flow in the alluvial aquifer.

REGIONAL FLOW SYSTEM

Regional ground-water flow in the Mississippi River Valley alluvial aquifer was analyzed by model simulations from predevelopment (prior to aquifer withdrawals) to modern-day conditions. A finite-difference digital ground-water model (McDonald and Harbaugh, 1984) was used to simulate two-dimensional confined or unconfined steady-state and transient regional flow. The description of the regional flow system, the changes in flow system, and the evaluation of the potential for further ground-water development are the result of the analysis of pumpage, hydraulic-head data, and simulation output. The transient model simulates the distribution of head and the components of the flow budget (inflow, outflow, and change in storage) from estimated pumping conditions for the period 1906–87. Comparisons were made between pumping and predevelopment conditions. Aquifer response to projected continuance or increased pumpage for periods of 10 and 20 years also were simulated to evaluate the potential for continued ground-water development. A complete discussion of the conceptual model of the flow system, the hydrogeologic framework, the input data for the model, and the preliminary calibration procedure for a model of steady-state flow for predevelopment and 1972 conditions are in a previous report (Ackerman, 1989a). A discussion of model adaptation for transient analysis and of the final calibration values are at the end of this report. A short description of how the aquifer properties and boundaries were modeled is provided below, and the reader is referred to the section at the end of this report and to Ackerman (1989a) for detailed discussions of these topics.

Transmissivity was calculated from the saturated aquifer thickness multiplied by a uniform value of hydraulic conductivity within each of the five areas (pl. 1). The hydraulic conductivity varied from 200 to 450 ft/d (table 8). Uniform values of specific yield (0.28) and confined storage coefficient (0.0001) were used for the entire aquifer. Vertical flow from an

overlying source head at the altitude of land surface shown on plate 2 (Ackerman, 1989a, p. 38) was controlled by the thickness of the Mississippi River Valley alluvial confining unit (pl. 1) and a model-derived vertical hydraulic conductivity of 0.00035 ft/d for all areas except for the Boeuf area where the value was 0.00044 ft/d (table 9). Flow between underlying aquifers and the alluvial aquifer, and between adjacent aquifers and the alluvial aquifer was controlled by the vertical or horizontal hydraulic conductivities and thicknesses of the respective units as shown diagrammatically in figure 7 (Ackerman, 1989a, fig. 20). Vertical hydraulic conductivities of the underlying aquifers of the Mississippi embayment aquifer system were reported by Arthur and Taylor (1990) and range from 0.0001 to 0.00001 ft/d. Vertical hydraulic conductivities of the underlying McNairy-Nacatoch and Ozark-St. Francois aquifers were reported by Brahana and Mesko (1988) and range from 0.0000043 to 0.000000173 ft/d. Flow between rivers and the aquifer was controlled by using previously tabulated river widths (Ackerman, 1989a, table 3) and lengths with a uniform value (0.16 per day) of the ratio of vertical streambed hydraulic conductivity to streambed thickness.

Hydraulic heads from simulations of flow in the underlying aquifers of the Mississippi embayment aquifer system and the McNairy-Nacatoch aquifer were used to calculate gradients relative to the alluvial aquifer for each pumping period. Mean annual stage at stream-gaging stations was used to estimate the hydraulic head in rivers, as discussed in detail by Ackerman (1989a, p. 38).


The following conventions are used for labeling the components of flow and in describing the hydrologic budget. Net flow to the aquifer from rivers, underlying confining units, adjacent units, the Mississippi River Valley confining unit, and other forms of recharge are inflow. Net flow from the aquifer to rivers, underlying confining units, wells, the Mississippi River Valley confining unit, the adjacent part of the aquifer to the south, and other forms of discharge are outflow. Because the predominant trend since predevelopment has been a decrease in water stored in the aquifer, it is convenient to discuss components of flow as percent of total outflow. The inflow plus the net change in storage (decrease of water in storage) is equal to the outflow. In some parts of the aquifer and for the entire aquifer after the mid-1970's, proportions of total flow (outflow) may be considered as proportions of pumpage, the only net outflow.

Rates of water as presented in the hydrologic budgets (tables 3, 4, and 7) are given in millions of gallons per day. These units are consistent with

CONCEPTUAL MODEL


DIGITAL MODEL

CONTROLLING MODEL PARAMETER

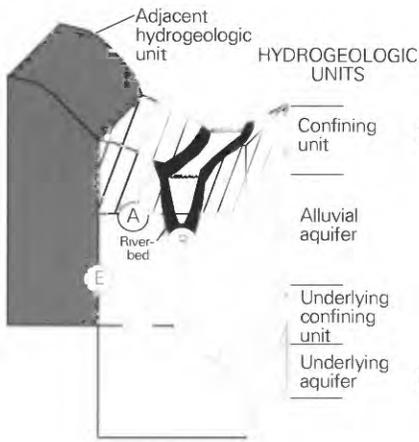


HEAD-DEPENDENT BOUNDARY CONDITIONS

(A) LEAKAGE TO OR FROM A CONFINING UNIT (LAYER 1) TO ALLUVIAL AQUIFER (LAYER 2)

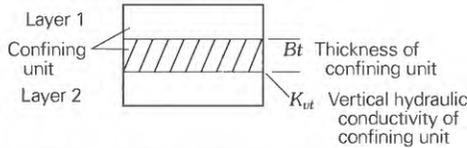


$$(VCONT) = K_{vt} / Bt$$

(B) LEAKAGE TO OR FROM A RIVER TO ALLUVIAL AQUIFER (LAYER 2)

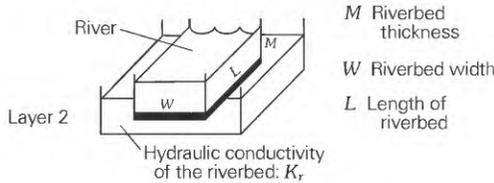


$$CONDUCTANCE OF RIVERBED = K_r LW/M$$

(C) LEAKAGE TO OR FROM AN UNDERLYING AQUIFER (LAYER 3) TO ALLUVIAL AQUIFER (LAYER 2)




$$(VCONT) = \frac{1}{\frac{B_2}{2} + \frac{B_3}{2}} + \frac{K_{v2}}{K_{v3}}$$

(D) LEAKAGE TO OR FROM AN UNDERLYING AQUIFER (LAYER 3) THROUGH AN UNDERLYING CONFINING UNIT TO ALLUVIAL AQUIFER (LAYER 2)

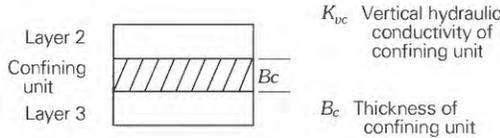

$$(VCONT) = \frac{K_{vc}}{B_c}$$

(E) LEAKAGE TO OR FROM AN ADJACENT HYDROGEOLOGIC UNIT TO ALLUVIAL AQUIFER

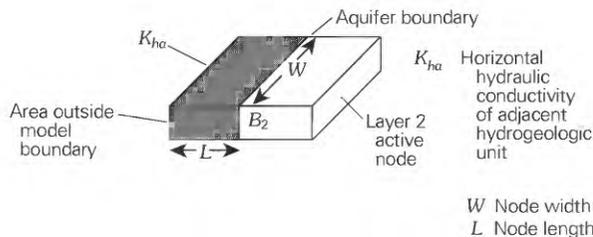

$$CONDUCTANCE = \frac{K_{ha} B_2 W}{L_2}$$

FIGURE 7.—Conceptual and digital model of head-dependent boundaries.

water-use data for the project (Mesko and others, 1990). Comparisons of rates within and between areas are given as rates normalized for area. The smallest unit of area used in this analysis was the surface of a model block 25 mi². The comparisons of rates within and between areas are expressed in inches per year, which is equivalent to 1.190 Mgal/d per 25 mi².

PREDEVELOPMENT STEADY-STATE FLOW IN THE ALLUVIAL AQUIFER

Prior to agricultural development of the Mississippi River Valley alluvial plain, much of the land was often flooded or wet, especially parts of the St. Francis area (Crider, 1906, p. 56). Wetlands drainage, flood control, navigation improvements, and

agricultural land use have significantly reduced the amount of wetlands. For this study, the predevelopment flow system is that which would result if pumping from wells were discontinued but drainage, flood control, and river navigation infrastructures were maintained.

HYDROLOGIC BUDGET

A hydrologic budget was developed for simulated predevelopment regional ground-water flow in the Mississippi River Valley alluvial aquifer (fig. 8, table 3). Inflow to the aquifer was down through the Mississippi River Valley confining unit and up from underlying units. Outflow from the aquifer was to rivers. Lateral inflow from adjacent hydrogeologic units was a very small (about 1 percent) part of total flow. The flow to and from the alluvial aquifer was separated into two categories based on the aquifers that underlie the study area. The first category is a

large area of about 30,000 mi² (94 percent of the study area) where the more extensive aquifers and confining units of the Mississippi embayment aquifer system subcrop the alluvium (corresponds to the subregional study of Arthur and Taylor, 1990). The second category is a small area of about 2,000 mi² along the northwestern boundary of the alluvial aquifer where the Paleocene Midway Group and older rocks subcrop the alluvium (corresponds to the McNairy-Nacatoch subregional study described by Brahana and Mesko, 1988). The Cache and St. Francis areas extend beyond the limits of aquifers in the Mississippi embayment aquifer system and include the very slight flow through the Midway confining unit.

The amount of flow from the subcrop area of aquifers in Cretaceous and older rocks is large and is confined to a small discharge area near the rivers along the northwestern boundary of the study area (Ackerman, 1989a) and are not discussed in detail. Interflow between the areas represented about 3 percent of inflow to the area underlain by the Mississippi

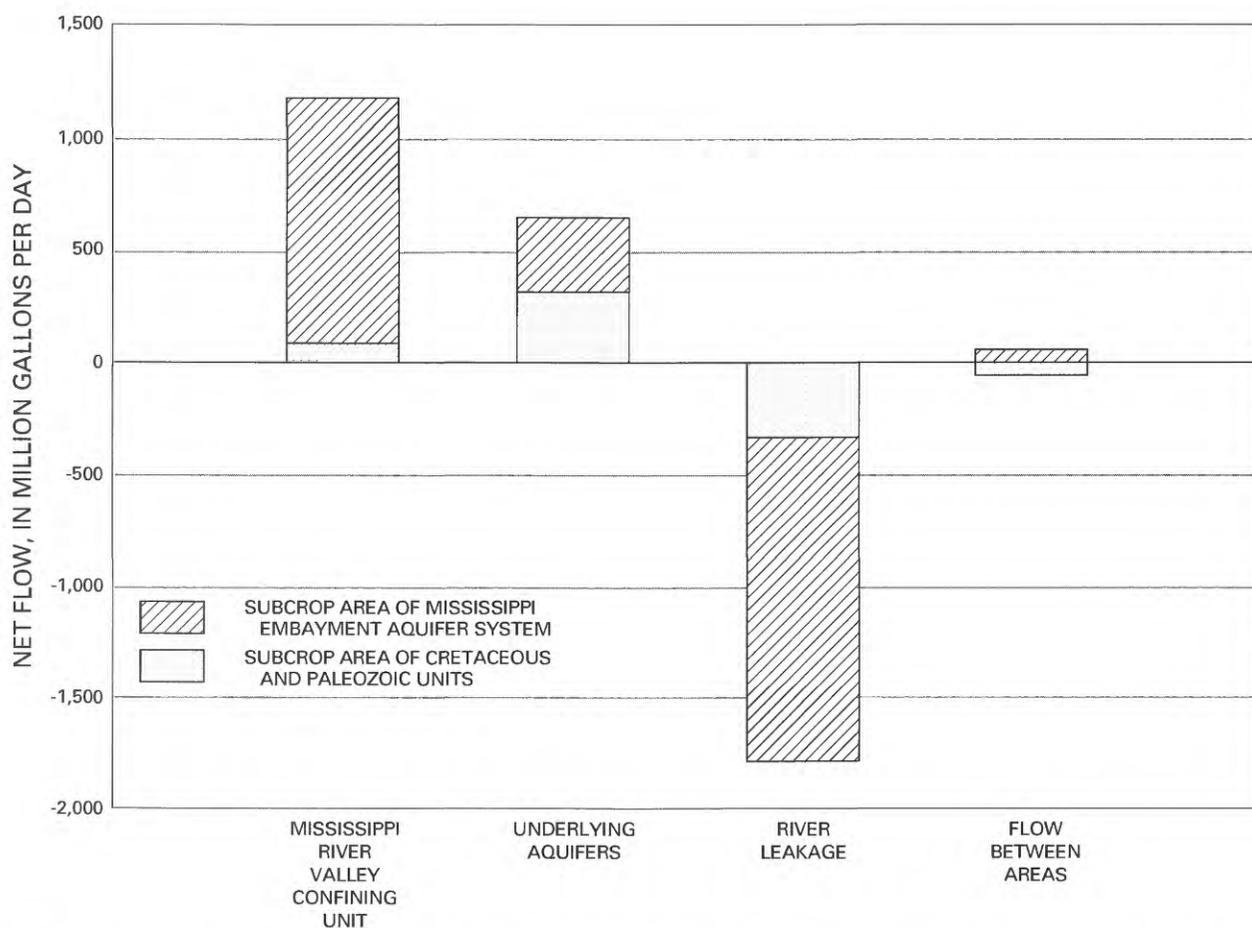


FIGURE 8.—Hydrologic budget for simulated predevelopment regional flow in the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

TABLE 3.—*Hydrologic budget for predevelopment regional flow in the Mississippi River Valley alluvial aquifer*

[Net flow in million gallons per day; negative values are flow out of the aquifer; CP, subcrop of Cretaceous and Paleozoic units; MEB, subcrop of Mississippi embayment aquifer system; <, less than; ---, not applicable; sums show slight variations due to rounding]

Model subcrop subareas	Mississippi River Valley confining unit	Underlying units	Adjacent units	All rivers	Interchange between subcrop areas
CP	75	314	<1	-341	-48
MEB	1,088	315	14	-1,466	+48
Total	1,163	629	15	-1,807	---

embayment aquifer system. The total flow for the area underlain by the Mississippi embayment aquifer system sediments may be considered as most representative of the study area as a whole and is used in subsequent tables, illustrations, and discussions. Most inflow (about 74 percent) was through the Mississippi River Valley confining unit. This corresponds to an inflow rate of 0.8 in/yr (1 Mgal/d/block). Flow from underlying aquifers represented 22 percent of inflow and corresponds to a rate of 0.2 in/yr. All outflow was to rivers. A small amount of water, 3 Mgal/d (less than 0.2 percent of the total regional flow), leaves the study area as lateral flow down the Mississippi River Valley in the alluvial aquifer to the coastal lowlands aquifer system.

In the Grand Prairie, predevelopment flow (table 4) was dominated by vertical flow through the Mississippi River Valley confining unit to the alluvial aquifer and then lateral flow to rivers. The relative contribution from underlying aquifers (about 4 percent) was smaller than in any other area. The inflow rate was about 0.7 in/yr (0.8 Mgal/d/block) through the Mississippi River Valley confining unit and 0.05 in/yr (0.06 Mgal/d/block) from underlying aquifers.

The Cache, Delta, and Boeuf areas were similar in the relative proportions of sources of inflow. In these areas most inflow was vertically through the Mississippi River Valley confining unit, but a significant part of the total inflow (10 to 20 percent) to the alluvial aquifer was from underlying aquifers (table 4). In the Cache area a small proportion of the outflow (less than 1 percent) left the area as lateral flow to adjacent parts of the alluvial aquifer. The inflow rates through the Mississippi River Valley confining unit were 0.8, 1.0, and 0.5 in/yr (1, 1.2, and 0.6 Mgal/d/block) in the Cache, Delta, and Boeuf areas, respectively. Inflow rates from underlying aquifers were 0.3, 0.1, and 0.2 in/yr (0.4, 0.1, and 0.2 Mgal/d/block), respectively.

The St. Francis area had a slightly larger (16 percent) contribution through the Mississippi River Valley confining unit than from underlying aquifers (table 4). Lateral flow from adjacent areas of the

alluvial aquifer amounted to about 9 percent of inflow. The inflow rate was 0.6 in/yr (0.7 Mgal/d/block) through the Mississippi River Valley confining unit and 0.4 in/yr (0.5 Mgal/d/block) from underlying aquifers.

PREDEVELOPMENT POTENTIOMETRIC SURFACE

The simulated predevelopment potentiometric surface (pl. 2) of the alluvial aquifer indicates movement down the Mississippi River Valley following the land-surface slope toward major rivers near the axes of the St. Francis, White, Arkansas, Yazoo, and Boeuf basins. Few data are available to verify the simulated potentiometric surface. Other than the preliminary version of plate 2 (Ackerman, 1989a, fig. 31), only one other predevelopment potentiometric surface map has been presented for any large area of the alluvial aquifer. That map (Broom and Lyford, 1981, pl. 10) was made using model simulation results and shows the location of several control points. The potentiometric surface shown on plate 2 agrees with that map except near Crowleys Ridge in southern Craighead and Poinsett Counties, Arkansas. In that area Broom and Lyford (1981, p. 35) simulated a hydraulic connection through Crowleys Ridge. As a result, their map shows similar heads on either side of Crowleys Ridge in that area. This study simulated the contact between Crowleys Ridge and the aquifer as a head-dependent flux from ridge sediments with a distinctly smaller horizontal conductivity (Ackerman, 1989a, p. 36). The head shown on the west side of Crowleys Ridge is 20 to 30 ft greater than on the east side. This relationship agrees with Hines and others (1972, sheet 1), who stated "Natural water levels in the alluvium were 25–30 ft higher west of Crowleys Ridge than east of the ridge."

Except for an area of western Drew and Ashley Counties in Arkansas, most simulated predevelopment heads were less than 20 ft below land surface. This result is in agreement with Broom and Lyford (1981, p. 28). Hines and others (1972, sheet 1) stated

TABLE 4.—Hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer, by area

[Net flow in million gallons per day; negative values are flow out of the aquifer; <, less than; ---, not applicable; data are from the end of the last time step in selected pumpage periods; sums may show variations due to rounding]

GRAND PRAIRIE AREA										
Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Storage	Arkansas River	White and Little Red Rivers	Bayou Meto	All rivers	Wells
Predevelopment		83	3	0	---	-14	-49	-23	-86	---
3	1933	136	37	0	37	0	8	17	25	-236
5	1942	149	28	0	10	1	8	17	33	-220
7	1952	192	-77	0	222	15	42	36	93	-432
8	1957	207	-19	<1	233	17	48	45	116	-537
9	1962	213	-4	0	13	26	34	45	105	-327
10	1967	215	17	0	45	24	34	41	98	-376
11	1972	218	-56	<1	100	27	32	45	104	-367
12	1977	228	-37	<1	198	39	41	49	129	-519
13	1982	233	-5	<1	388	54	53	52	160	-777
14	1987	233	37	<1	268	56	59	52	167	-706
CACHE AREA										
Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Adjacent alluvium	Storage	Cache River	All rivers	Wells	
Predevelopment		175	61	3	-2	---	-123	-237	---	
3	1933	200	83	4	-2	2	-111	-213	-74	
5	1942	215	70	4		17	-97	-184	-122	
7	1952	256	-86	4	1	230	-25	-70	-335	
8	1957	262	-8	4	3	173	-8	-29	-405	
9	1962	270	-16	5	5	198	9	16	-377	
10	1967	275	-1	5	6	161	26	54	-500	
11	1972	275	57	5	7	112	10	41	-496	
12	1977	292	16	5	15	414	137	259	-1,000	
13	1982	313	83	5	25	743	238	538	-1,704	
14	1987	313	157	6	35	553	246	571	-1,635	
DELTA AREA										
Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Storage	Mississippi River	All rivers	Wells		
Predevelopment		332	39	5	---	-34	-377	---		
3	1933	334	34	5	0	-33	-372	0		
5	1942	337	17	5	2	-31	-360	0		
7	1952	340	5	5	2	-29	-351	0		
8	1957	372	11	5	14	-6	-226	-176		
9	1962	383	9	5	15	2	-185	-224		
10	1967	376		5	4	-3	-207	-176		
11	1972	381	-8	5	5	4	-178	-204		
12	1977	450	-11	5	59	50	143	-646		
13	1982	492	-10	5	127	83	416	-1,028		
14	1987	500	-8	5	78	87	440	-1,014		

TABLE 4.—Hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer, by area—Continued

BOEUF AREA										
Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Adjacent alluvium	Storage	Arkansas River	Mississippi River	All rivers	Wells
Predevelopment		227	54	1	-3	---	-5	9	-279	---
3	1933	228	50	1	-3	1	-5	9	-275	-2
5	1942	230	32	1	-3	8	-5	10	-260	-10
7	1952	249	24	1	-3	25	12	17	-174	-124
8	1957	266	25	1	-3	43	30	26	-90	-241
9	1962	261	24	1	-2	7	17	24	-120	-171
10	1967	270	29	1	-2	17	21	26	-87	-219
11	1972	274	16	1	-2	11	18	27	-72	-229
12	1977	302	39	1	-2	45	32	35	65	-450
13	1982	311	22	1	-2	73	39	47	167	-571
14	1987	313	19	2	-1	33	37	50	164	-530

ST. FRANCIS AREA										
Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Adjacent alluvium	Storage	All rivers	Wells		
Predevelopment		147	103	3	26	---	-281	---		
3	1933	149	97	3	26	0	-276	-0		
5	1942	154	83	3	26	1	-259	-8		
7	1952	162	58	3	26	2	-225	-26		
8	1957	165	58	3	25	3	-211	-43		
9	1962	170	66	3	26	4	-194	-75		
10	1967	182	57	3	25	7	-157	-118		
11	1972	189	51	3	26	8	-138	-140		
12	1977	206	35	4	25	23	-72	-220		
13	1982	231	45	4	25	33	58	-396		
14	1987	240	47	4	25	46	87	-448		

that predevelopment heads in western Poinsett and Craighead Counties, Arkansas, were about 5 to 15 ft below land surface. In this area (just west of the middle of Crowleys Ridge) simulated heads shown on plate 2 generally were 4 to 12 ft below land surface. Simulated heads generally were within 5 ft of several heads given by Engler and others (1945, p. 29) in or near the edge of the Grand Prairie that may represent predevelopment conditions.

DISTRIBUTION OF FLOW COMPONENTS

Predevelopment inflow to the Mississippi River Valley alluvial aquifer is evenly distributed over the

aquifer, whereas outflow is concentrated at rivers. Areal distribution of predevelopment inflow and outflow across the top of the alluvial aquifer through the Mississippi River Valley confining unit and from rivers is shown on plate 3. Inflow to the top of the aquifer, as shown in the cumulative distribution (pl. 3), is fairly even; most of the area receives less than 0.8 in/yr (1 Mgal/d/block), and 90 percent of the area receives less than 2 in/yr (2 Mgal/d/block). Outflow from rivers generally is less than 3 in/yr (4 Mgal/d/block). About 90 percent of river reaches were gaining water from the aquifer. Predevelopment inflow to the top of the aquifer does not show any discernable areal pattern. A small amount of simulated outflow to the Mississippi River Valley confining unit in

Missouri and Louisiana may be due to input errors in land-surface elevations and for the aquifer framework caused by sparse data.

Areal distribution of simulated predevelopment inflow and outflow to the bottom of the alluvial aquifer is shown on plate 3. Inflow to the alluvial aquifer from underlying aquifers is greatest north of 35° N. latitude and along the margins of the alluvial aquifer. The area north of 35° N. corresponds to the subcrop of the middle and upper Claiborne aquifers (pl. 1). The other areas of larger inflow also correspond to subcrops of aquifers. The flow is largest in these areas because the leakance is large and gradients are steep. Leakance is large due to the larger vertical hydraulic conductivity of aquifer materials. Gradients are steepest in the area of transition between higher heads for underlying aquifers in the topographically higher outcrop areas and lower heads under the alluvial aquifer in the lowlands of the Mississippi River Valley. The highest average rate of inflow to the alluvial aquifer from underlying aquifers was in the St. Francis area. The subregional study of the Mississippi embayment aquifer system has shown that the steeper gradient in the St. Francis area is due to a topographically higher recharge area to the east and to a shorter flow path (J.K. Arthur, U.S. Geological Survey, written commun., 1988). Flow paths are longer and topographic differences between outcrop recharge areas and subcrop discharge areas (below the alluvial aquifer) are less for aquifers subcropping in the Delta and Boeuf areas. The Grand Prairie and Cache areas on the west side of the study area are farther from the outcrop areas for the underlying aquifers and have less inflow from underlying units. Outflow to underlying aquifers from the alluvial aquifer is small and occurs mostly in the western part of the Grand Prairie and Cache areas.

GROUND-WATER DEVELOPMENT AND CHANGES IN WATER LEVELS IN THE ALLUVIAL AQUIFER

Pumpage from wells tapping the Mississippi River Valley alluvial aquifer has been primarily for agricultural use. Withdrawals of large quantities of water, especially for rice irrigation, began in the Grand Prairie in the early 1900's. By the late 1950's large quantities of water were being pumped from the alluvial aquifer in all parts of the study area. Large seasonal withdrawals remained constant or increased nearly every year until about 1983. The withdrawals resulted in water-level declines in some areas to the extent that they are considered water problem areas.

TABLE 5.—*Acreage of rice in the Grand Prairie region of Arkansas*
[Modified from Engler and others (1963, table 2)]

Year	Total area irrigated (acres)
1905	460
1910	48,000
1915	80,000
1920	49,000
1925	143,000
1930	141,000
1935	105,000
1940	126,000
1945	158,000
1950	169,000
1955	185,000

HISTORY OF THE DEVELOPMENT OF THE ALLUVIAL AQUIFER

In the early 1900's ground water was a primary water source for domestic, farm, municipal, manufacturing, and railroad use in the Mississippi Alluvial Plain. The alluvial aquifer was not the preferred source of potable water due to water-quality problems but was commonly the only source used due to the expense of drilling deeper wells. At the turn of the century, scientific interest, as expressed by the nature of early reports, concerned deep, flowing wells. Few data were available for wells in the shallow alluvium. Prior to 1903 a variety of uses of water from the alluvial aquifer were cataloged (Purdue, 1904, p. 377), including one irrigation well that yields 100 gal/min at Stuttgart, Arkansas.

The impetus for the extensive development of the Mississippi River Valley alluvial aquifer was the realization that water from shallow wells could be used for commercial rice production. The history of the development of the alluvial aquifer parallels the history of rice culture. Stephenson and Crider (1916, p. 144–145) gave an account of the early attempts from 1897–1903 to raise rice in Arkansas. Commercial success was realized in 1904 when 80 acres were planted. After this initial success near Lonoke on the Grand Prairie, rice culture expanded rapidly, at first in Arkansas and later in adjoining states, as shown in table 5.

Rice culture uses large quantities of water to maintain 4 to 6 in. of water in the leveed fields for most of the growing season (May or June through July or August). The history of the increase in rice acreage, and therefore the most significant part of the history of water use from the alluvial aquifer, is shown in figure 9.

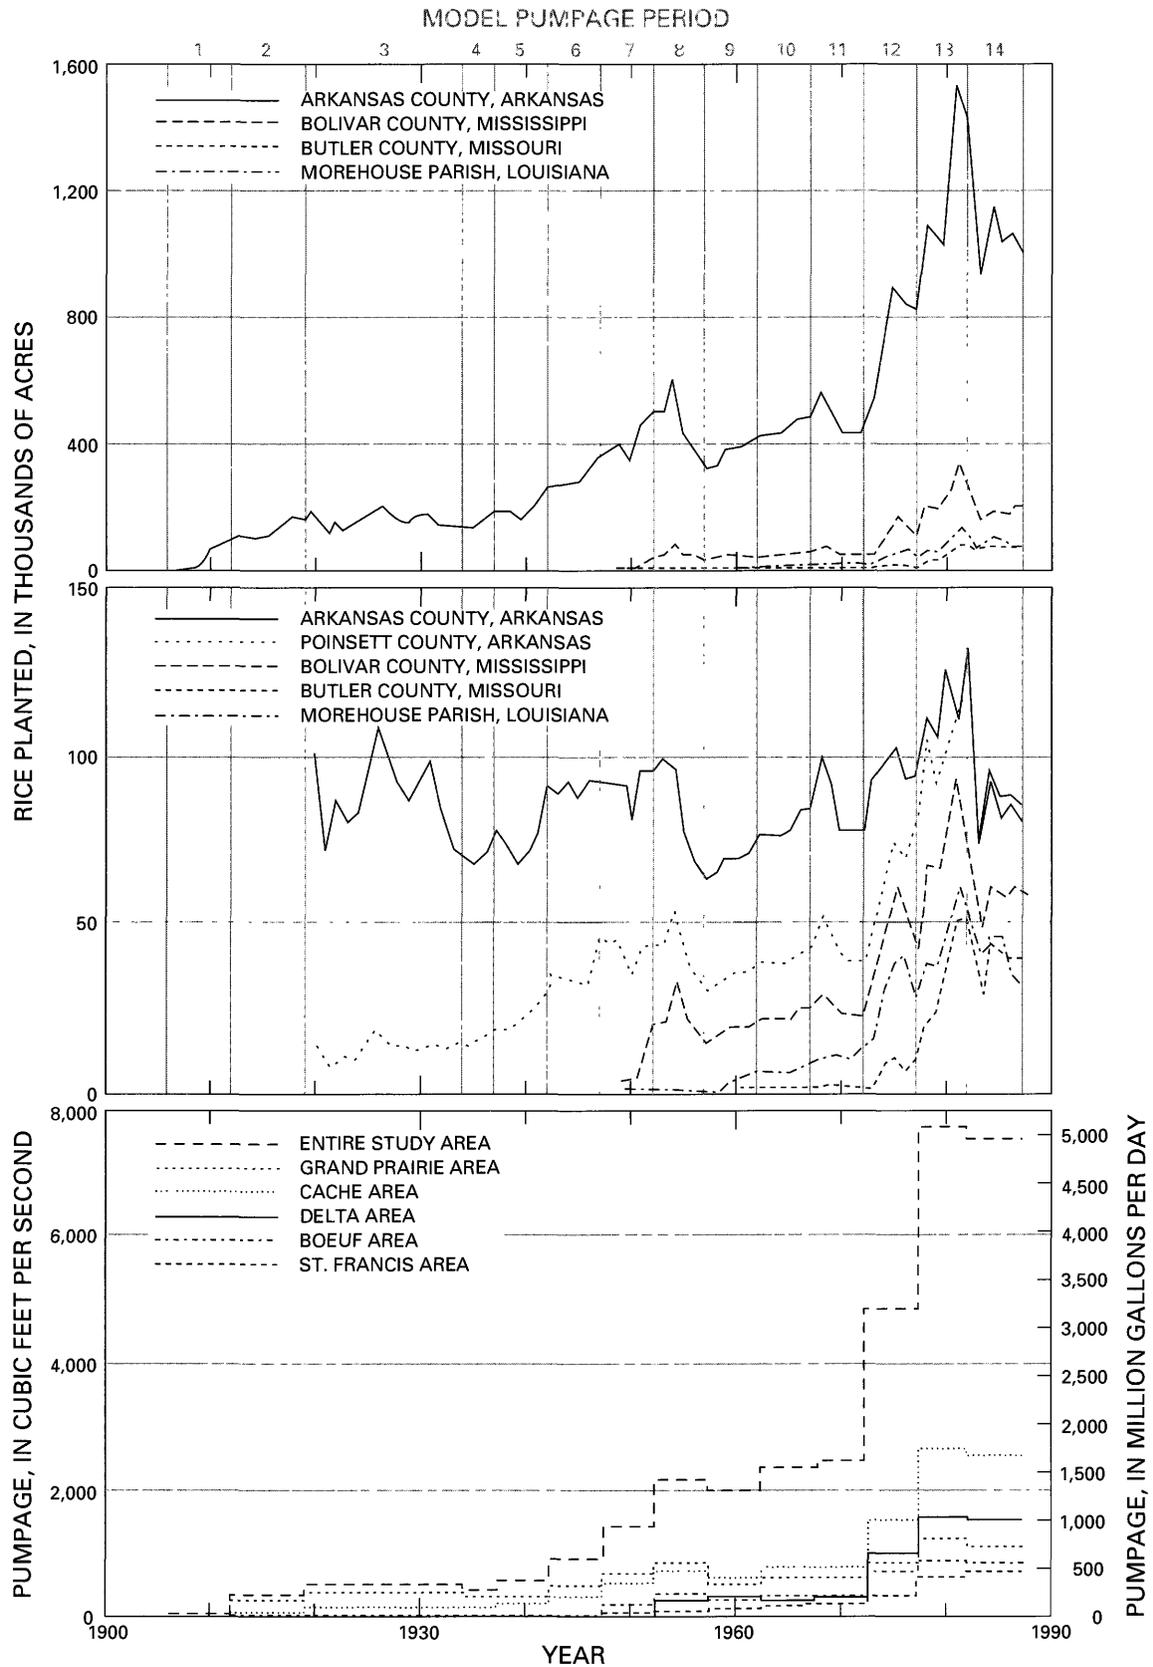


FIGURE 9.—Acreage of rice planted for selected States and counties in the study area and trends in pumpage for the Mississippi River Valley alluvial aquifer.

Within 10 years after rice culture started in the Grand Prairie, it began in the Cache area (pl. 1) with about 20,000 acres planted in 1915 and 33,000 acres by 1925. Rice acreage in the Arkansas part of the Boeuf area was about 7,000 acres in 1945 and 31,000 acres by 1950. In the Delta, 7,000 acres of rice were planted in 1950 and 53,000 acres in 1955. Rice acreage in the St. Francis area probably exceeded 5,000 acres in 1952 and probably did not exceed 8,000 acres in all of Missouri until 1974.

From 1955 to 1973 rice acreage was relatively constant. From 1974 to 1981 or 1982 there were large increases in rice acreage. In 1983 acreage decreased sharply in response to changes in national farm policy. Since 1983 the rice acreage has been relatively large but less than the peak of 1981 or 1982. Data describing the county distributions of water use, from reports such as Holland and Ludwig (1981), Walter (1982), and Callahan (1983), were compiled and distributed by model blocks for 1960–85 as a part of this project (Mesko and others, 1990).

Estimates of water use for the period 1905–57 in Arkansas were based on the work of Engler and others (1963, table 2) for the Grand Prairie and on rice acreages published by the Arkansas Agricultural Statistics Service for the rest of the study area. Estimates of water use for irrigation are based on application rates for rice production. Application rates range from 22 to more than 60 in. of water and depend on the area, source of water, and amount of rainfall during the growing season. Because substantial acreage is irrigated with surface water, water-use estimates were adjusted for the percentage of land irrigated with ground water. In parts of the Grand Prairie a significant part (as much as 18 percent in 1980) of the ground water pumped for rice irrigation is from the middle Claiborne aquifer.

Irrigation of crops probably accounts for about 90 percent of the 1988 water use from the alluvial aquifer. About 80 percent of the water withdrawn from the alluvial aquifer in 1988 was used for rice irrigation. A large quantity of water withdrawn from the alluvial aquifer was used for flood and sprinkler irrigation of other crops (principally soybeans, cotton, and corn). Use of water from the alluvial aquifer for irrigation of these crops is less due to lower application rates (2–15 in. of water) and fewer irrigated acres.

The third major use of ground water from the alluvial aquifer is for aquaculture, mostly catfish farming. Aquaculture is concentrated in the southeastern part of the Delta and the northwestern part of the Grand Prairie. About 3 to 9 ft of water is estimated to be added to large leveed ponds throughout the

year. Substantial pumpage for aquaculture probably started in the 1960's and has continued to increase through the 1980's. The combined pumpage for irrigation and aquaculture currently accounts for more than 95 percent of water use from the alluvial aquifer.

Water withdrawn from the alluvial aquifer also is used for domestic supply, farm supply, small municipalities, rural water systems, industrial supplies, and thermoelectric power generation. Individual users withdrawing 5 to 11 Mgal/d during 1980 were three thermoelectric power generation facilities at Clarksdale, Greenwood, and Yazoo City, Mississippi; paper mills near Pine Bluff in Jefferson County, Arkansas; and Crossett, in Ashley County, Arkansas; and the city of Vicksburg, Mississippi.

The pumpage from the Mississippi River Valley alluvial aquifer was estimated for 14 pumpage periods beginning in 1906 (table 6). The overall trend for pumpage from the Mississippi River Valley alluvial aquifer (fig. 9) has been an increase in water use to about 1982 followed by a slight decrease. Largest increases were in the early 1950's and from about 1973 to 1982. Maximum pumpage was about 5,000 Mgal/d. The expansion in the areas of pumpage and increase of withdrawal rates with time can be seen by comparing maps and graphs on plate 5. During 1940 most pumpage was in the Grand Prairie and Cache areas. By 1960 pumpage took place throughout the study area. During 1980 pumpage continued to increase in all areas except parts of the Grand Prairie. Parts of Arkansas and Prairie Counties, Arkansas, in the Grand Prairie have had nearly stable water levels (fig. 10) since about the late 1950's, which indicates fairly uniform withdrawals. In this area some water users have drilled new wells for additional supply in the middle Claiborne aquifer. For this study, it was assumed that usage from the alluvial aquifer was steady at a rate of about 5 Mgal/d/block (4 in./yr) from 1958 to 1987.

WATER-LEVEL CHANGE DUE TO DEVELOPMENT

Water-level fluctuations of 2 to 20 ft on a scale of months or years are common in the Mississippi River Valley alluvial aquifer (fig. 10). Most wells show a seasonal cycle of water levels. Lowest water levels occur in the late summer or early fall, corresponding to the end of the growing and irrigation seasons, low river stages, and less rainfall. Highest water levels generally occur in the spring and correspond to higher river stages and periods of greater precipitation, less evapotranspiration, and little or no

TABLE 6.—*Pumpage periods used for the analysis of transient regional flow in the Mississippi River Valley alluvial aquifer*

[Pumpage period is equivalent to stress period in McDonald and Harbaugh (1984)]

Pumpage	Time period represented	Length (years)	Time steps
1	1906–11	6	10
2	1912–18	7	10
3	1919–33	15	15
4	1934–37	4	10
5	1938–42	5	10
6	1943–47	5	10
7	1948–52	5	10
8	1953–57	5	10
9	1958–62	5	10
10	1963–67	5	10
11	1968–72	5	10
12	1973–77	5	10
13	1978–82	5	10
14	1983–87	5	10
¹ 15	² 1988–92	5	10
¹ 16	² 1993–2002	10	10
¹ 17	² 2003–22	20	10

¹Pumpage periods 15–17 were used for projected response only.²Time periods beyond 1987 were projected based on conditions similar to those of 1987 with similar or increased pumpage.

irrigation. Fluctuations due to changes in natural inflow and outflow such as river-stage change (fig. 5), seasonal wet and dry periods, and drought periods of a few years in duration tend to average out over a few years. These natural fluctuations cause no long-term change in storage and, therefore, no long-term change in water levels.

Withdrawals from the alluvial aquifer have caused seasonal and long-term fluctuations in water levels. The pumpage from individual irrigation wells is large, commonly 400 to 1,400 gal/min. Areal application rates of 22 to 60 in. of water per year, adjusted to the length of the growing season, are equivalent to withdrawal rates of more than 80 in. of water per year. These rates are higher than most rates of recharge or other inflow. Short-term excess of outflow over inflow is supplied from aquifer storage. Effects of pumpage from the alluvial aquifer range from short-term water-level declines in individual wells to long-term water-level declines extending throughout large areas of several hundred square miles. Declines in water levels are important for several reasons:

1. Pumpage costs increase as water levels decrease (lift increase);
2. Yields of wells decrease as water levels decrease (if saturated thickness decreases);

3. Pump settings and sometimes screens must be lowered as pumping levels decrease;
4. Continually decreasing water levels indicate overdraft of the aquifer (pumpage exceeds inflow).

The recognition of long-term water-level declines due to pumpage exceeding inflow is difficult for three reasons. First, original (pre-pumping) water levels commonly are not available. Second, early changes in water levels due to pumpage may be masked by natural water-level fluctuations. Third, water-level changes are strongly influenced by areal differences in the aquifer storage coefficient. In some places the water level is above the top of the aquifer (confined conditions) all or part of the year. In these areas pronounced water-level declines usually have equivalent recovery. In other areas where the water level is below the top of the aquifer (unconfined conditions), declines are less pronounced.

Simulated heads and drawdowns from the calibrated model of predevelopment and transient flow were used to aid in the understanding of regional flow systems in the alluvial aquifer. The simulated potentiometric surface and hydrographs agreed well with available observed data. The simulated drawdowns for pumpage periods 8 through 13 were very good representations of estimated drawdowns

constructed from available water-level data for 5-year intervals from 1957–82 and the simulated predevelopment heads. The estimated drawdowns for 1972 (Ackerman, 1989a, fig. 40) and the method of constructing estimated drawdowns were given in Ackerman (1989a, p. 37). The saturated thickness and change in saturated thickness calculated from observed head also compare well with simulated values.

AREAS WITH LONG-TERM REGIONAL DECLINES IN WATER LEVELS

The impact of water-level declines in the Mississippi River Valley alluvial aquifer on irrigated agriculture was first realized in about 1927 for the Grand Prairie (Engler and others, 1963, p. 21). The first potentiometric map for the area was included in a press release by D.G. Thompson of the U.S. Geological Survey (Engler and others, 1963, p. 21, pl. 4). This map of the 1929 potentiometric surface showed an elliptical area of depression of 50 by 20 mi. Thompson estimated that pumpage was exceeding inflow (about 156 Mgal/d) for part of the Grand Prairie as early as 1916 and concluded that the supply of irrigation water would need to be increased or pumpage reduced (Engler and others, 1963, p. 22). Engler and others (1945, p. 46) repeated D.G. Thompson's conclusion but estimated inflow to that part of the Grand Prairie to be 121 Mgal/d. The first map showing quantitative water-level declines was prepared by Counts and Engler (1954, fig. 3) for the period 1938–53. They described the extent of water-level declines in the Grand Prairie and Cache areas and recognized that a depression in the potentiometric surface probably existed in 1938 for an area just west of Crowleys Ridge in the Cache area (Counts and Engler, 1954, p. 3, 8).

The water-level decline in the Cache area was either not recognized or not considered significant by Boswell and others in 1965 (1968, p. 7). Hines and others (1972) estimated that pumpage exceeded inflow by one-third in 1966 and concluded that, while there was no immediate shortage, continued pumpage in excess of inflow would cause serious depletion in the next few decades.

General lowering of water levels such as occurred in the Cache area (pl. 5) are not as immediately recognizable as the development of a large trough such as occurred in the Grand Prairie. The lowering of water levels is most apparent by observing water-level changes.

The expansion of the areas of water-level decline shown on plate 5 follows the trends in pumpage as shown on plate 4. In 1942 the most significant decline was in the central part of the Grand Prairie. In 1962 the drawdown trough in the Grand Prairie had expanded, and a cone was evident in the Cache area. By 1982 drawdown had increased most in the northwestern part of the Grand Prairie and near Crowleys Ridge in the Cache area. Maximum drawdown was nearly 90 ft in the Grand Prairie and about 70 ft in the Cache area. Water levels generally declined throughout both areas except near large rivers. The Cache area did not show as rapid initial water-level declines as the Grand Prairie. This difference is probably because of the larger thickness of the Mississippi River Valley confining unit (pl. 1) that overlies the aquifer in the Grand Prairie. Initial water-level declines to the top of the aquifer in the Grand Prairie represented decreases in confined storage. A decline in water level from an altitude near land surface to the top of the aquifer is a decline of 40 to 60 ft for the Grand Prairie as opposed to a drop of 20 to 40 ft for the Cache area. Rates of decline in water levels for the Cache area, especially after 1962, seem to be greater than at any time for the Grand Prairie (fig. 10).

AREAS WITH LIMITED REGIONAL DECLINES IN WATER LEVELS

Long-term declines are smaller and cover less area in the Delta, Boeuf, and St. Francis areas than in the Grand Prairie and Cache areas. These declines are indicated in model results and generally are confirmed by short-term hydrographs and maps illustrating short-term change in potentiometric surfaces.

Several areas with long-term water-level declines (pl. 5) are scattered throughout parts of the Delta, Boeuf, and St. Francis areas in Mississippi and Arkansas. For the most part, these local declines in water levels correspond to locations of slightly more intense pumpage between streams. All areas with 10 ft or more of decline in water level by 1982 (pl. 5) are shown as areas of short-term (1–5 years) water-level declines in map reports by Edds and Fitzpatrick (1984), Plafcan and Edds (1986), Plafcan and Fugitt (1987), Plafcan and Remsing (1989), Darden (1982a, 1982b, 1983), and Sumner (1984a, 1984b). Only in the Delta area are water-level declines greater than 10 ft over large parts of the area.

The largest and most persistent declines are between Bogue Phalia and the Big Sunflower River and between the Big Sunflower and Yazoo Rivers in

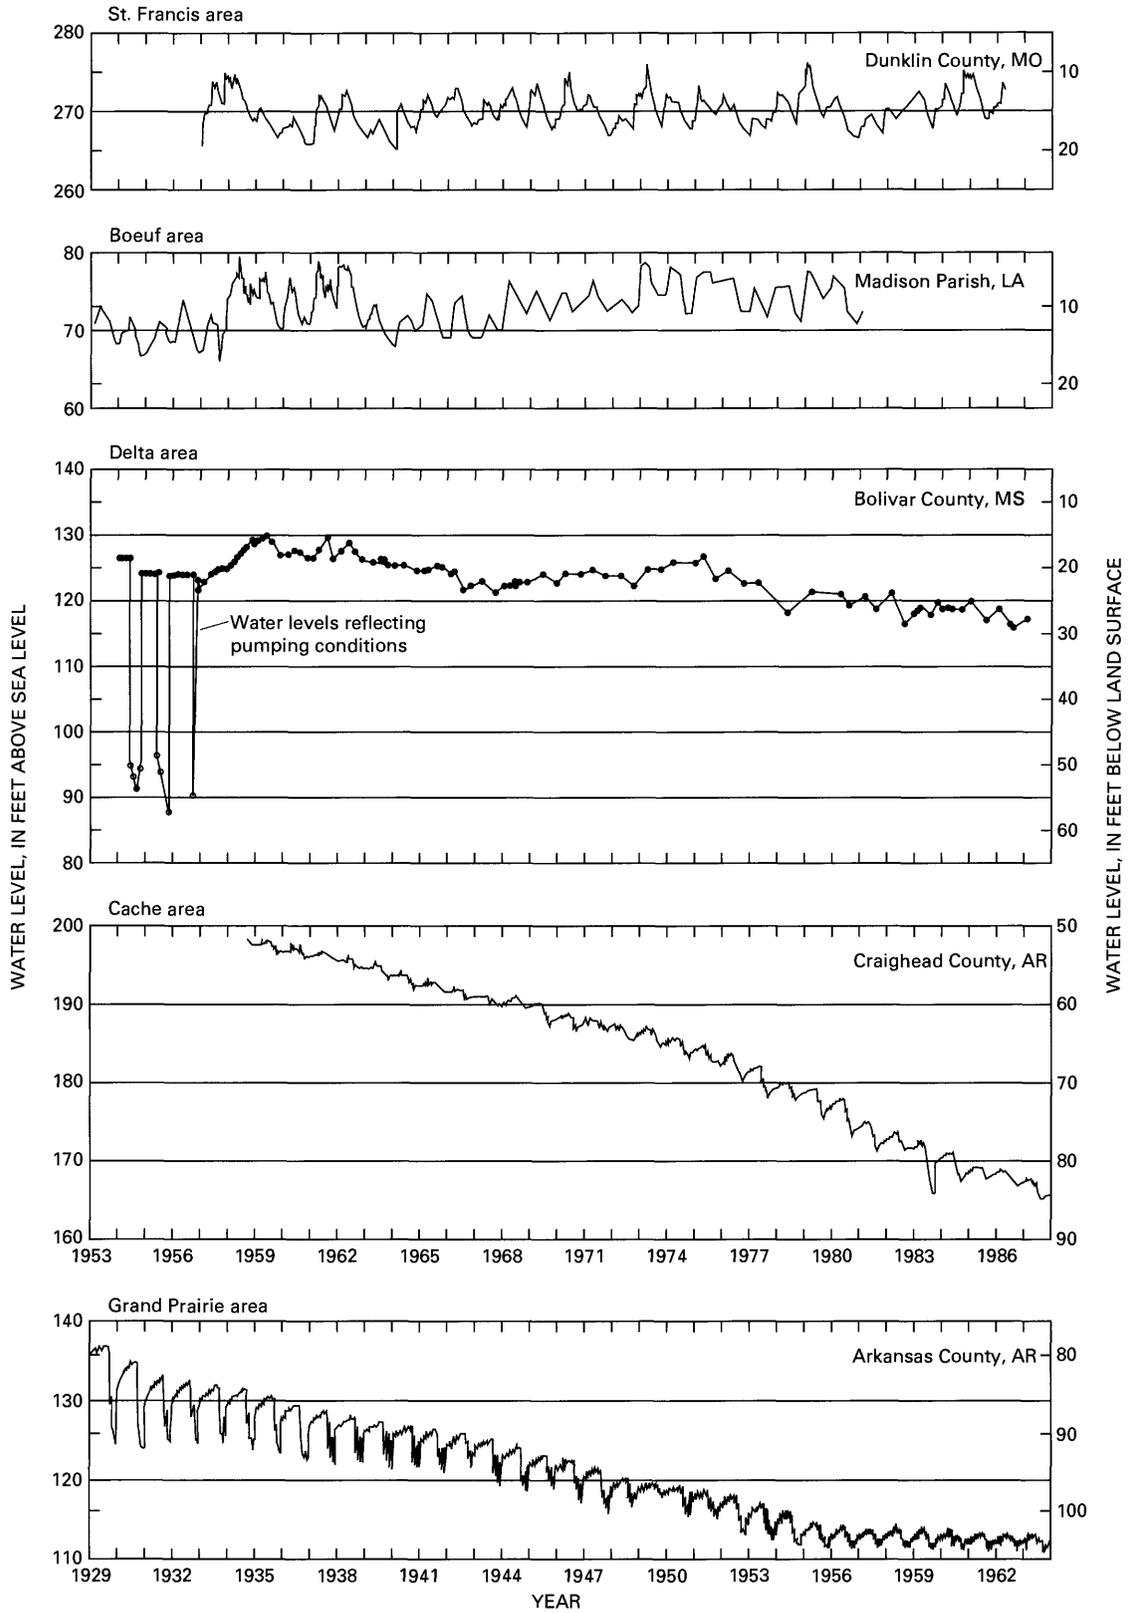


FIGURE 10.—Hydrographs showing water levels in selected wells in the Mississippi River Valley alluvial aquifer. Data for Bolivar County plotted from periodic measurements.

the central part of the Delta (pl. 1). Most long-term hydrographs in the Delta do not show long-term changes, but some short-term hydrographs show declines since 1980 (Sumner and Wasson, 1984, p. 10). Sumner (1984a) described the central part of the Delta as having gradually declining water levels with slight seasonal recoveries.

In the Boeuf area (pl. 1) between Bayou Bartholomew, the Arkansas River, and the Mississippi River in Desha and Lincoln Counties, Arkansas, water levels have declined 10 to 20 ft. These declines occurred mostly since about 1973. Onellion (1956, p. 19) noted no declines before 1956. A small area near Crossett in western Ashley County, Arkansas (an area with pumpage for the wood and paper industry) has shown water-level declines at least since the 1930's (Hewitt and others, 1949, p. 28).

In the St. Francis area between the Tyronza and Mississippi Rivers in Crittenden County, Arkansas, simulated water-level declines in 1982 were about 15 ft. The declines in this area from model simulations are less reliable due to lack of supporting data. The few hydrographs available for this area do not show as much drawdown as is indicated by the model results or by comparison of 1982 water levels with simulated predevelopment heads. It may be that the model has a resolution near 10 ft of drawdown in this area. The lack of resolution for drawdown may be due to underestimates of predevelopment head, overestimates of 1982 head, or both.

AREAS WITH NO REGIONAL DECLINES IN WATER LEVELS

Examination of model results, comparison of measured water level with simulated predevelopment heads, and examination of available long-term hydrographs indicates that water-level declines for most of the Boeuf and St. Francis areas are very limited in extent and magnitude. Water-level declines in these areas are generally localized or seasonal.

Most of the Boeuf and St. Francis areas and locations near major rivers show no long-term water-level declines. Whitfield (1975, p. 9) concluded that declines in the Mississippi River Valley alluvial aquifer in Louisiana may be as much as 40 ft but are only seasonal. Plebuch (1962) reported a small net rise in the Arkansas part of the St. Francis area between 1955 and 1962. Broom and Lyford (1981, pl. 7) described that area as having little or no water-level declines until 1978. Luckey (1985, p. 26) stated that no significant changes had taken place in the potentiometric surface of the alluvial aquifer in Missouri between 1956 and 1976.

CHANGES IN SATURATED THICKNESS DUE TO DEVELOPMENT

Long-term decreases in saturated thickness are the most important indication that the excess of outflow over inflow has affected the use of the Mississippi River Valley alluvial aquifer. A decrease in saturated thickness represents not only an increase in pumping lift but also a reduction in the ability of an aquifer to sustain current withdrawal rates because of reduced transmissivity. Continued decreases in saturated thickness indicate that the aquifer did not compensate for withdrawals by increased vertical inflow due to increased vertical head gradients or by the movement of distant inflow due to increased horizontal gradients. The demand imposed by withdrawals also was not met by the reduction in natural outflow. Because most of the alluvial aquifer contained water under confined conditions before development, a reduction in saturated thickness is an indication of a significant effect of development. Continuing decreases in saturated thickness indicate that the aquifer does not have the capacity to compensate for development and that current development may not be sustained. A reduction in saturated thickness may proceed to a point where most wells in an area do not have the capacity to sustain their design yields throughout an irrigation season. The aquifer framework, first defined regionally as part of this study, and simulated heads were used to analyze the change or lack of change in saturated thickness in the alluvial aquifer.

Simulated aquifer response showed no decrease in saturated thickness from predevelopment greater than 6 ft before 1942 in any place other than parts of the Grand Prairie and one small part of the Boeuf area (in western Ashley County, Arkansas). D.G. Thompson (Engler and others, 1963, pl. 4) showed some unquantified reduction in saturated thickness along the axes of depression in the 1929 potentiometric surface. The largest area in D.G. Thompson's 1929 map with a reduction in saturated thickness corresponded to the only area where any adjacent blocks had more than 7 ft of simulated decrease in saturated thickness. By 1962 parts of the Grand Prairie and Cache areas had decreases in saturated thickness of more than 10 ft (pl. 6). In parts of Lonoke and Prairie Counties in the Grand Prairie, scattered blocks had decreases in saturated thickness of 20 to 45 ft. Decreases of 20 to 36 ft were noted just west of Crowleys Ridge in Poinsett and Cross Counties, Arkansas. No other area had more than 7 ft of decrease in saturated thickness except the small area in Ashley County, Arkansas.

After the large increases in pumpage in the 1970's and early 1980's, the saturated thickness decreased three times as much from 1962 to 1982 as it had from predevelopment to 1962. Large parts of the Grand Prairie and Cache areas show reductions in saturated thickness of more than 20 ft (pl. 6) by 1982.

Decreases in saturated thickness through 1982 in the central Grand Prairie generally were 20 to 40 ft and as much as 50 to 60 ft. The largest change from 1962 to 1982 occurred in the northwestern end of the Grand Prairie in Lonoke County, Arkansas, where decreases were as much as 26 ft.

In the Cache area decreases in saturated thickness through 1982 generally were from 30 to 60 ft in the area between the Cache River and Crowleys Ridge. The decrease in saturated thickness between 1962 and 1982 generally was between 25 and 35 ft and as much as 38 ft.

The mean saturated thickness calculated from simulated values for the total aquifer area and for individual areas (pl. 1) are shown in figure 11. Also shown are the confidence intervals about the mean at the 50 and 90 percent probability levels for the total area and the Grand Prairie and Cache areas. Confidence limits were calculated according to methods given in Snedecor and Cochran (1967) from the formula

$$CI_x = Z_c s_x,$$

where

CI_x is the confidence limit of the sample mean;

n is the sample size;

Z_c is the confidence at $n-1$ for degrees of freedom for the given probability level, c ; and

s_x is the standard error of the sample mean.

The confidence interval, CI , is then given by

$$CI = x \pm CI_x,$$

where x is the sample mean. Only the Grand Prairie and Cache areas had decreases of more than 10 ft of mean saturated thickness for the period 1905-82. The Grand Prairie had a decrease by 1942 and has continuously decreased since then. Saturated thickness for the Grand Prairie has shown the largest decrease since predevelopment. The Cache area has shown a decrease only since 1942 and has shown the greatest rate of decrease for any area since 1962.

A small area of the central part of the Delta had a decrease in saturated thickness of 5 to 18 ft. The western part of the Boeuf area in Arkansas had a decrease of 5 to 14 ft. Over most of the Delta and Boeuf and all of the St. Francis areas, decreases in saturated thickness were less than 11 ft and generally less than 5 ft.

About 75 percent of the alluvial aquifer had more than 75 ft of saturated thickness in 1982 (pl. 6) as compared with 80 percent before development (pl. 6). The areas where saturated thickness decreased to less than 75 ft were nearly all in the Grand Prairie and Cache areas. About 20 percent of the Cache area had less than 75 ft of saturated thickness in 1982, a change of almost 15 percent from predevelopment. Nearly all of the decreases in saturated thickness to less than 75 ft have taken place since 1962. More than one-half of the Grand Prairie had less than 75 ft of saturated thickness in 1982, a change of more than 20 percent from predevelopment. About 15 percent of the Grand Prairie decreased to less than 50 ft of saturated thickness by 1982. Equal increases in area with saturated thickness less than 50 ft took place from 1942-62 and from 1962-82.

Sniegocki (1964, p. 32) stated that well yields ranged from 250 to 700 gal/min in areas that have 25 to 40 ft of saturated thickness and that any area where saturated thickness is less than 25 ft may be considered seriously depleted. Sniegocki (1964, p. 32) also stated that a well yield of 300 gal/min is a lower limit for economical rice irrigation. Peralta and others (1985, p. 19-27) used 25 ft as the minimum desirable saturated thickness in the Grand Prairie for efficient and reliable groundwater sources used for rice and soybean production. Their determination of desirable aquifer saturated thickness was based on irrigating 50 acres of rice with a 500 gal/min well during typical and drought years.

Annual water-level changes reflecting changes in saturated thickness (Plafcan and Remsing, 1989; Sumner, 1984a, 1984b) generally are 2 ft or less averaged over periods of 3 or 5 years. If saturated thickness is 50 to 75 ft, then continuous declines on the order of 2 ft per year would result in a serious depletion (less than 25 ft saturated thickness) in the near future.

If areas where the saturated thickness has decreased to less than 50 ft are in danger of being depleted in the near future, only the Grand Prairie had any appreciable area near serious depletion in 1982. If areas where saturated thickness has decreased to less than 75 ft are not currently in danger of but trending toward depletion, then only the Grand Prairie and Cache areas have any areas trending toward depletion in the near future. In all other areas less than 1 percent of the area had a decrease to less than 75 ft of saturated thickness, and less than 2 percent of the area had a decrease to less than 100 ft of saturated thickness in 1982.

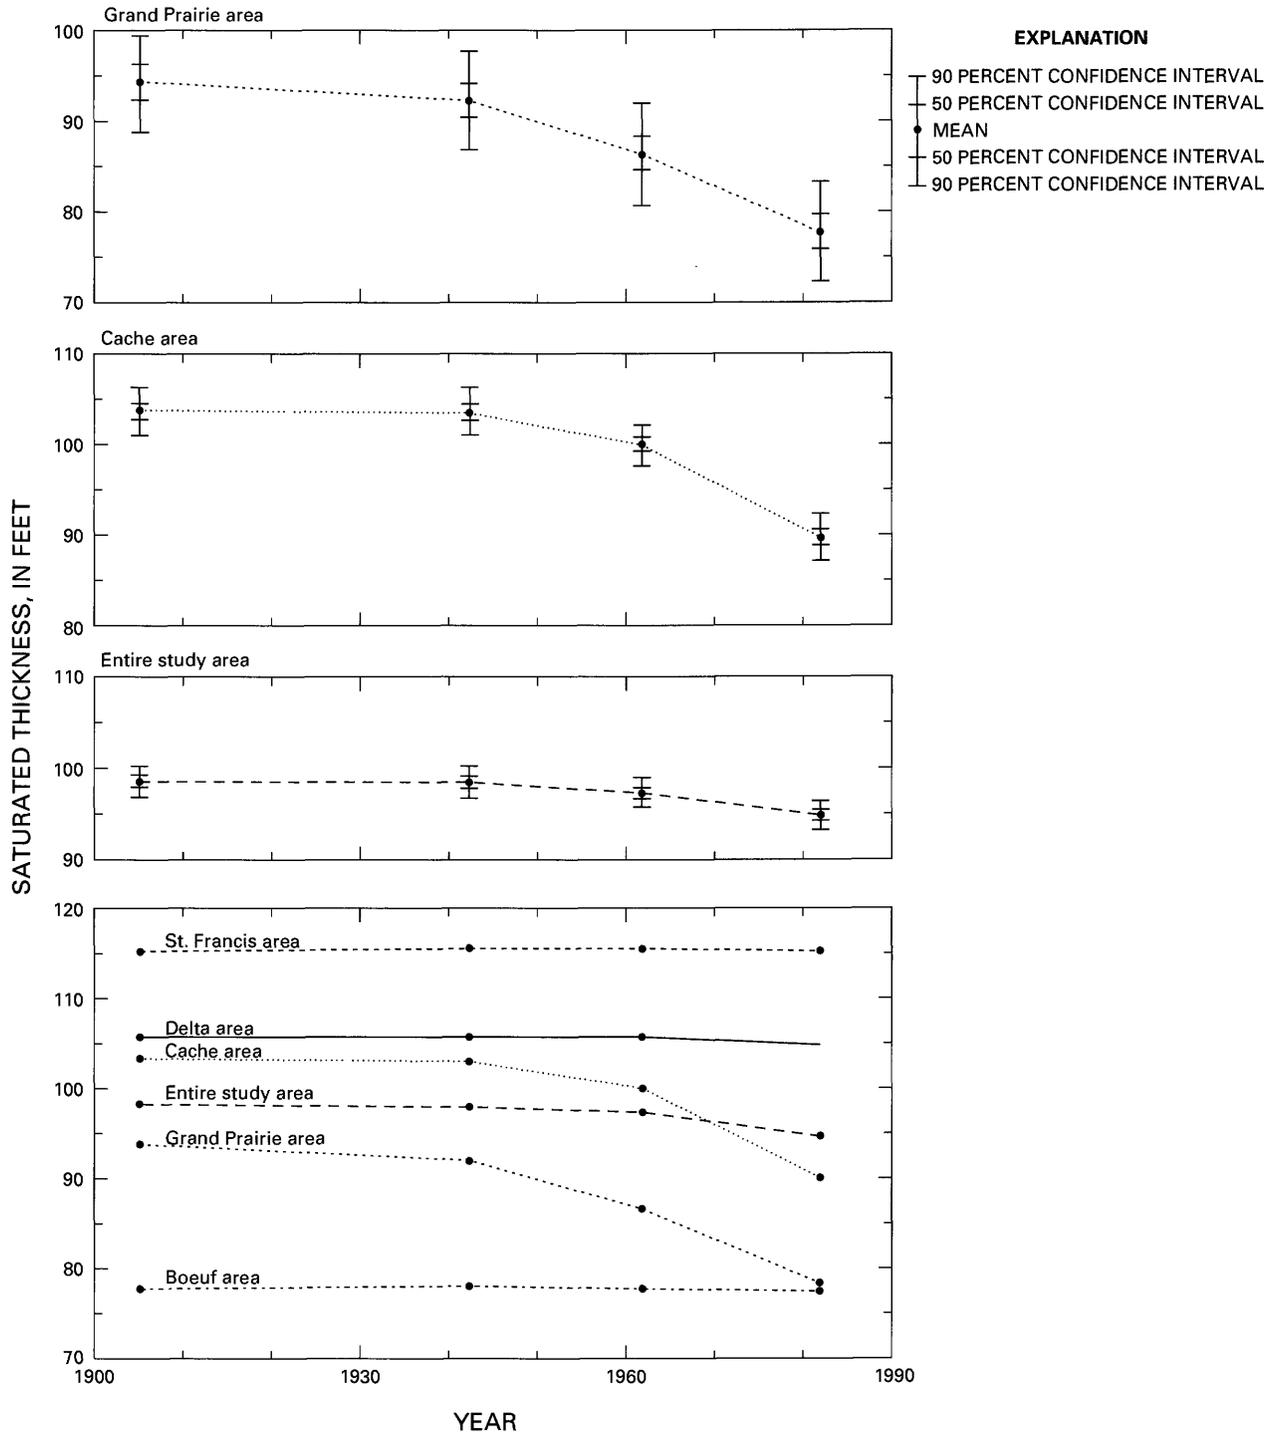


FIGURE 11.—Change in saturated thickness of the Mississippi River Valley alluvial aquifer, predevelopment to 1982, from simulated heads.

**CHANGES IN REGIONAL FLOW
DUE TO DEVELOPMENT**

Changes in the regional flow system of the Mississippi River Valley alluvial aquifer were analyzed at various intervals from predevelopment to 1987.

During this period the alluvial aquifer has been developed extensively as a source of water for agricultural use—the major stress on the flow system. Pumpage has had a major effect on the flow system throughout most of the aquifer as shown by an analysis of the hydrologic budget. As a result of this

stress, outflow to rivers has decreased, inflow from rivers has increased, and inflow through the overlying Mississippi River Valley confining unit has increased. In some areas the decrease in outflow to rivers and increase in inflow have not been sufficient to meet the demands of pumpage. As a consequence water has been removed from storage, resulting in large-scale regional declines in water levels, reduction in saturated aquifer thickness, and decreases in well yields for some parts of the aquifer. However, throughout most of the aquifer large-scale regional effects evidenced by changes in potentiometric head have not occurred. In some areas the direction of flow has been changed from that of the predevelopment flow system. Two areas have large depressions in the potentiometric surface and pronounced changes in the direction of flow. Most of the aquifer has no pronounced change in direction of flow, only a general lowering of 5 to 15 ft in the potentiometric surface.

HYDROLOGIC BUDGET

The hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer (fig. 12) shows a steady change in the distribution of inflow, outflow, and storage with time (table 7). The change in flow consisted of increased inflow and a general decrease in water in storage that has balanced the increase in outflow to wells. For the aquifer as a whole, pumpage from wells became the only outflow (100 percent of total flow) by the mid-1970's and corresponded to a rate of 4 Mgal/d/block (3 in/yr) in 1985. At the same time, rivers became a source of more than 30 percent of total flow rather than the recipient of net outflow. Inflow through the Mississippi River Valley confining unit increased from 0.8 in/yr (1 Mgal/d/block) for predevelopment to 1.3 in/yr (1.5 Mgal/d/block) by 1982. Inflow from underlying aquifers and confining beds has varied slightly in amount but has decreased as a proportion of the total flow. The alluvial aquifer

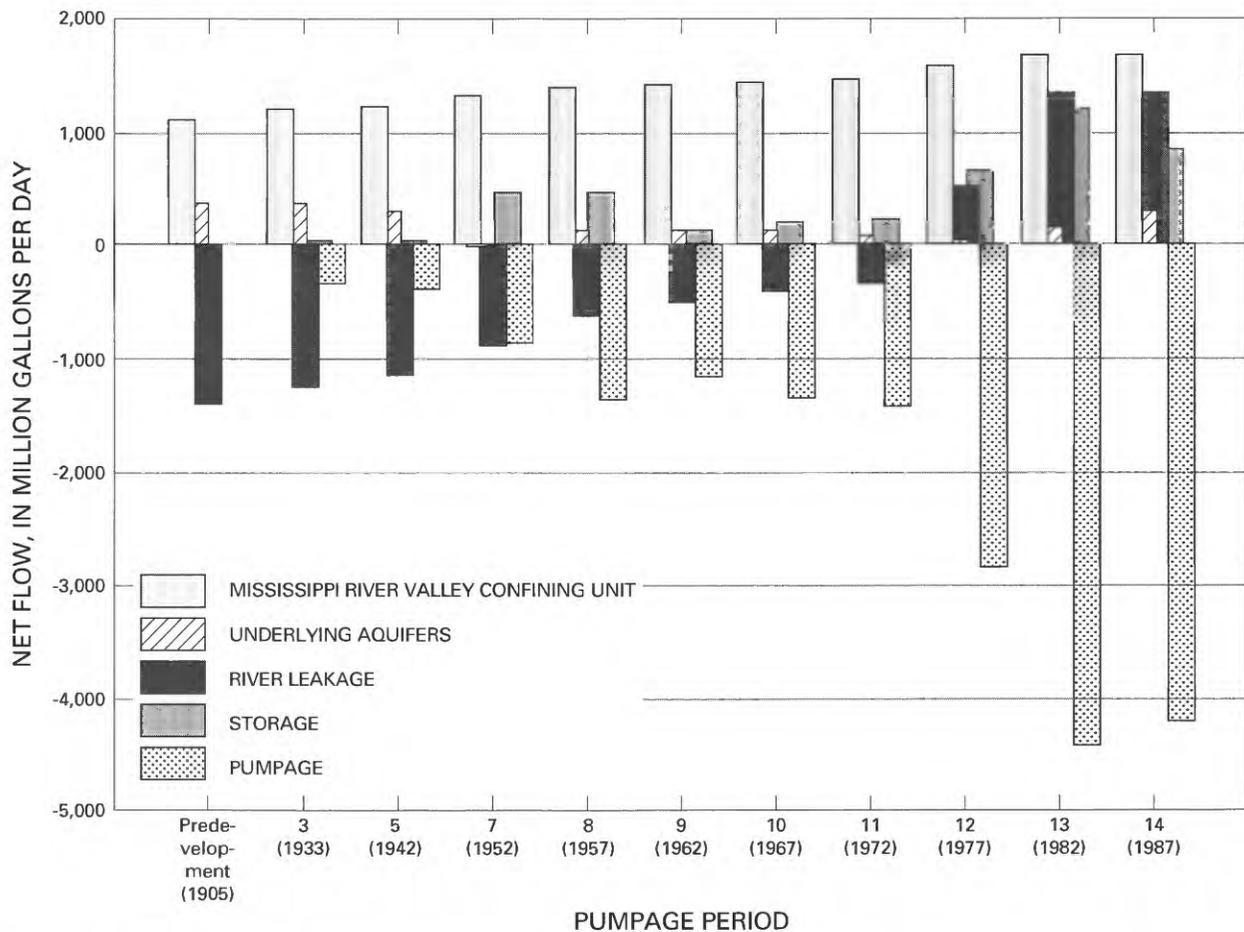


FIGURE 12.—Hydrologic budget for simulated regional flow in the entire Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

TABLE 7.—*Hydrologic budget for regional flow in the Mississippi River Valley alluvial aquifer in the study area*

[Net flow in million gallons per day; negative values are flow out of the aquifer; data are from the end of the last time step in selected pumpage periods; sums may show variations due to rounding; --, not applicable]

Pumpage period	Year	Mississippi River Valley confining unit	Underlying units	Adjacent units	Adjacent alluvium	Storage	All rivers	Wells
Predevelopment		1,088	315	17	-3	---	-1,466	---
3	1933	1,168	352	17	-3	41	-1,313	-312
5	1942	1,207	270	17	-3	36	-1,222	-355
7	1952	1,319	-24	17	-3	474	-938	-878
8	1957	1,390	120	17	-3	453	-654	-1,372
9	1962	1,412	109	18	-2	119	-508	-1,192
10	1967	1,432	112	18	-2	223	-414	-1,410
11	1972	1,450	79	18	-2	228	-328	-1,484
12	1977	1,583	36	19	-2	668	511	-2,855
13	1982	1,678	133	19	-2	1,228	1,348	-4,433
14	1987	1,694	255	21	-1	874	1,391	-4,250

has had continuous net losses of storage representing about 10 to 25 percent of total flow. Storage in the aquifer decreased at rates generally between 0.2 and 1 Mgal/d/block (0.2 and 0.9 in/yr). Inflow from areas outside the aquifer was less than 1 percent of total flow at any time for all areas.

Pumpage from wells in the Grand Prairie has caused the largest effect on the flow system as seen by large changes in the amount and distribution of flow and by changes in water levels. The hydrologic budget for the Grand Prairie (table 4, fig. 13) shows that inflow through the confining unit increased until about the 1950's and remained steady or increased only slightly through 1987. Inflow rates increased from 0.7 in/yr (0.8 Mgal/d/block) in predevelopment to about 1.9 in/yr (2.2 Mgal/d/block) in the 1980's. This value is probably near the maximum value for downward leakage because the head in the alluvial aquifer is below the top of the aquifer throughout the area. Inflow from rivers increased from 1906 to 1987, accounting for more than 20 percent of total flow after the mid-1970's. Nearly all river reaches in the area were losing water to the aquifer by the early 1950's. By 1987 about equal proportions of inflow were coming from the Arkansas River, Bayou Meto, and the White and Little Red Rivers. For much of the length of Bayou Meto, the potentiometric surface is 15 to 46 ft below the riverbed. Leakage from Bayou Meto has probably been near the maximum value since the mid-1950's. Movement of water from or to underlying aquifers in the area was less than 3 percent of total flow. Water removed from aquifer storage has supplied 20 to 50 percent of the total flow since the early 1970's. This corresponds to a loss

of 1 to 4 Mgal/d/block (1-3 in/yr) from storage. Pumpage from wells generally has been between 4 and 5 Mgal/d/block (3 and 4 in/yr) from 1950 through 1970 and 5 to 7 Mgal/d/block (4-6 in/yr) since 1970. The aquifer has not attained an equilibrium between pumpage and inflow since development started.

Changes in flow for the Cache area (table 4, fig. 14) are similar to those for the Grand Prairie; increases in pumpage from wells resulted in loss of water from storage and increases in inflow. Inflow through the Mississippi River Valley confining unit has increased only slightly since the 1950's. For most of the area the potentiometric surface is below the bottom of the confining unit (top of the alluvial aquifer), resulting in maximum inflow. Inflow through the confining unit increased from 0.8 in/yr (1 Mgal/d/block) in predevelopment to 1.4 in/yr (1.7 Mgal/d/block) in the 1980's. Rivers that formerly received outflow from the aquifer during early development became sources of inflow in the 1960's. By the 1980's inflow from rivers accounted for more than 30 percent of the total inflow. The Cache River is the largest source of inflow from rivers, but most recent increases have been from the White and Black Rivers.

For part of the length of the Cache River the potentiometric surface of the alluvial aquifer is below the riverbed, resulting in the maximum available inflow from reaches near areas of heaviest pumpage. Site C of figure 6 is in this area. In the area where the Cache River crosses Jackson County and southwestern Craighead County, Arkansas, the potentiometric surface is 4 to 21 ft below the riverbed. As inflow from the Cache River reached a maximum,

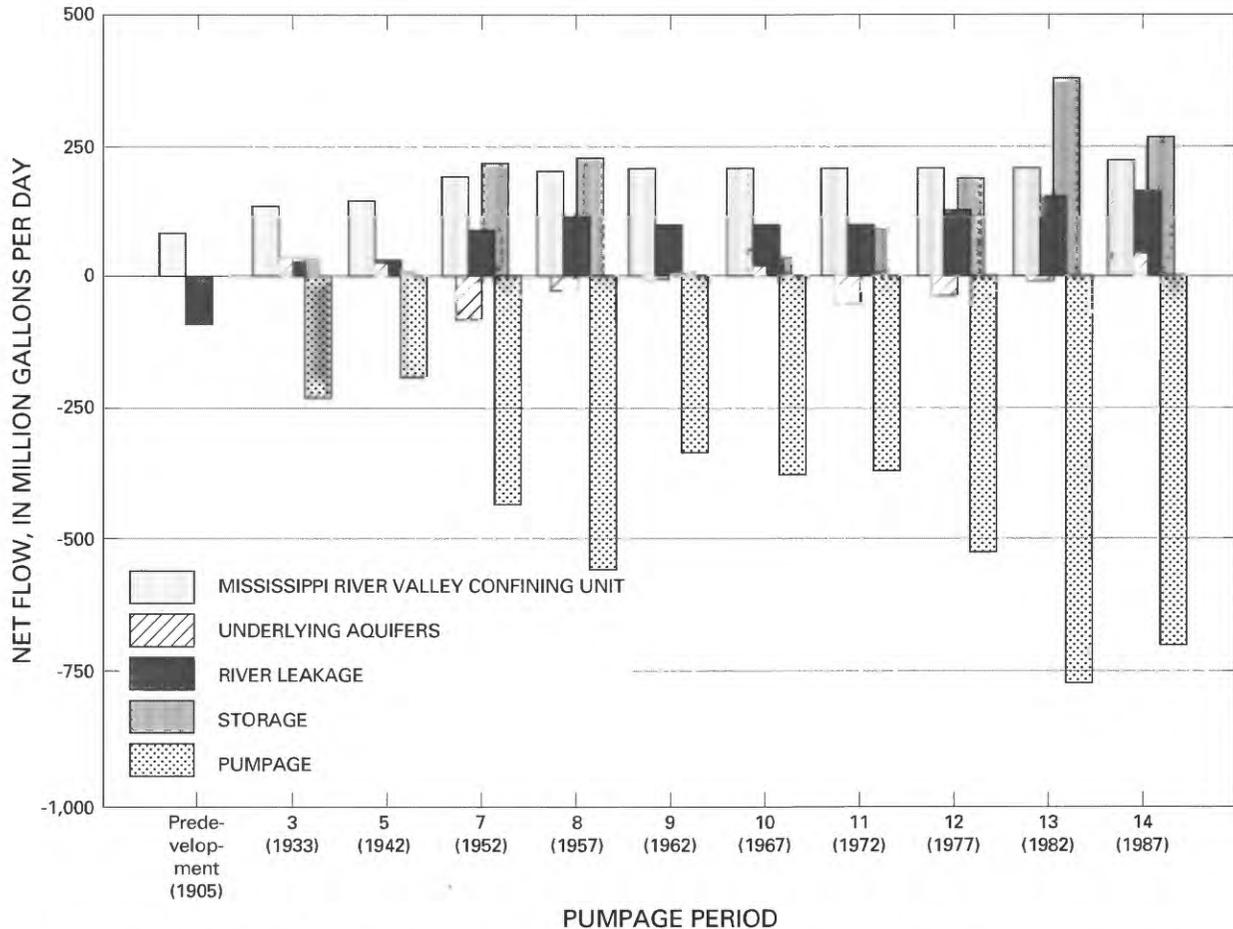


FIGURE 13.—Hydrologic budget for simulated regional flow in the Grand Prairie area of the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

more of the increase in inflow has been induced from reaches of the White and Black Rivers west of the area of greatest increase in pumpage. Nearly all reaches of all rivers were losing water to the alluvial aquifer by the mid-1970's. Inflow from or outflow to underlying aquifers generally has been a small part of total aquifer flow. In the 1970's and 1980's the alluvial aquifer received less than 11 percent, and generally about 7 percent, of total flow from underlying aquifers.

The increase in average pumpage from 1.8 Mgal/d/block (1.5 in/yr) in the 1950's to more than 5 Mgal/d/block (4 in/yr) in the mid-1970's and to 9 Mgal/d/block (8 in/yr) in the 1980's has exceeded increases in inflow, causing losses in storage in the Cache area. Net loss of storage was 0.6 Mgal/d/block (0.5 in/yr) to 1.2 Mgal/d/block (1 in/yr) from the early 1950's to the mid-1970's and 2 to 4 Mgal/d/block (2–3 in/yr) since the mid-1970's. Water removed from storage has represented 22 to 43 percent of total flow since the late 1950's.

The changes in flow for the Delta since predevelopment have mostly been the decrease in outflow to rivers and increase in inflow from rivers in response to increasing pumpage (table 4, fig. 15). Inflow from rivers exceeded outflow to rivers in the mid-1970's and represented more than 40 percent of total flow in the 1980's. Nearly all reaches of all rivers in the area were losing water to the alluvial aquifer by the early 1980's. Inflow through the confining unit has increased from 1 in/yr (1 Mgal/d/block) in predevelopment to 1.5 in/yr (1.8 Mgal/d/block) during the late 1970's and 1980's. Average pumpage in the Delta was about 0.6 Mgal/d/block (0.5 in/yr) prior to the mid-1970's and 2 to 4 Mgal/d/block (2 to 3 in/yr) since the mid-1980's.

Change in storage has supplied a noticeable part (about 8–12 percent) of total flow only since the mid-1970's. Loss of storage has been 0.2 to 0.5 Mgal/d/block (0.2–0.4 in/yr). The potential for increased induced inflow apparently exists for a large part of the Delta because the potentiometric surface is above

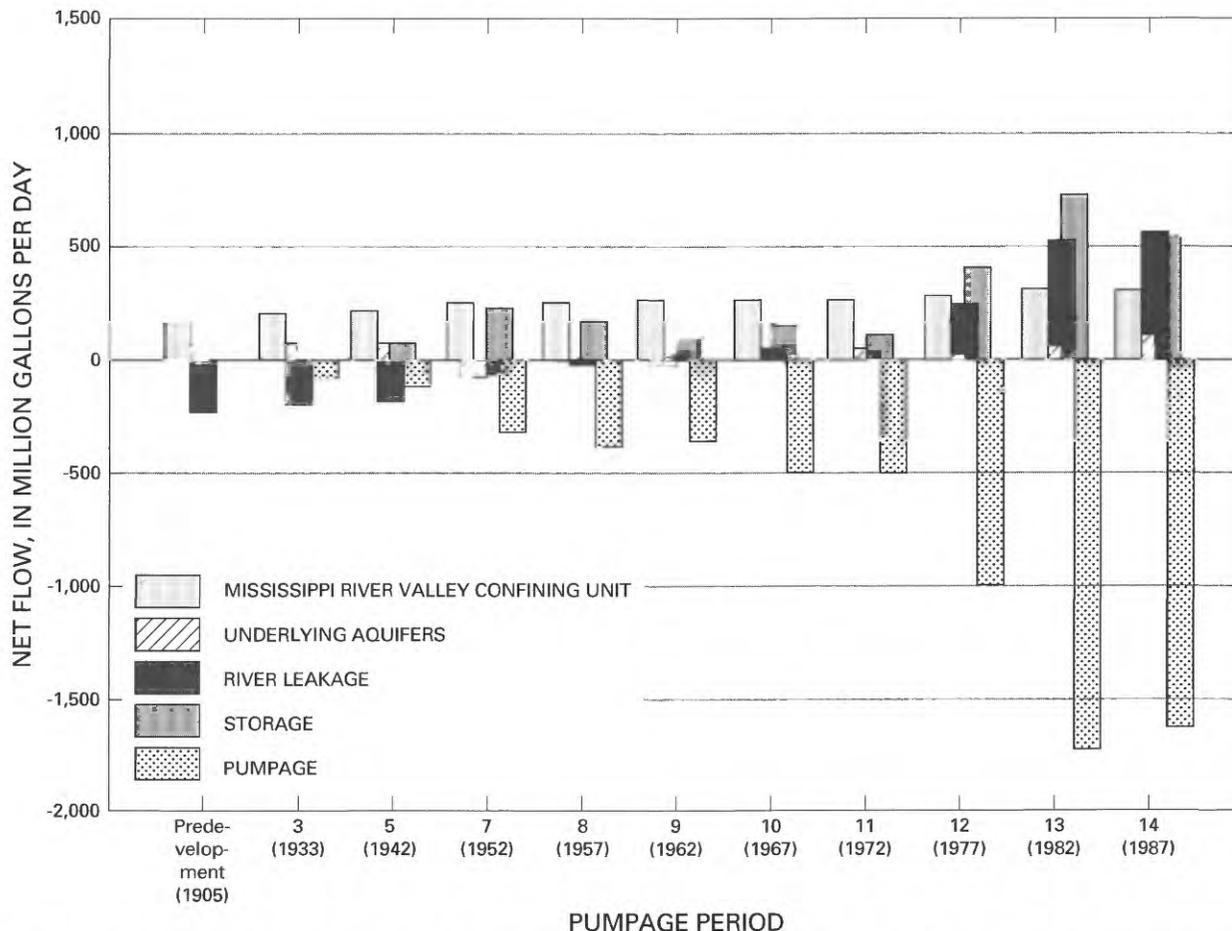


FIGURE 14.—Hydrologic budget for simulated regional flow in the Cache area of the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

the bottom of riverbeds and generally above the top of the aquifer. Outflow to underlying units has been a very small part of the total flow (less than 2 percent) since the early 1970's.

The changes in flow for the Boeuf area (table 4, fig. 16) are similar to those of the Delta. Most changes in flow have been in sources of inflow in response to increasing pumpage. Inflow through the confining unit increased from 0.7 in/yr (0.8 Mgal/d/block) in predevelopment to 1 in/yr (1 Mgal/d/block) after the mid-1970's. Outflow to rivers decreased, and inflow from rivers increased until the late 1970's when the rivers became net sources of inflow. Unlike the Grand Prairie, Cache, and Delta areas, part of the total (but not net) flow still was flow to rivers in the 1980's, indicating that not all outflow had been captured by pumpage. Average pumpage was 0.5 to 1 Mgal/d/block (0.4–0.8 in/yr) from 1950 to the mid-1970's. After the mid-1970's it was 1.7 to 2.1 Mgal/d/block (1.4–1.8 in/yr).

Although loss of water from storage in the Boeuf area was relatively small (0.1–0.2 Mgal/d/block)

compared to other areas, it generally has been a noticeable part (3–12 percent) of total flow. This amount may be due to slight but persistent water-level declines along the western border in southern Arkansas. Flow to the alluvial aquifer from underlying units has decreased slightly since predevelopment and represented less than 4 percent of total flow in the 1980's.

The changes in flow for the St. Francis area are similar to those of the Delta and Boeuf areas and may be thought of as progressing in the same direction but not as far. Increases in pumpage have been mostly satisfied by changes in sources and amounts of inflow (table 4, fig. 17). Inflow through the confining unit increased from 0.6 in/yr (0.7 Mgal/d/block) in predevelopment to 0.9 in/yr (1.1 Mgal/d/block) in the 1980's. Outflow to rivers decreased steadily from predevelopment. Inflow from rivers increased until rivers became a minor source of net regional inflow in 1982. River outflow and inflow nearly balanced because about as many river reaches were gaining as were losing. This

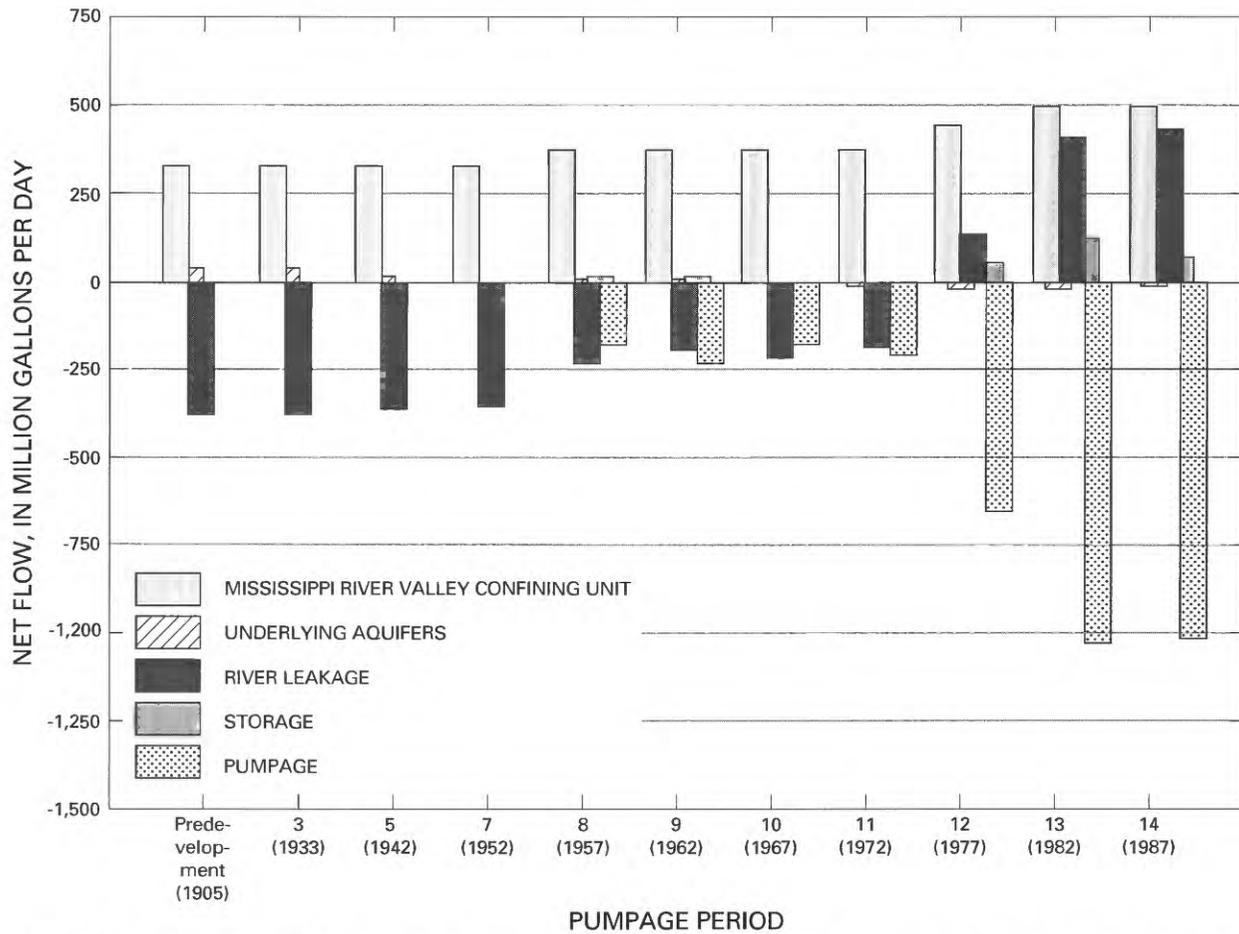


FIGURE 15.—Hydrologic budget for simulated regional flow in the Delta area of the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

balance was expected because many rivers and streams in the St. Francis area were engineered to act as drains.

Average pumpage increased steadily from 0.2 Mgal/d/block (0.2 in/yr) in the mid-1950's to 1.1 Mgal/d/block (0.9 in/yr) in the late 1970's. In the 1980's pumpage was about 2 Mgal/d/block (1.7 in/yr). Loss of water from storage has been small, about 0.1 to 0.2 Mgal/d/block (0.1 to 0.2 in/yr) in the 1980's but represented 10 percent of total flow. Inflow from underlying aquifers of 0.4 in/yr (0.5 Mgal/d/block) was a major part (37 percent) of predevelopment flow but was progressively less important (0.2 in/yr, 10 percent) by the 1980's.

DISTRIBUTION OF FLOW COMPONENTS

The driving force for change in the distribution of inflow and outflow is pumpage from the Mississippi River Valley alluvial aquifer. This change can best be

seen by noting the evolution of pumpage distribution (pl. 4). The most striking change in distribution of inflow and outflow is the change from predevelopment to 1982 of most river reaches from outflow toward inflow (pl. 7). The largest increases in flux were along the middle part of the Cache River in the Cache area (pl. 7). The smallest increase was along the Little River, a gaining river, in the St. Francis area. Most of the aquifer had increases in inflow through the Mississippi River Valley confining unit. The area with the largest gain in inflow from the confining unit was southwest of Bayou Meto in the Grand Prairie. Areas of least gain in inflow were in the Boeuf and St. Francis areas.

Another large change in the areal distribution of the components of flow is the loss of water from storage (pl. 7). This loss can be visualized by observing the decline in saturated thickness. A decrease in saturated thickness of 10 ft is a loss of about 34 in. of water, assuming the specific yield is 0.28, or a loss of 0.5 Mgal/d/block (0.4 in/yr) of water each

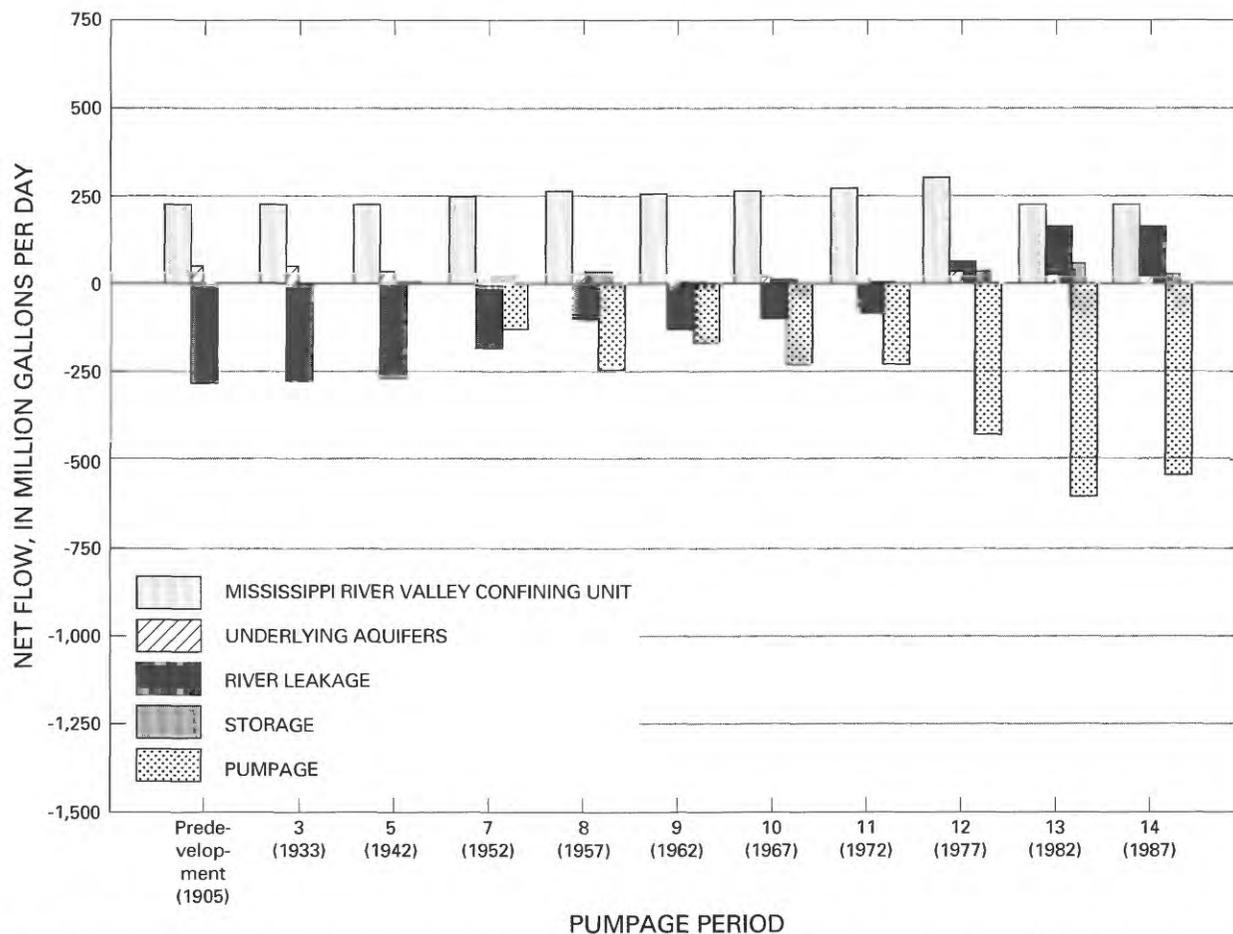


FIGURE 16.—Hydrologic budget for simulated regional flow in the Boeuf area of the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

year for the 77 years from 1906 to 1982. Current rates of loss of water from storage (pl. 7) are in the range of 1 to 10 Mgal/d/block (1–8 in/yr) in the Grand Prairie; 5 to 14 Mgal/d/block (4–12 in/yr) in the parts of the Cache area just west of Crowleys Ridge, and 4 Mgal/d/block (3 in/yr) or less, generally less than 1 Mgal/d/block (1 in/yr), elsewhere.

Changes in the distribution of inflow or outflow to the underlying aquifers (pl. 7) were small. About 86 percent of the area changed ± 0.6 Mgal/d/block (± 0.5 in/yr) or less (pl. 7).

DIRECTION OF FLOW

The development of the Mississippi River Valley alluvial aquifer has caused a change in directions of flow in the Grand Prairie and Cache areas. The changes in the Grand Prairie, as evidenced by the closed contours on the potentiometric surfaces and by areas of prominent drawdown, are more pronounced than those in the Cache area (pl. 5). The changes in

direction of flow in the Cache area are more recent but were more rapid than those in the Grand Prairie.

Predevelopment regional flow directions (pl. 2) in the Grand Prairie generally were southeastward, toward the White River but locally toward the Arkansas River. By 1942 the potentiometric surface (pl. 5) indicated that flow was diverted toward an elongate northwest-trending trough that plunges southeast and contains a closed circular depression centered 20 mi southeast of Stuttgart. The trough coincides with the thickest part of the Mississippi River Valley confining unit (pl. 1) and more intense pumpage (pl. 4), and is between sources of inflow from rivers. Flow was diverted away from the downstream reaches of the White and Arkansas Rivers but remained toward the rivers near the upstream reaches. Between 1942 and 1962 the trough in the potentiometric surface deepened and expanded. The trough area expanded to the northwest and became elliptical. In 1962 nearly all flow in the Grand Prairie (pl. 5) was toward the axis of the trough. Flow in the vicinity of the Arkansas and White Rivers was

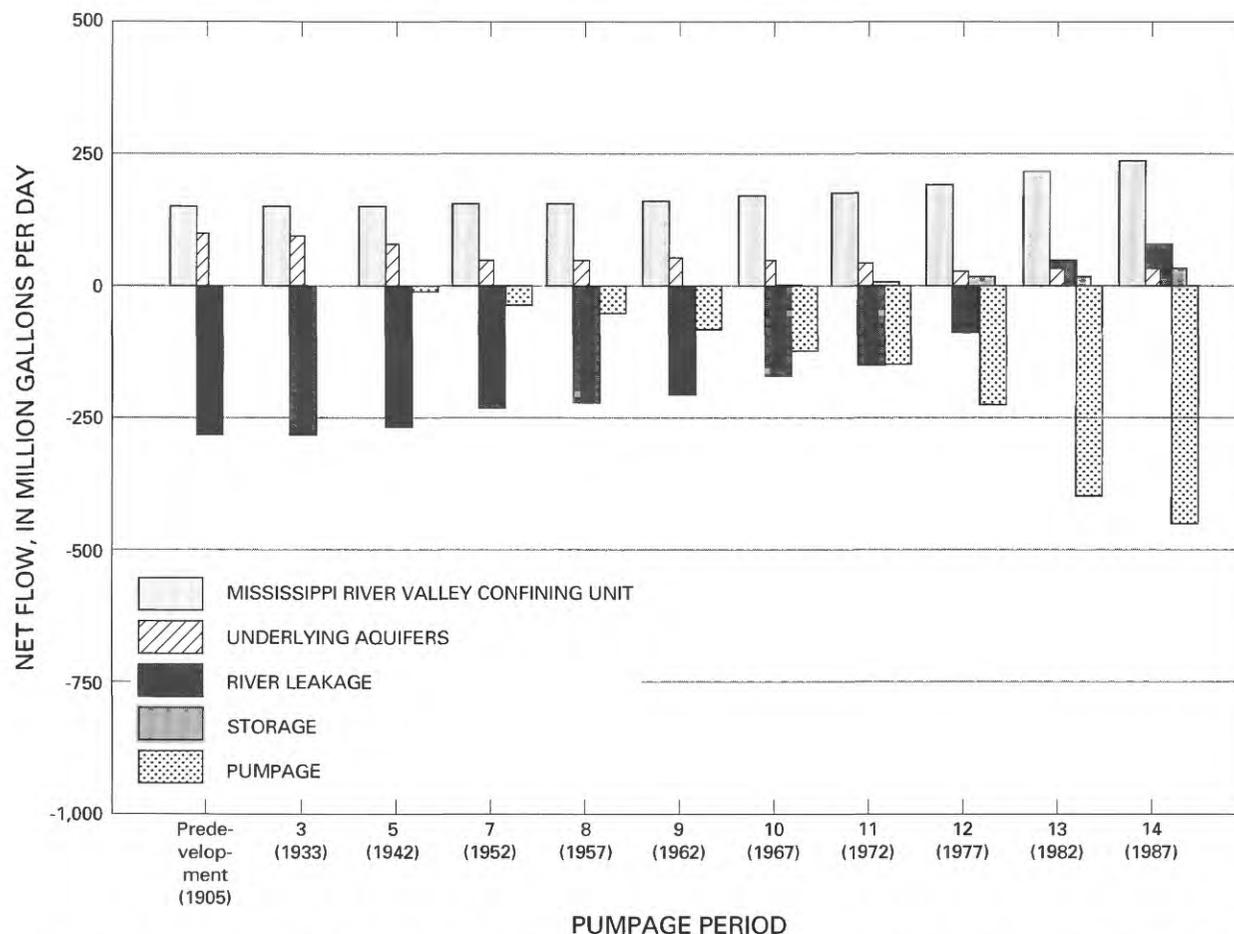


FIGURE 17.—Hydrologic budget for simulated regional flow in the St. Francis area of the Mississippi River Valley alluvial aquifer. Negative values are flow out of the aquifer.

away from the rivers toward the trough. The 1982 potentiometric surface (pl. 5) indicates a continuation of the expansion of the elliptical cone of depression. Hydraulic gradients did not change in direction but did change in magnitude, especially on the flanks and the northwest end of the trough.

In the Cache area, predevelopment flow directions generally were southwestward and toward the White River. Locally, flow in the vicinity of the smaller Cache and Black Rivers was toward the rivers. No large-scale change in flow direction for the Cache area could be discerned from the 1942 potentiometric map (pl. 5). Slight changes in the potentiometric surface may have caused local or small changes in flow direction. The first significant drawdown was in 1962. The potentiometric surface (pl. 5) indicated a trough had developed between Crowleys Ridge and the Cache River, between 35° N. and 36° N. latitude. Flow directions shifted southeastward toward the most intense pumpage (pl. 4).

The 1982 potentiometric surface (pl. 5) showed a recognizable trough between the Cache River and

Crowleys Ridge. The trough plunges southward paralleling Crowleys Ridge. The eastern extent of the trough is truncated by Crowleys Ridge. On larger scale maps with smaller contour intervals, parts of the trough show as closed contours in the potentiometric surface as early as 1972 (Ackerman, 1989b). Nearly all rivers in the area were losing flow to the alluvial aquifer in 1982 (pls. 6, 7). Some flow from the White and Black Rivers and from areas between those rivers and the Cache River was moving under the Cache River toward the major pumping area (pls. 4, 6). This observation was based on both modeled and mapped potentiometric gradients and is supported by hydrographs of wells (fig. 5) and by analysis of flow components mentioned previously that indicated the potentiometric surface was below the bottom of the riverbed in some areas.

In recent years the greatest drawdown of the potentiometric surface and, consequently, the greatest changes in the flow system are in the part of the Cache area just west of Crowleys Ridge. The reasons for the changes in this area are:

1. The most intense pumpage has been in this area (pl. 4). Poinsett County has the greatest rice acreage and pumpage from the alluvial aquifer of any county in the project area since 1975 (Halberg, 1977; Holland and Ludwig, 1981; and Holland, 1987).
2. Inflow through the Mississippi River Valley confining unit is low. The area is underlain by an above-average thickness of the confining unit (pl. 1).
3. The eastern side of the area is a hydrologic boundary between the alluvial aquifer and aquifers or confining beds having lower hydraulic conductivity. The simulated amount of water crossing this boundary was not greater than 0.4 in/yr (0.5 Mgal/d/block) even though it was greater along this boundary than along any other segment of the lateral boundary of the aquifer in the study area.
4. The rivers and streams in the area are smaller and probably do not penetrate to the aquifer. Most of the area is isolated from larger streams.

In the central part of the Delta and in parts of the Boeuf and St. Francis areas, drawdowns have been less than 20 ft (pl. 5). Most changes to the potentiometric surface since predevelopment have only shifted the contours upgradient (usually north), indicating an even lowering of the potentiometric surfaces, and have resulted in only minor or local changes in direction.

GROUND-WATER DEVELOPMENT POTENTIAL

Continued use and further development of the Mississippi River Valley alluvial aquifer as an integral part of the water supply of the study area are assumed to a varied degree in all water-use or water-management studies. Specific studies that project increased demand are U.S. Department of Agriculture (1983) and Sumner and Wasson (1984).

The effect of development has been greatest in Arkansas. The alluvial aquifer became so depleted in parts of the Grand Prairie that users were forced to reduce pumpage or use deeper aquifers for irrigation supplies. Various alternatives for water-supply management have been investigated, including: no action, conservation, surface-water diversion, and conjunctive use-sustained yield pumping strategies (U.S. Army Corps of Engineers, 1985). To assess the response of the regional flow system to continued use and further development and to evaluate the potential of the aquifer to support additional development,

two simulations were made to represent ground-water flow from 1982 to 2022. This report first discusses aquifer response to pumpage in terms of possible effects and then discusses the indicated potential for additional development in areas without projected effects.

The effect of continued or increased development and the ability of the system to support development were evaluated based on the change in head of the aquifer and decreases in saturated thickness. A decrease in head (drawdown) is an incomplete indication of the response of the system. A decrease in head generally is not economically significant unless accompanied by a serious decrease in saturated thickness and, consequently, a decrease in yield. Peralta and others (1985, p. 32) noted that increasing pumping costs due to declining ground-water levels probably are not and will not be prohibitive. As previously noted, 25 ft of saturated thickness is a lower limit for economical rice irrigation. When drawdown of head results in saturated thickness of less than 25 ft, the aquifer is assumed to be unable to support pumping at the simulated rate. A decrease in saturated thickness to 25 to 50 ft probably indicates that the aquifer has been severely affected and is not likely to support current development. When saturated thickness decreases to 50 to 75 ft, the effect of development is probably moderate.

Some areas have always had a small saturated thickness (pl. 6). Yields in these areas would probably always be less than yields in that part of the alluvial aquifer with larger saturated thickness. If drawdowns from pre-existing conditions are less than 10 ft after more than 20 years of sustained pumpage, effects are probably not significant.

The converse of measuring severity of effects by decrease in saturated thickness is to measure potential for further pumpage by lack of decrease in saturated thickness. Areas with less than 10 ft of drawdown and more than 100 ft of saturated thickness could be optimal locations for continued pumpage with the least foreseeable effect.

In the following discussion of projected regional aquifer response and potential for additional pumpage, no consideration was given to possible changes in water quality. In some isolated areas the potential for continued use or additional pumpage may be limited by the presence of saline water in the alluvial aquifer. Additional pumpage of the aquifer may also induce the movement of poor-quality water from adjacent areas or aquifers. Areas of the alluvial aquifer where water quality has degraded are small and probably are the result of local conditions.

PROJECTED AQUIFER RESPONSE TO CURRENT AND ADDITIONAL DEVELOPMENT

Based on simulation, the response of the Mississippi River Valley alluvial aquifer in the year 2002 to 20 years of pumpage at 1985 rates would be most pronounced in the Grand Prairie and Cache areas. The areas where saturated thickness would decrease as a result of sustaining current pumpage can be seen by comparing the simulated saturated thickness in 1982 (pl. 6) to that in 2022 (pl. 8). A decrease in saturated thickness to the extent that a severe effect or an inability of the aquifer to maintain current pumpage rates would be indicated only in parts of the Grand Prairie and Cache areas. In some areas saturated thickness would decline to less than 25 ft. In some areas where drawdown since 1982 would have exceeded 15 ft, saturated thickness would decline to less than 50 ft. After 40 years of pumpage at 1985 rates the Grand Prairie and Cache areas would be the only areas in the year 2022 with more than moderate effects (pl. 8). The areas of severe effects would decrease slightly. Areas unable to sustain development would increase from the year 2002 to 2022. Other than a small area of possible moderate effect in the St. Francis area, all the areas except the Grand Prairie and parts of the Cache areas seem to have the ability to sustain current levels of pumpage with only minimal effects.

A second simulation was made in order to assess the effect of increased pumpage and to determine areas that have a potential for increased pumpage. Beginning in 1987 an increased pumpage of 1.2 Mgal/d/block (1 in/yr) above 1985 rates was applied to all the study area for 35 years. The aquifer response projected by the two preceding development simulations is not intended to predict future response. It is highly unlikely that increased pumpage would occur uniformly throughout the study area as simulated. The purpose of this work is to indicate regions in the aquifer likely to show a similar response. After 15 years of pumping at the additional rate (2002), most of the aquifer would not be even moderately affected (pl. 8). Effects on the aquifer would be moderate or greater in large parts of the Grand Prairie and Cache areas (pl. 8) but only slightly more than that resulting from sustaining current pumpage (pl. 8). In these areas additional pumpage of 1.2 Mgal/d/block for 15 years would not be proportionately a large increase. The most noticeable effects of increased pumpage would occur after 35 years. A severe effect of additional pumpage would occur for most of the Grand Prairie and a large part of the Cache area. Possible effects would

occur for small areas in the Boeuf and St. Francis areas. The part of the Boeuf area that would have moderate to severe effects is at the edge of the alluvial aquifer where it consists of thin terrace deposits. The part of the St. Francis area where moderate effects would occur lies between the Tyronza and Mississippi Rivers in Crittenden County, Arkansas. This moderate-effect area was mentioned in the section on water-level changes due to development as showing declines in water levels that were unsupported by observations. Results may be less sure due to the lack of supporting data. Drawdowns from 1982 conditions of more than 10 ft would occur in small scattered locations throughout the Delta and in the remainder of the Boeuf and St. Francis areas. None of these small areas would coincide with decreases in saturated thickness of less than 70 ft for an area of more than 25 mi².

The areas modeled as being unable to support development were allowed to be pumped beyond the likely limit of use. As mentioned by Peralta and others (1985, p. 32), reduction of well yields is probably such a strong signal that water users will reduce withdrawals, abandon shallow wells, seek alternate supplies, improve efficiency, or switch to crops that demand less water. Various combinations of reduced water use or, at the least, reduced increase in water use have probably been affecting ground-water demand in the Grand Prairie for many years. The trends in rice acreage for Arkansas County, Arkansas, and in pumpage (fig. 9) for the Grand Prairie do not show a significant increase subsequent to 1940 as compared to other areas. Use of water from the underlying middle Claiborne aquifer for irrigation and aquaculture has increased steadily from about 1940 to 1980 in the Grand Prairie (D.J. Fitzpatrick, U.S. Geological Survey, written commun., 1987). The middle Claiborne aquifer was probably the primary alternative source of water in the Grand Prairie for those users who were experiencing problems with declining yields from the alluvial aquifer. In 1962 the saturated thickness in the central part of the Grand Prairie was about 40 to 70 ft. In 1982 the saturated thickness was about 30 to 60 ft in the same area. As other areas, especially part of the St. Francis area, approach limits of sustained yield as indicated by a saturated thickness of 40 to 60 ft, the pumping rates from the aquifer will stabilize or decrease.

POTENTIAL FOR ADDITIONAL DEVELOPMENT

Simulation of aquifer response to a uniform additional pumpage of 1.2 Mgal/d/block (1 in/yr) above

1985 rates was used to delineate areas with potential for supporting increased pumpage. By using the criteria of more than 100 ft of saturated thickness and less than 10 ft of drawdown following 35 years of additional development, several large areas of Mississippi River Valley alluvial aquifer show potential for continued pumpage at rates greater than 1985 pumpage. The largest area covers the central part of the Delta and small parts of the Boeuf area (pl. 8). The area coincides with thick saturated sections of the aquifer except for several small areas where drawdown in excess of 10 ft would be indicated. Pumpage in this area for the simulation generally was 2.3 to 7 Mgal/d/block.

A second large area where projected aquifer response indicates potential for increased development is the northern part of the St. Francis area. Simulated pumpage was 1 to 7 Mgal/d/block but generally 1 to 3.6 Mgal/d/block.

Three small areas, mostly in the Cache area, are indicated as having potential for additional development. One site is on the Arkansas-Missouri border, another is at the confluence of the White and Cache Rivers, and the third is at the confluence of the White and Mississippi Rivers. Simulated pumpage in these areas generally was 3.6 to 9.5 Mgal/d/block.

In reality, the potential for additional development is not limited to areas with more than 100 ft of saturated thickness nor is the greatest potential for further development directly proportional to saturated thickness. Other areas exist that probably would be able to support additional development with less saturated thickness. Historically, the best potential for inducing inflow to the alluvial aquifer is near large rivers, and to a limited extent, through the Mississippi River Valley confining unit. Therefore, locations where major rivers are in good hydraulic connection with the alluvial aquifer, or locations where the confining unit is thin, sandy, or absent, would have the greatest potential for further development. Conversely, areas far from potential induced recharge may have reduced potential for increased development even where saturated thickness is great. Predevelopment saturated thickness was more than 100 ft in the heavily stressed part of the Cache area near Crowleys Ridge and less than 75 ft in the central part of the Grand Prairie. The additional saturated thickness in the Cache area is apparently only delaying the inevitable decrease in yield and reduction in use.

SUMMARY

The Mississippi River Valley alluvial aquifer underlies a vast low, flat plain that extends from the apex of the Mississippi embayment south to the Gulf of Mexico. This report is limited to the area of occurrence north of the southern limit of the subcrop of the Vicksburg-Jackson confining unit (an area of about 32,000 mi²). The alluvial aquifer is part of the Mississippi embayment aquifer system and comprises unconsolidated alluvium and terrace deposits of Quaternary age. The aquifer consists predominately of sand and gravel. The aquifer grades from gravel or gravely sand at the bottom to fine-grained sand at the top. Lenses of clay, silt, or sandy silt occur at many places in the aquifer. The upper part of the Quaternary deposits are the silt, clay, and sand of the Mississippi River Valley confining unit.

Aquifer thickness generally ranges from 60 to 140 ft, and extremes occur where the Mississippi River Valley confining unit is absent or thick. Saturated thickness generally is equal to aquifer thickness except in areas where drawdown extends below the top of the aquifer. Based on aquifer tests the hydraulic conductivity is about 200 ft/d, and storage coefficients vary from 0.0001 where water in the aquifer is confined to 0.30 where it is unconfined.

The overlying Mississippi River Valley confining unit averages 30 ft in thickness but is highly variable, generally ranging from 10 to 50 ft. The confining unit is thinnest in the north and near the margins of the aquifer and is thickest between Bayou Meto and the White River near Stuttgart, Arkansas, where it is consistently more than 50 ft thick.

The alluvial aquifer is underlain by alternating sand and clay of the McNairy-Nacatoch aquifer and the Mississippi embayment aquifer system and also, in a small area, undifferentiated Paleozoic rocks. Most of the geohydrologic units of the Mississippi embayment aquifer system that underlie the alluvial aquifer are regional aquifers. They have distinctly smaller hydraulic conductivities and consist of alternating beds of sand and clay with some interbedded silt, lignite, and limestone. The Paleozoic rocks consist of shale, limestone, dolomite, and quartzite of minimal hydraulic conductivity.

The lateral boundary of the alluvial aquifer, including the contact with Crowleys Ridge, consists of the same hydrologic units that underlie the aquifer. Much of the boundary is a contact with the Paleozoic rocks and with the confining units of the Mississippi

embayment aquifer system units of minimal hydraulic conductivity. The remainder of the boundary consists of the contact with aquifers of the Mississippi embayment aquifer system, which generally have distinctly smaller hydraulic conductivities than the alluvial aquifer.

The alluvial aquifer is in hydraulic connection with many rivers and drains. The degree of connection is greatest for large rivers that fully penetrate the confining unit and the aquifer and is least, or not directly connected, for rivers not fully penetrating the confining unit. The Mississippi River is the largest of the rivers and commonly penetrates the aquifer but does not affect the water levels for as much of the area of the aquifer as do other rivers and drains. A large area to the east of the Mississippi River receives recharge from the river. This recharge occurs even though the net flow is to the Mississippi River for most of the year. A large gradient to the east exists year round a few miles from the Mississippi River. The Mississippi, White, and Arkansas Rivers are hydrologic boundaries for flow in the alluvial aquifer.

For the purpose of discussion, the study area was divided into five areal subdivisions bounded by three major rivers, Crowleys Ridge, and the eastern limit of the subcrop of the McNairy-Nacatoch aquifer. The five areas respond slightly differently and somewhat independently to pumpage. The area west of the McNairy-Nacatoch aquifer subcrop is excluded because simulated budget terms in that area would obscure analysis for the remainder of the area.

Simulation (computer modeling) of aquifer response between 1906 and 1987 was used to analyze ground-water flow patterns and to evaluate the effects of development on the flow system. The boundary of the computer model and of the study correspond to the physical limits of the Mississippi River Valley alluvial aquifer except that the southern limit is where the alluvial aquifer crosses the subcrop of the top of the Vicksburg-Jackson confining unit. The inclusion of all of the aquifer in the study area and the representation of all physical boundaries of the model as head-dependent flux boundaries in the computer model required fewer boundary assumptions and less constraint of the simulation of the flow system.

Predevelopment flow in the Mississippi River Valley alluvial aquifer consisted of inflow through the Mississippi River Valley confining unit, inflow from underlying and adjacent aquifers, and outflow to

rivers. Most inflow, about 74 percent, was through the confining unit at a net rate of 0.8 in/yr. Average rates for the five areas varied between 0.5 and 1.0 in/yr. Flow from underlying aquifers represented 22 percent of inflow and corresponds to a rate of 0.2 in/yr. Individual areas differed in the relative contribution from underlying units, the smallest being in the Grand Prairie and the largest in the St. Francis area. The simulated predevelopment potentiometric surface shows movement down the Mississippi River Valley and following the slope of land surface toward major rivers near the axes of the St. Francis, White, Arkansas, Yazoo, and Boeuf basins. Most predevelopment heads were within 20 ft of land surface.

The development of ground water from the alluvial aquifer has been primarily for agricultural use, particularly the irrigation of rice. The withdrawal of large quantities of water for rice irrigation started in the early 1900's in the Grand Prairie and was followed within about 10 years by similar development in the Cache area. Large withdrawals in other areas generally began about 1950. The largest increases in withdrawals occurred in all areas between 1973 and 1982. Maximum withdrawals for the study area before 1988 are estimated at 7,800 ft³/s (5,000 Mgal/d).

The water-level response to pumpage of the alluvial aquifer has followed the trend of development in time and areally. Water levels in the alluvial aquifer have shown long-term drawdowns of nearly 90 ft. The greatest drawdown of water levels occurred in the Grand Prairie area. The drawdown in the Grand Prairie was first documented in about 1927 and has been continuous since. Drawdown in the Cache area probably began in the 1940's but was indicated only as a closed depression on the potentiometric surface in the early 1960's. Water-level decline has continued since then, and the Cache area has the largest rate of decline in recent years of any area. The Delta has shown a limited regional drawdown of 10 to 20 ft only recently. The Boeuf area has only limited areas of drawdown of more than 10 ft since about 1973. The St. Francis area has one area where drawdown of 10 ft or more may have occurred.

Change in saturated thickness is a more important measure of aquifer response to increased development than drawdown. Decreases in saturated thickness represent not only increases in pumping lift, but also decreases in potential yield and reduction in the ability of an aquifer to sustain current yield. Continuing decreases in saturated thickness indicate

that the aquifer has not compensated for withdrawals by increased local inflow or by the movement of distant inflow.

Only the Grand Prairie and Cache areas have appreciable decreases in saturated thickness. The Grand Prairie had decreases by 1942 and continuous decrease since 1942. The Cache area has had decreases only since 1942 and has had the greatest rate of decrease since 1962. Decreases in saturated thickness through 1982 in the central Grand Prairie generally were 20 to 40 ft, and isolated decreases were 50 to 60 ft. Decreases in saturated thickness in the Cache area through 1982 generally were from 30 to 60 ft. A small area in the central part of the Delta had a decrease in saturated thickness of 5 to 18 ft. Decreases in saturated thickness in most of the Delta and Boeuf areas and in all of the St. Francis area were less than 11 ft and generally less than 5 ft.

About 75 percent of the Mississippi River Valley alluvial aquifer had more than 75 ft of saturated thickness in 1982 as compared with 80 percent before development. The areas where saturated thickness decreased below 75 ft were nearly all in the Grand Prairie and Cache areas. More than one-half of the Grand Prairie had less than 75 ft of saturated thickness in 1982, a decrease of more than 20 percent from predevelopment. About 15 percent of the Grand Prairie decreased to less than 50 ft of saturated thickness by 1982. About 20 percent of the Cache area had less than 75 ft of saturated thickness in 1982, a decrease of almost 15 percent from predevelopment.

If areas where saturated thickness has decreased to less than 50 ft may be considered to be in danger of being depleted for rice irrigation in the near future (10–25 years), only the Grand Prairie had any appreciable area near serious depletion in 1982. If areas where saturated thickness has decreased to less than 75 ft may be considered to be not currently in danger of depletion but trending toward depletion, then only the Grand Prairie and Cache areas have any large area trending toward depletion in the near future. No other areas have decreases of more than 1 percent of the area to less than 75 ft of saturated thickness, or 2 percent of the area to less than 100 ft of saturated thickness.

For most of the aquifer the demand imposed by pumpage has had a major effect on the hydrologic budget. Outflow to rivers has decreased, inflow from rivers has increased, and inflow through the overlying confining unit has increased. In some areas the decrease in outflow to rivers and increase in inflow have not been sufficient to meet the demands of pumpage. The excess of outflow over inflow has

resulted in the removal of water from storage, large-scale regional water-level declines, reduction in saturated aquifer thickness, and decreases in well yields for some parts of the aquifer. However, large-scale regional changes in head are not common for most of the aquifer. In some areas the flow directions have been changed from those of the predevelopment flow system. Parts of the Grand Prairie and Cache areas have large depressions in the potentiometric surface and pronounced changes in the direction of flow. Most of the aquifer has no pronounced change in direction of flow, only a general decline of less than 15 ft in the potentiometric surface.

Regional flow in the Mississippi River Valley alluvial aquifer shows a steady change toward increased inflow and a general decrease in water in storage to offset the increase in outflow to wells. Outflow to wells became the only net outflow by the mid-1970's and corresponded to a rate of 3 in/yr in 1985. At the same time rivers became a source of more than 30 percent of total inflow rather than the recipient of net aquifer outflow as they were in predevelopment. Recharge through the Mississippi River Valley confining unit increased from an inflow rate of 0.8 in/yr for predevelopment to 1.3 in/yr by 1982. Inflow from underlying aquifers and confining beds has varied only slightly but has decreased as a proportion of the total budget. The alluvial aquifer has had continuous net losses of storage representing about 10 to 25 percent of total flow. Storage for the entire aquifer generally decreased at rates between 0.2 and 0.9 in/yr.

Inflow through the Mississippi River Valley confining unit in the Grand Prairie area increased until about the 1950's and remained steady or increased only slightly through 1987. Inflow from rivers continued to increase from 1906 to 1987, accounting for more than 20 percent of total flow after the mid-1970's. The amount of water removed from storage has supplied 20 to 50 percent of total aquifer flow since the early 1970's.

The changes in flow for the Cache area are similar to those for the Grand Prairie. Increases in pumpage from wells resulted in loss of water from storage and increases in inflow. Inflow through the confining unit has increased only slightly since the 1950's. Rivers changed from the net outflow for the area in predevelopment to net inflow in the 1960's. By the 1980's inflow from rivers accounted for more than 30 percent of the total flow through the aquifer.

The changes in flow of the Delta since predevelopment mostly have been a decrease in outflow to rivers in response to increasing pumpage. Inflow from rivers exceeded outflow to rivers in the mid-1970's and represented more than 40 percent of total flow in

the 1980's. Decrease in storage has supplied from about 8 to 12 percent of total flow since the mid-1970's. The potential for increased induced inflow apparently exists for a large part of the Delta because the potentiometric surface is above the bottom of river beds and generally above the top of the aquifer, which indicates confined conditions.

The changes in flow for the Boeuf area are similar to those of the Delta. Most changes in flow have been shifts in sources of inflow in response to increasing pumpage. Outflow to rivers decreased and inflow from rivers increased until the late 1970's when the rivers became net sources of inflow. Unlike the Grand Prairie, Cache, and Delta areas, a large component of total flow still was flow to rivers in the 1980's, indicating that not all outflow had been captured by pumpage. Loss of water from storage was relatively small compared to other areas.

The changes in flow for the St. Francis area are similar to those of the Delta and Boeuf areas and may be thought of as progressing in the same direction but not as far. Increases in pumpage have been mostly satisfied by changes in source and amounts of inflow. Outflow to rivers decreased steadily from predevelopment, and inflow increased until rivers became a minor source of net regional inflow in 1982. Loss of water from storage has been small, but it represented 10 percent of total flow. Inflow from underlying aquifers was a major part, 37 percent, of the predevelopment budget but was progressively less, 10 percent, by the 1980's.

The development of the Mississippi River Valley alluvial aquifer has caused a change in flow directions in the Grand Prairie and Cache areas. Most changes to the potentiometric surface since predevelopment in the St. Francis, Boeuf, and Delta areas have resulted in the contours being shifted upgradient (usually north), indicating an even lowering of the potentiometric surface. Only minor or local changes in direction have resulted. The changes in the Grand Prairie, as evidenced by the closed contours on the potentiometric surfaces and by areas of prominent drawdown, are more pronounced than those in the Cache. The changes in flow direction in the Cache area occurred later but were more rapid than those in the Grand Prairie.

Flow in the Grand Prairie has been diverted toward an elliptical trough with a closed circular depression centered 20 mi southeast of Stuttgart, Arkansas. The trough roughly corresponds to the occurrence of the thickest part of the Mississippi River Valley confining unit, the area of largest pumpage, and is between sources of inflow from rivers.

The greatest recent drawdown of the potentiometric surface and, consequently, the greatest recent changes in the flow system are in the Cache area. Flow has been diverted toward a trough developed between Crowleys Ridge and the Cache River (between 35° N. and 36° N. latitude). The reasons for the changes in this area are as follows:

1. The largest pumpage has been in this area.
2. Inflow through the Mississippi River Valley confining unit is low. The area is underlain by a greater-than-average thickness of the confining unit.
3. The eastern side of the area is a hydrologic boundary between the alluvial aquifer and aquifers or confining beds having lower hydraulic conductivities.
4. Most of the area is isolated from larger streams. The rivers and streams in the area are small and probably do not penetrate the aquifer.

To assess response of the regional flow system to continued pumpage and to evaluate the potential of the aquifer to support additional ground-water development, two simulations were made to the year 2022. The effect of continued or additional pumpage and the ability to support development were based on simulated changes in head of the aquifer and decreases in saturated thickness. Drawdown is a fair indication of the response of the system but generally is not economically significant unless accompanied by a large decrease in saturated thickness and, consequently, a decrease in yield. When saturated thickness decreases to less than 25 ft, the aquifer is assumed to be unable to support pumpage at the simulated rate. A decrease in saturated thickness to 25 to 50 ft probably indicates that the aquifer has been severely affected and probably cannot support current pumpage in the near future. When saturated thickness decreases to 50 to 75 ft, the effect of pumpage is probably moderate. The converse of measuring severity of effects by decrease in saturated thickness is to measure potential for further ground-water development by lack of decrease in saturated thickness. Areas with less than 10 ft of drawdown and more than 100 ft of saturated thickness may be optimal locations for continued use or development with the least foreseeable effects.

The response of the Mississippi River Valley alluvial aquifer by the year 2002 to 20 years of pumpage at 1985 rates was most pronounced in the Grand Prairie and Cache areas. Saturated thickness would decrease to less than 25 ft in small areas. In some areas where drawdown would exceed 15 ft, saturated thickness would decrease to less than 50 ft. Saturated thickness would decrease to the extent that a

severe effect or an inability of the aquifer to maintain development was indicated only in the Grand Prairie and Cache areas. After 40 years of pumping at 1985 rates the Grand Prairie and Cache areas would be the only areas with more than moderate effects by the year 2022. Almost all of the Delta, Boeuf, and St. Francis and parts of the Cache areas would be able to sustain current levels of development with minimal effects.

In order to assess the effects of increased development and to determine areas with potential for increased development, a second simulation beyond 1987 was made with uniform additional pumpage of 1.2 Mgal/d/block (1 in/yr) above 1985 rates. After 15 years of pumping, most of the aquifer would not show even moderate effects by the year 2002. Effects on the aquifer would be moderate to severe in large parts of the Grand Prairie and Cache areas but would be only slightly greater than that shown as a result of sustaining current development. After 35 years, by the year 2022, severe effects because of additional development would be indicated for most of the Grand Prairie and a large part of the Cache areas. Drawdowns from 1982 conditions would be greater than 10 ft in small scattered locations throughout the Delta, Boeuf, and St. Francis areas. None of the small areas would coincide with decreases in saturated thickness to less than 70 ft for an area larger than 25 mi².

Projection of aquifer response to additional development was used to delineate areas with potential for supporting increased pumpage. Several areas of the Mississippi River Valley alluvial aquifer show potential for continued development at rates greater than 1985 pumpage. The largest areas are in the central part of the Delta and small parts of the Boeuf area. The areas coincide with thick sections of the aquifer except several small areas where drawdown in excess of 10 ft is indicated. A second large area where simulation indicates potential for additional development is the northern part of the St. Francis area. The potential for further development is not limited to areas with more than 100 ft of saturated thickness nor is the greatest potential for further development directly proportional to saturated thickness. There are other areas that probably would be able to support much further development with less saturated thickness. These areas are in locations where additional recharge could be induced. Historically, the best potential for inducing inflow to the alluvial aquifer is near large rivers and to a limited extent, through the Mississippi River Valley confining unit. Therefore, locations where rivers are near and in good hydraulic connection with the alluvial

aquifer or locations where the Mississippi River Valley confining unit is thin, sandy, or absent would have the greatest potential for further development.

Conversely, locations distant from areas where recharge may be induced would have less potential for increased development even where saturated thickness is great. Predevelopment saturated thickness was more than 100 ft in the heavily stressed part of the Cache area near Crowleys Ridge and less than 75 ft in the central part of the Grand Prairie. The additional saturated thickness in the Cache area is apparently delaying the inevitable decrease in yield and reduction in use.

REFERENCES

- Ackerman, D.J., 1989a, Hydrology of the Mississippi River Valley alluvial aquifer, south-central United States—A preliminary assessment of the regional flow system: U.S. Geological Survey Water-Resources Investigations Report 88-4028, 74 p.
- 1989b, Potentiometric surfaces of the Mississippi River Valley alluvial aquifer in eastern Arkansas, spring 1972 and 1980: U.S. Geological Survey Water-Resources Investigations Report 88-4075, scale 1:500,000.
- Arthur, J.K., and Taylor, R.E., 1990, Definition of geohydrologic framework and preliminary simulation of ground-water flow in the Mississippi embayment aquifer system, Gulf Coastal Plain, United States: U.S. Geological Survey Water-Resources Investigations Report 86-4364, 97 p.
- Boswell, E.H., Cushing, E.M., and Hosman, R.L., 1968, Quaternary aquifers in the Mississippi embayment, *with a discussion of Quality of the water* by H.G. Jeffery: U.S. Geological Survey Professional Paper 448-E, 15 p.
- Boswell, E.H., Moore, G.K., MacCary, L.M., and others, 1965, Cretaceous aquifers in the Mississippi embayment, *with discussions of Quality of the water* by H.G. Jeffery: U.S. Geological Survey Professional Paper 448-C, 37 p.
- Brahana, J.V., and Mesko, T.O., 1988, Hydrogeology and preliminary assessment of regional flow in the upper Cretaceous and adjacent aquifers in the northern Mississippi embayment: U.S. Geological Survey Water-Resources Investigations Report 87-4000, 65 p.
- Bredehoeft, J.D., and Young, R.A., 1970, The temporal allocation of ground-water—A simulation approach: *Water Resources Research*, v. 6, no. 1, p. 3-21.
- Broom, M.E., and Lyford, F.P., 1981, Alluvial aquifer of the Cache and St. Francis River basins, northeastern Arkansas: U.S. Geological Survey Open-File Report 81-476, 48 p.
- Callahan, J.A., 1983, Water use in Mississippi, 1980: U.S. Geological Survey Open-File Report 83-224, 1 sheet.
- Counts, H.B., and Engler, Kyle, 1954, Changes in water levels in deposits of Quaternary age in eastern Arkansas from 1938 to 1953: Arkansas University Agriculture Experiment Station Report, ser. 42, 11 p.
- Crider, A.F., 1906, Drainage of wetlands in Arkansas by wells, *in* Fuller, M.L., ed., *Underground-water papers*: U.S. Geological Survey Water Supply and Irrigation Paper 160, p. 54-58.
- Crider, A.F., and Johnson, L.C., 1906, *Underground water resources of Mississippi*: U.S. Geological Survey Water-Supply and Irrigation Paper 159, 86 p.

- Cushing, E.M., Boswell, E.H., and Hosman, R.L., 1964, General geology of the Mississippi embayment: U.S. Geological Survey Professional Paper 448-B, 28 p.
- Darden, Daphne, 1982a, Water-level maps of the alluvial aquifer, northwestern Mississippi, September 1981: U.S. Geological Survey Water-Resources Investigations Report 82-574, 1 sheet.
- 1982b, Water-level maps of the alluvial aquifer, northwestern Mississippi, April 1982: U.S. Geological Survey Water-Resources Investigations Report 82-4061, 1 sheet.
- 1983, Water-level maps of the alluvial aquifer, northwestern Mississippi, September 1982: U.S. Geological Survey Water-Resources Investigations Report 83-224, 1 sheet.
- Edds, Joe, and Fitzpatrick, D.J., 1984, Maps showing altitude of the potentiometric surface and changes in water levels of the alluvial aquifer in eastern Arkansas, spring 1983: U.S. Geological Survey Water-Resources Investigations Report 84-4264, 1 sheet.
- Engler, Kyle, Bayley, F.H., 3d, and Sniegocki, R.T., 1963, Studies of artificial recharge in the Grand Prairie region, Arkansas; environment and history: U.S. Geological Survey Water-Supply Paper 1615-A, 32 p.
- Engler, Kyle, Thompson, D.G., and Kazmann, R.G., 1945, Ground-water supplies for rice irrigation in the Grand Prairie region, Arkansas: Arkansas University Agricultural Experiment Station Bulletin 457, 56 p.
- Fisk, H.N., 1944, Geological investigation of the alluvial valley of the lower Mississippi River: U.S. Department of the Army, Mississippi River Commission, 78 p.
- 1947, Fine-grained alluvial deposits and their effects on Mississippi River activity: U.S. Army Corps of Engineers, Waterways Experiment Station, 82 p.
- Fitzpatrick, D.J., 1985, Occurrence of saltwater in the alluvial aquifer in the Boeuf-Tensas basin, Arkansas: U.S. Geological Survey Water-Resources Investigations Report 85-4029, 1 sheet.
- Franke, O.L., and Reilly, T.E., 1987, The effects of boundary conditions on the steady-state response of three hypothetical ground-water systems—Results and implications of numerical experiments: U.S. Geological Survey Water-Supply Paper 2315, 19 p.
- Freeze, R.A., 1971, Three-dimensional, transient, saturated-unsaturated flow in a groundwater basin: *Water Resources Research*, v. 7, no. 2, p. 347-366.
- Freeze, R.A., and Cherry, J.A., 1979, *Groundwater*: New Jersey, Prentice-Hall, 604 p.
- Glenn, L.C., 1906, Underground waters of Tennessee and Kentucky west of Tennessee River and of an adjacent area in Illinois: U.S. Geological Survey Water-Supply and Irrigation Paper 164, 173 p.
- Godson, Richard, 1981, Digital terrain map of the United States: U.S. Geological Survey Miscellaneous Investigations Map I-1318, 1 sheet.
- Grubb, H.F., 1984, Planning report for the Gulf Coast Regional Aquifer-System Analysis in the Gulf of Mexico Coastal Plain, United States: U.S. Geological Survey Water-Resources Investigations Report 84-4219, 30 p.
- 1986, Gulf Coastal Plain regional aquifer-system study, in Sun, R.J., ed., Regional aquifer system analysis program of the U.S. Geological Survey—Summary of projects, 1978-84: U.S. Geological Survey Circular 1002, p. 152-161.
- Halberg, H.N., 1977, Use of water in Arkansas, 1975: Arkansas Geological Commission Water Resources Summary Number 9, 28 p.
- Hewitt, F.A., Baker, R.C., and Billingsley, G.A., 1949, Ground-water resources of Ashley County, Arkansas: Arkansas University Institute of Science and Technology, Research Series 16, 35 p.
- Hines, M.S., Plebuch, R.O., and Lamonds, A.G., 1972, Water resources of Clay, Greene, Craighead, and Poinsett Counties, Arkansas: U.S. Geological Survey Hydrologic Investigations Atlas HA-377, 2 sheets.
- Holland, T.W., 1987, Use of water in Arkansas, 1985: Arkansas Geological Commission, Water Resources Summary Number 16, 27 p.
- Holland, T.W., and Ludwig, A.H., 1981, Use of water in Arkansas, 1980: Arkansas Geological Commission, Water Resources Summary Number 14, 30 p.
- Hosman, R.L., Long, A.T., Lambert, T.W., and others, 1968, Tertiary aquifers in the Mississippi embayment, *with discussions of Quality of the water by H.G. Jeffery*: U.S. Geological Survey Professional Paper 448-D, 29 p.
- Hosman, R.L., and Weiss, J.S., 1991, Geohydrologic units of the Mississippi embayment and Texas coastal uplands aquifer systems, south-central United States: U.S. Geological Survey Professional Paper 1416-B, 19 p.
- Hunrichs, R.A., 1983, Identification and classification of perennial streams of Arkansas: U.S. Geological Survey Water-Resources Investigations Report 83-4063, 1 sheet.
- Johnson, A.I., Mosten, R.P., and Versaw, S.F., 1966, Laboratory study of aquifer properties and well design for an artificial-recharge site: U.S. Geological Survey Water-Supply Paper 1615-H, 42 p.
- Krinitzky, E.L., and Wire, J.C., 1964, Ground water in alluvium of lower Mississippi Valley (upper and central areas): U.S. Department of the Army, Corps of Engineers, Waterways Experiment Station Technical Report 3-658, v. 1 and 2, 400 p.
- Leake, S.A., and Prudic, D.E., 1988, Documentation of a computer program to simulate aquifer-system compaction using the modular finite-difference ground-water flow model: U.S. Geological Survey Open-File Report 88-482, 80 p.
- Luckey, R.R., 1985, Water resources of the southeast lowlands, Missouri, *with a section on Water quality by D.L. Fuller*: U.S. Geological Survey Water-Resources Investigations Report 84-4277, 78 p.
- McDonald, M.G., and Harbaugh, A.W., 1984, A modular three-dimensional finite-difference ground-water flow model: U.S. Geological Survey Open-File Report 83-875, 528 p.
- Mesko, T.O., Williams, T., Ackerman, D.J., and Williamson, A.K., 1990, Ground-water pumpage from aquifers of the gulf coast aquifer systems, south-central United States: U.S. Geological Survey Water-Resources Investigations Report 89-4180, 177 p.
- Morris, E.E., and Bush, W.V., 1986, Extent and source of saltwater intrusion into the alluvial aquifer near Brinkley, Arkansas, 1984: U.S. Geological Survey Water-Resources Investigations Report 85-4322, 123 p.
- Newcome, Roy, Jr., 1971, Results of aquifer tests in Mississippi: Mississippi Board of Water Commissioners Bulletin 71-2, 44 p.
- Onellion, F.E., 1956, Geology and ground-water resources of Drew County, Arkansas: Arkansas Geological and Conservation Commission Water Resources Circular 4, 32 p.
- Peralta, R.C., Yazdanian, A., Killian, P.J., and Shulstad, R.N., 1985, Future Quaternary groundwater accessibility in the Grand Prairie—1993: University of Arkansas, Agricultural Experiment Station Bulletin 877, 37 p.
- Pettijohn, R.A., Weiss, J.S., and Williamson, A.K., 1988, Dissolved-solids concentrations and temperature in ground water of the gulf coast aquifer systems, south-central United States: U.S. Geological Survey Water-Resources Investigations Report 88-4082, map, scale 1:3,500,000, 5 sheets.

- Plafcan, Maria, and Edds, Joe, 1986, Water level and saturated thickness maps of the alluvial aquifer in eastern Arkansas, 1984: U.S. Geological Survey Water-Resources Investigations Report 86-4014, 1 sheet.
- Plafcan, Maria, and Fugitt, D.T., 1987, Water-level maps of the alluvial aquifer in eastern Arkansas, 1985: U.S. Geological Survey Water-Resources Investigations Report 86-4178, 1 sheet.
- Plafcan, Maria, and Remsing, L.M., 1989, Water-level maps of the Mississippi River Valley alluvial aquifer in eastern Arkansas, 1986: U.S. Geological Survey Water-Resources Investigations Report 88-4067, 1 sheet.
- Plebuch, R.O., 1961, Fresh-water aquifers of Crittenden County, Arkansas: Arkansas Geological and Conservation Commission Water Resources Circular 8, 65 p.
- 1962, Changes in ground-water levels in deposits of Quaternary age in northeastern Arkansas: Arkansas Geological Commission, Water Resources Summary Number 3, 11 p.
- Purdue, A.H., 1904, Arkansas (well and spring records), in Fuller, M.L., Contributions to the hydrology of eastern United States, 1903: U.S. Geological Survey Water-Supply and Irrigation Paper 102, p. 374-388.
- Reed, J.E., and Broom, M.E., 1979, Digital model of the Bayou Bartholomew alluvial aquifer-stream system, Arkansas: U.S. Geological Survey Open-File Report 79-685, 37 p.
- Ryling, R.W., 1960, Ground-water potential of Mississippi County, Arkansas: Arkansas Geological and Conservation Commission Water Resources Circular 7, 87 p.
- Shepard, E.M., 1907, Underground waters of Missouri, their geology and utilization: U.S. Geological Survey Water Supply and Irrigation Paper 195, 224 p.
- Snedecor, G.W., and Cochran, W.G., 1967, Statistical methods (6th ed.): Ames, Iowa, Iowa State University Press, 593 p.
- Sniegocki, R.T., 1964, Hydrogeology of a part of the Grand Prairie region, Arkansas: U.S. Geological Survey Water-Supply Paper 1615-B, 72 p.
- Sniegocki, R.T., Bayley, F.H., 3d, Engler, Kyle, and Stephens, J.W., 1965, Testing procedures and results of studies of artificial recharge in the Grand Prairie region, Arkansas: U.S. Geological Survey Water-Supply Paper 1615-G, 56 p.
- Stephenson, L.W., and Crider, A.F., 1916, Geology and ground waters of northeastern Arkansas, with a discussion of The chemical character of the waters, by R.B. Dole: U.S. Geological Survey Water-Supply Paper 399, 315 p.
- Stephenson, L.W., Logan, W.N., and Waring, G.A., 1928, The ground-water resources of Mississippi: U.S. Geological Survey Water-Supply Paper 576, 515 p.
- Sumner, D.M., 1984a, Water-level maps of the alluvial aquifer, northwestern Mississippi, April 1983: U.S. Geological Survey Water-Resources Investigations Report 83-4285, 1 sheet.
- 1984b, Water-level maps of the alluvial aquifer, northwestern Mississippi, September 1983: U.S. Geological Survey Water-Resources Investigations Report 84-4346, 1 sheet.
- Sumner, D.M., and Wasson, B.E., 1984, Geohydrology and simulated effects of large ground-water withdrawals on the Mississippi River alluvial aquifer in northwestern Mississippi: U.S. Geological Survey Open-File Report 84-822, 82 p.
- Sun, R.J., ed., 1986, Regional aquifer-system analysis program of the U.S. Geological Survey—Summary of projects, 1978-84: U.S. Geological Survey Circular 1002, 264 p.
- U.S. Army Corps of Engineers, 1985, Eastern Arkansas region comprehensive study, summary of reconnaissance study findings: Memphis, U.S. Army Corps of Engineers, Memphis District, v. 1, 168 p.
- U.S. Department of Agriculture, 1983, Agricultural water use study: Little Rock, Arkansas, U.S. Department of Agriculture, Soil Conservation Service, 43 p.
- Veatch, A.C., 1906, Geology and underground water resources of northern Louisiana and southern Arkansas: U.S. Geological Survey Professional Paper 46, 389 p.
- Walter, W.H., 1982, Pumpage of water in Louisiana, 1980: Louisiana Department of Transportation and Development, Office of Public Works, Water Resources Special Report 3, 15 p.
- Wang, H.F., and Anderson, M.P., 1982, Introduction to groundwater modeling—Finite difference and finite element methods: New York, W.H. Freeman and Co., 237 p.
- Weeks, J.B., and Sun, R.J., 1987, Regional aquifer-system analysis program of the U.S. Geological Survey—Bibliography, 1978-86: U.S. Geological Survey Water-Resources Investigations Report 87-4138, 81 p.
- Whitfield, M.S., Jr., 1975, Geohydrology and water quality of the Mississippi River alluvial aquifer, northeast Louisiana: Louisiana Department of Public Works, Water-Resources Technical Report 10, 29 p.
- Williamson, A.K., Grubb, H.F., and Weiss, J.S., 1990, Ground-water flow in the gulf coast aquifer systems, south-central United States—A preliminary analysis: U.S. Geological Survey Water-Resources Investigations Report 89-4071, 124 p.

**DIGITAL MODEL ANALYSIS
OF POSTDEVELOPMENT
REGIONAL FLOW**

DIGITAL MODEL ANALYSIS OF POSTDEVELOPMENT REGIONAL FLOW

This section documents differences between the transient-flow model used to analyze postdevelopment regional flow in the Mississippi River Valley alluvial aquifer and the steady-state flow model used for preliminary analysis (Ackerman, 1989a). This section also provides additional information on model sensitivity not applicable to the steady-state model. The information in this section is intended to accommodate evaluation of the transient model.

CHANGES TO PRELIMINARY MODEL

The digital model used for simulating postdevelopment regional flow in the Mississippi River Valley alluvial aquifer is nearly the same as that reported previously (Ackerman, 1989a). The following input data or boundary conditions were changed or added for transient modeling:

1. Pumpage was added for all pumpage (stress) periods;
2. Revised heads in underlying aquifers were added for all pumpage periods;
3. Predevelopment heads from steady-state simulation were used for initial conditions;
4. Storage terms were added;
5. Values for hydrogeologic parameters were changed by area as a result of calibration of the transient model.

In addition to the above changes and additions, head data from the period 1956 to 1983 were used in the calibration process.

This model shares the 5-year discretization used by other projects in the RASA study for pumping simulations from 1958 through 1987. The period from 1905 to 1957 was subdivided into pumping periods so as to give reasonable approximations of the pumpage stress on the aquifer (fig. 9, table 6). The pumpage used for the entire study area for pumpage periods 9–14 (1958–87) was compiled at 5-year intervals by Mesko and others (1990) from water-use reports. Pumpage for 1906 to 1957 was based on the work of Engler and others (1963, table 2) and on rice acreages published by the Arkansas Agricultural Statistics Service.

Water use for irrigation of rice in Arkansas prior to 1975 was based on application rates given by Halberg (1977; p. 18). Based on an analysis of the amount (fig. 9) and distribution of rice acreage in Mississippi, pumpage in stress periods 8 and 10 were the same in the Delta. Pumpage prior to 1957 in

Louisiana (part of the Boeuf area) and in Missouri (parts of the Cache and St. Francis areas) was assumed to be zero.

Based on the work of T.W. Holland (U.S. Geological Survey, written commun., 1988), water use for aquaculture in Arkansas was revised for 1963 to 1987. The revision was based on revised estimates of acreage and resulted in reductions in pumpage of 30 to 56 percent for aquaculture.

Revised heads in underlying aquifers of the Mississippi embayment aquifer system for predevelopment and each pumpage period were from the Mississippi embayment subregional model (J.K. Arthur, U.S. Geological Survey, written commun., 1988). The model code (McDonald and Harbaugh, 1984) was modified to allow the head in underlying aquifers to vary linearly with time during pumping periods (Leake and Prudic, 1988, p. 69). Heads in underlying aquifers of Cretaceous age and older were from the Cretaceous and Paleozoic subregional model (Brahana and Mesko, 1988).

Initial conditions were provided by simulation of steady-state conditions with no pumpage and predevelopment heads in underlying aquifers. The results reported in this report reflect changes to the calibration provided by transient simulation and are very similar to those reported by Ackerman (1989a).

Two values of storage coefficient were used for simulation of the alluvial aquifer—one each for the confined and unconfined equations of flow. Because no data concerning the areal distribution of storage coefficient were available, the model used uniform values of confined storage coefficient or specific yield depending upon the flow condition being simulated. Aquifer test data compiled for the project showed a range of storage coefficients from 0.0001 to 0.15 for 75 locations, and most values were between 0.0001 and 0.01 (A.K. Williamson, U.S. Geological Survey, written commun., 1985). Previous model simulations of the Mississippi River Valley alluvial aquifer were concerned mainly with predicting effects of long-term dewatering of the aquifer and were calibrated using specific yield. These models generally were calibrated with a value of 0.3 for specific yield (Broom and Lyford, 1981, p. 35; Peralta and others, 1985, p. 3; and Sumner and Wasson, 1984, p. 46). Specific yield from laboratory tests on repacked samples from near Stuttgart in the Grand Prairie ranged from 0.27 to 0.38 (Johnson and others, 1966, p. 23). Values of 0.31 to 0.38 were determined using samples from the bottom of the aquifer. A value of 0.27 was determined from material near the top of the aquifer. Results of long-term aquifer tests at the same site indicated a storage coefficient of 0.28 after 4 days of pumping

TABLE 8.—Numbers of hydraulic-head observations used for calibration of transient flow in the Mississippi River Valley alluvial aquifer

[PP, pumpage period]

Areal subdivision	Model pumpage period and year represented					
	PP 8 1957	PP 9 1962	PP 10 1967	PP 11 1972	PP 12 1977	PP 13 1982
Grand Prairie.....	681	681	170	93	93	88
Cache.....	71	82	118	149	123	102
Delta.....	73	157	42	58	306	1,011
Bocuf.....	293	264	190	257	127	95
St. Francis.....	252	16	64	40	462	40
Total model area.....	1,501	1,114	669	690	1,246	1,403

(Sniegocki and others, 1965, p. 5). A storage coefficient of 0.30 was reached after 9 days of recharge tests at the same location (Sneigocki and others, 1965, p. 8). Only Sumner and Wasson have simulated confined conditions for the alluvial aquifer. They reported using 0.001 for the storage coefficient and stated that the value, although high, is relatively unimportant due to the lack of model sensitivity to storage coefficient (Sumner and Wasson, 1984, p. 46).

CALIBRATION

Calibration of the transient model was accomplished by adjusting the hydrogeologic parameters within plausible or observed bounds until a best fit of observed head with simulated head was achieved. The procedure for calibration was the same as that used for preliminary calibration except that (1) model performance was judged for six pumping periods, (2) model performance also was judged separately for each area, and (3) both root mean squared error and mean error were used. The hydraulic-head data (A.K. Williamson, U.S. Geological Survey, written commun., 1987) are at 5-year intervals and represent averages of all values from ½ year before to ½ year after a given year. Thus, calibration for pumpage period 13 that ends in 1982 (table 6) was a comparison of simulated heads at the end of pumpage period 13 with the average of observed heads between July 1981 and June 1983. The results of calibration of the model are shown in figure 18. The areal distribution of the error in simulated head for pumping period 13 is shown on pl. 8. The percentile distribution of the difference between observed and simulated head for pumpage periods 8–13 is given in figure 19. Data (table 8) generally were well distributed except that few observations were available for Missouri. Excellent coverage was available for pumping period 12

(1977) in Missouri. For that pumpage period, nearly all of Missouri had a difference of less than ±5 ft. Less than 2 percent of 540 observations from Missouri showed a difference of more than ±10 ft. Simulated head closely agrees with observed head for most of the study area (pl. 8). Hydrographs of wells in areas of long-term drawdown (fig. 20) show agreement between observed head and head in the center of the nearest model block.

The calibrated model has reproduced the potentiometric surface of the Mississippi River Valley alluvial aquifer with errors generally less than 9 ft for all periods where data were available. The major features of potentiometric surface maps taken from the map dated 1929 by Thompson (Engler and others, 1963, pl. 4) through the most recent (Plafcan and Remsing, 1989; Luckey, 1985, fig. 15; Sumner, 1984b; Whitfield, 1975, fig. 2) are all shown in model output except those that are seasonal or ephemeral. Seasonal or ephemeral features such as mounds on the potentiometric surface near the Mississippi River (Ryling, 1960, p. 26; Sumner and Wasson, 1984, p. 10) were not reproducible with the discretization of time and space used for this model.

The potentiometric surface in the two major areas of drawdown (pl. 5) is adequately modeled (pl. 8). Values of hydrogeologic parameters (table 9) were changed only slightly from those chosen for calibration of 1972 flow as steady state (Ackerman, 1989a).

The calibration of the transient-flow model was more difficult than the steady-state model because five more pumpage periods and one additional criterion (mean error) were evaluated for each of the five areas. The values of calibration criteria were not constant with time or between areas due to differences in the distribution of observed head, response of the aquifer, and assumptions in the conceptual model (fig. 18). The values of hydrogeologic parameters were adjusted by area as a last step in calibration.

Formal parameter estimation to areas smaller than the areas of this study was probably not warranted by the discretization of the model, distribution and quality of the observations, or purpose of the study.

Sensitivity of the transient-flow model was tested by observing the results of each sensitivity analysis run after changing each hydrogeologic parameter individually from calibrated values (table 10). The sensitivity of the calibration process for the transient-flow model to changes in values of calibration parameters and pumpage was similar to that of the preliminary steady-state model. Sensitivity of the calibration parameters for pumpage stress period 11 (1972) is compared with similar values from Ackerman (1989a, figs. 29, 30) for 1972 as steady state (fig. 21). The values of the hydrogeologic parameters used for sensitivity analysis are given in table 10. The most sensitive parameters were about the same as those in Ackerman (1989a), the order now being most sensitive to least sensitive, pumpage>vertical hydraulic conductivity of Mississippi River Valley confining unit>specific yield>hydraulic conductivity of the alluvial aquifer. On the basis of the ability of

the model to reproduce the observed heads for 1929 to 1986 without severe bias in any area and the similarity of calibration values to those of a previous calibration and other models, the calibration was considered sufficient for the purposes of this study.

As a further test of the sensitivity of an interpretation to changes in hydrogeologic parameters, the cumulative flux from various sources was examined for each sensitivity-analysis model run. The conclusion that rivers changed from sources of net discharge to sources of net recharge in the 1970's was true for all values of hydrogeologic parameters tested (fig. 22). The total amount of flux from rivers was most sensitive to the changes in values of vertical hydraulic conductance of the materials in overlying and underlying units and least sensitive to specific yield. The total flux from rivers might have been much larger or smaller and the calibration less accurate, but the conclusion regarding change in flow from rivers would have been the same. As in the preliminary model (Ackerman, 1989a), the major assumptions were not sensitive to the changes in hydrologic parameters used in sensitivity analysis.

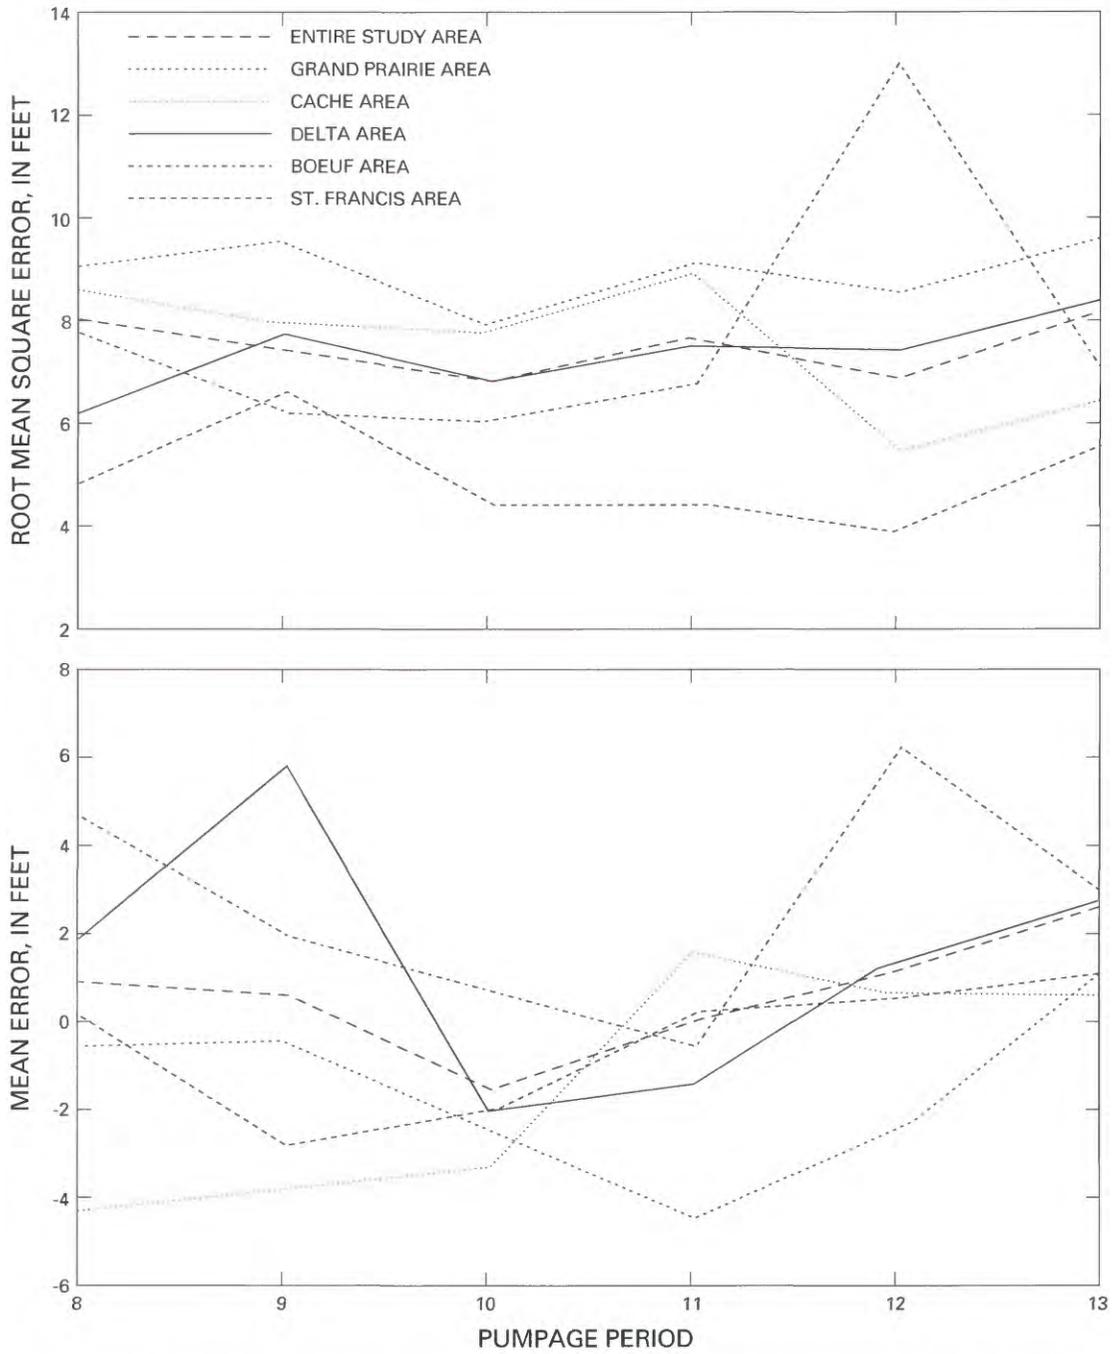


FIGURE 18.—Calibration results for a model of transient flow in the Mississippi River Valley alluvial aquifer.

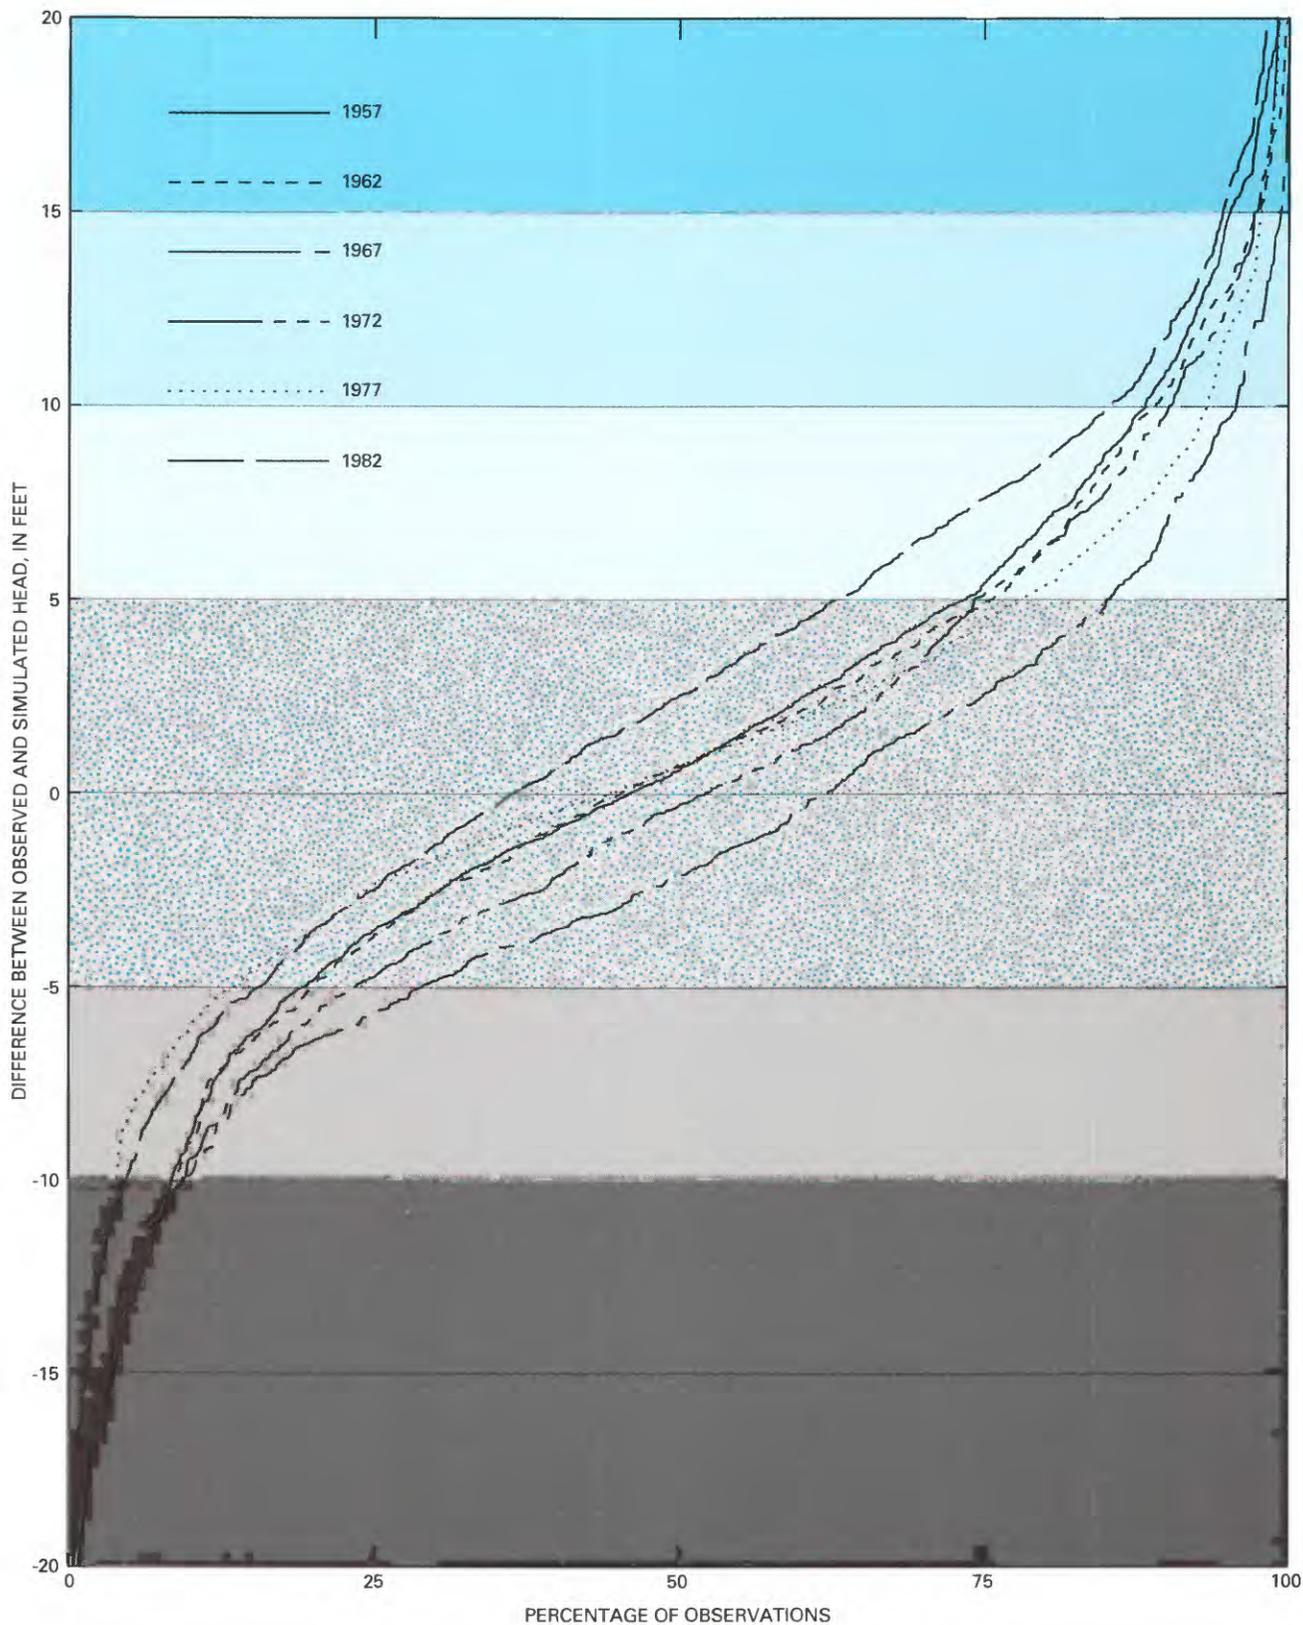


FIGURE 19.—Percentiles of difference between observed and simulated hydraulic head for the Mississippi River Valley alluvial aquifer.

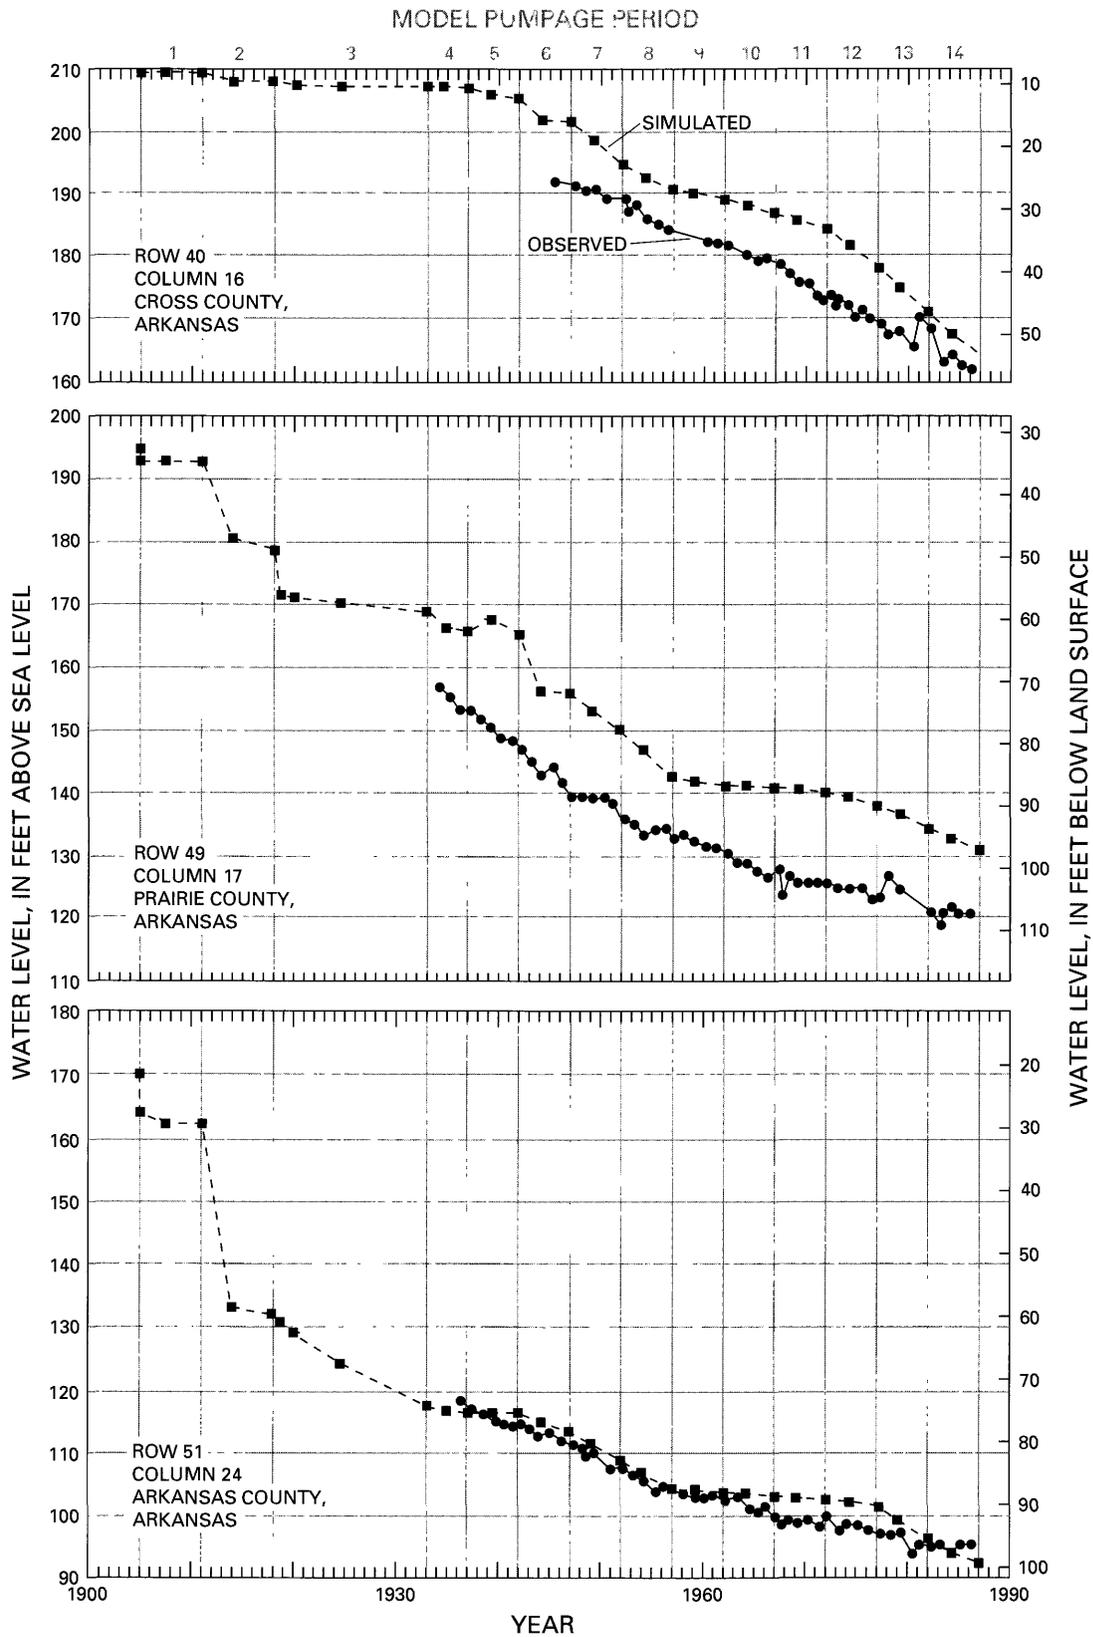


FIGURE 20.—Hydrographs showing observed and simulated water levels for selected wells in the Mississippi River Valley alluvial aquifer. Numbers along time axis are model pumpage periods. Water levels in feet below land surface for observed data only.

TABLE 9.—*Calibration values for individual areas of the Mississippi River Valley alluvial aquifer*

[ft/d, feet per day; ---, not applicable]

	Preliminary calibration	Transient calibration by area				
		Grand Prairie	Cache	Delta	Boeuf	St. Francis
Hydraulic conductivity of the Mississippi River Valley alluvial aquifer, ft/d.	300	200	300	300	450	450
Vertical hydraulic conductivity of the Mississippi River Valley confining unit, ft/d.	0.0003	0.00035	0.00035	0.00044	0.00035	0.00035
Ratio of vertical hydraulic conductivity to bed thickness for riverbed materials, day ⁻¹ .	0.05	0.16	0.16	0.16	0.16	0.16
Multiple of vertical hydraulic conductivity of underlying units ¹ .	3	1	1	1	1	1
Storage coefficient (specific yield) for unconfined conditions.	---	0.28	0.28	0.28	0.28	0.28
Storage coefficient for confined conditions.	---	0.0001	0.0001	0.0001	0.0001	0.0001

¹ The vertical hydraulic conductivity of underlying units is the same as that used in the simulations of Mississippi embayment aquifers (Arthur and Taylor, 1990) and Cretaceous and Paleozoic aquifers (Brahana and Mesko, 1988).

TABLE 10.—*Sensitivity values for individual areas of the Mississippi River Valley alluvial aquifer*

[ft/d, feet per day]

	Multipliers for sensitivity analysis	Range of values by area				
		Grand Prairie	Cache	Delta	Boeuf	St. Francis
Hydraulic conductivity of the Mississippi River Valley alluvial aquifer, ft/d.	0.67–1.5	133–300	200–450	200–450	300–675	300–675
Vertical hydraulic conductivity of the Mississippi River Valley confining unit, ft/d.	0.71–1.28	0.00025–0.00045	0.00025–0.00045	0.00025–0.00058	0.00025–0.00045	0.00025–0.00045
Ratio of vertical hydraulic conductivity to bed thickness for river-bed materials, day ⁻¹ .	0.12–3.12	0.015–0.5	0.015–0.5	0.015–0.5	0.015–0.5	0.015–0.5
Multiple of vertical hydraulic conductivity of underlying units.	0.5–2.8	0.5–2	0.5–2	0.5–2	0.5–2	0.5–2
Specific yield	0.86–1.33	0.24–0.32	0.24–0.32	0.24–0.32	0.24–0.32	0.24–0.32

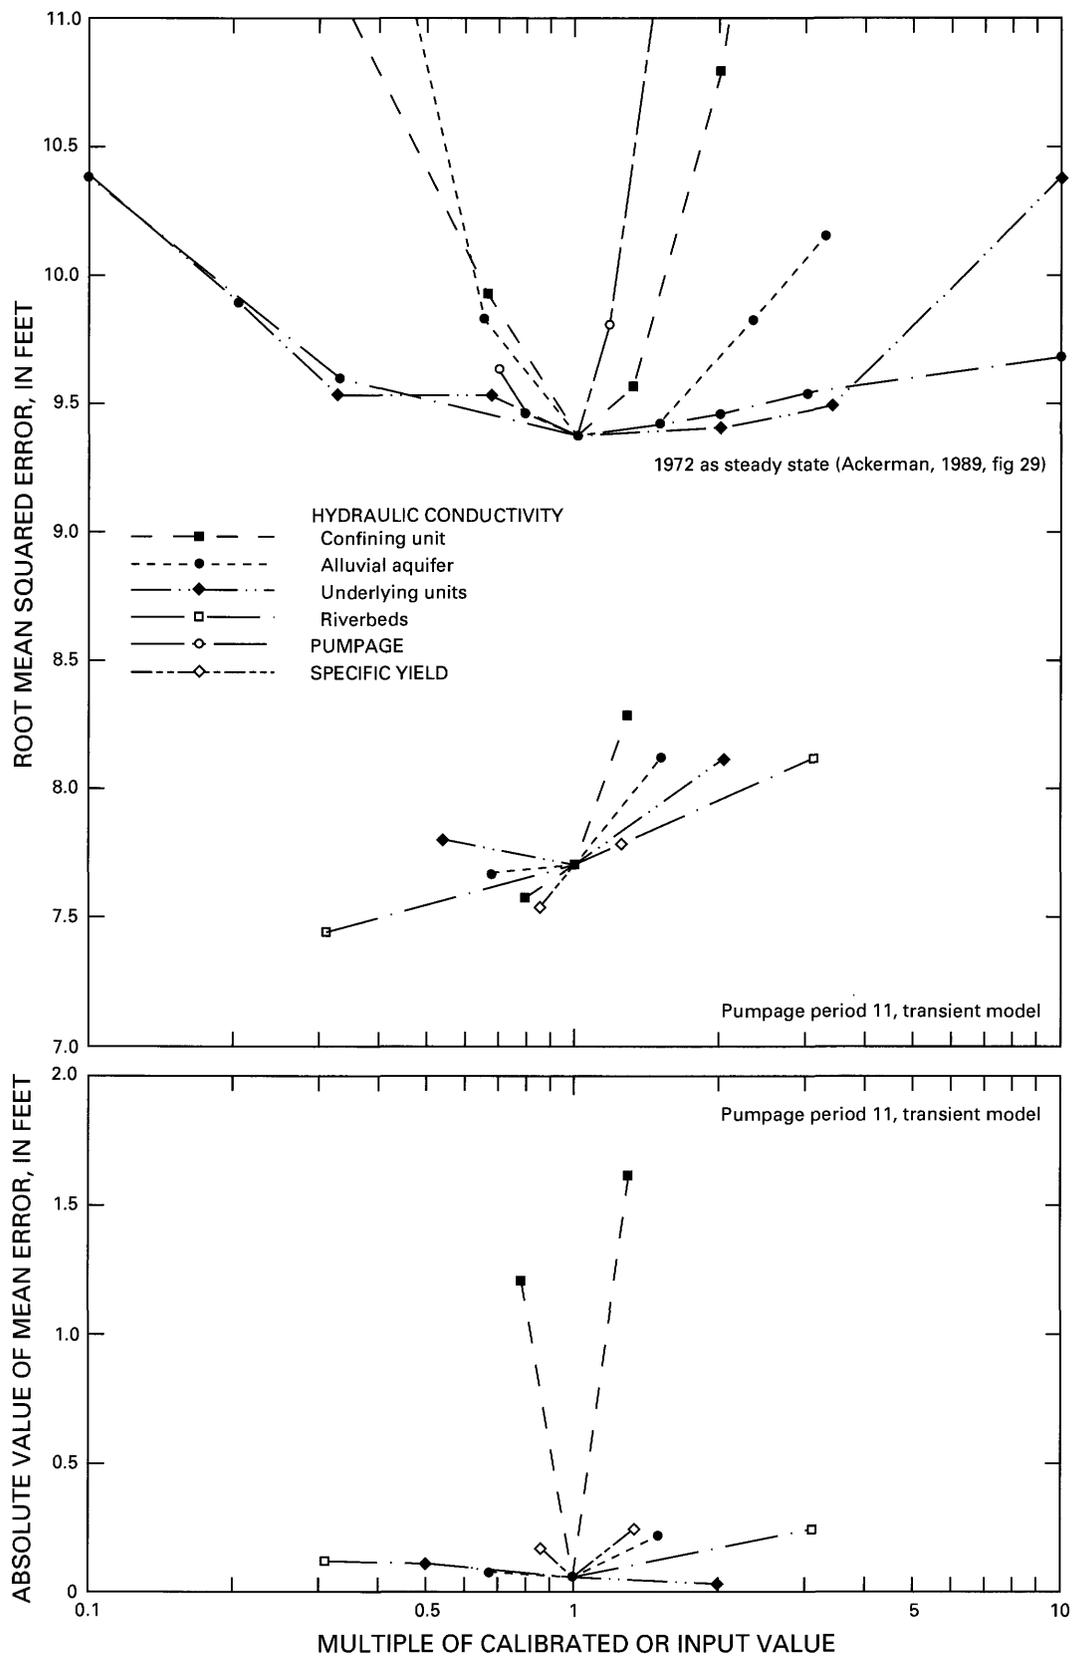


FIGURE 21.—Sensitivity of regional models to changes in calibration values, Mississippi River Valley alluvial aquifer.

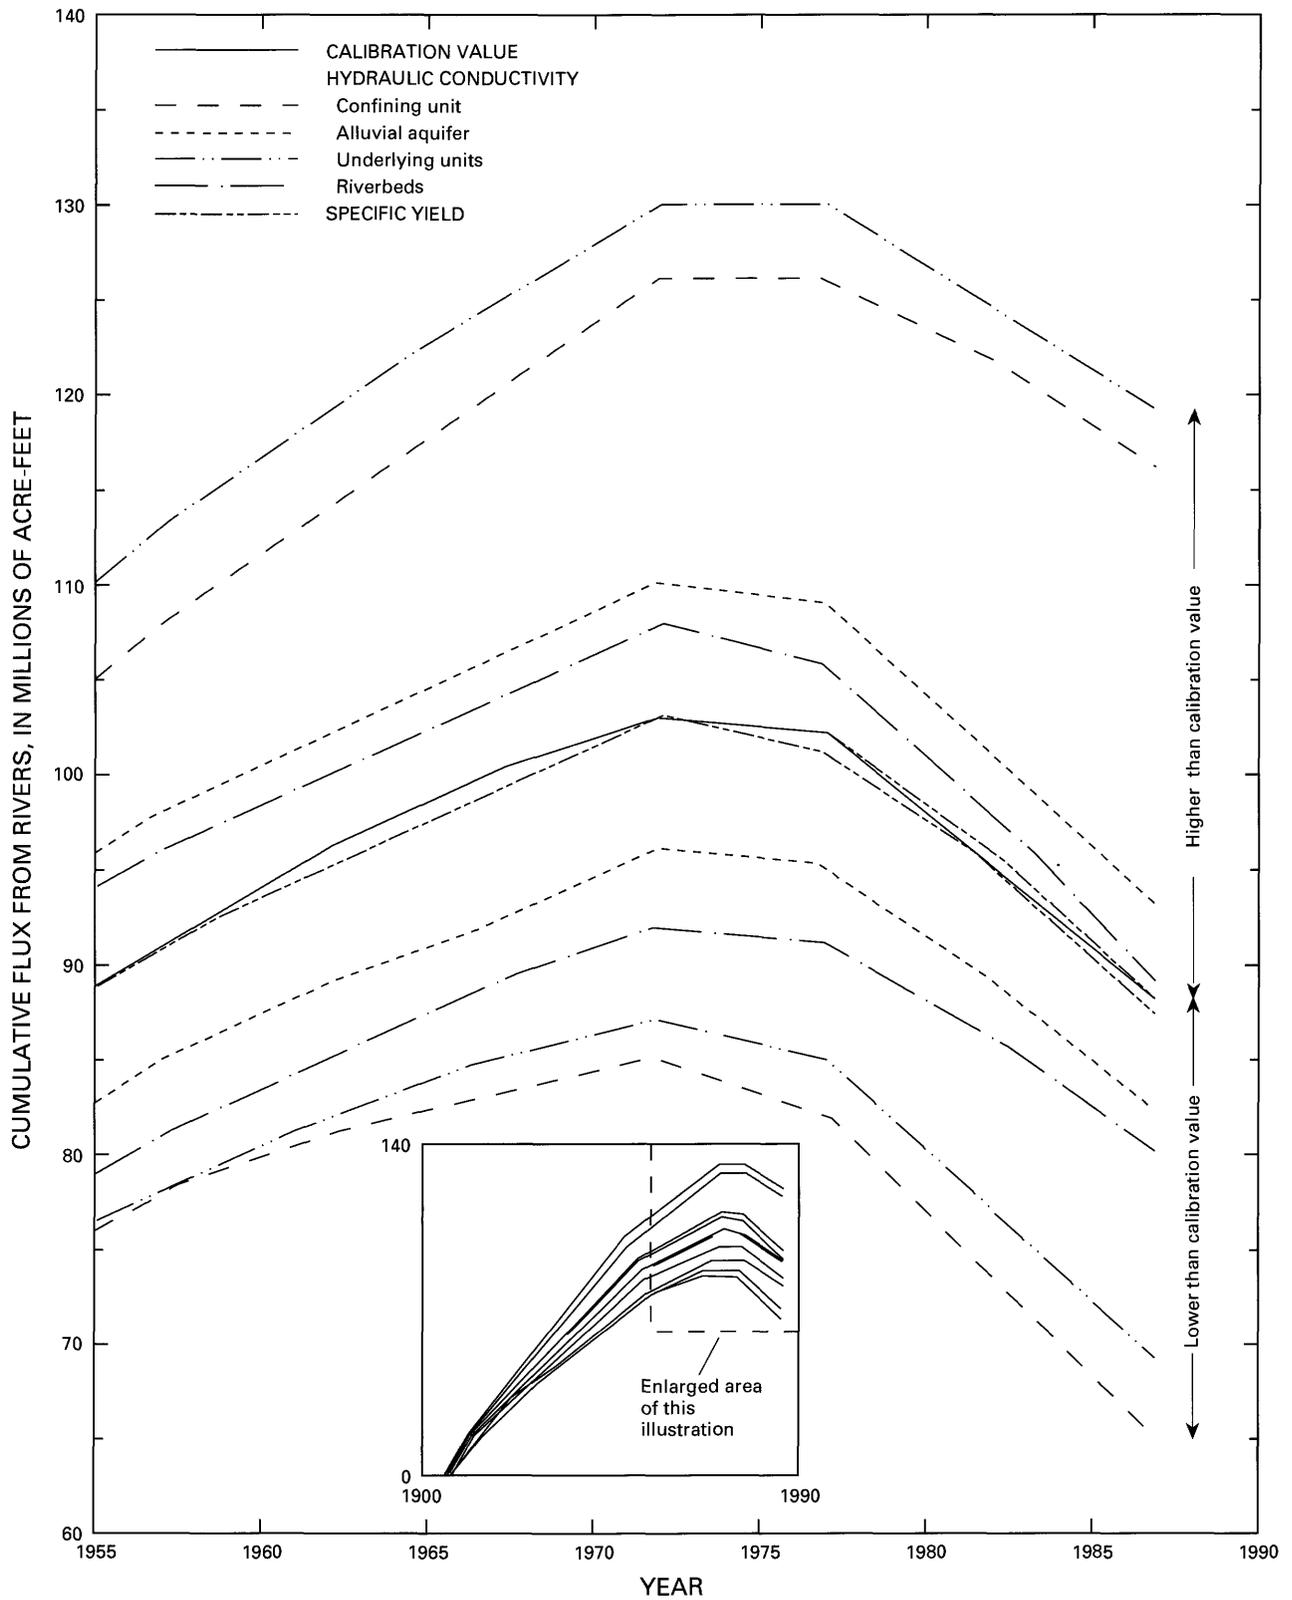


FIGURE 22.—Sensitivity of cumulative flux from rivers to changes in calibration values, Mississippi River Valley alluvial aquifer.

SELECTED SERIES OF U.S. GEOLOGICAL SURVEY PUBLICATIONS

Periodicals

Earthquakes & Volcanoes (issued bimonthly).

Preliminary Determination of Epicenters (issued monthly).

Technical Books and Reports

Professional Papers are mainly comprehensive scientific reports of wide and lasting interest and importance to professional scientists and engineers. Included are reports on the results of resource studies and of topographic, hydrologic, and geologic investigations. They also include collections of related papers addressing different aspects of a single scientific topic.

Bulletins contain significant data and interpretations that are of lasting scientific interest but are generally more limited in scope or geographic coverage than Professional Papers. They include the results of resource studies and of geologic and topographic investigations; as well as collections of short papers related to a specific topic.

Water-Supply Papers are comprehensive reports that present significant interpretive results of hydrologic investigations of wide interest to professional geologists, hydrologists, and engineers. The series covers investigations in all phases of hydrology, including hydrology, availability of water, quality of water, and use of water.

Circulars present administrative information or important scientific information of wide popular interest in a format designed for distribution at no cost to the public. Information is usually of short-term interest.

Water-Resources Investigations Reports are papers of an interpretive nature made available to the public outside the formal USGS publications series. Copies are reproduced on request unlike formal USGS publications, and they are also available for public inspection at depositories indicated in USGS catalogs.

Open-File Reports include unpublished manuscript reports, maps, and other material that are made available for public consultation at depositories. They are a nonpermanent form of publication that may be cited in other publications as sources of information.

Maps

Geologic Quadrangle Maps are multicolor geologic maps on topographic bases in 7 1/2- or 15-minute quadrangle formats (scales mainly 1:24,000 or 1:62,500) showing bedrock, surficial, or engineering geology. Maps generally include brief texts; some maps include structure and columnar sections only.

Geophysical Investigations Maps are on topographic or planimetric bases at various scales, they show results of surveys using geophysical techniques, such as gravity, magnetic, seismic, or radioactivity, which reflect subsurface structures that are of economic or geologic significance. Many maps include correlations with the geology.

Miscellaneous Investigations Series Maps are on planimetric or topographic bases of regular and irregular areas at various scales; they present a wide variety of format and subject matter. The series also includes 7 1/2-minute quadrangle photogeologic maps on planimetric bases which show geology as interpreted from aerial photographs. The series also includes maps of Mars and the Moon.

Coal Investigations Maps are geologic maps on topographic or planimetric bases at various scales showing bedrock or surficial geology, stratigraphy, and structural relations in certain coal-resource areas.

Oil and Gas Investigations Charts show stratigraphic information for certain oil and gas fields and other areas having petroleum potential.

Miscellaneous Field Studies Maps are multicolor or black-and-white maps on topographic or planimetric bases on quadrangle or irregular areas at various scales. Pre-1971 maps show bedrock geology in relation to specific mining or mineral-deposit problems; post-1971 maps are primarily black-and-white maps on various subjects such as environmental studies or wilderness mineral investigations.

Hydrologic Investigations Atlases are multicolored or black-and-white maps on topographic or planimetric bases presenting a wide range of geohydrologic data of both regular and irregular areas; the principal scale is 1:24,000, and regional studies are at 1:250,000 scale or smaller.

Catalogs

Permanent catalogs, as well as some others, giving comprehensive listings of U.S. Geological Survey publications are available under the conditions indicated below from USGS Map Distribution, Box 25286, Building 810, Denver Federal Center, Denver, CO 80225. (See latest Price and Availability List.)

"Publications of the Geological Survey, 1879-1961" may be purchased by mail and over the counter in paperback book form and as a set microfiche.

"Publications of the Geological Survey, 1962-1970" may be purchased by mail and over the counter in paperback book form and as a set of microfiche.

"Publications of the U.S. Geological Survey, 1971-1981" may be purchased by mail and over the counter in paperback book form (two volumes, publications listing and index) and as a set of microfiche.

Supplements for 1982, 1983, 1984, 1985, 1986, and for subsequent years since the last permanent catalog may be purchased by mail and over the counter in paperback book form.

State catalogs, "List of U.S. Geological Survey Geologic and Water-Supply Reports and Maps For (State)," may be purchased by mail and over the counter in paperback booklet form only.

"Price and Availability List of U.S. Geological Survey Publications," issued annually, is available free of charge in paperback booklet form only.

Selected copies of a monthly catalog "New Publications of the U.S. Geological Survey" is available free of charge by mail or may be obtained over the counter in paperback booklet form only. Those wishing a free subscription to the monthly catalog "New Publications of the U.S. Geological Survey" should write to the U.S. Geological Survey, 582 National Center, Reston, VA 22092.

Note.—Prices of Government publications listed in older catalogs, announcements, and publications may be incorrect. Therefore, the prices charged may differ from the prices in catalogs, announcements, and publications.

