




## Introduction

This report presents a topographic map of the bedrock surface beneath western Cape Cod, Massachusetts, that was prepared for use in groundwater-flow models of the Sagamore lens of the Cape Cod aquifer. The bedrock surface of western Cape Cod had been characterized previously through seismic refraction surveys and borings drilled to bedrock. The borings were mostly on and near the Massachusetts Military Reservation (MMR). The bedrock surface was first mapped by Oldale (1969), and mapping was updated in 2006 by the Air Force Center for Environmental Excellence (AFCEE, 2006). This report updates the bedrock-surface map with new data points collected by using a passive seismic technique based on the horizontal-to-vertical spectral ratio (HVSr) of ambient seismic noise (Lane and others, 2008) and from borings drilled to bedrock since the 2006 map was prepared.

The HVSr method is based on a relationship between the resonance frequency of ambient seismic noise as measured at land surface and the thickness of the unconsolidated sediments that overlie consolidated bedrock. The HVSr method was shown by Lane and others (2008) to be an effective method for determining sediment thickness on Cape Cod owing to the distinct difference in the acoustic impedance between the sediments and the underlying bedrock. The HVSr data for 164 sites were combined with data from 559 borings to bedrock in the study area to create a spatially distributed dataset that was manually contoured to prepare a topographic map of the bedrock surface. The interpreted bedrock surface generally slopes downward to the southeast as was shown on the earlier maps by Oldale (1969) and AFCEE (2006). The surface also has complex small-scale topography characteristic of a glacially eroded surface. More information about the methods used to prepare the map is given in the pamphlet that accompanies this plate.

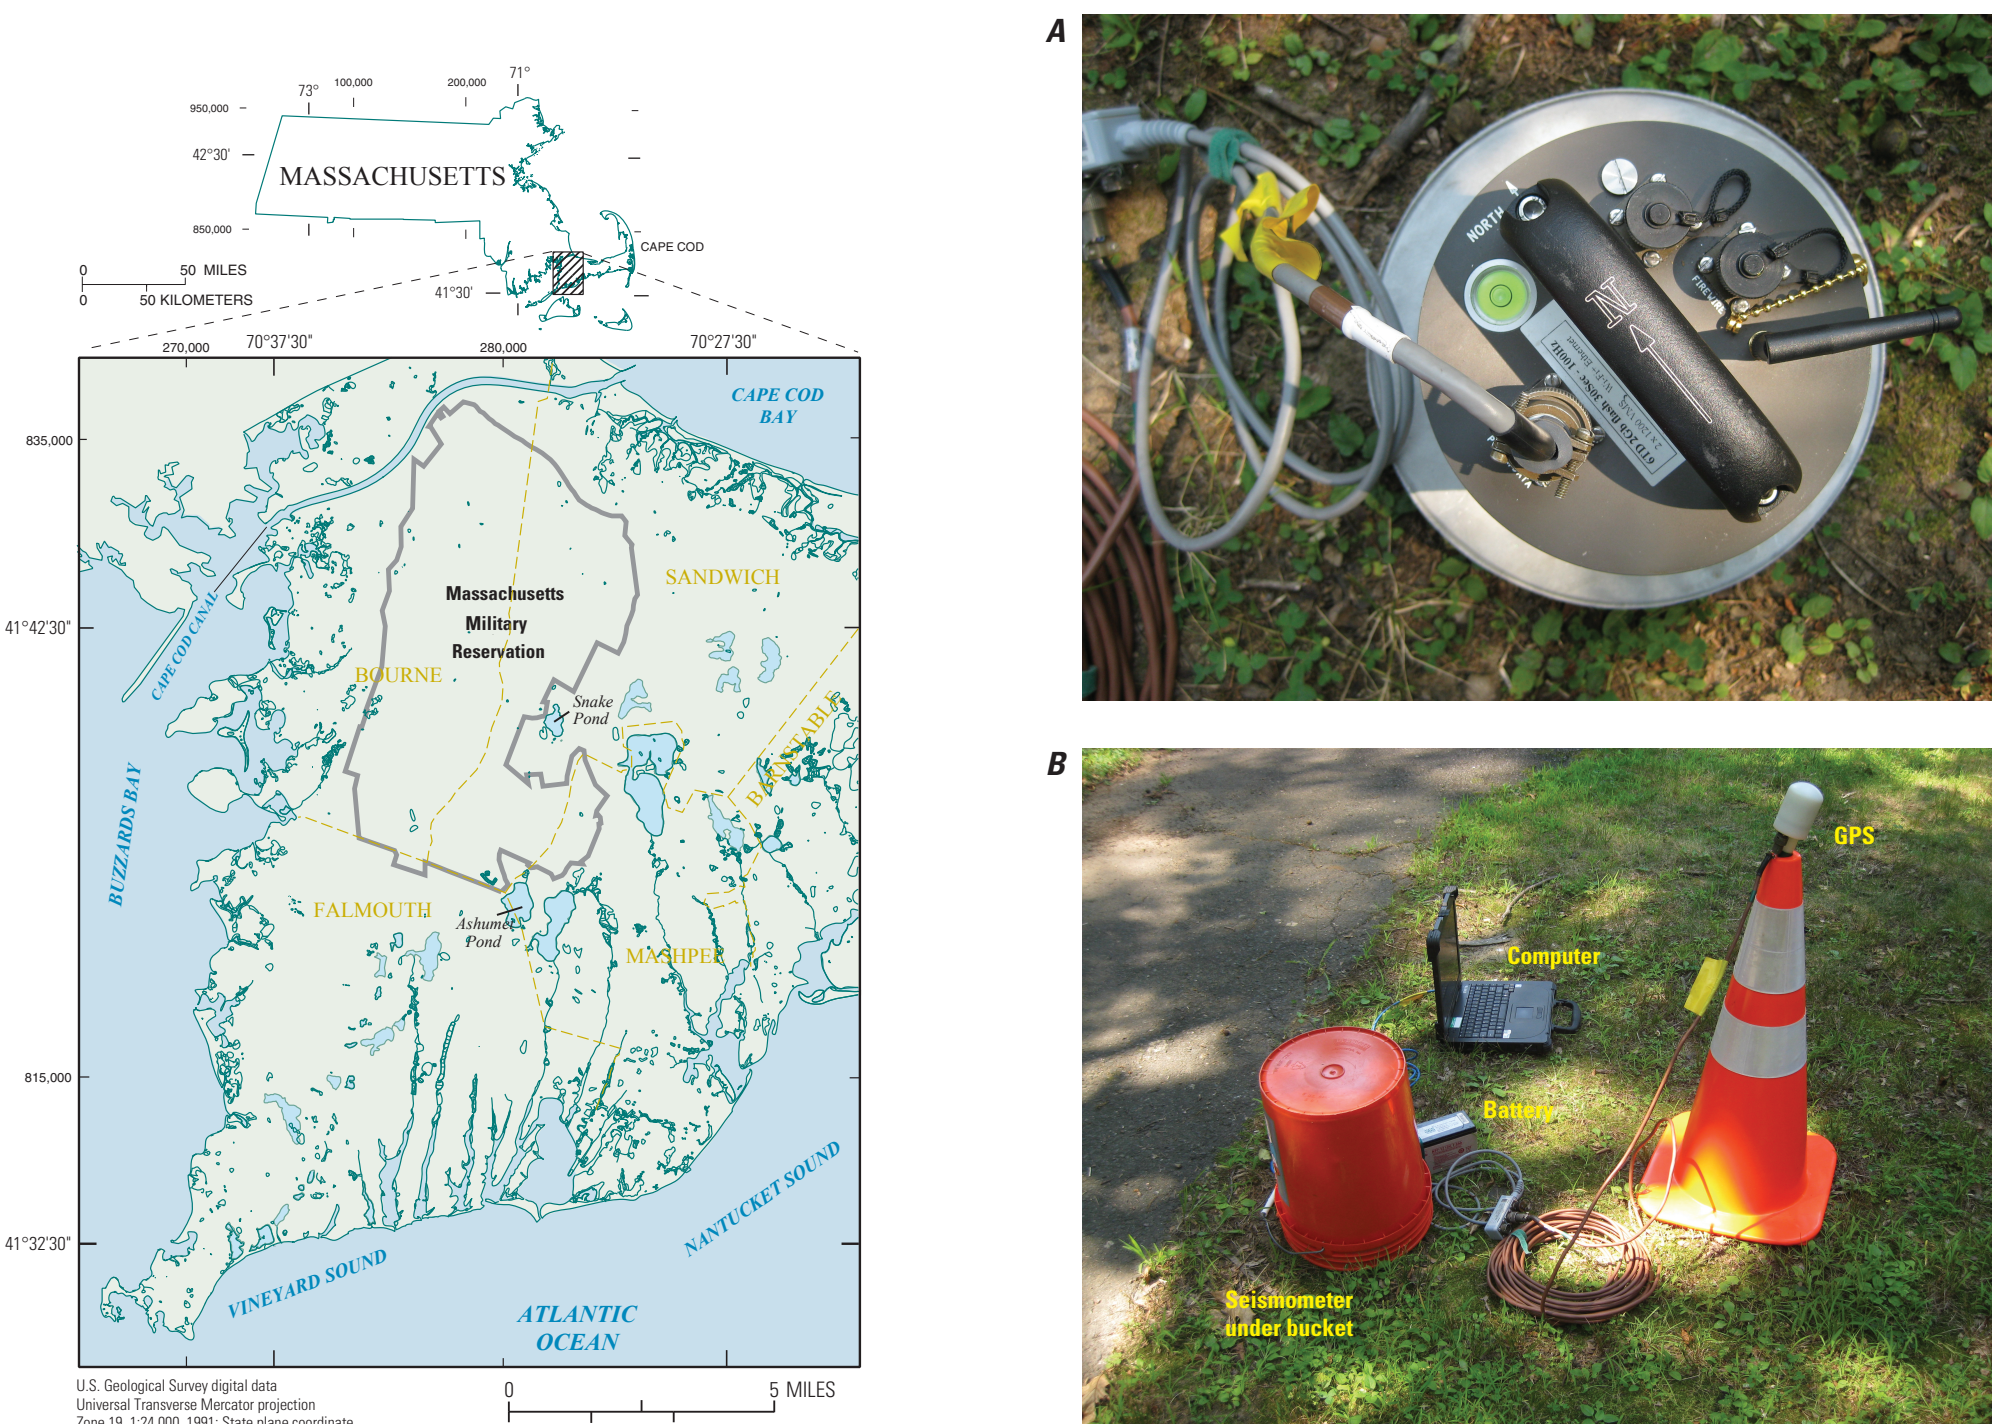


**Figure 1.** The area of the map presented in this report is on western Cape Cod, Massachusetts, and includes the Massachusetts Military Reservation and all or parts of five surrounding towns. The study area is on unconsolidated glacial drift deposits that consist of glacioluvial sand and gravel outwash overlying glaciolacustrine sand and silt, with sandy moraines near the northern and western coasts. The underlying bedrock is primarily granodiorite (Oldale and Barlow, 1966; Oldale, 1992).

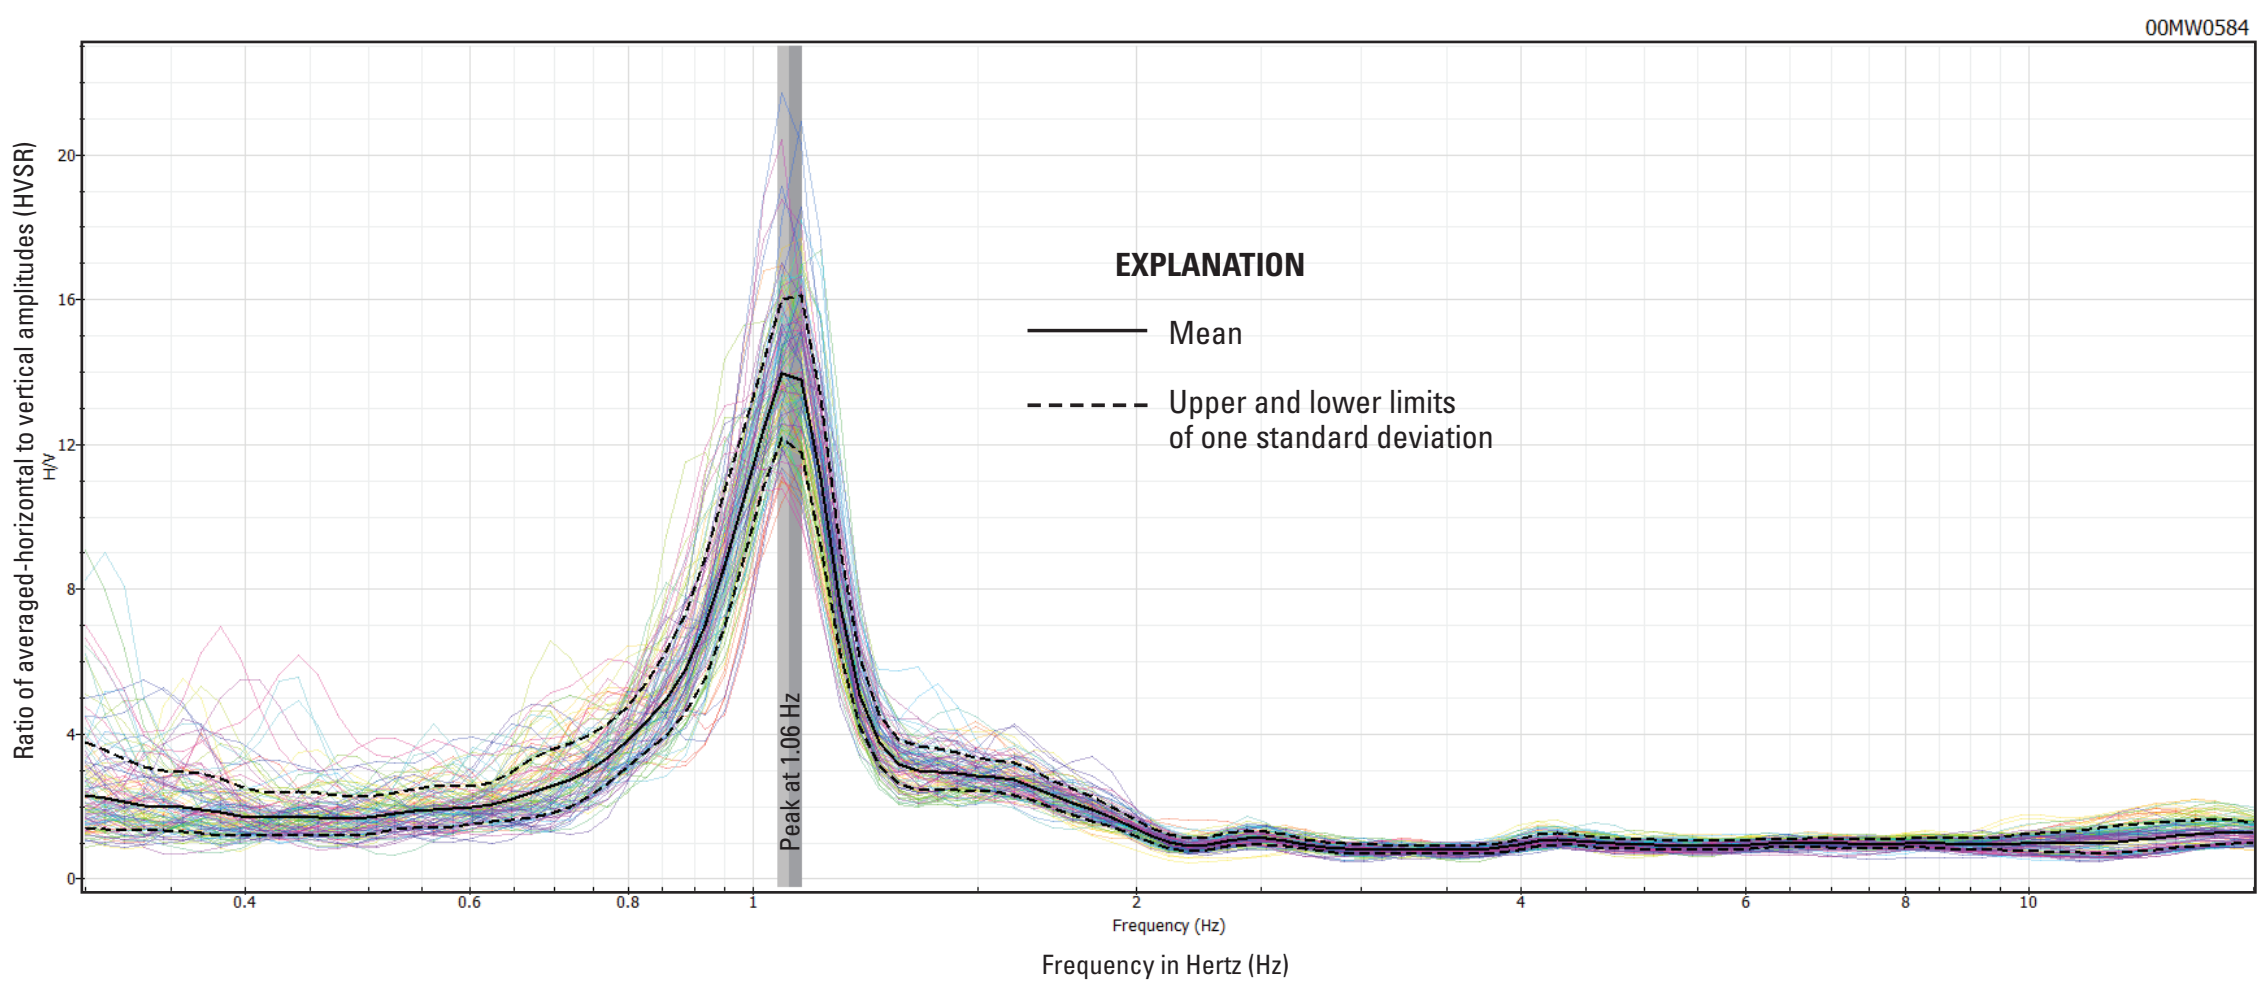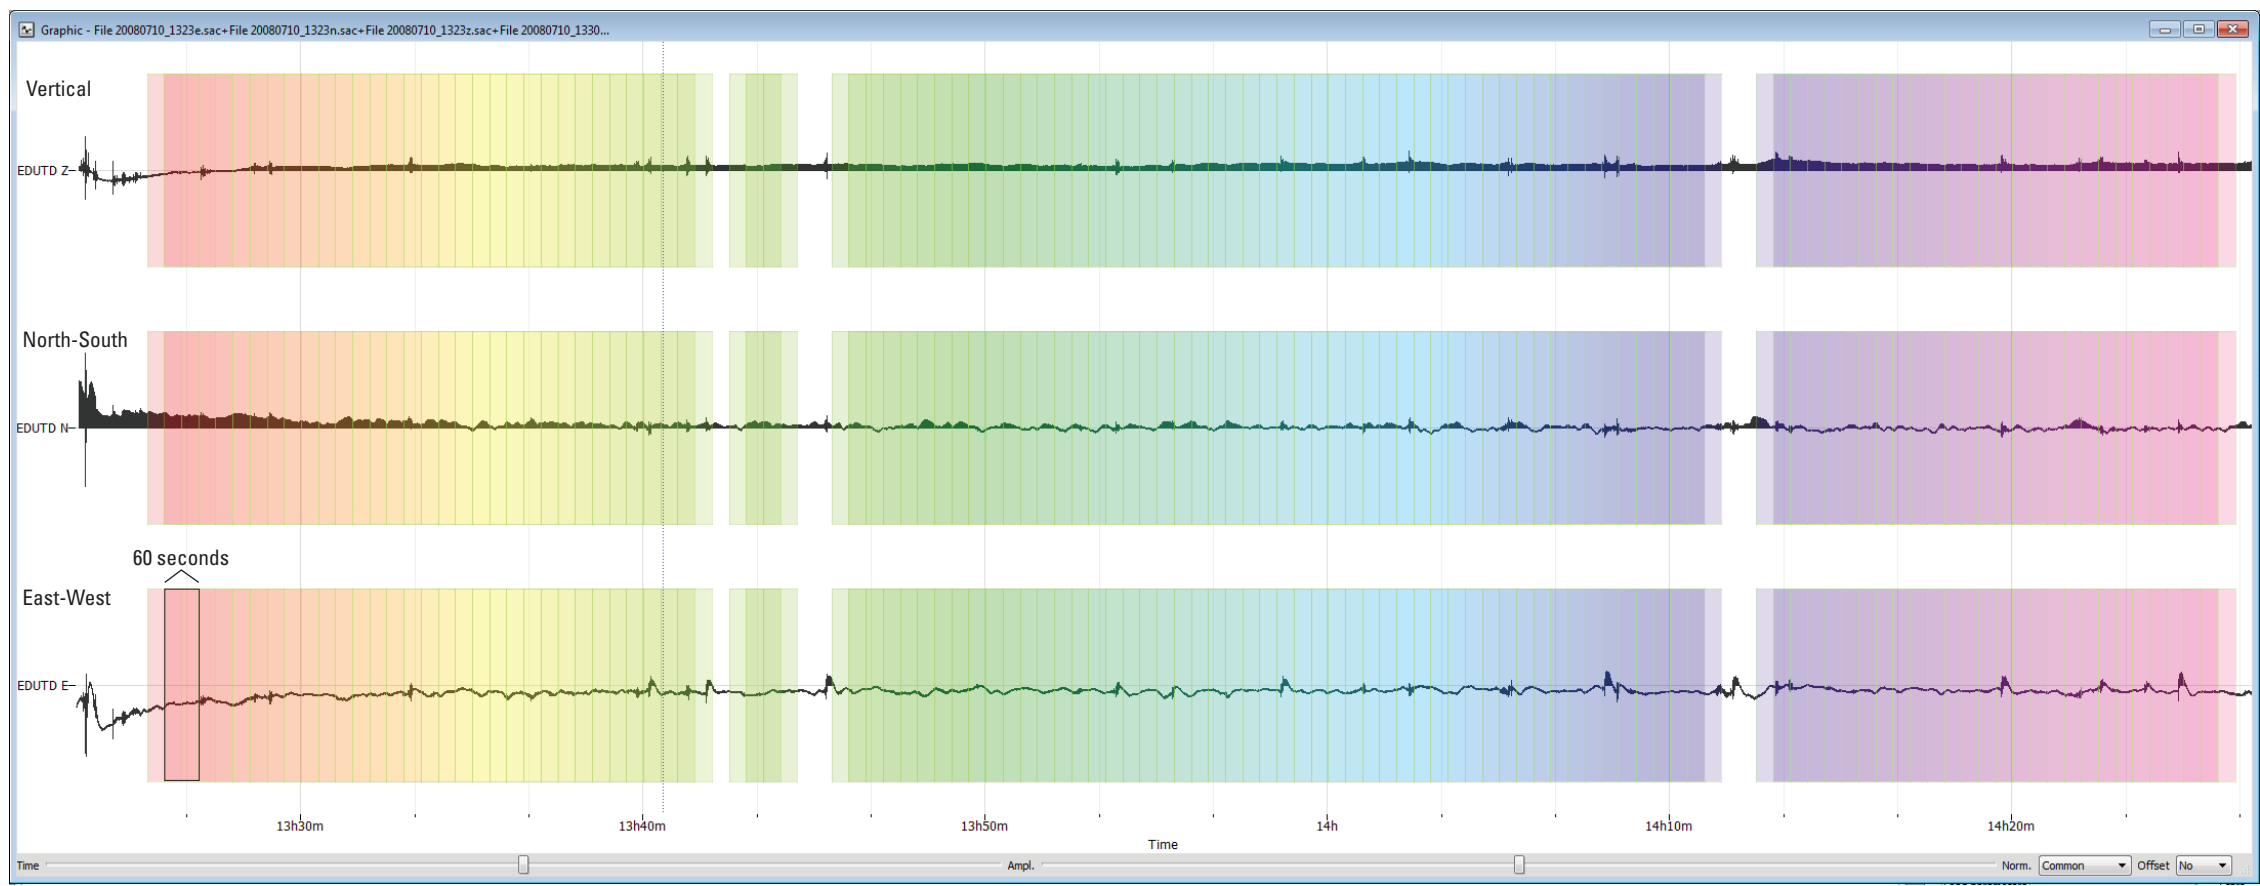


**Figure 3.** The graphical representation of the raw data to obtain the depth to bedrock is shown for site 00MW0584 (location shown in fig. 5). The graph was prepared by using the computer program Geopsy version 2.7.0 (Geopsy, 2011). The horizontal scale represents time, and the vertical scale represents the amplitudes of the data collected for seismic components in three perpendicular directions: vertical (Z), north-south (N), and east-west (E). The raw data were divided into time intervals 60 seconds long that overlap adjacent intervals by 30 seconds each. The small spikes in amplitude above the generally smooth traces were caused by high-amplitude noise disturbances such as the nearby passage of individual vehicles or pedestrians. Data from these intervals, which are not colored, were removed prior to further data processing.




**Figure 4.** The fundamental resonance frequency at a site was determined by a spectral analysis of the horizontal and vertical components of the recorded seismic noise. The amplitudes of the spectra of the vertical and two horizontal components of the microtremors for each of the 60-second time intervals were calculated by the Geopsy program. The average of the amplitudes for the horizontal components was divided by the vertical component, and this ratio (the HVSr) was plotted as a function of frequency. The colored lines in this graphical output from the Geopsy program correspond to the similarly colored time intervals shown in figure 3. The fundamental resonance frequency in this example from site 00MW0584 is 1.06 Hz defined by the peak in the average HVSr plot (average and standard deviation shown by the solid and dashed black lines, respectively). An empirical equation (see accompanying pamphlet) developed for Cape Cod by Lane and others (U.S. Geological Survey, written commun., 2011) was used to estimate the sediment thickness from the fundamental resonance frequency. The resulting thickness was subtracted from the land-surface altitude to obtain the bedrock-surface altitude.

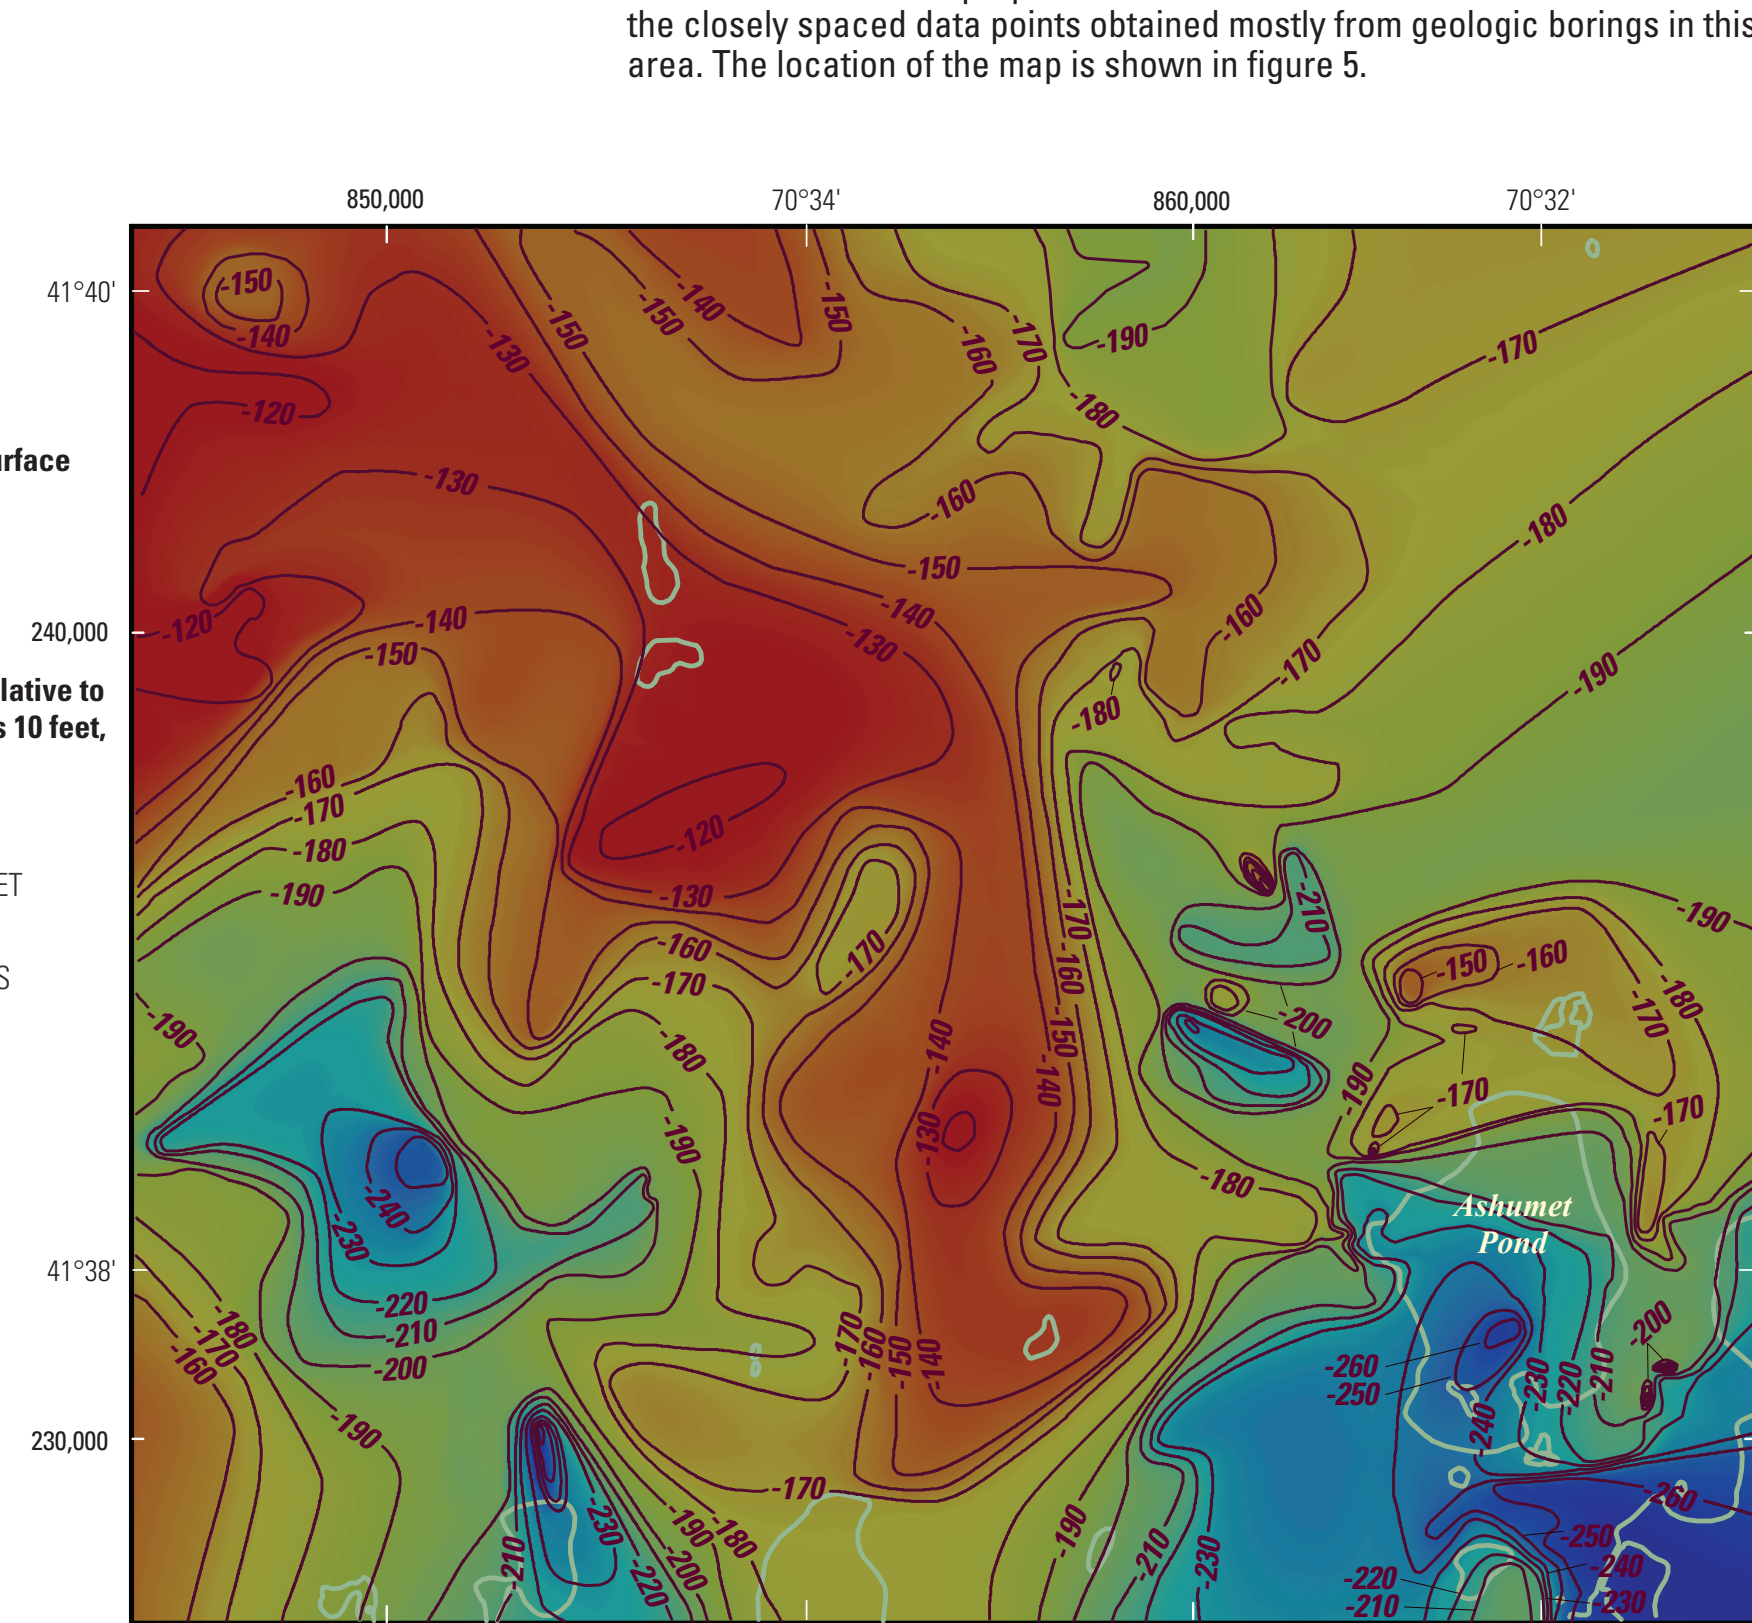

**Figure 5.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.

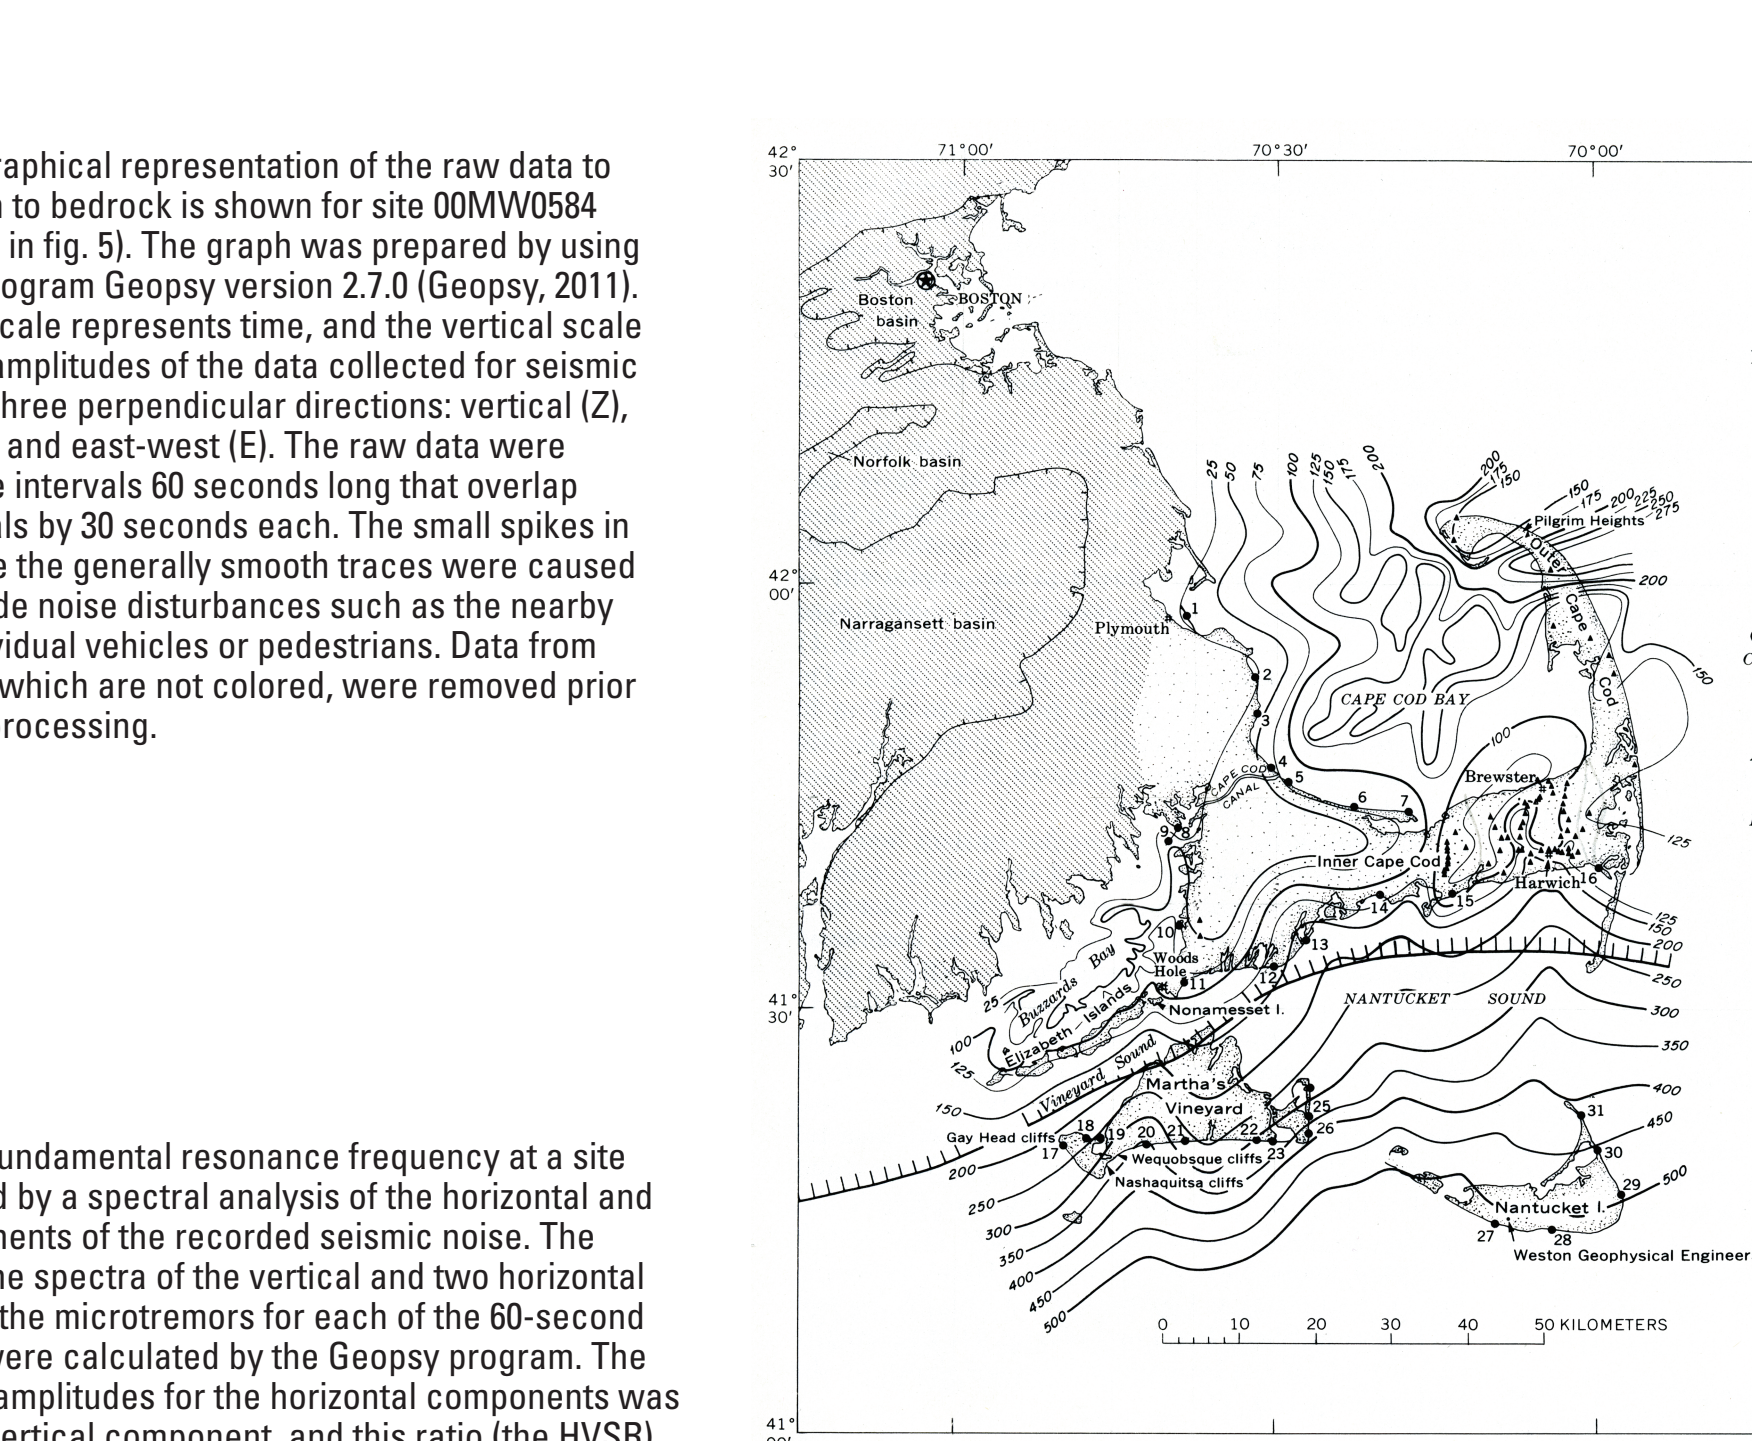

**Figure 6.** The topographic map of the bedrock surface beneath the area near Ashumet Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.

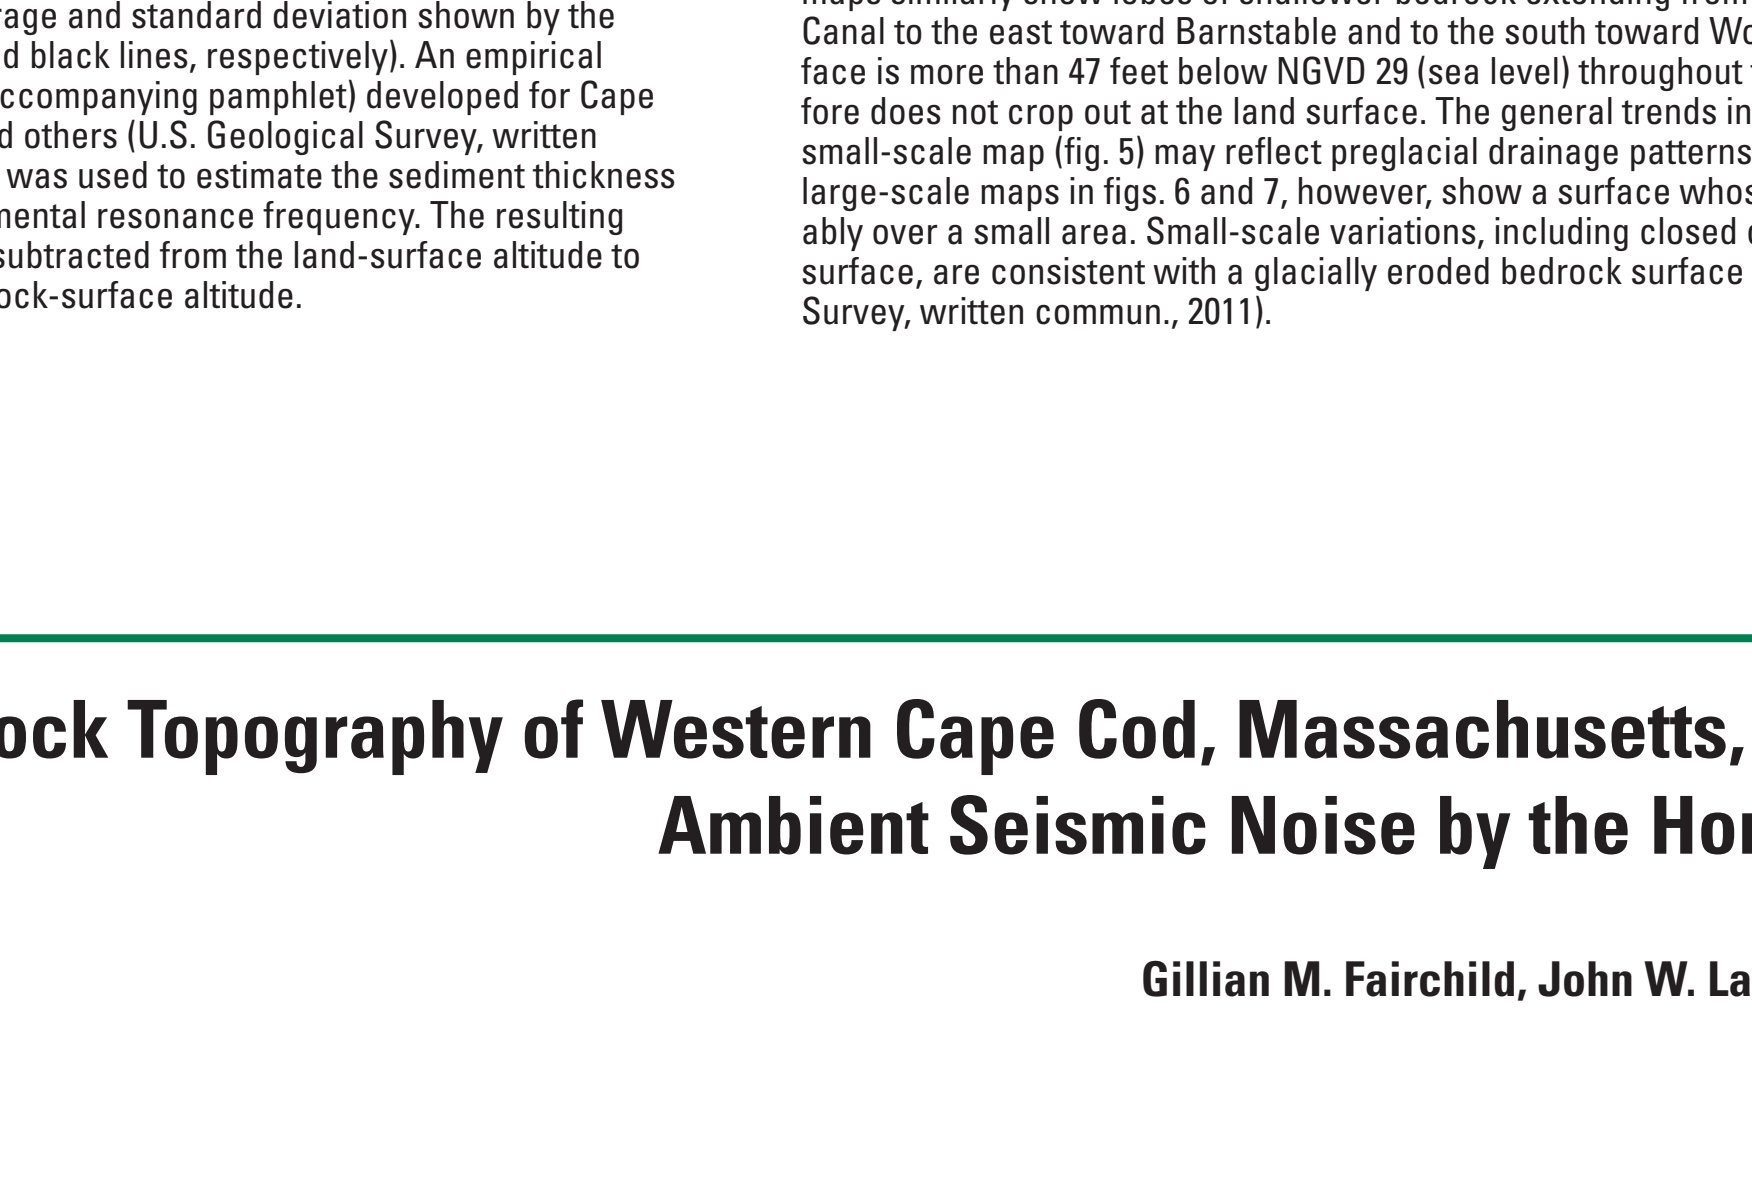

**Figure 7.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 8.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 9.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 10.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 11.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 12.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 13.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 14.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 15.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 16.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 17.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 18.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 19.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 20.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 21.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 22.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 23.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 24.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 25.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 26.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 27.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 28.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 29.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 30.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 31.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 32.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 33.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 34.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 35.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 36.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 37.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 38.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 39.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 40.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 41.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 42.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 43.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 44.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 45.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 46.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 47.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 48.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 49.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 50.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 51.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 52.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 53.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 54.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 55.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.



**Figure 56.** The topographic map of the bedrock surface beneath the area near Snake Pond was prepared with a 10-foot contour interval because of the closely spaced data points obtained mostly from geologic borings in this area. The location of the map is shown in figure 1.

