

OK-RAT

SCOUR ANALYSIS AND REPORTING FORM

Bridge Structure No. 41238262 Date 9-20-12 Initials RFT Region (A)BCD
 Site _____ Location 0.3 mi S. of FR 198 / Benchmark Rd
 $Q_{100} = \underline{2030}$ by: drainage area ratio _____ flood freq. anal. _____ regional regression eq.
 Bridge discharge (Q_2) = 2030 (should be Q_{100} unless there is a relief bridge, road overflow, or bridge overtopping)

3.5
6/15


Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 68 ft. Flow angle at bridge = 18 ° Abut. Skew = 0 ° Effective Skew = 18 °
 Width (W_2) iteration = 62 66 65 ↳ bridge is arc-shaped
 Avg. flow depth at bridge, y_2 iteration = 5.0 4.8
 Corrected channel width at bridge Section = W_2 times cos of flow angle = 61.82 ft* $q_2 = Q_2/W_2 = \underline{32.8}$ ft²/s
 Bridge Vel, $V_2 = \underline{6.7}$ ft/s Final $y_2 = q_2/V_2 = \underline{4.9}$ ft $\Delta h = \underline{0.9}$ ft
 Average main channel depth at approach section, $y_1 = \Delta h + y_2 = \underline{5.8}$ ft

* NOTE: repeat above calculations until y_2 changes by less than 0.2 Effective pier width = $L \sin(q) + a \cos(q)$
 If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

PRGM: "RegionA", "RegionB", "RegionC", or "RegionD"

Water Surface Elev. = -0.17 ft
 Low Steel Elev. = 7.7 ft
 n (Channel) = .040
 n (LOB) = .035
 n (ROB) = .035
 Pier Width = NA ft
 Pier Length = NA ft
 # Piers for 100 yr = 0 ft

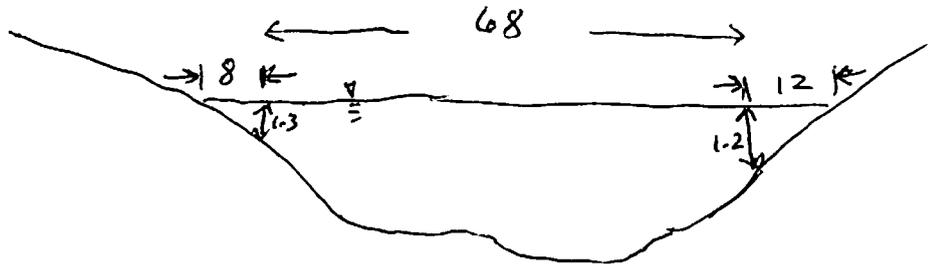

CONTRACTION SCOUR

Width of main channel at approach section $W_1 = \underline{68}$ ft
 Width of left overbank flow at approach, $W_{lob} = \underline{8}$ ft Average left overbank flow depth, $y_{lob} = \underline{2.65}$ ft
 Width of right overbank flow at approach, $W_{rob} = \underline{14}$ ft Average right overbank flow depth, $y_{rob} = \underline{0.60}$ ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)

$x = \underline{0.64}$ From Figure 9 W_2 (effective) = 61.8 ft $y_{cs} = \underline{1.0}$ ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles)

Estimated bed material $D_{50} =$ _____ ft Average approach velocity, $V_1 = Q_{100}/(y_1 W_1) =$ _____ ft/s
 Critical approach velocity, $V_c = 11.17 y_1^{1/6} D_{50}^{1/3} =$ _____ ft/s
 If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.
 $D_{c50} = 0.0006 (q_2 / y_1^{7/6})^{3/2} =$ _____ ft If $D_{50} \geq D_{c50}$, $\chi = 0.0$
 Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ _____ ft

PRGM: Contract

PRGM: CWCSNEW

PIER SCOUR CALCULATIONS

L/a ratio = _____ Correction factor for flow angle of attack (from Table 1), $K_2 =$ _____
 Froude # at bridge = _____ Using pier width a on Figure 11, $\xi =$ _____ Pier scour $y_{ps} =$ _____ ft

PRGM: Pier

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} = \underline{1.65}$ ft right abutment, $y_{aRT} = \underline{1.60}$ ft
 Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through
 Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} = \underline{2.9}$ and $\psi_{RT} = \underline{2.7}$
 Left abutment scour, $y_{as} = \psi_{LT} (K_1 / 0.55) = \underline{2.9}$ ft Right abutment scour $y_{as} = \psi_{RT} (K_1 / 0.55) = \underline{2.7}$ ft

PRGM: Abutment

SCOUR ANALYSIS AND REPORTING FORM

Bridge Structure No. 41238262 Date _____ Initials _____ Region (A B C D)

Site _____ Location 0.3 mi S. of Benchmark Rd

$Q_{500} =$ 4660 by: drainage area ratio _____ flood freq. anal. _____ regional regression eq.

Bridge discharge (Q_2) = _____ (should be Q_{500} unless there is a relief bridge, road overflow, or bridge overtopping)

Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 68 ft. Flow angle at bridge = 18 ° Abut. Skew = 0 ° Effective Skew = 18 °
 Width (W_2) iteration = 68 ↳ bridge is arc-shaped

Avg. flow depth at bridge, y_2 iteration = 7.5

Corrected channel width at bridge Section = W_2 times cos of flow angle = 64.67 ft* $q_2 = Q_2/W_2 =$ 72.1 ft²/s


Bridge Vel, $V_2 =$ 9.6 ft/s Final $y_2 = q_2/V_2 =$ 7.5 ft $\Delta h =$ 1.9 ft

Average main channel depth at approach section, $y_1 = \Delta h + y_2 =$ 9.4 ft

* NOTE: repeat above calculations until y_2 changes by less than 0.2 Effective pier width = $L \sin(q) + a \cos(q)$

If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

Water Surface Elev. = -0.1? ft
 Low Steel Elev. = 7.7 ft
 n (Channel) = .024
 n (LOB) = .035
 n (ROB) = .035
 Pier Width = NA ft
 Pier Length = NA ft
 # Piers for 500 yr = 0 ft

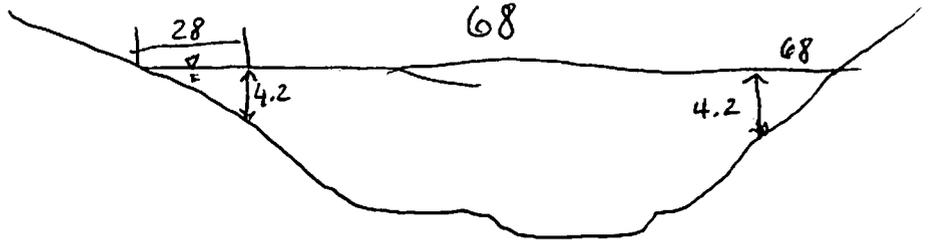

CONTRACTION SCOUR

Width of main channel at approach section $W_1 =$ 68 ft

Width of left overbank flow at approach, $W_{lob} =$ 28 ft Average left overbank flow depth, $y_{lob} =$ 2.1 ft

Width of right overbank flow at approach, $W_{rob} =$ 68 ft Average right overbank flow depth, $y_{rob} =$ 2.1 ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)

$x =$ 1.8 From Figure 9 W_2 (effective) = 64.7 ft $y_{cs} =$ 2.3 ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles)

Estimated bed material $D_{50} =$ _____ ft Average approach velocity, $V_1 = Q_{500}/(y_1 W_1) =$ _____ ft/s

Critical approach velocity, $V_c = 11.17 y_1^{1/6} D_{50}^{1/3} =$ _____ ft/s

If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.

$D_{c50} = 0.0006 (q_2/y_1)^{7/6} =$ _____ ft If $D_{50} \geq D_{c50}$, $\chi = 0.0$

Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ _____ ft

PIER SCOUR CALCULATIONS

L/a ratio = _____ Correction factor for flow angle of attack (from Table 1), $K_2 =$ _____

Froude # at bridge = _____ Using pier width a on Figure 11, $\xi =$ _____ Pier scour $y_{ps} =$ _____ ft

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} =$ 2.1 ft right abutment, $y_{aRT} =$ 2.1 ft

Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through

Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} =$ 8.6 and $\psi_{RT} =$ 8.6

Left abutment scour, $y_{as} = \psi_{LT} (K_1/0.55) =$ 8.6 ft Right abutment scour $y_{as} = \psi_{RT} (K_1/0.55) =$ 8.6 ft

PGRM: "RegionA", "RegionB", "RegionC", or "RegionD"

PGRM: Contract

PGRM: CWCNEW

PGRM: Pie

PGRM: Abutment

Route Nevad Rd Stream Boxelder Ck MRM _____ Date _____ Initials _____
 Bridge Structure No. 41238262 Location 0.3 mi S. Benchmark Rd
 GPS coordinates: N 44° 13.493' taken from: USL abutment centerline of \uparrow MRM end _____
W 163° 34.608' Datum of coordinates: WGS84 NAD27 _____

Drainage area = 37.83 sq. mi.
 The average bottom of the main channel was 14.1 ft below top of guardrail at a point 17 ft from left abutment.
 Method used to determine flood flows: _____ Freq. Anal. _____ drainage area ratio regional regression equations.

MISCELLANEOUS CONSIDERATIONS

Flows	Q ₁₀₀ = <u>2030</u>			Q ₅₀₀ = <u>4660</u>		
Estimated flow passing through bridge	<u>2030</u>			<u>4660</u>		
Estimated road overflow & overtopping	<u>0</u>			<u>0</u>		
Consideration	Yes	No	Possibly	Yes	No	Possibly
Chance of overtopping		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Chance of Pressure flow		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Armored appearance to channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Lateral instability of channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	

7-3

PK	Q
2	69.5
5	219
10	413
25	822
50	1330
100	2030
500	4660

Riprap at abutments? _____ Yes No _____ Marginal
 Evidence of past Scour? Yes _____ No _____ Don't know left abutment is eroded under bridge
 Debris Potential? _____ High _____ Med Low trees, but no piers

Does scour countermeasure(s) appear to have been designed?
 Riprap _____ Yes _____ No _____ Don't know NA
 Spur Dike _____ Yes _____ No _____ Don't know NA
 Other _____ Yes _____ No _____ Don't know NA

Bed Material Classification Based on Median Particle Size (D₅₀)

Material	Silt/Clay	Sand	Gravel	Cobbles	Boulders
Size range, in mm	<0.062	0.062-2.00	2.00-64	64-250	>250

Comments, Diagrams & orientation of digital photos

Str. no.
 approach from bridge
 LOB from bridge
 ROB from bridge
 bridge from approach

eroded left abutment
 right abutment

Summary of Results

	Q ₁₀₀	Q ₅₀₀
Bridge flow evaluated	<u>2030</u>	<u>4660</u>
Flow depth at left abutment (yaLT), in feet	<u>0.65</u>	<u>2.1</u>
Flow depth at right abutment (yaRT), in feet	<u>0.60</u>	<u>2.1</u>
Contraction scour depth (y _{cs}), in feet	<u>1.0</u>	<u>2.3</u>
Pier scour depth (y _{ps}), in feet	<u>NA</u>	<u>NA</u>
Left abutment scour depth (y _{as}), in feet	<u>2.9</u>	<u>8.6</u>
Right abutment scour depth (y _{rs}), in feet	<u>2.7</u>	<u>8.6</u>
Flow angle of attack	<u>18°</u>	<u>18°</u>

See Comments/Diagram for justification where required