

OK RJ

SCOUR ANALYSIS AND REPORTING FORM


Bridge Structure No. S2315370 Date 10/22/10 Initials CW Region (A B C D)
 Site _____ Location Second bridge downstream from Mountain Park Road
 $Q_{100} =$ 3010 by: drainage area ratio flood freq. anal. _____ regional regression eq. _____
 Bridge discharge (Q_2) = 3010 (should be Q_{100} unless there is a relief bridge, road overflow, or bridge overtopping)

Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 76 ft. Flow angle at bridge = 25 ° Abut. Skew = 0 ° Effective Skew = 25 °
 Width (W_2) iteration = 78 59 62 57
 Avg. flow depth at bridge, y_2 iteration = 5.6 8.1 6.4 6.6 51.66 58.3
 Corrected channel width at bridge Section = W_2 times cos of flow angle = 52.57 ft* $q_2 = Q_2/W_2 =$ 57.3 ft²/s
 Bridge Vel, $V_2 =$ 4.7 ft/s Final $y_2 = q_2/V_2 =$ 6.6 ft $\Delta h =$ 1.5 ft 1.6
 Average main channel depth at approach section, $y_1 = \Delta h + y_2 =$ 8.2 ft

* NOTE: repeat above calculations until y_2 changes by less than 0.2 Effective pier width = $L \sin(a) + a \cos(a)$
 If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

Water Surface Elev. = _____ ft
 Low Steel Elev. = 13.7 ft
 n (Channel) = 0.04
 n (LOB) = 0.050
 n (ROB) = 0.045
 Pier Width = 2.0 ft
 Pier Length = 2.0 ft
 # Piers for 100 yr = 2 ft

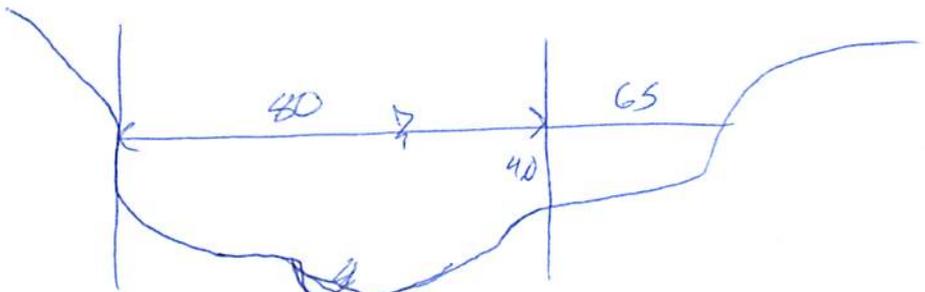

CONTRACTION SCOUR

Width of main channel at approach section $W_1 =$ 80 ft
 Width of left overbank flow at approach, $W_{lob} =$ 0.0 ft Average left overbank flow depth, $y_{lob} =$ 0.0 ft
 Width of right overbank flow at approach, $W_{rob} =$ 65 ft Average right overbank flow depth, $y_{rob} =$ 4.0 ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)

$x =$ _____ From Figure 9 W_2 (effective) = _____ ft $y_{cs} =$ _____ ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles) 2 = 0

Estimated bed material $D_{50} =$ 0.3 ft Average approach velocity, $V_1 = Q_{100}/(y_1 W_1) =$ 4.59 ft/s 2.53

Critical approach velocity, $V_c = 11.52 y_1^{1/6} D_{50}^{1/3} =$ 10.62 ft/s

If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.

$D_{c50} = 0.0006 (q_2 / y_1^{7/6})^3 =$ 0.0715 ft 0.0753

If $D_{50} \geq D_{c50}$, $\chi = 0.0$

Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ 0.0 ft

PIER SCOUR CALCULATIONS

L/a ratio = 1.0 Correction factor for flow angle of attack (from Table 1), $K_2 =$ 1.0
 Froude # at bridge = 0.6 Using pier width a on Figure 11, $\xi =$ 8 Pier scour $y_{ps} =$ 7.4 ft
0.59

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} =$ 0.0 ft right abutment, $y_{aRT} =$ 4.0 ft
 Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through
 Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} =$ 0.0 and $\psi_{RT} =$ 13.3
 Left abutment scour, $y_{as} = \psi_{LT} (K_1 / 0.55) =$ 0.0 ft Right abutment scour $y_{as} = \psi_{RT} (K_1 / 0.55) =$ 13.3 ft

PGRM: "RegionA", "RegionB", "RegionC", or "RegionD"

PGRM: Contract

PGRM: CWCNEW

PGRM: Pier

PGRM: Abutment

SCOUR ANALYSIS AND REPORTING FORM


Bridge Structure No. 52315370 Date 10/22/10 Initials CW Region (A B C D)
 Site _____ Location Second Bridge downstream from Mountain Park Rd.
 $Q_{500} =$ 22400 by: drainage area ratio flood freq. anal. _____ regional regression eq. _____
 Bridge discharge (Q_2) = 15306 (should be Q_{500} unless there is a relief bridge, road overflow, or bridge overtopping)
15310

Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 78 ft. Flow angle at bridge = 25 ° Abut. Skew = 0 ° Effective Skew = 25 °
 Width (W_2) iteration = 78
 Avg. flow depth at bridge, y_2 iteration = 16.9 RD Overflow $78 \cos 25 = 70.69$
 Corrected channel width at bridge Section = W_2 times cos of flow angle = 70.69 ft* $q_2 = Q_2/W_2 = \frac{216.5}{78} = 2.77$ ft²/s 216.6
 Bridge Vel, $V_2 =$ 15.8 ft/s Final $y_2 = q_2/V_2 = \frac{2.77}{15.8} = 0.175$ ft $\Delta h =$ 5.2 ft
 Average main channel depth at approach section, $y_1 = \Delta h + y_2 =$ 18.9 ft

* NOTE: repeat above calculations until y_2 changes by less than 0.2 Effective pier width = $L \sin(a) + a \cos(a)$
 If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

Water Surface Elev. = _____ ft
 Low Steel Elev. = 13.7 ft
 n (Channel) = 0.040
 n (LOB) = 0.050
 n (ROB) = 0.045
 Pier Width = 2.0 ft
 Pier Length = 2.0 ft
 # Piers for 500 yr = 2

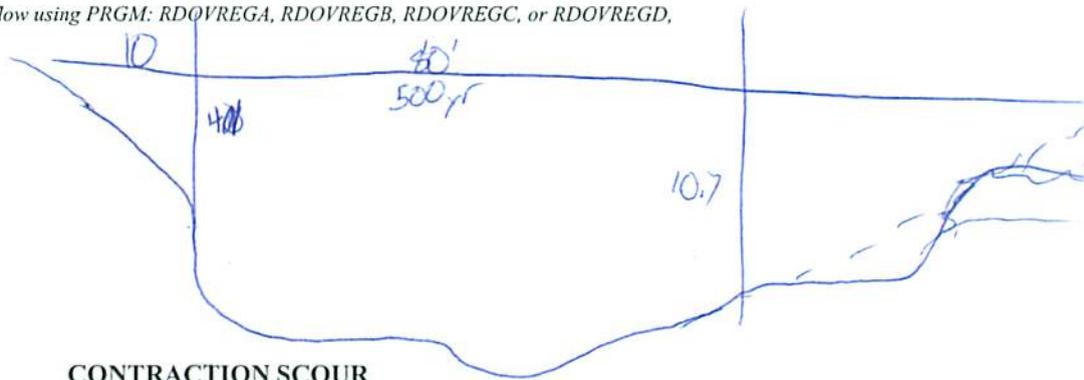

CONTRACTION SCOUR

Width of main channel at approach section $W_1 =$ 80 ft
 Width of left overbank flow at approach, $W_{lob} =$ 10 ft Average left overbank flow depth, $y_{lob} =$ 2.0 ft
 Width of right overbank flow at approach, $W_{rob} =$ 78 ft Average right overbank flow depth, $y_{rob} =$ 5.35 ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)

$x =$ _____ From Figure 9 W_2 (effective) = _____ ft $y_{cs} =$ _____ ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles) 2=0

Estimated bed material $D_{50} =$ 0.3 ft Average approach velocity, $V_1 = Q_{500}/(y_1 W_1) = \frac{22400}{18.9 \times 80} = 14.8$ ft/s 10.12 4.82 10.13

Critical approach velocity, $V_c = 11.52 y_1^{1/6} D_{50}^{1/3} =$ 12.2 ft/s

If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.

$D_{c50} = 0.0006 (q_2/y_1)^{7/6} =$ 0.2077 ft If $D_{50} \geq D_{c50}$, $\chi =$ 0.0
 Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ 0.0 ft

PIER SCOUR CALCULATIONS

L/a ratio = 1.0 Correction factor for flow angle of attack (from Table 1), $K_2 =$ 1.0
 Froude # at bridge = 0.75 Using pier width a on Figure 11, $\xi =$ 8 Pier scour $y_{ps} =$ 7.6 ft

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} =$ 2.0 ft right abutment, $y_{aRT} =$ 5.35 ft
 Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through
 Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} =$ 8.2 and $\psi_{RT} =$ 15.6
 Left abutment scour, $y_{as} = \psi_{LT} (K_1/0.55) =$ 8.2 ft Right abutment scour $y_{as} = \psi_{RT} (K_1/0.55) =$ 15.6 ft

PGRM: "RegionA", "RegionB", "RegionC", or "RegionD"

PGRM: Contract

PGRM: CWCNEW

PGRM: Pie

PGRM: Abutment

Sheridan

Route Lake Rd Stream Spring Creek MRM _____ Date 10/22/10 Initials CW
Bridge Structure No. 52315370 Location Second bridge downstream from Mountain Park Rd.
GPS coordinates: N 43° 59' 02.5" taken from: USL abutment centerline of ↑ MRM end _____
W 103° 25' 51.4" Datum of coordinates: WGS84 NAD27 _____

Drainage area = 150.9 sq. mi.

The average bottom of the main channel was 17.4 ft below top of guardrail at a point 21 ft from left abutment.

Method used to determine flood flows: ___ Freq. Anal. ___ drainage area ratio ___ regional regression equations.

MISCELLANEOUS CONSIDERATIONS

Flows	Q ₁₀₀ = <u>3010</u>			Q ₅₀₀ = <u>22400</u>		
Estimated flow passing through bridge	<u>3010</u>			<u>+15306 15310</u>		
Estimated road overflow & overtopping				<u>7094 7090</u>		
Consideration	Yes	No	Possibly	Yes	No	Possibly
Chance of overtopping		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		
Chance of Pressure flow		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>
Armored appearance to channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Lateral instability of channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	

Riprap at abutments? ___ Yes No ___ Marginal
Evidence of past Scour? ___ Yes No ___ Don't know
Debris Potential? High ___ Med ___ Low

Does scour countermeasure(s) appear to have been designed?
Riprap ___ Yes ___ No ___ Don't know NA
Spur Dike ___ Yes ___ No ___ Don't know NA
Other _____ ___ Yes ___ No ___ Don't know NA

Bed Material Classification Based on Median Particle Size (D₅₀)

Material Silt/Clay ___ Sand ___ Gravel ___ Cobbles Boulders ___
Size range, in mm <0.062 0.062-2.00 2.00-64 64-250 >250

Comments, Diagrams & orientation of digital photos Prescribed burn in area
1403 - Bridge ID
04 - Bridge
05 - US
06 - US RB
07 - US LB
08 - Burn
09 - App. XS Looking @ LB
10 - App. XS looking @ RB
11 - US Face of Bridge

Summary of Results

	Q100	Q500
Bridge flow evaluated	<u>3010</u>	<u>15306</u>
Flow depth at left abutment (yaLT), in feet	<u>0.0</u>	<u>2.0</u>
Flow depth at right abutment (yaRT), in feet	<u>4.0</u>	<u>5.35</u>
Contraction scour depth (y _{cs}), in feet	<u>0.0</u>	<u>0.0</u>
Pier scour depth (y _{ps}), in feet	<u>7.4</u>	<u>7.6</u>
Left abutment scour depth (y _{as}), in feet	<u>0.0</u>	<u>8.2</u>
Right abutment scour depth (y _{as}), in feet	<u>13.3</u>	<u>15.6</u>
Flow angle of attack	<u>25°</u>	<u>25°</u>

See Comments/Diagram for justification where required