

SCOUR ANALYSIS AND REPORTING FORM


Bridge Structure No. 62190319 Date 8/16/11 Initials CA Region (A B C D)
 Site _____ Location 3.4 mi S of Winner on 315 Ave
 $Q_{100} =$ 1870 by: drainage area ratio _____ flood freq. anal. _____ regional regression eq.
 Bridge discharge (Q_2) = 1870 (should be Q_{100} unless there is a relief bridge, road overflow, or bridge overtopping)

Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 90 ft. Flow angle at bridge = 10 ° Abut. Skew = 0 ° Effective Skew = 10 °
 Width (W_2) iteration = 90
 Avg. flow depth at bridge, y_2 iteration = 5.3 Vert Wall
 Corrected channel width at bridge Section = W_2 times cos of flow angle = 80.63 ft* $q_2 = Q_2/W_2 =$ 21.1 ft²/s
 Bridge Vel, $V_2 =$ 4.0 ft/s Final $y_2 = q_2/V_2 =$ 5.3 ft $\Delta h =$ 0.3 ft
 Average main channel depth at approach section, $y_1 = \Delta h + y_2 =$ 5.6 ft

*NOTE: repeat above calculations until y_2 changes by less than 0.2
 Effective pier width = $L \sin(q) + a \cos(q)$
 If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

Water Surface Elev. = _____ ft
 Low Steel Elev. = _____ ft
 n (Channel) = 0.060
 n (LOB) = 0.045
 n (ROB) = 0.033
 Pier Width = 2.0 ft
 Pier Length = 2.0 ft
 # Piers for 100 yr = 2

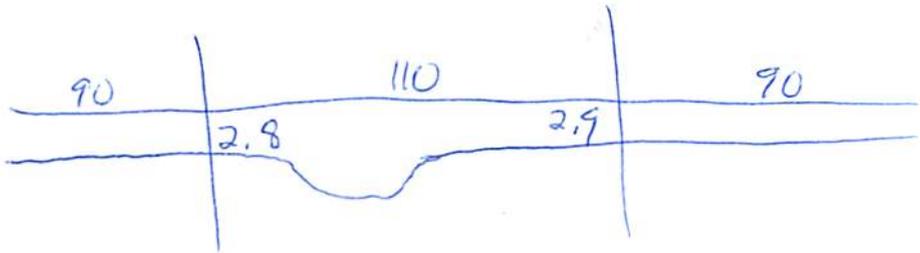

CONTRACTION SCOUR

Width of main channel at approach section $W_1 =$ 110 ft
 Width of left overbank flow at approach, $W_{lob} =$ 90 ft Average left overbank flow depth, $y_{lob} =$ 2.8 ft
 Width of right overbank flow at approach, $W_{rob} =$ 90 ft Average right overbank flow depth, $y_{rob} =$ 2.9 ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)
 $x =$ 7.8 From Figure 9 W_2 (effective) = 84.6 ft $y_{cs} =$ 8.6 ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles)
 Estimated bed material $D_{50} =$ _____ ft Average approach velocity, $V_1 = Q_{100}/(y_1 W_1) =$ _____ ft/s
 Critical approach velocity, $V_c = 11.17 y_1^{1/6} D_{50}^{1/3} =$ _____ ft/s
 If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.
 $D_{c50} = 0.0006 (q_2 / y_1^{7/6})^3 =$ _____ ft If $D_{50} \geq D_{c50}$, $\chi = 0.0$
 Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ _____ ft

PIER SCOUR CALCULATIONS

L/a ratio = 1.0 Correction factor for flow angle of attack (from Table 1), $K_2 =$ 1.0
 Froude # at bridge = 0.31 Using pier width a on Figure 11, $\xi =$ 8.0 Pier scour $y_{ps} =$ 6.7 ft

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} =$ 2.8 ft right abutment, $y_{aRT} =$ 2.9 ft
 Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through
 Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} =$ 11.2 and $\psi_{RT} =$ 11.3
 Left abutment scour, $y_{as} = \psi_{LT}(K_1/0.55) =$ 11.2 ft Right abutment scour $y_{as} = \psi_{RT}(K_1/0.55) =$ 11.3 ft

PGRM: "RegionA", "RegionB", "RegionC", or "RegionD"

PGRM: Contract

PGRM: CWCSNEW

PGRM: Pier

PGRM: Abutment

SCOUR ANALYSIS AND REPORTING FORM


Bridge Structure No. 62190319 Date 8/16/11 Initials CW Region (A B C D) D
 Site _____ Location 3.4 mi. S of Winner on 315 Ave
 $Q_{500} =$ 3190 by: drainage area ratio _____ flood freq. anal. _____ regional regression eq.
 Bridge discharge (Q_2) = 3190 (should be Q_{500} unless there is a relief bridge, road overflow, or bridge overtopping)

Analytical Procedure for Estimating Hydraulic Variables Needed to Apply Method

Bridge Width = 90 ft. Flow angle at bridge = 10 ° Abut. Skew = 0 ° Effective Skew = 10 °
 Width (W_2) iteration = 90
 Avg. flow depth at bridge, y_2 iteration = 7.1 Vert Wall
 Corrected channel width at bridge Section = W_2 times cos of flow angle = 88.63 ft* $q_2 = Q_2/W_2 =$ 36 ft²/s
 Bridge Vel, $V_2 =$ 5.1 ft/s Final $y_2 = q_2/V_2 =$ 7.1 ft $\Delta h =$ 0.5 ft
 Average main channel depth at approach section, $y_1 = \Delta h + y_2 =$ 7.6 ft

* NOTE: repeat above calculations until y_2 changes by less than 0.2 Effective pier width = $L \sin(\alpha) + a \cos(\alpha)$
 If y_2 is above LS, then account for Road Overflow using PRGM: RDOVREGA, RDOVREGB, RDOVREGC, or RDOVREGD.

Water Surface Elev. = _____ ft
 Low Steel Elev. = _____ ft
 n (Channel) = 0.060
 n (LOB) = 0.045
 n (ROB) = 0.038
 Pier Width = 2.0 ft
 Pier Length = 2.0 ft
 # Piers for 500 yr = 2

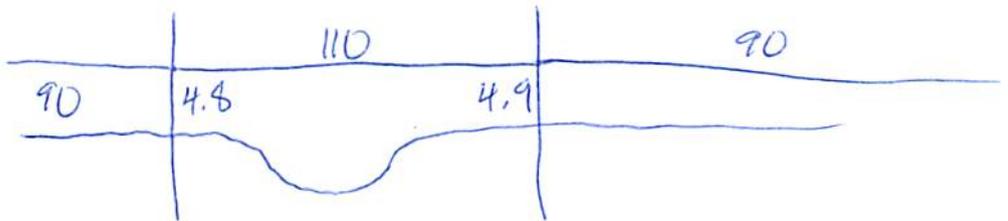

CONTRACTION SCOUR

Width of main channel at approach section $W_1 =$ 110 ft
 Width of left overbank flow at approach, $W_{lob} =$ 90 ft Average left overbank flow depth, $y_{lob} =$ 4.8 ft
 Width of right overbank flow at approach, $W_{rob} =$ 90 ft Average right overbank flow depth, $y_{rob} =$ 4.9 ft

Live Bed Contraction Scour (use if bed material is small cobbles or finer)
 $x =$ 14.36 From Figure 9 W_2 (effective) = 84.6 ft $y_{cs} =$ 14.6 ft

Clear Water Contraction Scour (use if bed material is larger than small cobbles)
 Estimated bed material $D_{50} =$ _____ ft Average approach velocity, $V_1 = Q_{500}/(y_1 W_1) =$ _____ ft/s
 Critical approach velocity, $V_c = 11.17 y_1^{1/6} D_{50}^{1/3} =$ _____ ft/s
 If $V_1 < V_c$ and $D_{50} \geq 0.2$ ft, use clear water equation below, otherwise use live bed scour equation above.
 $D_{c50} = 0.0006 (q_2 / y_1^{7/6})^3 =$ _____ ft If $D_{50} \geq D_{c50}$, $\chi = 0.0$
 Otherwise, $\chi = 0.122 y_1 [q_2 / (D_{50}^{1/3} y_1^{7/6})]^{6/7} - y_1 =$ _____ From Figure 10, $y_{cs} =$ _____ ft

PIER SCOUR CALCULATIONS

L/a ratio = 1.0 Correction factor for flow angle of attack (from Table 1), $K_2 =$ 1.0
 Froude # at bridge = 0.34 Using pier width a on Figure 11, $\xi =$ 8.0 Pier scour $y_{ps} =$ 6.8 ft

ABUTMENT SCOUR CALCULATIONS

Average flow depth blocked by: left abutment, $y_{aLT} =$ 4.8 ft right abutment, $y_{aRT} =$ 4.9 ft
 Shape coefficient $K_1 =$ 1.00 for vertical-wall, 0.82 for vertical-wall with wingwalls, 0.55 for spill-through
 Using values for y_{aLT} and y_{aRT} on figure 12, $\psi_{LT} =$ 14.7 and $\psi_{RT} =$ 14.8
 Left abutment scour, $y_{as} = \psi_{LT} (K_1 / 0.55) =$ 14.7 ft Right abutment scour $y_{as} = \psi_{RT} (K_1 / 0.55) =$ 14.8 ft

PRGM: "RegionA", "RegionB", "RegionC", or "RegionD"

PRGM: Contract

PRGM: CWCSNEW

PRGM: Pie

PRGM: Abutment

Route 315 Ave Stream Mud CK MRM Date 8/16/11 Initials Car
 Bridge Structure No. 62190319 Location 3.4 mi S of Winner on 315 Ave
 GPS coordinates: N 43° 18' 55.3" taken from: USL abutment centerline of \uparrow MRM end _____
W 99° 52' 12.5" Datum of coordinates: WGS84 NAD27 _____

Drainage area = 16.81 sq. mi.
 The average bottom of the main channel was 11.7 ft below top of guardrail at a point 36 ft from left abutment.
 Method used to determine flood flows: _____ Freq. Anal. _____ drainage area ratio regional regression equations.

MISCELLANEOUS CONSIDERATIONS

Flows	Q ₁₀₀ = <u>1870</u>			Q ₅₀₀ = <u>3190</u>		
Estimated flow passing through bridge	<u>1870</u>			<u>3190</u>		
Estimated road overflow & overtopping						
Consideration	Yes	No	Possibly	Yes	No	Possibly
Chance of overtopping		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Chance of Pressure flow		<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>
Armored appearance to channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
Lateral instability of channel		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	

PK calc'd 8/8
 2 | 124
 5 | 370
 10 | 640
 25 | 1040
 50 | 1436
 100 | 1970
 500 | 3190

Riprap at abutments? _____ Yes No _____ Marginal
 Evidence of past Scour? _____ Yes No _____ Don't know
 Debris Potential? High _____ Med _____ Low

Does scour countermeasure(s) appear to have been designed?

Riprap _____ Yes _____ No _____ Don't know NA
 Spur Dike _____ Yes _____ No _____ Don't know NA
 Other _____ Yes _____ No _____ Don't know NA

Bed Material Classification Based on Median Particle Size (D₅₀)
 Material Silt/Clay Sand _____ Gravel _____ Cobbles _____ Boulders _____
 Size range, in mm <0.062 0.062-2.00 2.00-64 64-250 >250

Comments, Diagrams & orientation of digital photos

19 57-1D
 58-us
 59-us RB
 60-us LB
 61-R. Abut
 62-us Face
 63-L. Abut

Summary of Results

	Q100	Q500
Bridge flow evaluated	<u>1870</u>	<u>3190</u>
Flow depth at left abutment (yaLT), in feet	<u>2.8</u>	<u>4.8</u>
Flow depth at right abutment (yaRT), in feet	<u>2.9</u>	<u>4.9</u>
Contraction scour depth (yca), in feet	<u>8.6</u>	<u>14.6</u>
Pier scour depth (ypp), in feet	<u>6.7</u>	<u>6.8</u>
Left abutment scour depth (yas), in feet	<u>11.2</u>	<u>14.7</u>
Right abutment scour depth (yas), in feet	<u>11.3</u>	<u>14.8</u>
Flow angle of attack	<u>10°</u>	<u>10°</u>

See Comments/Diagram for justification where required