

Geologic Guides to Prospecting for Carnotite Deposits on the Colorado Plateau

Trace Elements Investigations Report 119

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OFFICIAL USE ONLY

This document consists of 26 pages
Series A.

CATEGORY VII (Colorado Plateau geology)

Pub. as USGS Bull 988-B.

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

GEOLOGIC GUIDES TO PROSPECTING FOR CARNOTITE DEPOSITS
ON THE COLORADO PLATEAU

By

Doris H. Blackman (Weir)

September 1951

Trace Elements Investigations Report 119

OFFICIAL USE ONLY

USGS - TEI Report 119

The distribution (Series A) of this report is as follows:

3 copies	AEC, Washington (J. C. Johnson)
8 copies	AEC, New York (P. L. Merritt)
1 copy	AEC, Denver (C. C. Towle, Jr.)
1 copy	AEC, Spokane (E. E. Thurlow)
1 copy	AEC, Grand Junction (F. H. MacPherson)
1 copy	AEC, Grand Junction (T. W. Oster)
1 copy	Columbia Univ., New York (P. F. Kerr)
1 copy	Univ. Minnesota, Minneapolis (J. W. Gruner)
2 copies	USGS, Washington (Mineral Deposits Branch)
1 copy	USGS, Denver (A. H. Koschmann)
1 copy	USGS, San Francisco (E. H. Bailey)
1 copy	USGS, Prescott, Ariz. (C. A. Anderson)
1 copy	USGS, Joplin (David Gallagher)
1 copy	USGS, Madison (Carl Dutton)
1 copy	USGS, Knoxville (R. A. Laurence)
1 copy	USGS, Salt Lake City (R. J. Roberts)
1 copy	USGS, Washington (Geochemistry & Petrology Branch)
1 copy	USGS, Washington (Geophysics Branch)
1 copy	USGS, Washington (Fuels Branch)
1 copy	USGS, Washington (Alaskan Branch)
1 copy	USGS, Washington (V. E. McKelvey)
1 copy	USGS, Denver (L. R. Page)
1 copy	USGS, Denver (J. F. Smith, Jr.)
1 copy	USGS, Grand Junction (R. P. Fischer)
1 copy	USGS, Spokane (A. E. Weissenborn)
1 copy	USGS, Plant City, Fla. (J. B. Cathcart)
4 copies	USGS, Washington (TEPCO)
(Including master copy)	

CONTENTS

Page

Abstract	4
Introduction	4
Geology of ore deposits.	5
Geological Survey exploration.	7
Guides to prospecting.	8
Thickness of the ore-bearing sandstone	9
Color of the ore-bearing sandstone	9
Altered mudstone associated with the ore-bearing sandstone	11
Abundance of carbonaceous material within the ore-bearing sandstone	15
Numerical evaluation of geologic guides.	18
Comparison of results obtained from drilling with and without geologic guidance	23
Summary and conclusions.	24
Bibliography	25

ILLUSTRATIONS

Figure 1. Index map of part of Colorado, Utah, Arizona, and New Mexico, showing the general distri- bution of carnotite-bearing deposits	6
2. Average thickness of ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of five drilled areas)	10
3. Average percentage of ore-bearing sandstone with a reddish cast, in zones coextensive with and outward from ore deposits (composite of six drilled areas)	12
4. Geologic section through diamond-drill holes, Calamity group of claims, Mesa County, Colorado	13
5. Average thickness of gray mudstone immediately beneath the ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of six drilled areas)	14
6. Average percentage of gray mudstone relative to the total mudstone within the ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of six drilled areas)	16
7. Average percentage of drill holes cutting abundant carbonaceous material, in zones coextensive with and outward from ore deposits (composite of six drilled areas)	17
8. Map showing the relations of numerical favorability ratings and carnotite deposits on part of Calamity Mesa, Mesa County, Colorado	20
9. Average numerical values of favorability, in zones coextensive with and outward from ore deposits, Calamity group of claims, Mesa County, Colorado	22

GEOLOGIC GUIDES TO PROSPECTING FOR CARNOTITE DEPOSITS

ON THE COLORADO PLATEAU

By

Doris H. Blackman (Weir)

ABSTRACT

This report describes the geologic features that can be used to appraise the favorability of ground in guiding diamond-drill exploration for carnotite deposits in the Upper Jurassic Morrison formation on the Colorado Plateau. It is based on a statistical study of the geologic logs of about 2,500 holes drilled by the Geological Survey. The most useful features consist of the thickness of the ore-bearing sandstone, the color of the ore-bearing sandstone, the altered mudstone associated with the ore-bearing sandstone, and the abundance of carbonaceous material in the ore-bearing sandstone. Although each feature can be used alone to appraise the favorability of ground, an appraisal based on all of them together is even more useful. A method of expressing this favorability in numerical values is suggested.

The results obtained by the Geological Survey using these geologic guides appear to be at least twice as favorable as the drilling results obtained with little or no geologic guidance.

INTRODUCTION

The relations of certain geologic features to carnotite deposits in the Colorado Plateau region have long been recognized by miners and geologists. Not until 1947, however, when the Geological Survey began a large-scale program of diamond-drill exploration on behalf of the Atomic Energy Commission, were these features used extensively as guides in prospecting for carnotite. This report summarizes the results of a study of geologic logs of about

2,500 holes drilled by the Geological Survey in several areas in southwestern Colorado. All geologic features observable in drill core, and which might be of value in guiding exploration, were recorded systematically and appraised as guides. It is hoped that the geologic relations discussed here will be of practical value to private industry in prospecting for carnotite ore, and that the recognition and study of these guides will result in the development of even more useful application and perhaps in additional guides.

The geologic guides to be described in this paper--those that appear to be most valuable in recognizing ground favorable for ore--are as follows: thickness of the ore-bearing sandstone, color of the ore-bearing sandstone, altered mudstone associated with the sandstone, and the presence of abundant carbonaceous material within the ore-bearing sandstone. In order to demonstrate the practical value of these features in exploration, a comparison is given of reserves developed per foot of drilling with and without their aid.

The writer wishes to express her appreciation to R. P. Fischer, L. S. Hilpert, and L. B. Riley, of the Geological Survey, for guidance in the study and for helpful criticism of the manuscript.

GEOLOGY OF ORE DEPOSITS

The carnotite deposits have a wide distribution in southwestern Colorado and the adjoining parts of Utah, Arizona, and New Mexico, where they extend over an area of at least 40,000 square miles (fig. 1). Nearly all of the known deposits of economic importance are restricted to the Shinarump formation of Triassic age and the Entrada and Morrison formations of Jurassic age. Most of the deposits occur in the Salt Wash sandstone member of the Morrison formation, and in many mining districts the deposits are found in one stratigraphic zone within the Salt Wash. This zone

consists of sandstone lenses interbedded with some mudstone. The sandstone in this zone ranges in thickness from slightly less than 20 to slightly more than 80 feet, averaging about 50 feet. This sandstone is referred to in this report as the "ore-bearing sandstone."

The ore mainly impregnates sandstone, averaging about 0.25 percent U_3O_8 and 2 percent V_2O_5 , but some of the fossil plant material in the ore-bearing beds is richly mineralized. The ore bodies are irregularly tabular layers, at most only a few feet thick. They lie generally parallel to the sandstone bedding, but do not follow the beds in detail. They range in size from those containing only a few tons of ore to those containing many thousand tons; most of the deposits contain only a few hundred tons or less. Although the deposits have a spotty distribution, most of them are clustered in relatively small, vaguely defined areas. The larger areas between these clusters contain only few scattered deposits, most of which are small.

The ultimate source, or sources, of the metals in the ore have not been determined. The distribution of the deposits and the habits of the ore, however, suggest an origin that is due to precipitation from groundwater solutions shortly after accumulation of the sands. Localization probably resulted from slight changes in the chemical composition of the solutions, perhaps in the environment of decaying organic material.

Readers desiring a more complete description of the geology of these deposits are referred to Coffin (1921) and Fischer (1942 and 1950).

GEOLOGICAL SURVEY EXPLORATION

The exploration work of the Geological Survey is done in three general stages. During the first stage, holes are drilled at a wide spacing,

usually about 1,000 feet apart, for geologic information. From this drilling, it is possible to recognize favorable ground that may contain one or more clusters of deposits. During the second stage, the favorable ground is drilled with holes at a moderate spacing, usually 100 to 300 feet apart, to find ore deposits. In the third stage, holes are drilled at a close spacing, about 50 to 100 feet apart, to extend and outline any deposits discovered in the earlier drilling. The geologic features that serve as guides are particularly useful during the first and second stages, as these features provide larger targets for drilling than do the ore deposits themselves.

GUIDES TO PROSPECTING

The geologic guides described below are now being used by the Geological Survey in its exploratory drilling program. They are discussed in terms of their application to subsurface exploration, though all of them are useful in surface prospecting. These guides vary in importance according to the size of the drilling target that they provide, and they are described here in that order of importance, beginning with the one that provides the largest target.

Accompanying the description of each geologic guide is a graph showing the relation of that guide to ore. In order that enough measurements may be included for the graphs to have statistical meaning, each graph is a composite of several of the larger areas drilled by the Survey. These graphs show the average amount (arithmetic mean) of each feature cut by holes in all of the areas studied. The drill holes are grouped into five zones according to their position relative to ore deposits. The first zone includes all holes that cut mineralized rock, and the remaining four include, respectively, the holes in the zone 0 to 100 feet outward, 100 to 200 feet outward, 200 to 300 feet outward, and 300 to 400 feet outward from mineralized rock. A limit of 400 feet outward is used because drill-hole information beyond 400 feet from

the ore deposits is generally insufficient for statistical purposes. It is believed that if a larger number of holes had been drilled in zones farther from mineralized rock, and if data from these zones had been added to the graphs, they would continue to show a decrease in favorability as distance from mineralized rock increases. It is not the averages themselves on these graphs that are significant, as they may vary from one drilling area to another, but rather the relations between the averages. Likewise, minor deviations from the general slope of these graphs probably represent incomplete statistical data rather than geologically significant variations.

Thickness of the ore-bearing sandstone

In the Morrison formation the sandstone beds containing the carnotite deposits are lenticular, ranging in thickness from slightly less than 20 to slightly more than 80 feet. In southwestern Colorado, no large ore deposit has been found, by Survey drilling, in sandstone that had an original thickness (prior to recent erosion) of less than about 40 feet. This minimum thickness figure is a reliable guide in wide-spaced drilling. In addition, most of the ore bodies are in or near the thicker, central parts of the sandstone lenses; these thicker parts can be recognized in cross-sections through diamond-drill holes. Not all thick sandstone is favorable, however. The spatial relations of ore deposits to differences in sandstone thickness are apparent in figure 2.

Color of the ore-bearing sandstone

The sandstone enclosing most of the ore bodies is dominantly pale to light yellow brown and speckled with limonite stain. Generally this favorable color and staining extend several hundred feet beyond ore deposits.

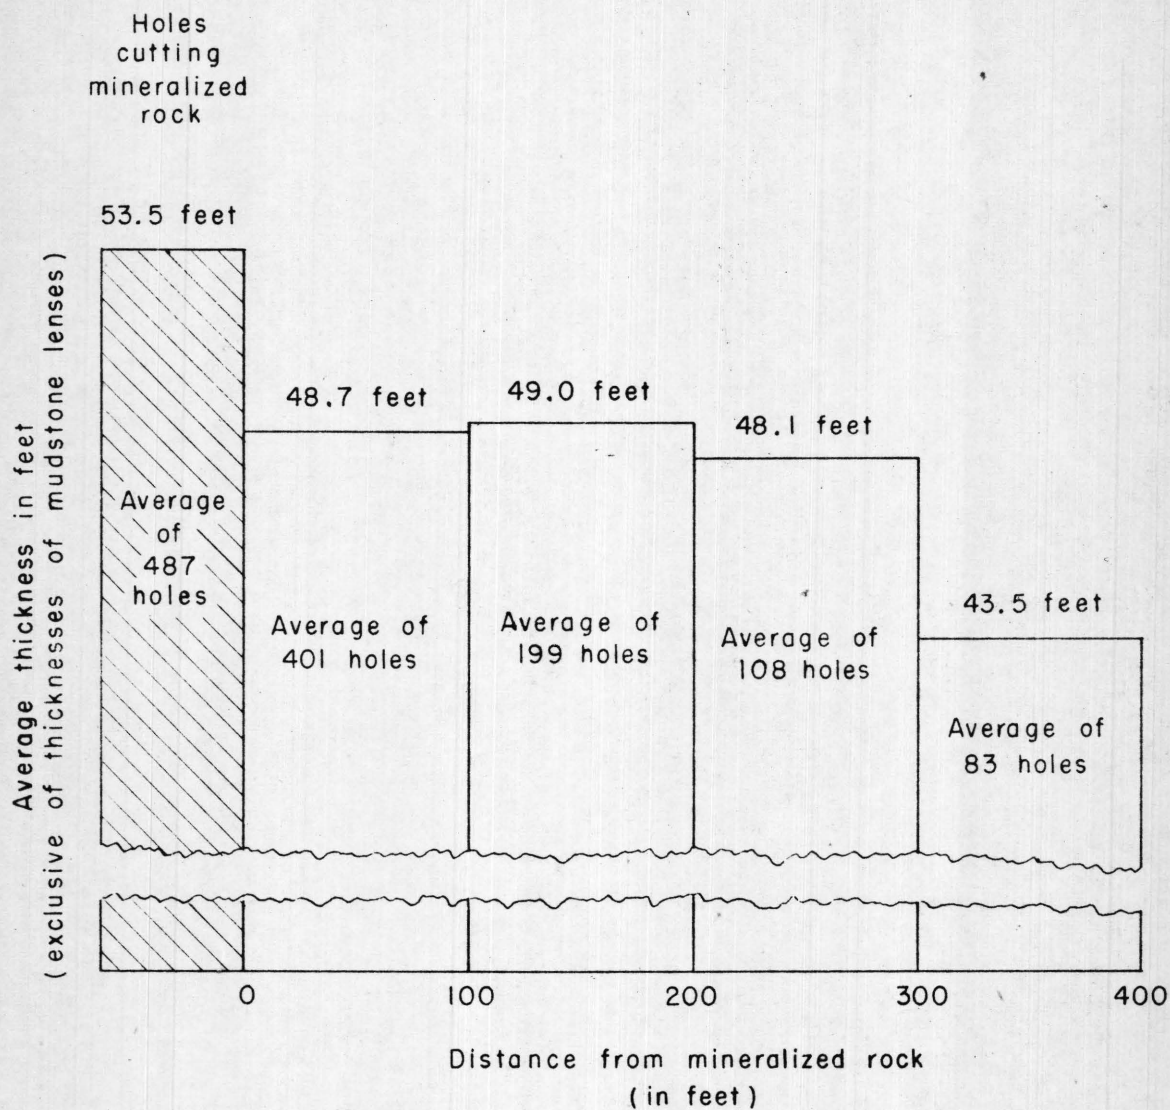


Figure 2.—Average thickness of ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of five drilled areas).

Farther away from deposits, the sandstone in many places is reddish brown. Sandstone with a reddish cast may contain a few ore deposits, but most of them are small, and generally a pronounced red color is indicative of unfavorable ground. These relations are illustrated by figure 3, which shows that the average percentage of ore-bearing sandstone with a reddish cast increases outward from ore.

Altered mudstone associated with the ore-bearing sandstone

The ore-bearing sandstone is interbedded with mudstone, and it also contains thin lenses of mudstone and mudstone-pebble conglomerate. This mudstone is normally red, but near ore deposits the mudstone within the sandstone and the mudstone immediately beneath the ore-bearing sandstone have been altered to gray. A preliminary study of the red and gray mudstone has been made by Weeks (1951).

Figure 4 shows the character of a typical ore body and its relationship to the enclosing sandstone and associated mudstone. Near ore, the gray mudstone beneath the ore-bearing sandstone commonly is as much as several feet thick, as shown in this cross section. The thickness of gray mudstone decreases laterally, but some of it usually extends a few hundred feet outward from the deposits. Figure 5 shows the average thicknesses of gray mudstone immediately beneath the ore-bearing sandstone, in zones coextensive with and outward from ore deposits.

The percentage of gray mudstone, relative to the total amount of mudstone within the ore-bearing sandstone, is also a useful guide, though it is more difficult to measure quantitatively. In the present study, because of the necessity for a numerical comparison of geologic guides, only measurable units of mudstone within the sandstone (units 0.1 foot or more thick) have been considered. Because units of this thickness are not cut by every drill hole in a given area, some holes have been excluded from the calculations of

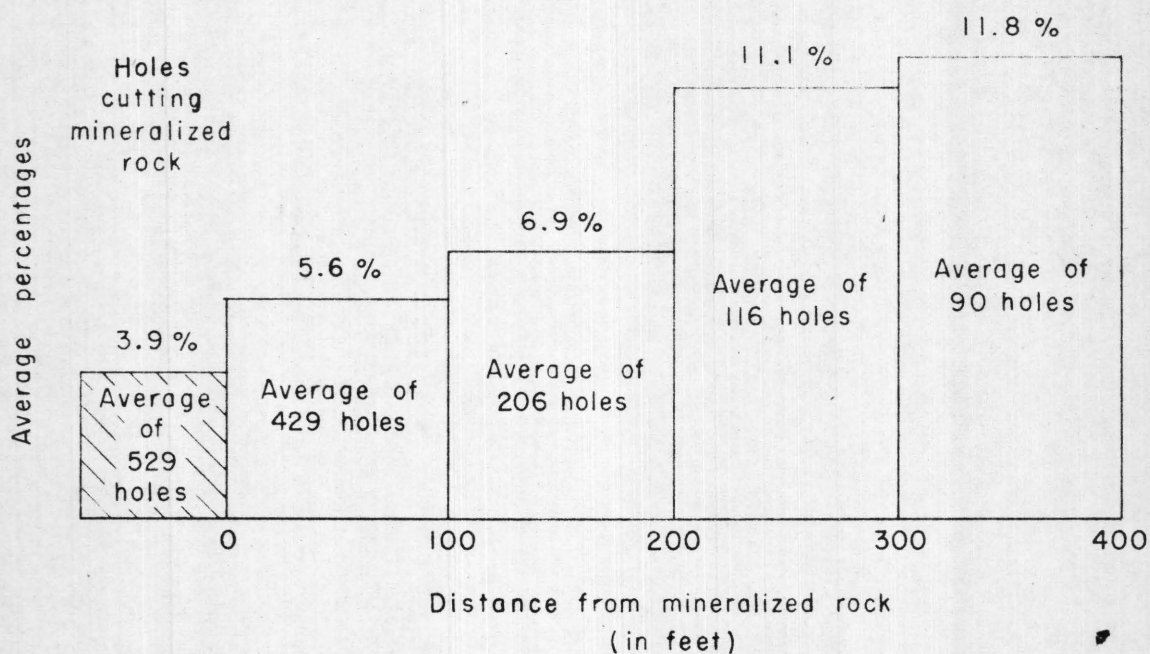


Figure 3.—Average percentage of ore-bearing sandstone with a reddish cast, in zones coextensive with and outward from ore deposits (composite of six drilled areas).

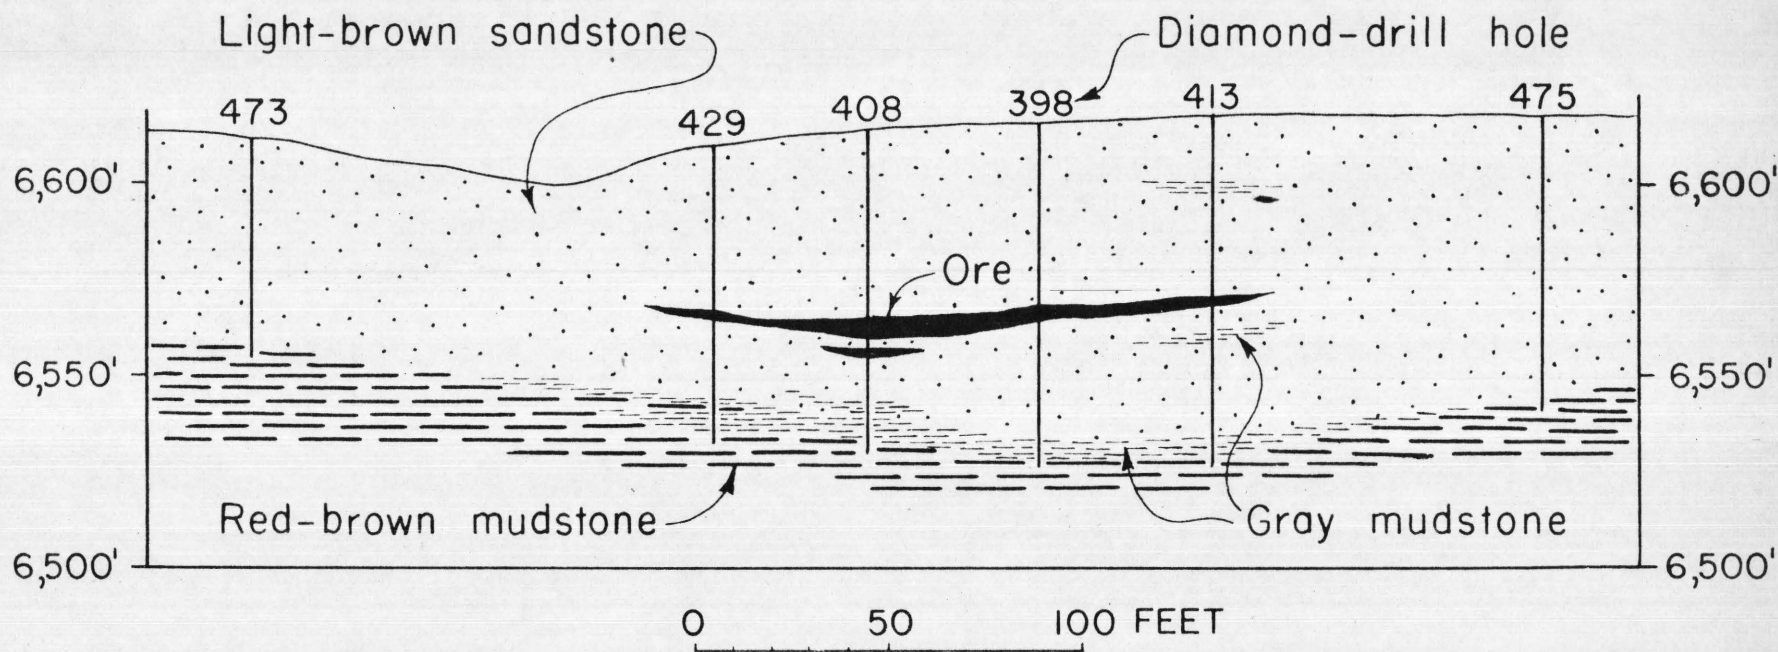


Figure 4.— Geologic section through diamond-drill holes, Calamity group of claims, Mesa County, Colorado

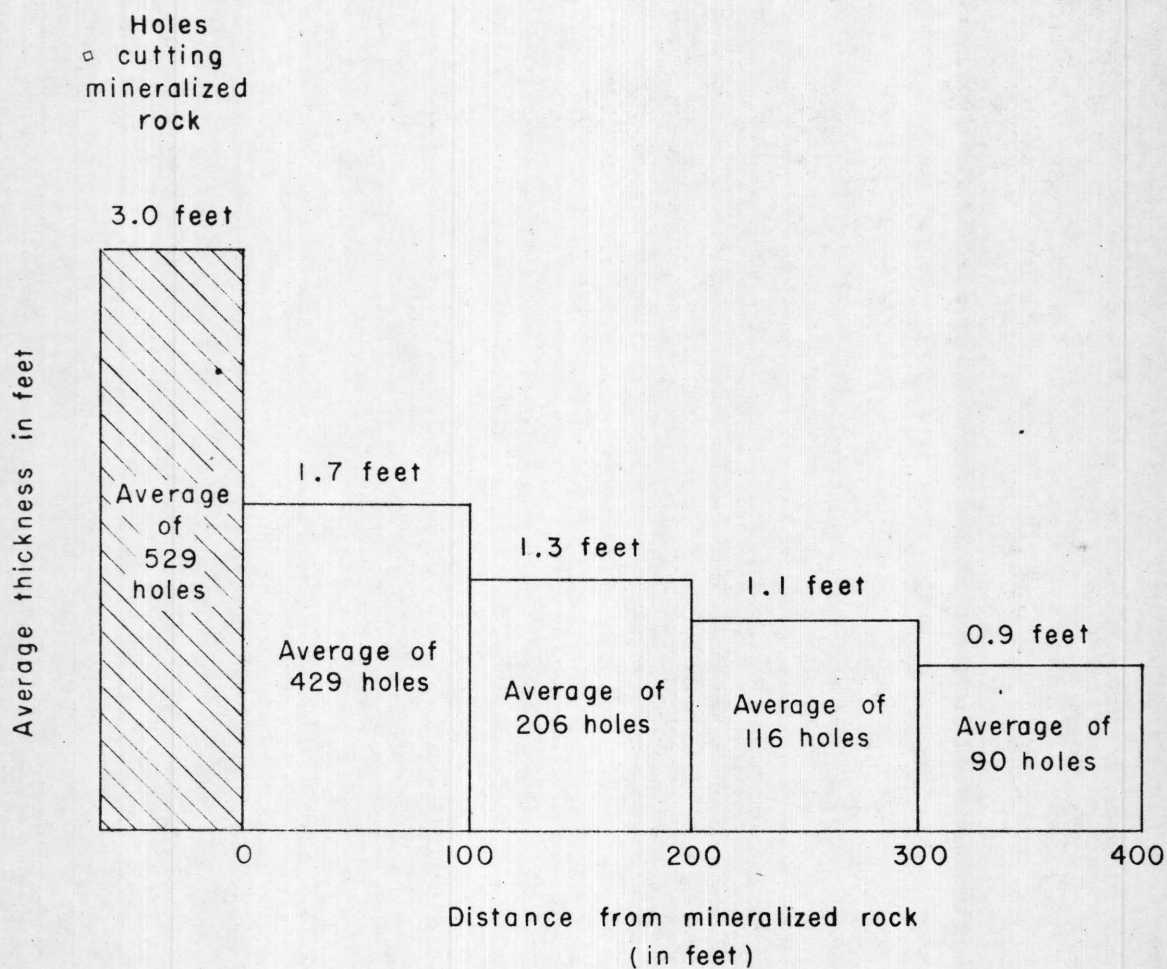


Figure 5.—Average thickness of gray mudstone immediately beneath the ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of six drilled areas).

average percentage of gray mudstone relative to the total mudstone, as shown in figure 6. A sufficient number of holes remains, however, to illustrate clearly the relation of color of mudstone to ore.

Abundance of carbonaceous material within
the ore-bearing sandstone

Carbonized plant remains, consisting of fossil logs, branches, leaf-like material, and unidentifiable fragments, are common in the ore-bearing sandstone. A close relationship between carnotite ore and these remains has long been recognized, for some of the remains have been richly replaced by ore minerals. As all of the remains have not been mineralized, however, and as the plant materials--particularly the logs--are not uniformly distributed through the sandstone, either horizontally or vertically, the significance of the observed relationship between carnotite ore and plant remains is difficult to evaluate. This relationship, therefore, has limited application in exploration. Figure 7 shows, however, that abundant carbonized material is more common in holes cutting mineralized rock, and in holes near ore deposits, than in holes several hundred feet away from ore deposits. Possible traces of carbonized material have been ignored in this study, because of the limitations of observation in drill core and the possibility of misidentification of minute amounts of material.

Field relations suggest that ore deposits have been localized in the vicinity of abundant carbonaceous material, and the relations shown in figure 7 can be interpreted to mean the same thing. In diamond-drill exploration, abundant carbonaceous material can be interpreted to indicate favorable ground, but because of the erratic distribution of plant remains, the lack of abundant carbonaceous material in a single drill hole does not

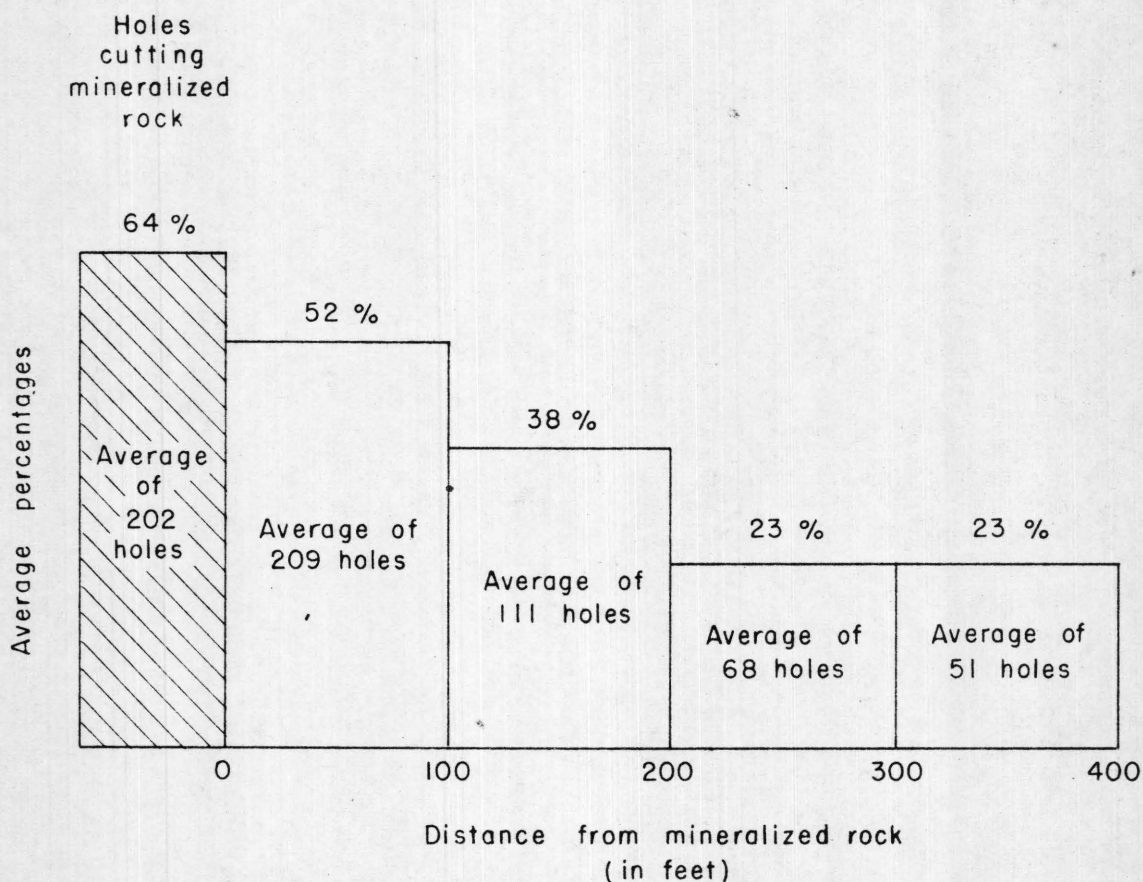


Figure 6.--Average percentage of gray mudstone relative to the total mudstone within the ore-bearing sandstone, in zones coextensive with and outward from ore deposits (composite of six drilled areas).

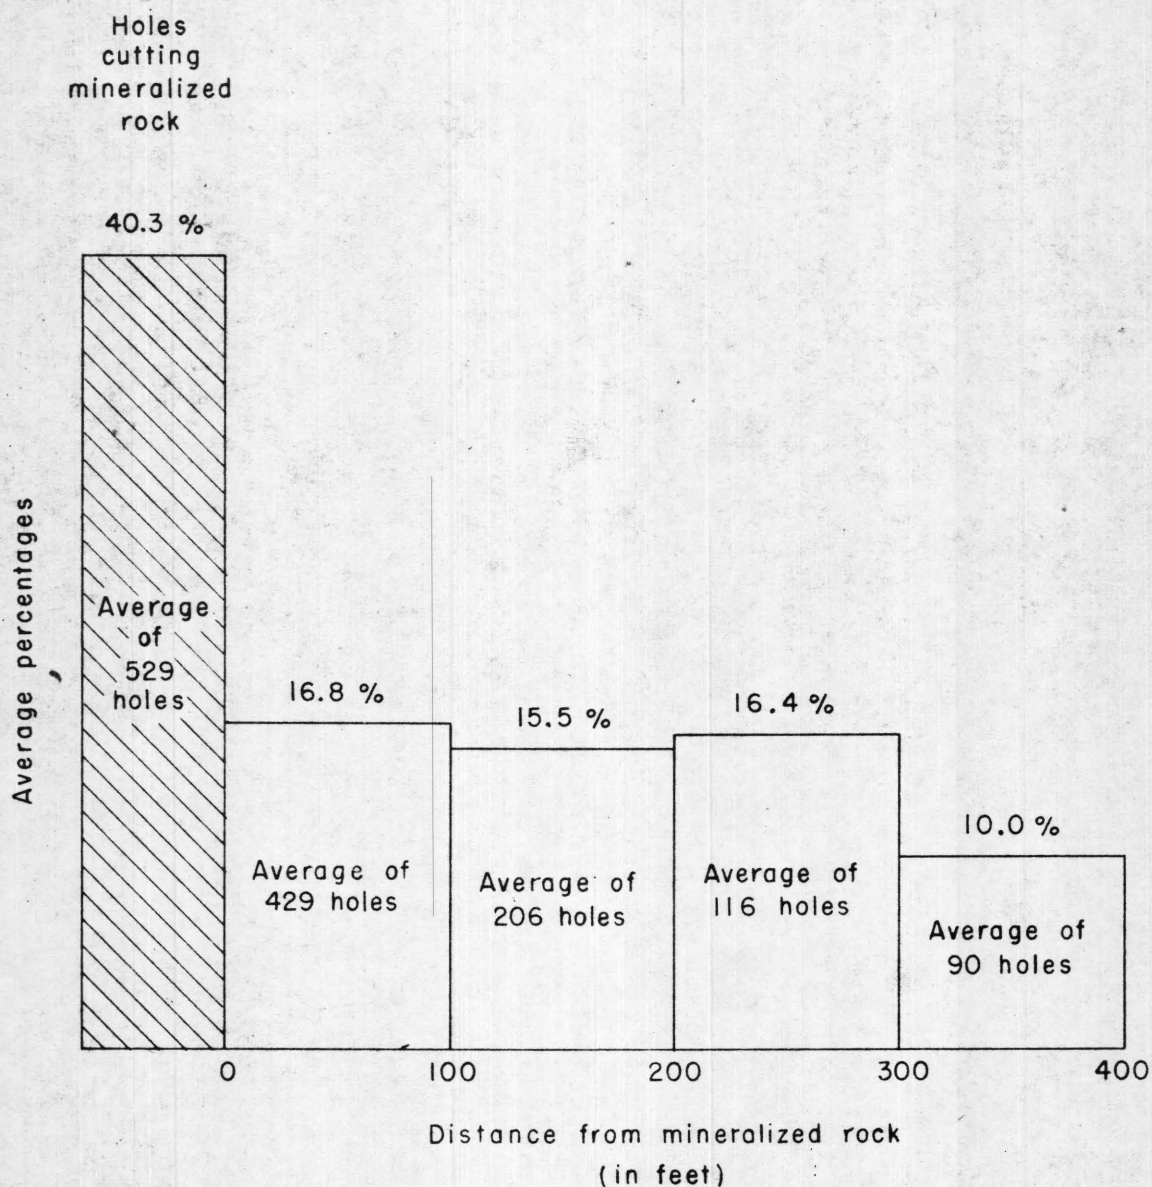


Figure 7.—Average percentage of drill holes cutting abundant carbonaceous material, in zones coextensive with and outward from ore deposits (composite of six drilled areas).

in itself mean unfavorable ground.

Numerical evaluation of geologic guides

Each of the geologic guides described above is useful individually, but an appraisal based on all of them, expressed in numerical terms, is more valuable than is the use of any one alone. In order to test the reliability of such an appraisal, the following method was applied to one area after drilling by the Geological Survey was completed. Modifications of this method are now being applied in the appraisal of other areas.

Each drill hole in the area was rated numerically according to the following scheme:

1. Thickness of ore-bearing sandstone (exclusive of mudstone lenses).

<u>Rating</u>	<u>Thickness in feet</u>
8	41 or more
6	31 - 40
4	21 - 30
2	11 - 20
0	10 or less

2. Color of ore-bearing sandstone.

<u>Rating</u>	<u>Percentage of sandstone with a reddish cast</u>
8	0
6	1 - 15
4	16 - 30
2	31 - 60
0	More than 60

3. Thickness of gray mudstone at base of ore-bearing sandstone.

<u>Rating</u>	<u>Thickness in feet</u>
8	More than 4.0
6	3.1 - 4.0
4	2.1 - 3.0
2	1.1 - 2.0
0	1.0 or less

4. Color of mudstone (units 0.1 foot or more thick) within the ore-bearing sandstone.

<u>Rating</u>	<u>Percentage of total mudstone that is gray</u>
8	100 - 85
6	84 - 70
4	69 - 40
2	39 - 10
0	Less than 10

5. Carbonaceous material within the ore-bearing sandstone.

<u>Rating</u>	<u>Quantity</u>
4	Abundant
0	Sparse or absent

It will be noted from the above table that a maximum rating of 8 is assigned to each of the first four features, but that a maximum rating of 4 is assigned to carbonaceous material, owing to its erratic distribution and the fact that a quantitative measurement of this feature is more difficult than for the other features.

To determine a favorability rating for each drill hole, the numerical values given each of the features cut by that hole are totalled. In order to compensate the rating for holes that do not cut mudstone units 0.1 foot or more thick, and thus are assigned ratings for only four features rather than five, the total ratings for these holes are multiplied by 1.29. In this manner, a favorability range of from zero to 36 is obtained (or 36.12 for those holes that are rated on the basis of four features).

On the basis of drilling on the Calamity group of claims, Mesa County, Colo., the critical point on this favorability scale is approximately 20; no large ore deposits occur in ground given a lower favorability rating. Ground that has a rating of less than 15 is essentially barren. Favorabilities of 30 or more generally occur in the centers of the deposits. Figure 8 shows these relations in part of the area.

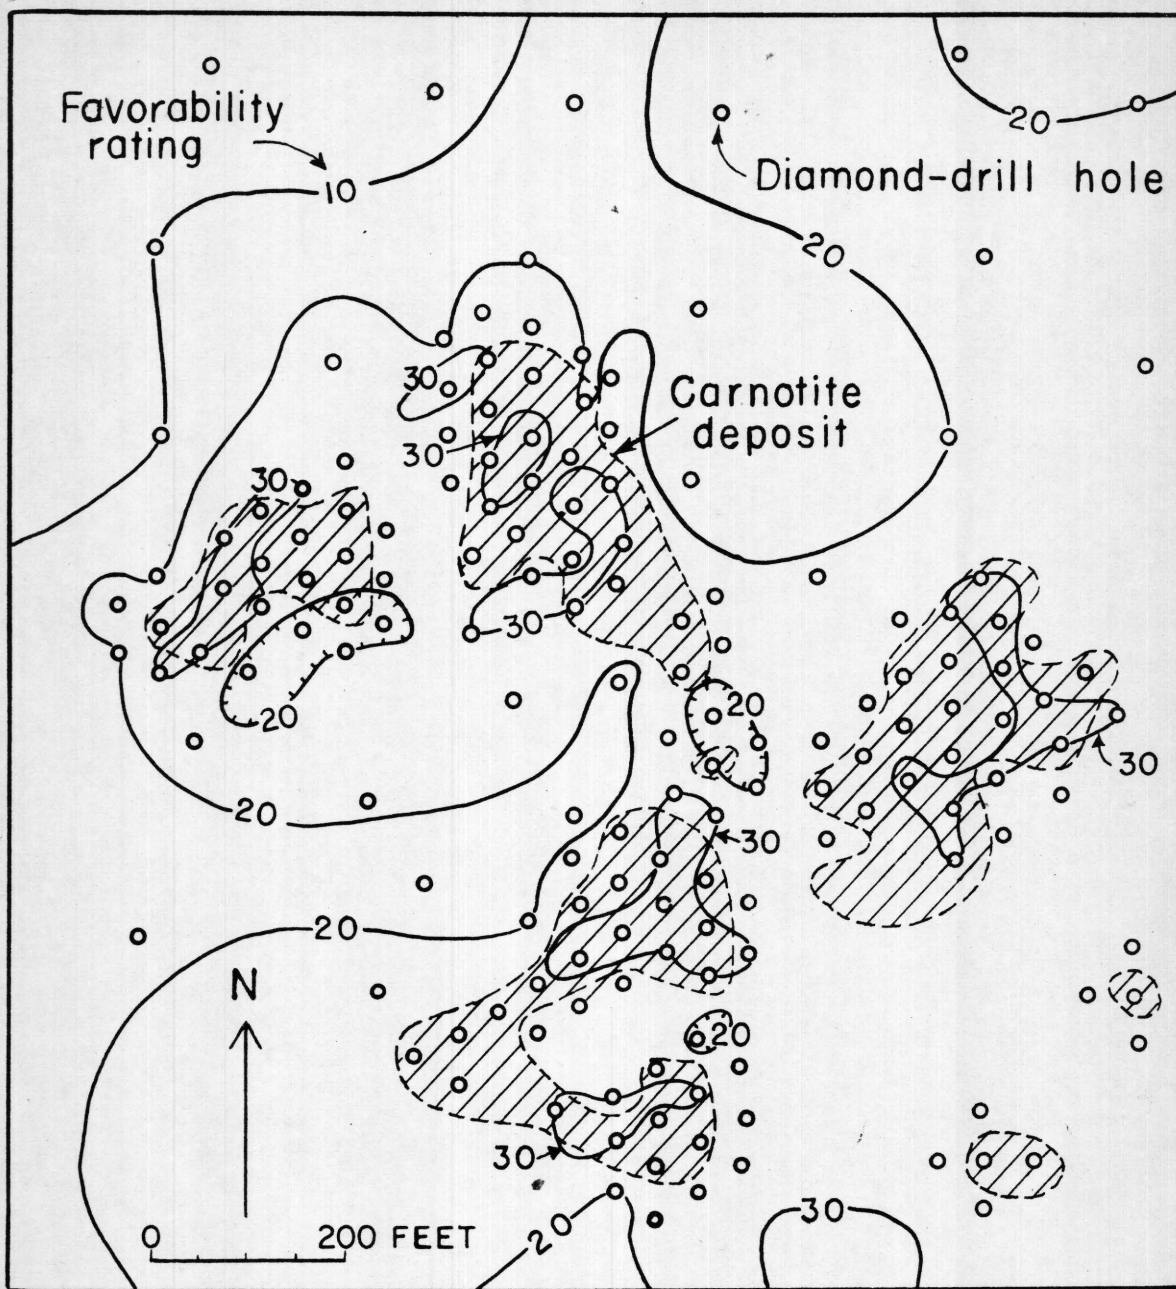


Figure 8.—Map showing the relations of numerical favorability ratings and carnotite deposits on part of Calamity Mesa, Mesa County, Colorado

Figure 9 shows graphically the relation of favorability to ore deposits in the Calamity group of claims. Forty-two ore bodies, including all those drilled by the Geological Survey in this area, are included. It is believed that no importance should be attached to the slight upward trend of the averages in the zone 300-400 feet outward from ore. The trend of the averages is downward, outward from ore; if data could be collected from a greater number of holes in the 300-400 foot zone, as well as from zones farther outward from ore, they would show a continued downward, though less steep trend.

The significance of these geologic criteria of favorability is essentially the same in all the areas drilled by the Geological Survey on the Colorado Plateau. They are being followed in all stages of drilling--wide-spaced as well as moderate- and close-spaced.

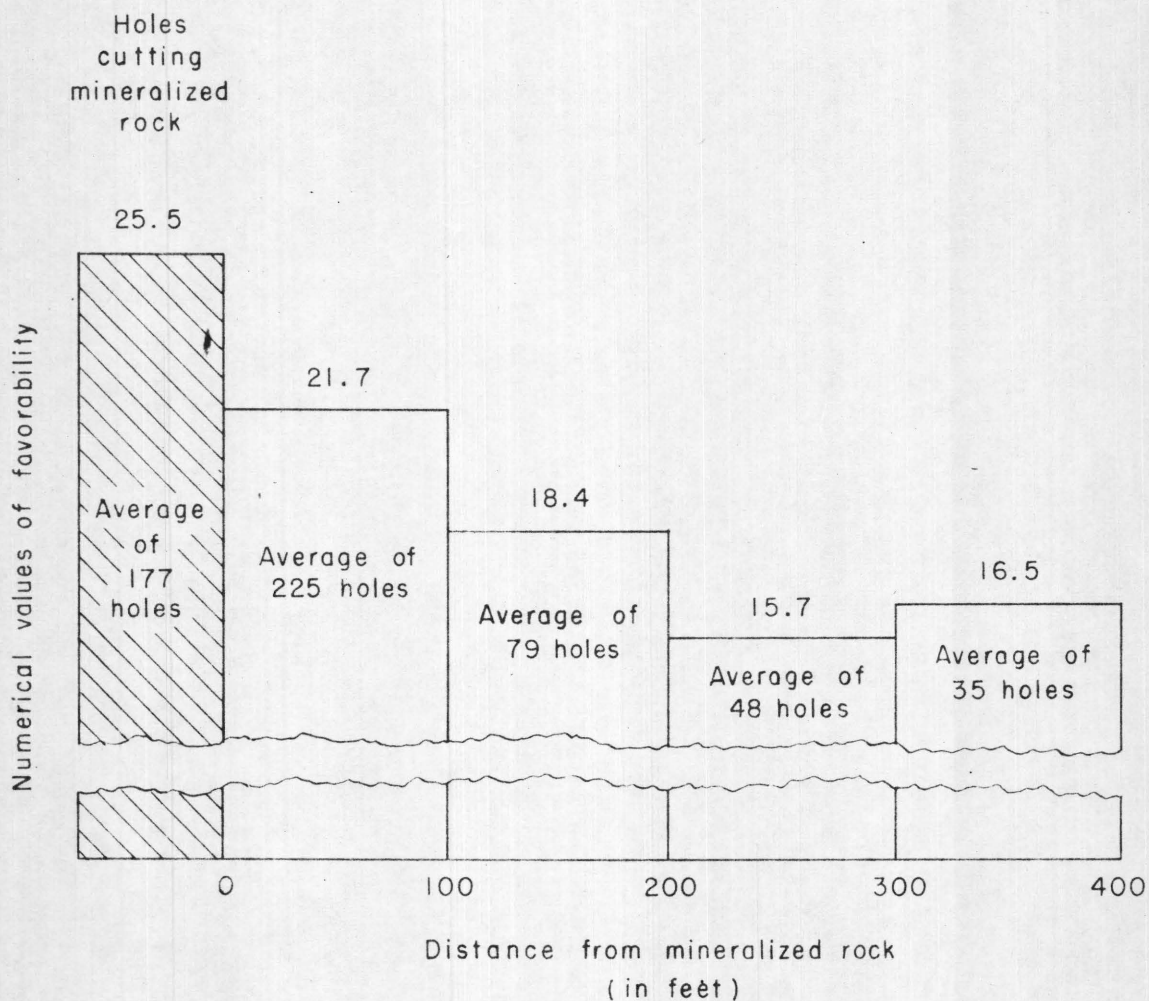


Figure 9.--Average numerical values of favorability, in zones coextensive with and outward from ore deposits, Calamity group of claims, Mesa County, Colorado

COMPARISON OF RESULTS OBTAINED FROM DRILLING
WITH AND WITHOUT GEOLOGIC GUIDANCE

Proof of the value of using geologic guides in exploration drilling lies in the results. To demonstrate this value, in order to sell the practice of using geologic guidance, an attempt is made to compare the results obtained by the Geological Survey's drilling, using geologic features as guides, with the drilling that had been done previously by private interests, using little or no geologic guidance. Unfortunately, because the two drilling operations differ in character, it is not possible to express results strictly on a comparable basis.

The total footage drilled by private interests before 1947 is not known, but it must have been nearly a million feet. For instance, Ebbley (1949) estimates that between 1934 and 1944 private companies put down about 600,000 feet of diamond-drill hole and about 100,000 feet of jackhammer hole. During this period, about 775,000 tons of carnotite ore was mined. Of this amount, perhaps 300,000 tons was obtained from deposits that were found and developed by mining from the outcrop rather than by drilling. In addition, a considerable amount of ore, perhaps at least 100,000 tons, had been developed by drilling prior to 1934. On the other hand, there was perhaps 100,000 tons of ore developed by the 1934-44 drilling that was not mined during this period. On this basis, therefore, it is estimated that the drilling done during the 1934-44 period found and developed about 475,000 tons of ore. If these figures express the correct order of magnitude, this drilling yielded about 0.6 ton per foot.

From November 10, 1947, to September 30, 1950, the Geological Survey drilled 490,358 feet. Reserves found by this drilling are estimated to be

about 600,000 tons, representing a yield of about 1.2 tons per foot of drilling. (Fischer, R. P., et al., 1951).

Nearly all of the private drilling during the 1934-44 period was near known deposits in areas that would be classed generally as favorable because of the proximity of ore. Thus, there should be a better chance of any single drill hole cutting ore in this type of drilling than in the "wild-cat" type of exploration away from known deposits such as has been done by the Geological Survey. Furthermore, nearly all of the private drilling was in shallow ground, perhaps averaging 50 to 75 feet in depth, whereas the Geological Survey drilling during the 1947-50 period averaged about 125 feet in depth. On the other hand, the holes drilled by private industry were mostly on a close spacing to develop deposits for mining, and for this reason more holes were put in a single deposit than is normally drilled in a deposit found by the Geological Survey.

If consideration is given to the much greater depth of Survey drilling and to the higher risk of exploring ground away from known deposits, even though fewer holes are drilled in a single deposit, the results of Survey exploration, using geologic guidance systematically, are more than twice as favorable as the results obtained by private industry using little or no geologic guidance.

SUMMARY AND CONCLUSIONS

Geologic logs of about 2,500 holes drilled by the Geological Survey in the Morrison formation in southwestern Colorado were studied to appraise the value of certain geologic features as guides to exploration for carnotite deposits. On the basis of this study, the following conclusions are made:

1. Most ore deposits are in or near the thicker, central parts of sandstone lenses, and in general the thickness of the sandstone decreases away from ore deposits. Sandstone that is less than 40 feet thick is generally not favorable for large ore bodies.

2. Sandstone in the vicinity of ore deposits is colored light brown, but an increasing proportion of sandstone away from ore deposits has a reddish color, which is indicative of unfavorable ground.

3. Near ore deposits the mudstone in the ore-bearing sandstone and immediately below it has been altered from red to gray. The amount of altered mudstone decreases outward from ore deposits.

4. Sandstone in the immediate vicinity of ore deposits contains more carbonized plant fossils than do the same beds away from ore deposits, suggesting that ore deposits are localized in the vicinity of abundant carbonaceous material.

Each of these features is useful individually in guiding exploration, but a combination of all of them, expressed in terms of a numerical rating, is even more useful. Exploration that uses these features as guides yields results that are about twice as good as exploration using little or no geologic guidance.

BIBLIOGRAPHY

Coffin, R. C., 1921, Radium, uranium, and vanadium deposits of southwestern Colorado: Colorado Geol. Survey Bull. 16.

Ebbley, N. E., 1949, A resume of past and present drilling methods: paper presented before the annual meeting of the Colorado Mining Association, Denver, Colorado on February 1, 1949.

Fischer, R. P., 1942, Vanadium deposits of Colorado and Utah: U. S. Geol. Survey Bull. 936-P.

Fischer, R. P., 1950, Uranium-bearing sandstone deposits of the Colorado Plateau: Econ. Geol., vol. 45, pp. 1-11.

BIBLIOGRAPHY (Continued)

Fischer, R. P., Hilpert, L. S., Schumacher, J. I., Cater, F. W., Strobell, J. D. Jr., Craig, L. C., Phoenix, D. A., and Trace, R. D., 1951, Summary of investigations through 1950 of the carnotite-bearing sandstones of the Colorado Plateau: U. S. Geol. Survey Trace Elements Memorandum Rept. 276.

Weeks, A. D., 1951, Red and gray clay underlying ore-bearing sandstone of the Morrison formation in western Colorado: U. S. Geol. Survey Trace Elements Memorandum Rept. 251.