

EXPLANATION

DRAINAGE DIVIDE

5.0

STREAMFLOW

Streamflow equaled or exceeded 90 percent of the time, in millions of gallons per day, approximately equal to the lowest 30-day average flow having a two-year recurrence interval.

1.138

USABLE STORAGE

Usable storage in ponds, lakes, and reservoirs, in millions of gallons.

FAVORABLE AREA

SATURATED-THICKNESS CONTOUR
(Contour intervals, in feet)

TILL-STRATIFIED DRIFT CONTACT

REAL OR HYPOTHETICAL PUMPING WELL

IMPERMEABLE BARRIER BOUNDARY


LINE SOURCE BOUNDARY

INSET MAP SCALE 1:24,000

CONTOUR INTERVAL 10 FEET Datum is mean sea level
BASE BY U.S. GEOLOGICAL SURVEY

LOCATION MAP SCALE 1:125,000

BASE BY U.S. GEOLOGICAL SURVEY

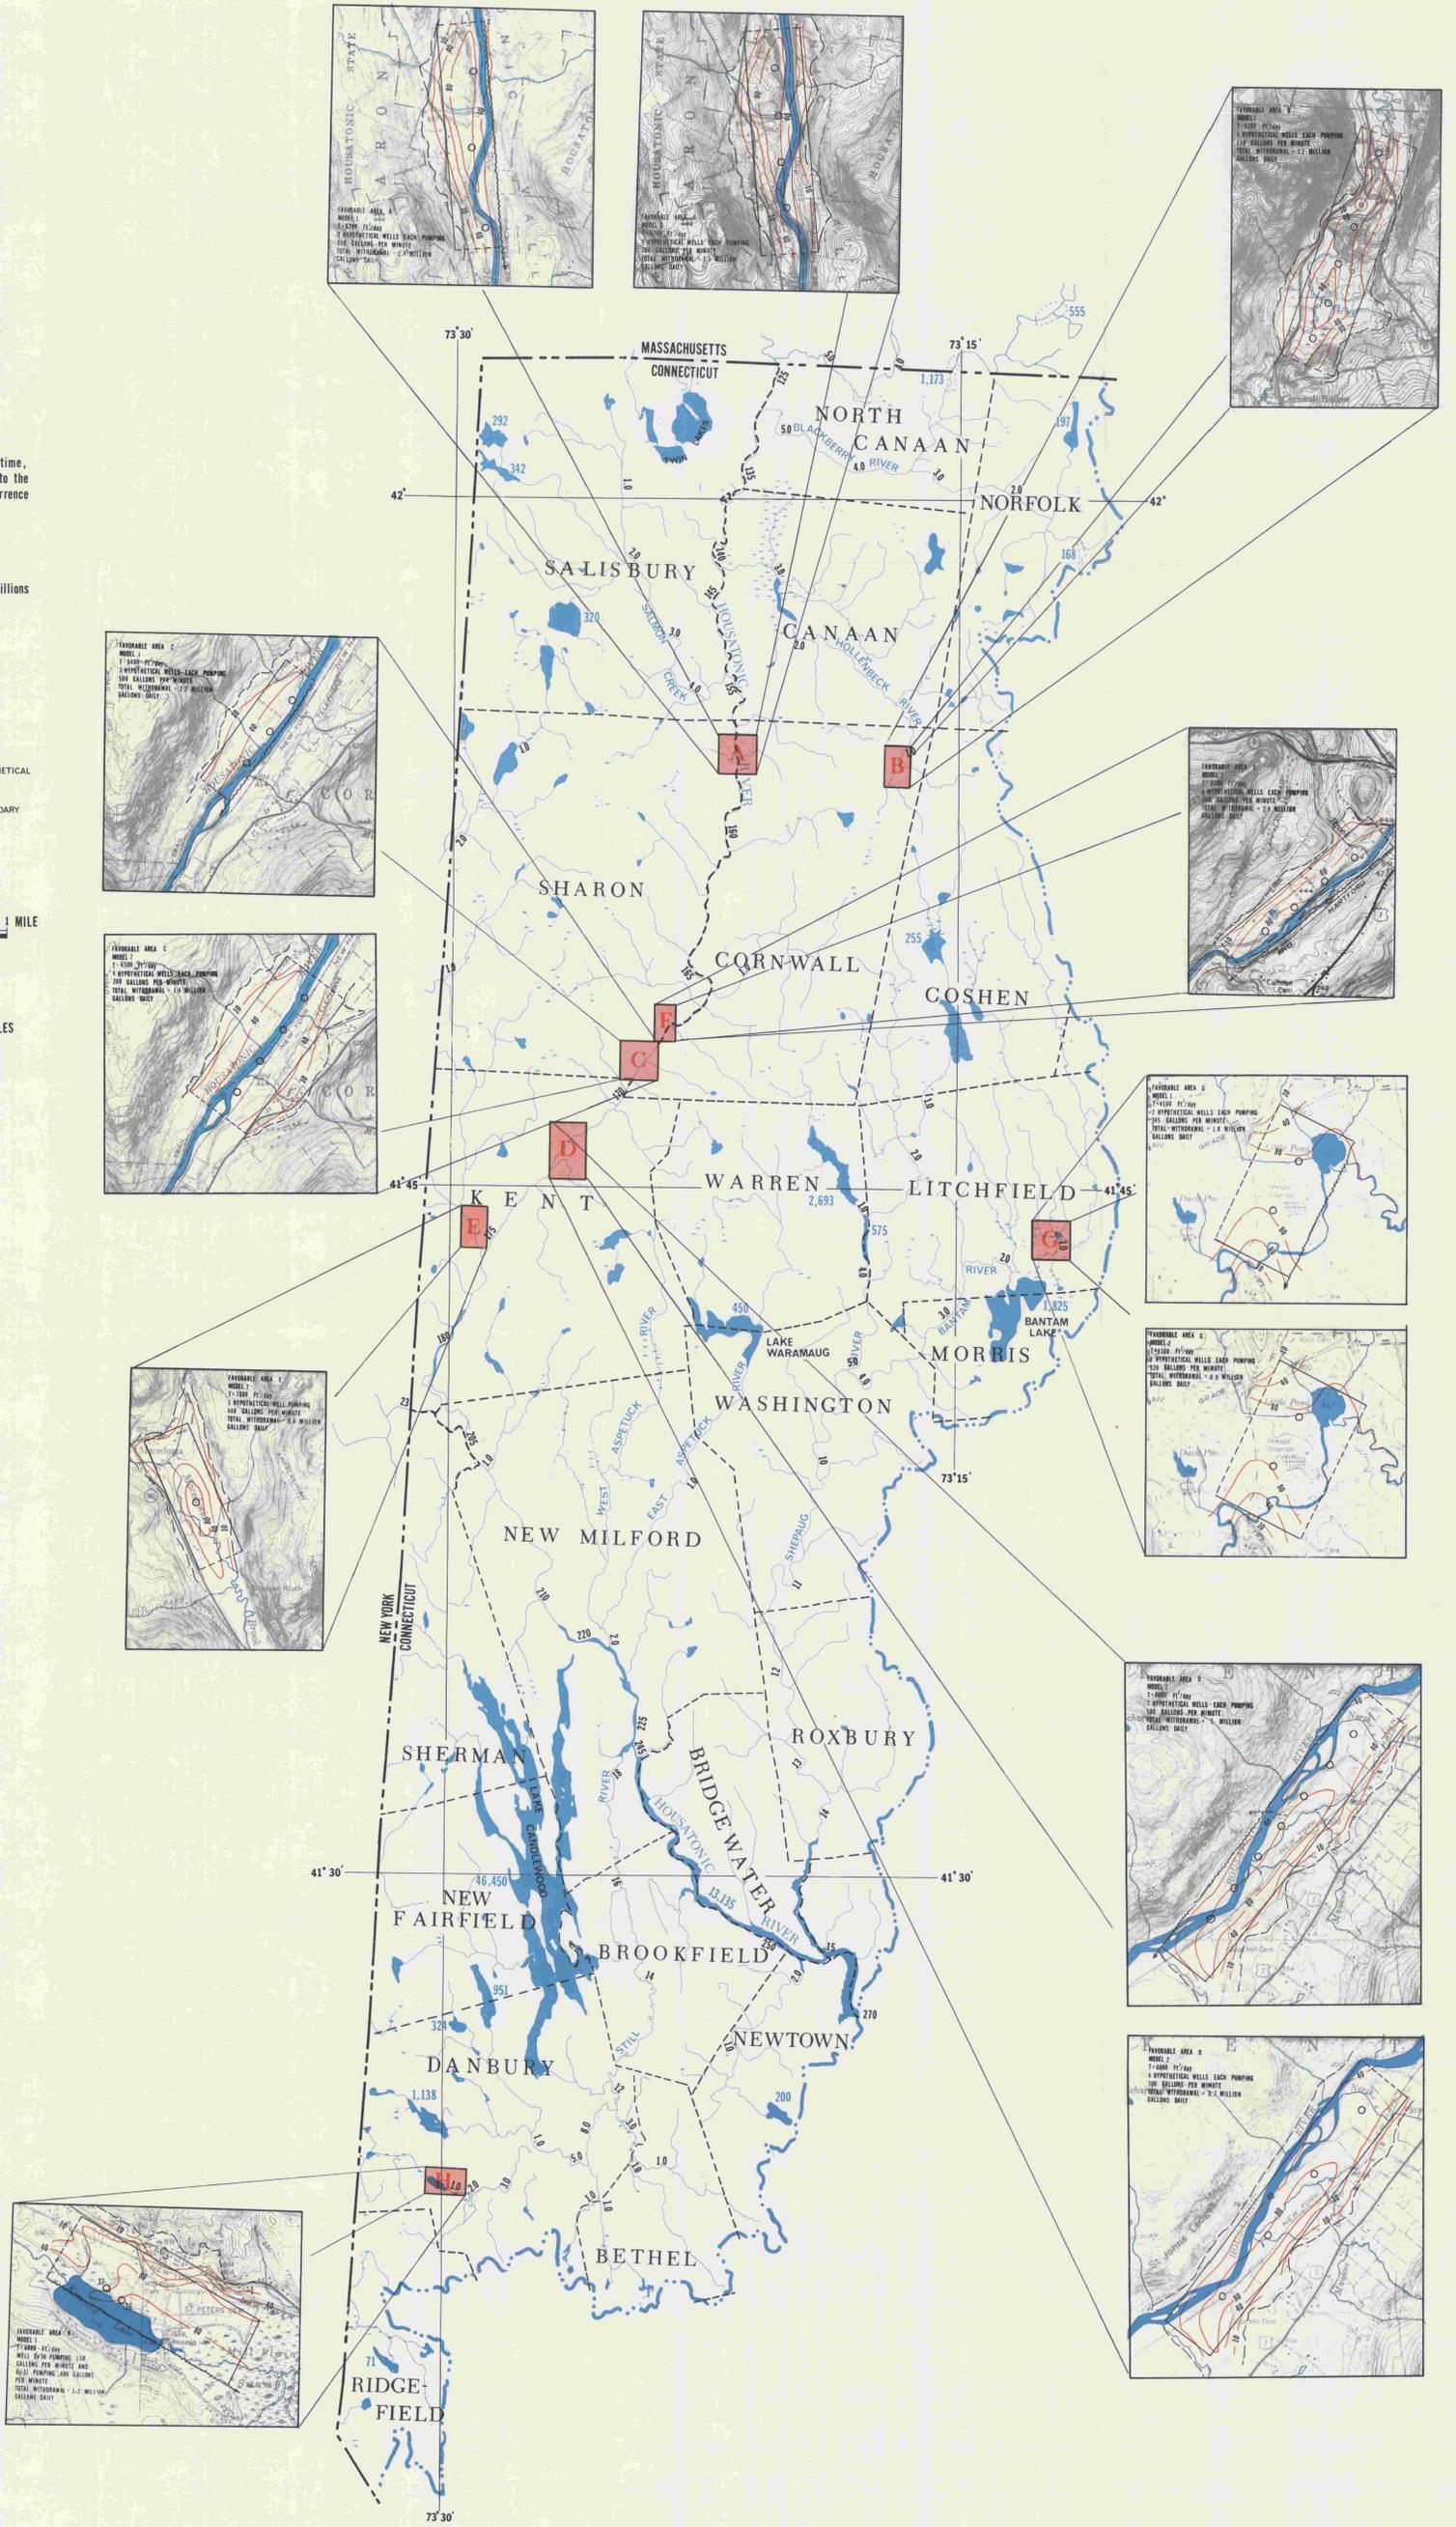

SUMMARY OF WATER AVAILABLE IN THE
UPPER HOUSATONIC RIVER BASIN