

Water Resources Data Montana Water Year 2004

Volume 1. Hudson Bay and Upper Missouri River Basins

By Wayne R. Berkas, Melvin K. White, Patricia B. Ladd, Fred A. Bailey, and Kent A. Dodge

Water-Data Report MT-04-1

Prepared in cooperation with the State of Montana and other agencies

**U.S. Department of the Interior
U.S. Geological Survey**

U.S. Department of the Interior

Gale A. Norton, Secretary

U.S. Geological Survey

Charles G. Groat, Director

2005

U.S. Geological Survey
3162 Bozeman Avenue
Helena, Montana 59601
406-457-5900

Information about the USGS, Montana District is available on the Internet at <http://mt.water.usgs.gov>

Information about all USGS reports and products is available by calling 1-888-ASK-USGS or on the Internet via the World Wide Web at <http://www.usgs.gov/>

Additional earth science information is available by accessing the USGS home page at <http://www.usgs.gov/>

PREFACE

In the act that established the U.S. Geological Survey more than a century ago, the agency was charged by Congress with the responsibility for "...classification of the public lands, and examination of the geologic structure, mineral resources, and products of the national domain." This charge was simple recognition of the principle that factual information is essential to sound development and management decisions involving natural resources. In keeping with this principle, the Water Resources Division of the Survey publishes annually, by district, hydrologic records for water resources thought to be of particular usefulness to the public and to the scientific community.

This report is the culmination of a concerted effort by dedicated personnel of the U.S. Geological Survey, who collected, compiled, analyzed, verified, and organized the data, and who typed, edited, and assembled the report. In addition to the authors, who had primary responsibility for assuring that the information contained herein is accurate, complete, and adheres to Geological Survey policy and established guidelines, the following individuals contributed significantly to the collection, processing, and tabulation of the data:

Donald A. Bischoff, Hydrologic Technician
Bruce M. Bochy, Hydrologic Technician
Craig L. Bowers, Hydrologic Technician
Tyrel F. Brandt, Hydrologic Technician
Rodney R. Caldwell, Hydrologist
Thomas E. Cleasby, Hydrologist
DeAnn M. Dutton, Hydrologic Technician
James R. Finley, Hydrologic Technician
Kari L. Finley, Hydrologic Technician
James L. Fisher, Hydrologic Technician
John J. French, Hydrologic Technician
Cynthia J. Harksen, Technical Editor
Terry L. Heinert, Hydrologic Technician
Kurt C. Jenewein, Scientific Illustrator
Arthur W. Johnson, Hydrologic Technician
Philip L. Karper, Hydrologic Technician
Stacy M. Kinsey, Hydrologic Technician

John H. Lambing, Hydrologist
Robert G. Legare, Hydrologic Technician
Stephen V. Lynn, Supervisory Hydrologic Technician
Norman A. Midtlyng, Hydrologic Technician
Evonne S. Mitton, Hydrologic Technician
Timothy J. Morgan, Hydrologic Technician
Steven W. Nichols, Hydrologic Technician
Virginia L. Redstone, Hydrologic Technician
Kevin L. Sattler, Hydrologic Technician
Todd C. Schmitt, Hydrologic Technician
Ronald R. Shields, Scientist Emeritus
Andrew A. Skerda, Hydrologic Technician
William G. Stotts, Hydrologic Technician
LaVerne G. Sultz, Hydrologic Technician
Wayne A. Tice, Hydrologic Technician
Greg R. Trunkle, Hydrologic Technician
Peter R. Wright, Hydrologist

This report is one of a series issued State by State under the general direction of R.M. Hirsch, Associate Director for Water. This report was prepared by the U.S. Geological Survey in cooperation with the State of Montana and with other agencies, under the supervision of R.E. Davis, District Chief, and W.J. Carswell, Jr., Regional Hydrologist, Central Region.

REPORT DOCUMENTATION PAGE*Form Approved*
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 28, 2005	3. REPORT TYPE AND DATES COVERED Annual, 1 Oct 2003 - 30 Sep 2004	
4. TITLE AND SUBTITLE Water Resources Data, Montana, Water Year 2004 Volume 1. Hudson Bay and Upper Missouri River Basins		5. FUNDING NUMBERS	
6. AUTHOR(S) W.R. Berkas, M.K. White, P.B. Ladd, F.A. Bailey, and K.A. Dodge			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Geological Survey, Water Resources Division 3162 Bozeman Avenue Helena, MT 59601		8. PERFORMING ORGANIZATION REPORT NUMBER USGS-WDR-MT-04-1	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Geological Survey, Water Resources Division 3162 Bozeman Avenue Helena, MT 59601		10. SPONSORING / MONITORING AGENCY REPORT NUMBER USGS-WDR-MT-04-1	
11. SUPPLEMENTARY NOTES Prepared in cooperation with the State of Montana and with other agencies.			
12a. DISTRIBUTION / AVAILABILITY STATEMENT This report may be purchased from: National Technical Information Service Springfield, VA 22161		12b. DISTRIBUTION CODE No restriction on distribution	
13. ABSTRACT (<i>Maximum 200 words</i>) Water resources data for Montana for the 2004 water year, volumes 1 and 2, consist of records of stage, discharge, and water quality of streams; stage, contents, and water quality of lakes and reservoirs; and water levels in wells. This volume contains discharge records for 134 streamflow-gaging stations; stage or content records for 18 lakes and reservoirs; and water-quality records for 66 streamflow stations (34 ungedged), and 13 ground-water wells. Additional water year 2004 data collected at crest-stage gage and miscellaneous-measurement sites were collected but are not published in this report. These data are stored within the District office files in Helena and are available on request. These data represent part of the National Water Data System operated by the U.S. Geological Survey and cooperating State and Federal agencies in Montana.			
14. SUBJECT TERMS *Montana, *Hydrologic data, *Surface water, *Ground water, *Water quality, Flow rate, Gaging stations, Lakes, Reservoirs, Chemical analyses, Sediments, Water temperatures, Sampling sites, Water levels, Water analyses.		15. NUMBER OF PAGES 505	16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT

CONTENTS

	Page
Preface	iii
Report documentation page	iv
List of surface-water and ground-water stations, in downstream order, for which records are published in this volume.....	vii
Introduction.....	1
Cooperation.....	2
General hydrologic setting.....	2
Hydrologic-monitoring activity	4
Summary of hydrologic conditions	6
Temperature and precipitation.....	6
Surface water	7
Streamflow	7
Water quality	12
Ground water	15
Ground-water levels	15
Explanation of the records	15
Downstream order and station number.....	15
Numbering system for wells and miscellaneous sites	15
Special networks and programs	16
Explanation of stage- and water-discharge records.....	17
Data collection and computation	17
Data presentation	19
Station manuscript.....	20
Data table of daily mean values	21
Statistics of monthly mean data	21
Summary statistics.....	21
Identifying estimated daily discharge	22
Accuracy of field data and computed results	22
Other data records available	23
Publications	23
Explanation of precipitation records.....	24
Data collection and computation	24
Data presentation	24
Explanation of water-quality records.....	24
Collection and examination of data.....	24
Water analysis	25
Surface-water-quality records.....	25
Classification of records	25
Accuracy of the records.....	25
Arrangement of records.....	27
On-site measurements and sample collection.....	27
Water temperature	27
Sediment	27
Laboratory measurements	27
Data presentation	28
Remark codes	28
Water-quality control data.....	28
Blank samples	29
Reference samples.....	29
Replicate samples.....	29

Spike samples	30
Publications	30
Explanation of ground-water-level records	30
Site identification numbers	30
Data collection and computation	30
Data presentation	31
Water-level tables	31
Hydrographs	31
Ground-water-quality data	33
Data collection and computation	33
Laboratory measurements	33
Publications	33
Access to USGS water data	33
Definition of terms	33
Montana active and discontinued streamflow-gaging, water-quality, and crest-stage gage stations	50
Station records, surface water and water quality	107
Index	489

ILLUSTRATIONS

Figure 1. Map showing general geographic features of Montana	3
2. Streamflow data for water year 2004 compared to long-term data at selected streamflow-gaging stations in Montana	8
3. Annual departure from mean annual discharge at two streamflow-gaging stations on unregulated streams in Montana	9
4. System for numbering wells and miscellaneous sites (latitude and longitude)	16
5. System for numbering wells and miscellaneous sites (township and range)	16
6-8. Maps showing location of:	
6. Streamflow-gaging and selected reservoir stations in Montana and adjacent areas, water year 2004	18
7. Water-quality and precipitation stations in Montana and adjacent areas, water year 2004	26
8. Ground-water observation wells in Montana, water year 2004	32
9. Schematic diagram showing diversion from St. Mary River in Part 5 to Milk River in Part 6	116
10-12. Schematic diagrams showing diversions and storage in:	
10. Sun River basin	266
11. Lodge Creek basin	376
12. Battle Creek and Frenchman River basins	390

TABLES

Table 1. Precipitation and departure from normal, in inches, and percentage of normal, Montana, water year 2004	6
2. Snow-water equivalent and percent of average snow-water equivalent of mountain snowpack in selected basins in Montana, March 1-May 1, 2004	7
3. Comparisons of instantaneous peak discharge for water year 2004 with instantaneous peak discharge for period of record at selected stations in Montana	10
4. Comparisons of minimum daily mean discharge for water year 2004 with minimum daily mean discharge for period of record at selected stations in Montana	11
5. Percentage-of-normal storage, by month, during water year 2004 for selected major reservoirs in Montana	12
6. Statistical summaries of selected water-quality measurements for long-term water-quality stations in Montana for water year 2004 and the period of record through water year 2003	14
7. Water-Supply Paper numbers and parts for surface-water stations, 1899-1970	23
8. Rating classifications for continuous water-quality records	25
9. Water-Supply Paper numbers and parts for water-quality stations, 1947-70	30
10. Water-Supply Paper numbers and parts for ground-water stations, 1940-74	33
11. Montana active and discontinued streamflow-gaging, water-quality, and crest-stage gage stations	50
Conversion factors	Inside back cover

SURFACE-WATER AND GROUND-WATER STATIONS, IN DOWNSTREAM ORDER,
FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

[Letter after station name designates types of data: (d) discharge, (c) chemical, (b) biological, (m) microbiological, (t) water temperature, (s) sediment, (e) elevations or contents]

	Station number	Page
HUDSON BAY RIVER BASIN		
SASKATCHEWAN RIVER BASIN		
Old Man River:		
St. Mary River:		
Swiftcurrent Creek above Swiftcurrent Lake, at Many Glacier (d)	05014300	107
Swiftcurrent Creek at Many Glacier (d)	05014500	109
Lake Sherburne at Sherburne (e)	05015500	111
Swiftcurrent Creek at Sherburne (ds)	05016000	112
St. Mary River near Babb (d)	05017500	114
St. Mary Canal at Intake, near Babb (d)	05018000	117
St. Mary Canal at St. Mary Crossing, near Babb (d)	05018500	119
St. Mary River at international boundary (d)	05020500	121
MISSOURI RIVER BASIN		
RED ROCK RIVER BASIN		
Red Rock Creek above Lakes, near Lakeview (d)	06006000	123
Red Rock River below Lima Reservoir, near Monida (d)	06012500	125
Clark Canyon Reservoir near Grant (e)	06015300	127
Beaverhead River (continuation of Red Rock River):		
Beaverhead River at Barretts (d)	06016000	128
Beaverhead River at Dillon (d)	06017000	130
Beaverhead River near Twin Bridges (d)	06018500	132
RUBY RIVER BASIN		
Ruby River above reservoir, near Alder (d)	06019500	134
Ruby River below reservoir, near Alder (d)	06020600	136
BIG HOLE RIVER BASIN		
Big Hole River below Big Lake Creek, at Wisdom (dt)	06024450	138
Big Hole River below Mudd Creek, near Wisdom (d)	06024540	141
Big Hole River near Melrose (dt)	06025500	143
Big Hole River near Glen (d)	06026210	147
Jefferson River (continuation of Beaverhead River):		
Jefferson River near Twin Bridges (d)	06026500	149
BOULDER RIVER BASIN		
Luttrell Well EPA-1, 08N06W25AABB01(c)	462517112173001	151
Luttrell Well EPA-6, 08N05W30BBCD01 (c)	462507112170601	152
Luttrell Well EPA-4S, 08N06W25ADAC02 (c)	462503112172302	153
Luttrell Well EPA-4, 08N06W25ADAC01 (c)	462503112172301	154
Luttrell Well EPA-5, 08N05W30BCBD01 (c)	462500112170701	155
Buckeye Well BTMW-9, 08N06W36DCAA01 (c)	462347112173301	156
Buckeye Well BTMW-1, 08N06W36DCAC01 (c)	462344112173701	157
Buckeye Well BTMW-3, 08N06W36DCBD02 (c)	462342112174201	158
Buckeye Well BTMW-6, 08N06W36DCBC01 (c)	462342112174601	159
Buckeye Well BTMW-7, 08N06W36DCCB01 (c)	462341112174601	160
Buckeye Well BTMW-8, 08N06W36DCBC02 (c)	462342112174801	161
Basin Creek below Buckeye Mine near logging road, near Basin (cs)	462347112180401	162
Unnamed stream (LAD 1) draining Luttrell repository (c)	462500112170201	163
Unnamed stream (LAD 2) draining Luttrell repository (c)	462500112170501	164
Unnamed tributary to Grub Creek, SS No. 4, near Rimini (c)	462501112173501	165
Unnamed tributary to Grub Creek, SS No. 5, near Rimini (c)	462458112173201	166
Unnamed tributary to Grub Creek at mouth, SS No. 6, near Rimini (c)	462442112174602	167
Grub Creek above mouth of unnamed tributary, near Rimini (c)	462442112174601	168
Jack Creek above Bullion Mine tributary, near Basin (cs)	462155112181501	169
Bullion Mine adit near Basin (c)	462120112173701	170
Bullion Mine tributary at mouth, near Basin (cs)	462153112181701	171
Jack Creek at mouth, near Basin (cs)	462047112201901	172
Basin Creek at Basin (cs)	06031600	173
Crystal Mine adit near Basin (c)	462053112153601	174
Uncle Sam Gulch at mouth, near Basin (cs)	461904112144401	175
Cataract Creek at Basin (cs)	06031960	176
Boulder River below Little Galena Gulch, near Basin (cs)	06032400	177
Boulder River near Boulder (d)	06033000	178
Willow Creek near Harrison (dt)	06035000	180
Jefferson River near Three Forks (d)	06036650	183

SURFACE-WATER AND GROUND-WATER STATIONS, IN DOWNSTREAM ORDER,
FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

	Station number	Page
MISSOURI RIVER BASIN--Continued		
MADISON RIVER BASIN		
Firehole River near West Yellowstone (dt)	06036905	185
Tantalus Creek at Norris Junction, Yellowstone National Park (dt).....	06036940	189
Gibbon River at Madison Junction, Yellowstone National Park (dt)	06037100	192
Madison River near West Yellowstone (dc)	06037500	196
Madison River below Hebgen Lake, near Grayling (dc)	06038500	199
Madison River at Kirby Ranch, near Cameron (dc)	06038800	202
Madison River above Powerplant, near McAllister (dc)	06040800	205
Madison River below Ennis Lake, near McAllister (dt).....	06041000	208
Madison River at Three Forks (c)	06042600	212
GALLATIN RIVER BASIN		
Gallatin River near Gallatin Gateway (d)	06043500	213
East Gallatin River below Bridger Creek, near Bozeman (d)	06048700	215
Gallatin River at Logan (dt).....	06052500	217
Missouri River at Toston (dt).....	06054500	221
Canyon Ferry Lake near Helena (e)	06058500	225
TENMILE CREEK BASIN		
Luttrell Well EPA-3S, 08N06W24DDCD02 (c).....	462522112172402	226
Luttrell Well EPA-3, 08N06W24DDCD01 (c)	462522112172401	227
Tenmile Creek above Monitor Creek, near Rimini (c).....	462720112165101	228
Monitor Creek SS 12, near Rimini (c).....	462542112173101	229
Monitor Creek at mouth, near Rimini (c).....	462721112164801	230
Ruby Creek RC2A, above Scott Reservoir, near Rimini (c).....	462544112162001	231
Banner Creek at bridge, 0.5 mile above City diversion, near Rimini (c).....	462657112143501	232
Poison Creek at mouth, near Rimini (cs)	462838112143901	233
Tenmile Creek above City diversion, near Rimini (cs)	462853112144101	234
Beaver Creek tributary No. 2 near Rimini (cs).....	462758112123001	235
Tenmile Creek below Spring Creek, at Rimini (cs).....	462922112145401	236
Moores Spring Creek at mouth, near Rimini (cs).....	462932112145801	237
Minnehaha Creek below Armstrong Mine, near Rimini (cs).....	462917112165601	238
Beatrice Mine tributary at mouth, near Rimini (cs)	462918112170801	239
Minnehaha Creek above City diversion, near Rimini (cs)	463023112153701	240
Tenmile Creek near Rimini (d).....	06062500	241
Tenmile Creek at Tenmile Water Treatment Plant, near Rimini (cs).....	06062750	243
Tenmile Creek below Colorado Gulch, near Helena (cs).....	463438112091801	244
Tenmile Creek near Helena (cs).....	06063000	245
Sevenmile Creek at mouth, near Helena (cs)	463747112033801	246
Tenmile Creek at Green Meadow Drive, at Helena (cs).....	06064100	247
Missouri River below Hauser Dam, near Helena (d).....	06065500	248
Missouri River below Holter Dam, near Wolf Creek (dt)	06066500	250
Little Prickly Pear Creek at Wolf Creek (d)	06071300	254
Dearborn River near Craig (dt).....	06073500	256
Smith River below Eagle Creek, near Fort Logan (dt).....	06077200	260
Missouri River near Ulm (d).....	06078200	264
SUN RIVER BASIN		
Sun River at Simms (d)	06085800	267
Muddy Creek:		
Muddy Creek near Vaughn (dcs)	06088300	269
Muddy Creek at Vaughn (dcs).....	06088500	272
Sun River near Vaughn (dcs)	06089000	275
Missouri River near Great Falls (d).....	06090300	278
Lake Creek:		
Lake Creek near Power (d).....	06090650	280
Missouri River at Fort Benton (d).....	06090800	282
MARIAS RIVER BASIN		
Two Medicine River below South Fork, near Browning (d)	06091700	284
Badger Creek below Four Horns Canal, near Browning (d).....	06093200	286
Cut Bank Creek near Browning (d)	06098500	288
Cut Bank Creek at Cut Bank (d)	06099000	290
Marias River near Shelby (d)	06099500	292
Marias River near Chester (d)	06101500	294
Marias River near Loma (d).....	06102050	296
Teton River below South Fork, near Choteau (dcs).....	06102500	298
Teton River near Dutton (dcs).....	06108000	301

SURFACE-WATER AND GROUND-WATER STATIONS, IN DOWNSTREAM ORDER,
FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

	Station number	Page
MISSOURI RIVER BASIN--Continued		
MARIAS RIVER BASIN--Continued		
Teton River at Loma (dcs).....	06108800	304
Missouri River at Virgelle (d).....	06109500	307
Judith River near mouth, near Winifred (dt)	06114700	309
Missouri River near Landusky (ds).....	06115200	313
Armells Creek near Landusky (d).....	06115270	317
Duval Creek near Landusky (d).....	06115300	319
Rock Creek near Landusky (d).....	06115350	321
Fort Peck Lake:		
MUSSELSHELL RIVER BASIN		
Musselshell River near Martinsdale (d)	06119600	323
Musselshell River at Harlowton (d)	06120500	325
Musselshell River above Mud Creek, near Shawmut (d)	06123030	327
Musselshell River near Lavina (d)	06126050	329
Musselshell River near Roundup (d)	06126500	331
Willow Creek above LMGA Reservoir, near Roundup (d).....	06127020	333
Willow Creek at U.S. Canal, near Roundup (d)	06127060	334
Musselshell River at Musselshell (d).....	06127500	335
Musselshell River at Mosby (ds)	06130500	337
Hell Creek near Jordan (d)	06130650	340
BIG DRY CREEK BASIN		
Big Dry Creek near Van Norman (d).....	06131000	342
Nelson Creek near Van Norman (d)	06131200	344
Fort Peck Lake at Fort Peck (e).....	06131500	346
Missouri River below Fort Peck Dam (dcts)	06132000	347
MILK RIVER BASIN		
South Fork Milk River near Babb (d)	06132200	352
Milk River at western crossing of international boundary (d)	06133000	354
North Fork Milk River above St. Mary Canal, near Browning (d)	06133500	356
North Milk River near international boundary (d)	06134000	358
Milk River at Milk River, Alberta (d).....	06134500	360
Verdigris Coulee near the mouth, near Milk River, Alberta (d).....	06134700	362
Milk River at eastern crossing of international boundary (d)	06135000	364
Big Sandy Creek:		
Big Sandy Creek at reservation boundary, near Rocky Boy (d).....	06137400	366
Big Sandy Creek near Havre (d).....	06139500	368
Beaver Creek at reservation boundary, near Rocky Boy (d)	06139900	370
Milk River at Havre (d)	06140500	372
Clear Creek near Chinook (d)	06142400	374
Lodge Creek:		
Altawan Reservoir near Govenlock, Saskatchewan (e).....	06144260	377
Spangler Ditch near Govenlock, Saskatchewan (d).....	06144270	378
Middle Creek near Saskatchewan Boundary (d).....	06144350	380
Middle Creek below Middle Creek Reservoir, near Govenlock, Saskatchewan (d)	06144395	382
Middle Creek near Govenlock, Saskatchewan (d)	06144440	384
Middle Creek above Lodge Creek, near Govenlock, Saskatchewan (d).....	06144450	386
Lodge Creek below McRae Creek, at international boundary (d)	06145500	388
Battle Creek:		
Gaff Ditch near Merryflat, Saskatchewan (d)	06147950	391
Cypress Lake west inflow canal near West Plains, Saskatchewan (d)	06148500	393
Cypress Lake west inflow canal drain near Oxarat, Saskatchewan (d)	06148700	395
Cypress Lake west outflow canal near West Plains, Saskatchewan (d)	06149000	397
Vidora Ditch near Consul, Saskatchewan (d).....	06149100	399
Richardson Ditch near Consul, Saskatchewan (d).....	06149200	401
McKinnon Ditch near Consul, Saskatchewan (d)	06149300	403
Nashlyn Canal near Consul, Saskatchewan (d)	06149400	405
Battle Creek at international boundary (d)	06149500	407
Battle Creek near Chinook (d).....	06151500	409
Milk River near Harlem (d).....	06154100	411
Peoples Creek:		
Peoples Creek near Hays (d).....	06154400	413
Little Peoples Creek near Hays (d).....	06154410	415
Peoples Creek below Kuhr Coulee, near Dodson (d)	06154550	417
Milk River near Dodson (d)	06155030	419

SURFACE-WATER AND GROUND-WATER STATIONS, IN DOWNSTREAM ORDER,
FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

	Station number	Page
MISSOURI RIVER BASIN--Continued		
MILK RIVER BASIN--Continued		
Milk River at Cree Crossing, near Saco (d).....	06155900	421
Belanger Creek (head of Frenchman River)		
Belanger Creek diversion canal near Vidora, Saskatchewan (d)	06156500	423
Cypress Lake:		
Cypress Lake east outflow canal near Vidora, Saskatchewan (d)	06157500	425
Frenchman River:		
Eastend Reservoir:		
Eastend Canal at Eastend, Saskatchewan (d)	06158500	427
Huff Lake:		
Huff Lake pumping canal near Val Marie, Saskatchewan (d).....	06161300	429
Huff Lake gravity canal near Val Marie, Saskatchewan (d)	06161500	431
Newton Lake:		
Newton Lake Main Canal near Val Marie, Saskatchewan (d).....	06162500	433
Frenchman River at international boundary (d).....	06164000	435
Reservoirs in Frenchman River basin in Saskatchewan (e)		437
Milk River at Juneberg Bridge, near Saco (d).....	06164510	439
Beaver Creek:		
Beaver Creek below Guston Coulee, near Saco (d).....	06166000	441
Rock Creek:		
Rock Creek below Horse Creek, near international boundary (d).....	06169500	443
Milk River at Tampico (d).....	06172310	445
Milk River at Nashua (d)	06174500	447
Missouri River near Wolf Point (dcts)	06177000	449
REDWATER RIVER BASIN		
Redwater River at Circle (d)	06177500	454
POPLAR RIVER BASIN		
Poplar River at international boundary (dcs)	06178000	456
East Poplar River at international boundary (dcs).....	06178500	460
Poplar River near Poplar (dcs)	06181000	464
BIG MUDDY CREEK BASIN		
Big Muddy Creek near Antelope (d).....	06183450	468
Big Muddy Creek diversion canal near Medicine Lake (d).....	06183700	470
Lake Creek near Dagmar (d).....	06183750	472
Cottonwood Creek near Dagmar (d)	06183800	474
Sand Creek near Dagmar (d).....	06183850	476
Missouri River near Culbertson (dcbts).....	06185500	478
Smaller reservoirs in the Missouri River basin		485

INTRODUCTION

The U.S. Geological Survey (USGS), in cooperation with other Federal, State, and local agencies and Tribal governments, collects a large amount of data pertaining to the water resources of Montana each water year. These data, accumulated over many years, constitute a valuable data base for developing an improved understanding of the water resources of the State. To make these data readily available to interested parties outside the USGS, the data are published annually, by water year, in this report series entitled, "Water Resources Data, Montana."

This report, volumes 1 and 2, includes records of both surface and ground water from stations within the State and selected stations near the Montana border in adjacent states and Canada. Specifically, it contains (1) discharge records for 253 streamflow-gaging stations; (2) stage or content records for 39 reservoirs or lakes; (3) water-quality records for 135 stream sites (50 ungaged), 13 wells, and 3 lake sites; (4) water-level records for 51 wells; and (5) precipitation and water-quality records for 2 atmospheric-deposition stations. Volume 1 contains discharge records for 134 streamflow-gaging stations; stage or content records for 18 reservoirs or lakes; and water-quality records for 66 stream sites (34 ungaged) and 13 wells. Volume 2 contains discharge records for 119 streamflow-gaging stations; stage or content records for 21 reservoirs or lakes; water-quality records for 69 stream sites (17 ungaged) and 3 lake sites; water-level records for 51 observation wells; and precipitation and water-quality records for 2 atmospheric-deposition stations. The locations of streamflow-gaging and reservoir stations are shown in figure 6, locations of water-quality and precipitation stations are shown in figure 7, and locations of observation wells are shown in figure 8.

Additional data for water year 2004 were collected at crest-stage gage and miscellaneous-measurement sites but are not published in this report. These data are stored in the USGS Montana District Office in Helena and are available on request.

Records pertaining to the discharge of streams and contents of lakes and reservoirs were first published in a series of USGS Water-Supply Papers entitled "Surface Water Supply of the United States." These Water-Supply Papers were published in an annual series for water years 1899-1960 and then in a 5-year series for water years 1961-65 and 1966-70. Records of chemical quality, water temperatures, and suspended sediment were published from 1941 to 1970 in an annual series of Water-Supply Papers entitled "Quality of Surface Waters of the United States." Records of ground-water levels were published from 1935 to 1974 in a series of Water-Supply Papers entitled "Ground-Water Levels in the

United States." Water-Supply Papers may be reviewed in the libraries of the principal cities of the United States. The annual Water-Supply Papers were compiled and may be purchased by writing to USGS Information Services, Box 25286, Denver, Colorado 80225. For water years 1961 through 1970, streamflow data were published by the USGS in annual reports for each State. Water-quality records for water years 1964 through 1970 were similarly published either in separate reports or in conjunction with streamflow records. Beginning with the 1971 water year, data for surface and ground water are published as a single or multi-volume USGS annual water-data report for each State. These reports carry an identification number consisting of the two-letter State abbreviation, the last two digits of the water year, and the volume number. For example, volume 1 is identified as "U.S. Geological Survey Water-Data Report MT-04-1." The water-data reports published prior to 2003 are for sale, in paper copy or on microfiche, by the National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161, telephone 1-800-553-6847. Reports published from 2003 to present are located on the Web at <http://water.usgs.gov/pubs/wdr>.

Water-resources information for Montana and the rest of the Nation are available through the World Wide Web as part of the USGS National Water-Information System (NWIS) at <http://waterdata.usgs.gov/nwis>. For Montana, this information includes surface-water, water-quality, and ground-water data. Surface-water information available from the USGS includes provisional real-time streamflow data for stations with satellite telemetry, provisional daily data for the previous 18 months, and daily data for the period of record at each site. Daily, monthly, and annual streamflow statistics also are available as well as annual peak streamflow data. In addition, flood-frequency and basin-characteristics information for selected sites in Montana is available at <http://mt.water.usgs.gov/freq>.

Water-quality information available from the USGS includes provisional real-time specific-conductance and water-temperature data for selected sites with satellite telemetry and historical water-quality data for many surface- and ground-water sites in Montana.

Ground-water information available from the USGS includes descriptive information for wells, springs, and test holes such as location (latitude and longitude), well depth, site use, water levels, and aquifer.

Additional information, including current prices, for ordering specific reports may be obtained from the District Chief at the address given on the back of the title page or by telephone at (406) 457-5900 or 1-888-ASK-USGS.

COOPERATION

The USGS has had cooperative agreements with other agencies and organizations for the systematic collection of streamflow records since 1906, for water-quality records since 1946, and for ground-water levels since 1964. In water year 2004, agencies and organizations that supported data collection through cooperative agreements with the USGS are:

Federal Agencies

- Department of Energy, Bonneville Power Administration
- Bureau of Indian Affairs
- Bureau of Land Management
- Bureau of Reclamation
- Department of State, International Joint Commission
- Federal Emergency Management Agency
- National Park Service
- U.S. Army Corps of Engineers
- U.S. Department of Agriculture, Forest Service
- U.S. Environmental Protection Agency
- U.S. Fish and Wildlife Service
- U.S. Geological Survey

Tribal Governments

- Blackfeet Nation
- Chippewa Cree Tribe of the Rocky Boy's Reservation
- Confederated Salish and Kootenai Tribes of the Flathead Reservation
- Fort Peck Tribes
- Northern Cheyenne Tribe

State Agencies

- Montana Bureau of Mines and Geology
- Montana Department of Environmental Quality
- Montana Fish, Wildlife and Parks
- Montana Department of Natural Resources and Conservation
- Montana Department of Transportation
- Wyoming Department of Environmental Quality
- Wyoming State Engineer

Federal Energy Regulatory Commission Licensees

- Avista Corporation
- Pacific Power and Light

Local Agencies

- Cascade County Conservation District
- City of Bozeman
- East Bench Irrigation District
- Lewis and Clark County Water Quality Protection District
- Lower Musselshell Conservation District

- North Powell Conservation District
- Park Conservation District
- Stillwater Conservation District
- Teton County Conservation District


GENERAL HYDROLOGIC SETTING

Montana, with an area of about 147,200 square miles (mi^2), is the fourth largest State in the Nation (fig. 1). The major drainage basins in the State are the Hudson Bay basin (465 mi^2) and the upper Missouri River basin ($120,700 \text{ mi}^2$) east of the Continental Divide, and the upper Columbia River basin ($26,000 \text{ mi}^2$) west of the divide. The Hudson Bay and upper Missouri River basins drain about 82 percent of the State and provide slightly less than 50 percent of the total annual streamflow. The upper Columbia River basin drains about 18 percent of the State and provides about 50 percent of the total annual streamflow.

The western and southwestern parts of the State are in the Northern and Middle Rocky Mountains physiographic provinces. The central and eastern parts are in the Great Plains physiographic province. The Northern and Middle Rocky Mountains are characterized by rugged mountains and intermontane valleys, whereas the Great Plains consists of rolling to dissected plains and small mountain ranges. Altitude in Montana ranges from more than 12,000 feet above the National Geodetic Vertical Datum of 1929 (NGVD 29) in the mountains northeast of Yellowstone National Park to about 1,850 feet above NGVD 29 where the Kootenai River flows from the northwestern part of the State.

Climate and hydrologic conditions differ substantially across the State. Annual precipitation varies considerably throughout the basins, from about 100-120 inches along the Continental Divide in Glacier National Park to about 6-12 inches in parts of eastern and south-central Montana and in some of the western intermontane valleys. The diverse precipitation patterns in Montana result from the effects of geographic and topographic features on warm, moist air from either the Gulf of Mexico or the Pacific Ocean. In mountainous areas, much of the annual precipitation falls as snow during the winter. Although much of the annual precipitation on the Great Plains also falls as snow during the winter, intense rainstorms during the summer can add substantial quantities of precipitation to the annual totals in a short time. In areas east of the mountains, generally one-half of the annual precipitation falls from May through July.

Peak runoff from the basins can result from snowmelt, snowmelt mixed with rain, or intense rainfall. In addition, backwater from ice jams commonly creates flooding in many rivers throughout the State. The record flood of April

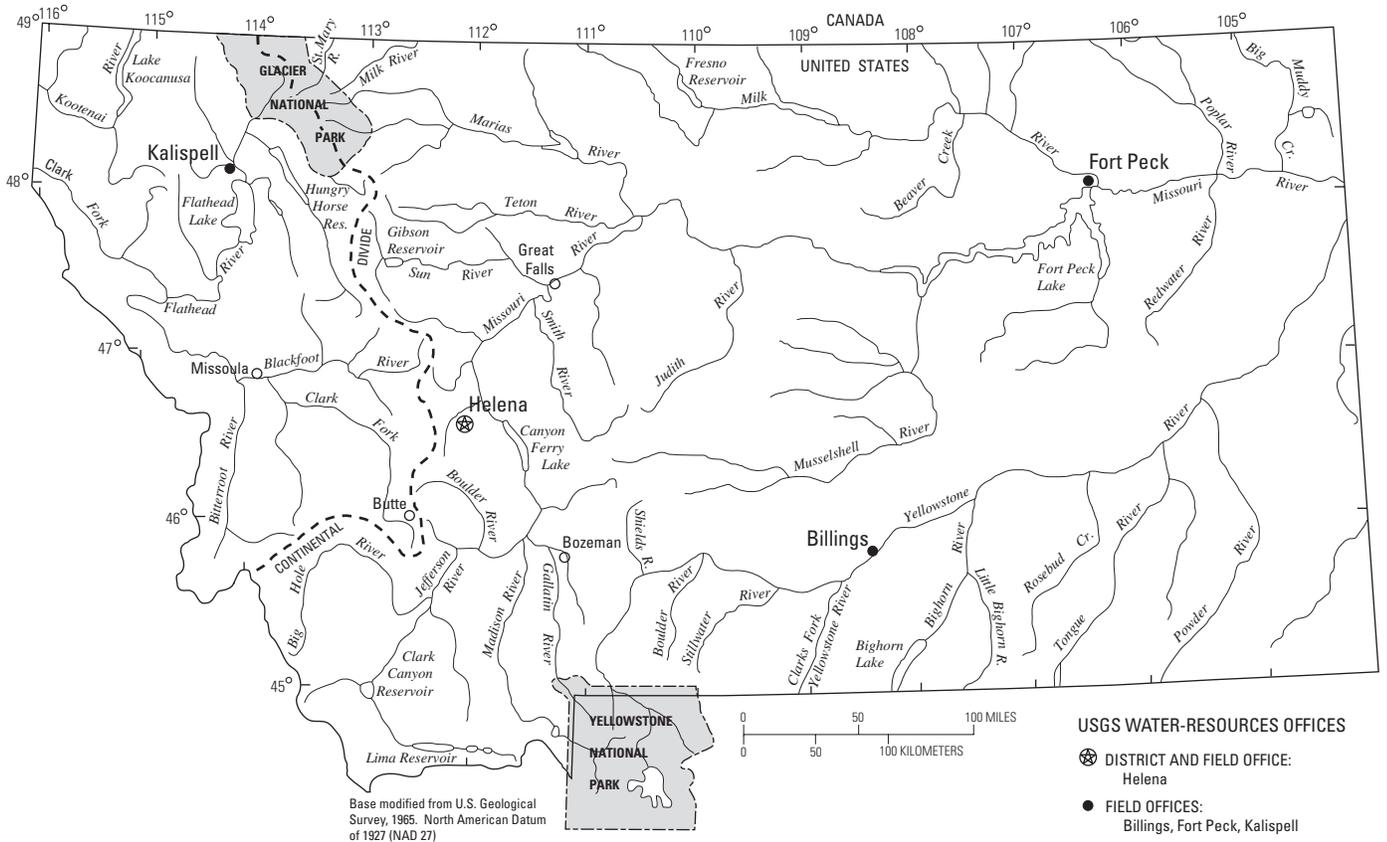

MAJOR DRAINAGE BASINS



PHYSIOGRAPHIC PROVINCES

Figure 1. General geographic features of Montana.

1952 in northeastern Montana is an example of spring snowmelt flooding. The flood in May 1981 in west-central Montana is an example of flooding caused by snowmelt mixed with rain. The floods of June 1964, June 1975, and May 1978 are examples of flooding predominantly caused by intense rainfall. Flash floods, although restricted in areal extent, are at times numerous in the north-central and eastern parts of the State. In many areas, peak runoff is stored in reservoirs to decrease flooding. The stored water is used for irrigation (the predominant consumptive use of water statewide), power generation, and recreation.

Surface water throughout the State generally is suitable for most uses except in parts of eastern Montana where, because of large concentrations of dissolved solids and some individual constituents, water-quality standards or recommended guidelines for protecting human health, agricultural irrigation, and freshwater aquatic life may be exceeded. The ionic composition of surface water is largely influenced by geology and can vary markedly between the western mountains and the eastern plains. In addition, dissolved-solids concentrations can vary substantially between runoff conditions and base flow. In the western mountains, where the rocks generally are older and resistant to weathering, the streamflow characteristically is a calcium bicarbonate type. The dissolved-solids concentrations in mountain streams commonly are less than 100 milligrams per liter (mg/L) and seldom exceed 500 mg/L, even during base-flow conditions. In the eastern plains, where sedimentary rocks are less resistant to weathering, streamflow commonly is a sodium sulfate type, with dissolved-solids concentrations ranging from about 100 mg/L during runoff to several thousand mg/L during base flow. In the northeastern part of the State, streamflow typically is a sodium bicarbonate type. Snowmelt and intense rainstorms sometimes produce large quantities of runoff that can dilute concentrations of dissolved solids, modify chemical compositions, and increase concentrations of suspended sediment.

The availability and quality of ground water in Montana are largely controlled by the diverse hydraulic and geochemical properties of the various rocks, sediments, and hydrologic settings. In western Montana, ground water is available from alluvium along streams and rivers, from basin fill in intermontane valleys, from glacial deposits, and from fractured consolidated rocks. In eastern Montana, ground water is available from alluvial deposits along larger rivers and streams and from sedimentary rocks. Outside of the alluvial valleys, ground-water availability in sedimentary rock is variable. Throughout Montana, alluvial deposits along streams generally are the most productive aquifers, and wells completed in alluvium along the major streams may produce several hundred gallons per minute. Alluvium can be readily recharged by precipitation, by streams during

periods of high flow, and by applied irrigation water. The particle-size distribution and sorting of glacial deposits largely determines their potential for water development. Where coarse, well-sorted outwash gravels are present, the potential for developing large-yield wells is good, whereas yields from wells completed in poorly sorted glacial till generally are limited to a few gallons per minute. Many fractured consolidated-rock formations are tapped for ground water but, because of the complexity of the geology, fractured rocks might not provide an adequate water supply in all areas. Wells completed in consolidated rocks generally yield only a few gallons per minute. However, several hundred gallons per minute can be obtained from highly fractured or cavernous formations in some areas. The well depth required to reach a given aquifer varies with location.

HYDROLOGIC-MONITORING ACTIVITY

One streamflow-gaging station was established during water year 2004 to aid in the assessment of the Nation's water resources::

06036940 Tantalus Creek at Norris Junction,
Yellowstone National Park

Thirteen streamflow-gaging stations were discontinued during or at the end of water year 2004. The stations were:

05016000 Swiftcurrent Creek at Sherburne
06115270 Armells Creek near Landusky
06115300 Duval Creek near Landusky
06115350 Rock Creek near Landusky
06127020 Willow Creek above LMGD Reservoir, near
Roundup
06127060 Willow Creek at U.S. Canal, near Roundup
06130650 Hell Creek near Jordan
06131200 Nelson Creek near Van Norman
06139900 Beaver Creek at reservation boundary, near
Rocky Boy
06177500 Redwater River at Circle
06290500 Little Bighorn River below Pass Creek, near
Wyola
12331500 Flint Creek near Drummond
12343400 East Fork Bitterroot River near Conner

Six water-quality stations were established or reestablished in the Tongue River basin to supplement information in an area of potential coal-bed methane development. These stations are:

06299980 Tongue River at Monarch, Wyo.
06305700 Goose Creek near Acme, Wyo.
06306250 Prairie Dog Creek near Acme, Wyo.

06307500 Tongue River at Tongue River Dam, near Decker
 06307616 Tongue River at Birney Day School, near Birney
 06308400 Pumpkin Creek near Miles City

Water-quality sampling continued for surface-water sites and ground-water wells that were established in 2002 in the headwaters of Tenmile Creek and Basin Creek near the Luttrell Repository where mine wastes and mill tailings from nearby abandoned-mine sites are being placed for long-term storage. The sampling of streams and ground water in the area surrounding the repository is intended to detect any potential migration of contaminants from the repository. Two surface-water stations were reestablished for the study in 2004:

462500112170201 LAD 01
 462500112170501 LAD 02

A one-time sampling for mercury and related geothermal constituents was conducted during 2004 at the following stations:

06037500 Madison River near West Yellowstone
 06038500 Madison River below Hebgen Lake, near Grayling
 06038800 Madison River at Kirby Ranch, near Cameron
 06040800 Madison River above powerplant, near McAllister
 06042600 Madison River at Three Forks

An expanded monitoring network was established for the Blackfoot River basin in 2004, which included the following new or reestablished stations:

12334650 Blackfoot River below Alice Creek, near Lincoln
 12334680 Landers Fork near Lincoln
 12334800 Blackfoot River at Dalton Mountain Road bridge, near Lincoln
 12336600 Nevada Creek below reservoir, near Helmville
 12337820 Blackfoot River at Raymond Bridge, near Ovando
 12338300 North Fork Blackfoot River above Dry Gulch, near Ovando
 12338690 Monture Creek near Ovando
 12338700 Blackfoot River at Scotty Brown Bridge, near Ovando
 12339500 Clearwater River at Clearwater

Six wells in the Buckeye Mine area that were sampled in past years were again sampled in 2004 to evaluate the effects of acid mine drainage on water quality. These stations are:

462341112174601 Well BTMW-7
 462342112174201 Well BTMW-3
 462342112174601 Well BTMW-6
 462342112174801 Well BTMW-8
 462344112173701 Well BTMW-1
 462347112173301 Well BTMW-9

Water-quality data collection was discontinued at 28 locations during or at the end of water year 2004. These locations were:

05016000 Swiftcurrent Creek at Sherburne
 06037500 Madison River near West Yellowstone
 06038500 Madison River below Hebgen Lake, near Grayling
 06038800 Madison River at Kirby Ranch, near Cameron
 06040800 Madison River above powerplant, near McAllister
 06042600 Madison River at Three Forks
 06062750 Tenmile Creek at Tenmile Water Treatment Plant, near Rimini
 06063000 Tenmile Creek near Helena
 06064100 Tenmile Creek at Green Meadow Drive, near Helena
 06130500 Musselshell River at Mosby
 12300110 Lake Koocanusa at international boundary
 12301830 Lake Koocanusa at Tenmile Creek, near Libby
 12301919 Lake Koocanusa at forebay, near Libby
 12301933 Kootenai River below Libby Dam, near Libby
 12324590 Little Blackfoot River near Garrison
 12331500 Flint Creek near Drummond
 12334510 Rock Creek near Clinton
 12335500 Nevada Creek above reservoir, near Helmville
 445832106551401 Youngs Creek above mouth, near Decker
 450047106514201 Squirrel Creek above mouth, at Decker
 450137106595101 Youngs Creek near reservation boundary, near Decker
 451302106583201 Rosebud Creek near Rosebud Battlefield, near Kirby
 451618106590001 Indian Creek at mouth, near Kirby
 452800107001101 Thompson Creek near Busby
 462458112173201 Unnamed tributary to Grub Creek, SS No. 5, near Rimini
 462501112173501 Unnamed tributary to Grub Creek, SS No. 4, near Rimini
 463438112091801 Tenmile Creek below Colorado Gulch, near Helena
 463747112033801 Sevenmile Creek at Green Meadow Drive, at Helena

SUMMARY OF HYDROLOGIC CONDITIONS

Temperature and Precipitation

For most of Montana, temperatures from October through April were warmer than normal. The above-normal temperatures in March caused valley and prairie snow in many areas to melt earlier than usual. Warmer temperatures in April caused mountain snow to begin to melt earlier than usual, but cooler than normal temperatures in May and June slowed the melting of the remaining mountain snowpack. Temperatures generally remained above normal across the State for the rest of the water year.

Precipitation, departure from normal precipitation, and percentage of normal precipitation for seven climatological divisions of the State are presented in table 1. The precipitation data listed in table 1 are averages of the total monthly

precipitation for the National Weather Service (NWS) reporting stations within each of the climatological divisions. No attempt was made to area-weight the division totals. As shown in table 1, for October 2003 through March 2004, precipitation ranged from 70 percent of normal in the southwestern division to a near-record 130 percent of normal in the northeastern division. For April through September 2004, precipitation ranged from 73 percent of normal in the southeastern division to 123 percent of normal in the western division. Percentage of normal precipitation for water year 2004 varied across the State from 78 percent of normal in the southeastern division to 101 percent of normal in the north-central division. Overall, all climatological divisions, except the north-central division, received less-than-normal precipitation in water year 2004. Total average precipitation for water year 2004 ranged from 10.81 inches in the southeastern division to 19.59 inches in the western division (table 1).

Table 1. Precipitation and departure from normal, in inches, and percentage of normal, Montana, water year 2004.¹

Climatological division (number of stations)	October 2003 through March 2004			April through September 2004			Water year 2004		
	Total monthly precipitation	Departure from normal, 1971-2000	Percentage of normal	Total monthly precipitation	Departure from normal, 1971-2000	Percentage of normal	Total average precipitation	Departure from normal, 1971-2000	Percentage of normal
Western (45)	7.73	-2.60	75	11.86	2.23	123	19.59	-0.37	98
Southwestern (22)	3.81	-1.65	70	10.50	.00	100	14.31	-1.65	90
North Central (42)	3.07	-.24	93	10.45	.42	104	13.52	.18	101
Central (35)	3.75	-.49	88	10.18	-.62	94	13.93	-1.11	93
South Central (26)	4.43	-1.00	82	9.28	-1.74	84	13.71	-2.74	83
Northeastern (27)	3.44	.80	130	8.91	-1.38	87	12.35	-.58	96
Southeastern (22)	3.27	-.28	92	7.54	-2.83	73	10.81	-3.11	78

¹Data from U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Weather Service, 2004, Climatological Data, Montana, v. 106, no. 10 through v. 107, no. 9. Normals of precipitation are determined from the base period 1971-2000.

Most NWS stations in Montana measure precipitation in valley or non-mountainous locations. Data for precipitation falling as snow in the mountainous parts of the State during the winter are published by the U.S. Department of Agriculture, Natural Resources Conservation Service (available at <http://www.wcc.nrcs.usda.gov/snow/snotel-reports.html>). Snow-water equivalents of mountain snowpack, determined from SNOTEL information, for various basins in Montana are presented in table 2.

By March 1, 2004, snow-water equivalent of the snowpack in all basins ranged from 81 to 133 percent of average. During March, a month when mountain snowpack typically increases, early melting coupled with little additional snowfall resulted in snow-water equivalents on April 1 that were all less than average. Continued early melting and

little additional snowfall in April resulted in snow-water equivalents on May 1 that were well below average. Because the snowpack began melting earlier than usual and the melt occurred over a long period, much of the melt water infiltrated the ground rather than running off to streams.

Table 2. Snow-water equivalent and percent of average snow-water equivalent of mountain snowpack in selected basins in Montana, March 1-May 1, 2004.¹

Drainage basin	March 1, 2004			April 1, 2004			May 1, 2004		
	Basin-wide snow-water equivalent, in inches	Basin-wide average snow-water equivalent, in inches	Percentage of average	Basin-wide snow-water equivalent, in inches	Basin-wide average snow-water equivalent, in inches	Percentage of average	Basin-wide snow-water equivalent, in inches	Basin-wide average snow-water equivalent, in inches	Percentage of average
Hudson Bay									
St. Mary	21.8	26.8	81	21.2	30.2	70	18.6	26.2	71
Missouri									
Upper Missouri	13.7	14.0	98	14.4	17.4	83	12.2	17.4	70
Sun, Teton, Marias	13.2	16.2	81	14.5	19.1	76	9.7	17.7	55
Smith, Judith, Musselshell	11.3	10.6	107	11.3	13.1	86	7.1	11.4	62
Lower Milk	5.7	4.3	133	.9	4.4	20	.0	1.2	0
Upper Yellowstone	13.2	15.7	84	13.4	19.2	70	10.8	19.6	55
Bighorn	9.7	11.6	84	10.0	14.3	70	9.0	15.2	59
Tongue	9.0	8.9	101	9.3	11.6	80	7.9	12.3	64
Powder	8.4	7.4	114	7.5	9.6	78	5.8	10.0	58
Upper Columbia									
Kootenai	22.0	22.7	97	22.6	26.3	86	15.8	23.8	66
Flathead	20.0	22.8	88	20.4	26.7	76	15.5	23.8	65
Clark Fork	17.5	18.8	93	17.6	22.1	80	12.8	19.9	64

¹SNOTEL data from Natural Resources Conservation Service (NRCS) National Water and Climate Center, accessed January 31, 2005 at <http://www.wcc.nrcs.usda.gov/snow/snotel-reports.html>. Averages were determined from the base period 1971-2000.

SURFACE WATER

Streamflow

Streamflow data for water year 2004 can be compared to long-term data for water years 1971-2000 and maximum and minimum monthly mean discharge for the period of record at seven streamflow-gaging stations (fig. 2). Compared to the mean annual discharge (average of the annual mean discharges) for water years 1971-2000, the annual mean discharge (fig. 2) during water year 2004 was 84 percent of average at Middle Fork Flathead River near West Glacier (station 12358500); 73 percent of average at Clark Fork at St. Regis (station 12354500); 53 percent of average at Missouri River at Toston (station 06054500); 72 percent of average at Yellowstone River at Corwin Springs (station 06191500); 59 percent of average at Yellowstone River at Billings (station 06214500); 100 percent of average at Rock Creek below Horse Creek, near international boundary (sta-

tion 06169500); and 55 percent of average at Marias River near Shelby (station 06099500).

The annual departure from mean annual discharge at two streamflow-gaging stations on unregulated streams is shown in figure 3. At both Yellowstone River at Corwin Springs and Middle Fork Flathead River near West Glacier, the annual mean discharge during water year 2004 was less than the long-term average for the period of record.

Extraordinary flooding did not occur in any major river basins in Montana during water year 2004. Although near-record amounts of snow were on the ground in much of northeastern Montana on March 1, the anomalously cool temperatures in that part of the State resulted in a slow melting with no substantial flooding. Generally the low soil-moisture conditions also meant that much of the slowly melting prairie snowpack percolated into the soil.

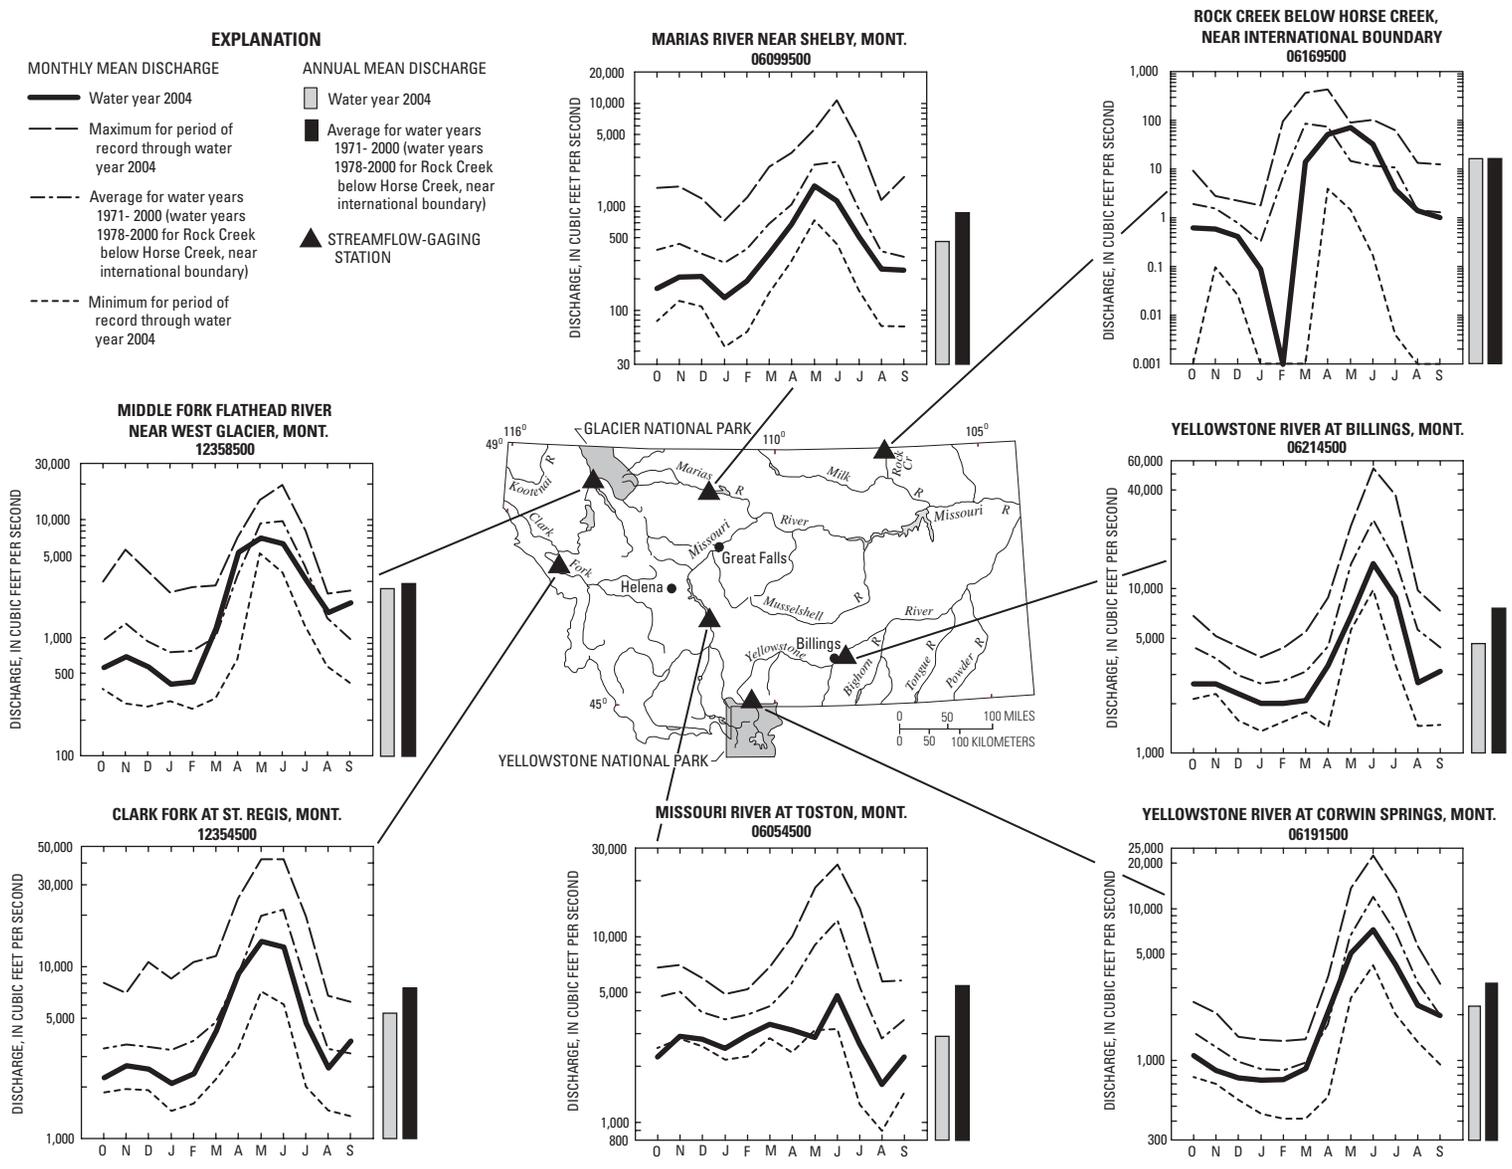


Figure 2. Streamflow data for water year 2004 compared to long-term data at selected streamflow-gaging stations in Montana.

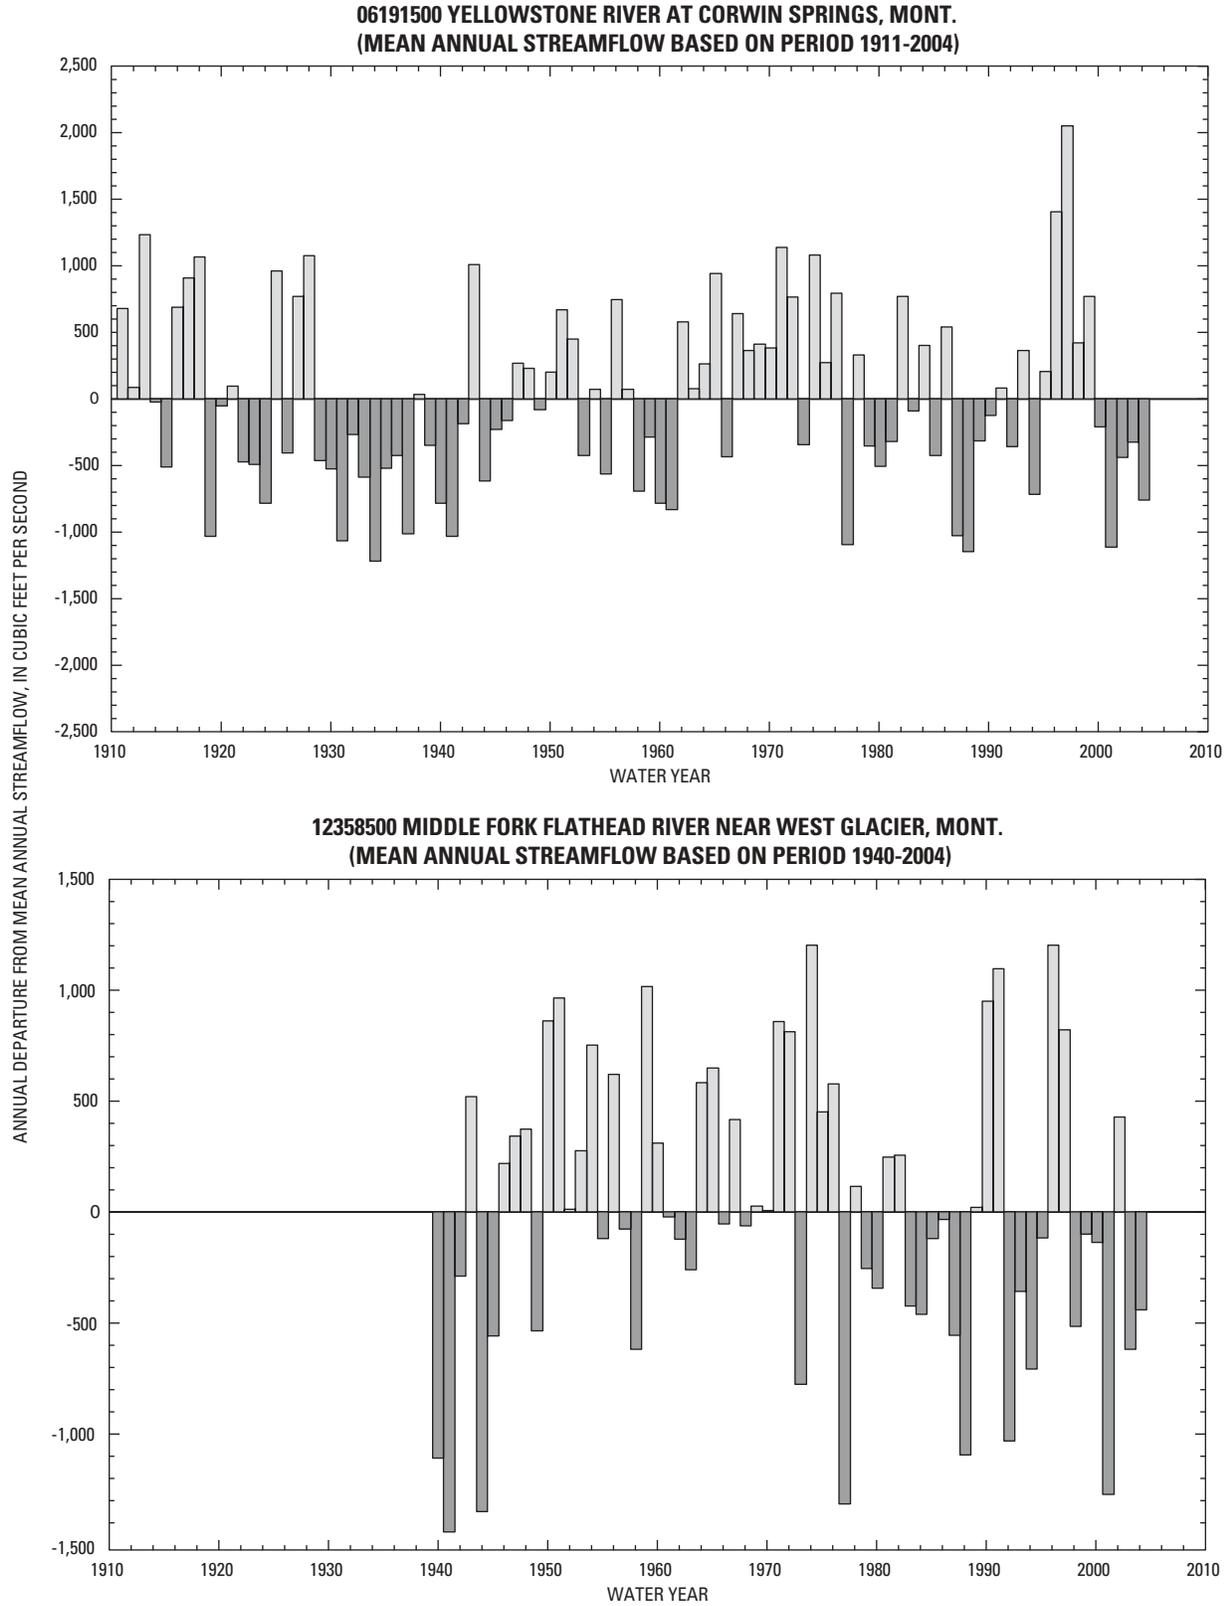


Figure 3. Annual departure from mean annual discharge at two streamflow-gaging stations on unregulated streams in Montana.

A comparison of instantaneous peak discharge at 25 selected streamflow-gaging stations for water year 2004 to instantaneous peak discharge for the period of record is presented in table 3. Record peak discharges were not recorded for any of these stations. However, peak discharge

could not be determined at two stations in water year 2004 due to ice conditions. The recurrence intervals for peaks during water year 2004 were less than 2 years, except for one station in northeastern Montana that had a recurrence interval of 2-5 years.

Table 3. Comparisons of instantaneous peak discharge for water year 2004 to instantaneous peak discharge for period of record at selected stations in Montana.

[Symbols: <, less than; --, not determined; *, outside period of record]

Station number	Station name	Drainage area (square miles)	Peak discharge, water year 2004			Peak discharge, period of record through water year 2003	
			Date	Cubic feet per second	Recurrence interval (years)	Date	Cubic feet per second
05014500	Swiftcurrent Creek at Many Glacier	30.9	08/26	773	<2	06/08/64	6,700
05017500	St. Mary River near Babb	276	06/07	2,080	<2	06/09/64	16,500
06025500	Big Hole River near Melrose	2,476	06/12	2,250	<2	06/10/72	14,300
06054500	Missouri River at Toston	14,669	06/12	9,730	<2	06/12/97	34,000
06089000	Sun River near Vaughn	1,854	06/08	1,800	<2	06/09/64	53,500
06099500	Marias River near Shelby	3,242	06/08	18,400	<2	06/09/64	241,000
06115200	Missouri River near Landusky	40,987	05/30	10,700	<2	06/03/53	137,000
06120500	Musselshell River at Harlowton	1,125	06/13	694	<2	06/20/75	7,270
06154400	Peoples Creek near Hays	220	03/09	238	2-5	06/08/72	8,460
06174500	Milk River at Nashua	22,332	--	--	--	04/18/52	45,300
06181000	Poplar River near Poplar	3,174	05/31	1,380	<2	04/06/54	37,400
06191500	Yellowstone River at Corwin Springs	2,623	06/10	11,800	<2	06/10/96 06/06/97	32,200 32,200
06200000	Boulder River at Big Timber	523	06/10	3,230	<2	06/05/97	9,940
06214500	Yellowstone River at Billings	11,795	06/11	27,800	<2	06/12/97	82,000
06289000	Little Bighorn River at State line, near Wyola	193	05/08	215	<2	06/03/44	2,730
06308500	Tongue River at Miles City	5,397	--	--	--	06/15/62	13,300
06329500	Yellowstone River near Sidney	69,103	06/14	25,800	<2	06/21/21	159,000
12301300	Tobacco River near Eureka	440	04/15	857	<2	05/13/91	3,180
12304500	Yaak River near Troy	766	04/09	2,990	<2	05/17/97 * 05/54	12,600 *13,400
12332000	Middle Fork Rock Creek near Philipsburg	123	06/10	547	<2	06/16/74	1,680
12335500	Nevada Creek above reservoir, near Helmville	116	03/17	328	<2	06/02/53	1,800
12340000	Blackfoot River near Bonner	2,290	05/08	4,590	<2	06/10/64	19,200
12354500	Clark Fork at St. Regis	10,709	06/02	19,600	<2	05/24/48 05/18/97	68,900 68,900
12358500	Middle Fork Flathead River near West Glacier	1,128	05/05	11,100	<2	06/09/64	140,000
12370000	Swan River near Bigfork	671	06/08	3,150	<2	06/20/74	8,890

A comparison of minimum daily mean discharge at 24 selected long-term streamflow-gaging stations for water year 2004 to minimum daily mean discharge for the period of record is presented in table 4. Record minimum daily mean discharges were not recorded during water year 2004, although below-normal streamflow conditions prevailed at

many stations throughout the year in Montana. Minimum daily discharges had recurrence intervals of less than 2 years at 5 sites, recurrence intervals of 2-5 years at 12 sites, recurrence intervals of 5-10 years at 4 sites, recurrence intervals of 10-20 years at 2 sites, and a recurrence interval of greater than 100 years at 1 site.

Table 4. Comparisons of minimum daily mean discharge for water year 2004 to minimum daily mean discharge for period of record at selected stations in Montana.

[Symbol: <, less than; >, greater than]

Station number	Station name	Drainage area (square miles)	Minimum daily mean discharge, water year 2004			Minimum daily mean discharge, period of record through water year 2003	
			Date	Cubic feet per second	Recurrence interval (years)	Date	Cubic feet per second
05014500	Swiftcurrent Creek at Many Glacier	30.9	01/29	10	2-5	11/14,16/76	0
05017500	St. Mary River near Babb	276	01/01	45	2-5	01/03/53	27
06025500	Big Hole River near Melrose	2,476	08/16	157	2-5	08/17/31	49
06054500	Missouri River at Toston	14,669	08/16	1,240	2-5	01/12/63	700
06089000	Sun River near Vaughn	1,854	05/06	97	2-5	05/26/41	23
06099500	Marias River near Shelby	3,242	01/27	86	2-5	08/20/19	10
06115200	Missouri River near Landusky	40,987	01/02	3,400	2-5	12/13/36	1,220
06120500	Musselshell River at Harlowton	1,125	09/02	6.7	2-5	(¹)	0
06174500	Milk River at Nashua	22,332	01/05	40	2-5	(¹)	0
06181000	Poplar River near Poplar	3,174	01/28	4.0	<2	(¹)	0
06191500	Yellowstone River at Corwin Springs	2,623	01/05	660	<2	02/05/89	380
06200000	Boulder River at Big Timber	523	01/05	60	2-5	08/26/61	12
06214500	Yellowstone River at Billings	11,795	08/17	1,450	<2	12/12/32	450
06289000	Little Bighorn River at State line, near Wyola	193	01/04	28	5-10	02/02/89	18
06308500	Tongue River at Miles City	5,397	05/08	7.6	5-10	07/09/40	0
06329500	Yellowstone River near Sidney	69,103	08/22	1,480	10-20	05/17/61	570
12301300	Tobacco River near Eureka	440	08/18	44	2-5	01/11/63	20
12304500	Yaak River near Troy	766	10/05	64	5-10	09/19/01	49
12332000	Middle Fork Rock Creek near Philipsburg	123	01/05	25	<2	02/09/53	5.3
12335500	Nevada Creek above reservoir, near Helmville	116	01/06	5.0	<2	01/11/44	2.0
12340000	Blackfoot River near Bonner	2,290	01/06	300	2-5	01/04/50	200
12354500	Clark Fork at St. Regis	10,709	01/06	826	>100	02/03/89	800
12358500	Middle Fork Flathead River near West Glacier	1,128	01/28	228	10-20	11/27/52	189
12370000	Swan River near Bigfork	671	01/07	272	5-10	01/26-29/30	193

¹At various dates.

The percentage-of-normal storage (based on water years 1971-2000), by month, for selected major reservoirs is presented in table 5. At the end of water year 2004, storage was within 20 percent of normal in four of the six major reser-

voirs used to supply water primarily for hydroelectric-power generation. Storage was within 20 percent of normal at the end of water year 2004 in two of the four reservoirs used to supply water primarily for irrigation.

Table 5. Percentage-of-normal storage, by month, during water year 2004 for selected major reservoirs in Montana.

Reservoir	Usable capacity (acre-feet)	Percentage-of-normal storage based on 1971-2000 period of record											
		2003			2004								
		Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.
Hydroelectric-power generation													
Canyon Ferry Lake	1,993,000	88	86	88	89	92	94	93	83	80	82	83	83
Fort Peck Lake	18,910,000	64	64	64	62	63	65	63	58	57	58	55	55
Bighorn Lake	1,356,000	79	82	83	81	83	82	81	75	65	65	71	72
Lake Koocanusa	5,748,000	108	117	119	141	168	158	158	139	109	99	97	103
Hungry Horse Reservoir	3,451,000	104	106	110	115	119	130	145	123	109	102	98	103
Flathead Lake	1,791,000	108	102	94	98	97	88	131	106	100	99	101	101
Irrigation													
Lima Reservoir	84,050	15	15	17	20	22	28	28	43	49	59	76	101
Clark Canyon Reservoir	255,600	16	20	25	30	34	36	35	31	23	19	17	21
Gibson Reservoir	96,480	22	34	41	45	48	65	111	106	101	82	56	75
Fresno Reservoir	103,000	47	43	40	35	29	39	50	55	62	88	77	82

WATER QUALITY

The USGS operates water-quality stations throughout Montana in cooperation with numerous Federal, State, local agencies, and Tribal governments. The stations change from year to year as objectives are achieved or modified, or funding levels change. Some stations are operated for only a few years and commonly are part of a short-term investigation to examine water quality related to a specific condition. Other stations have been in operation for many years and provide a basis for description of long-term water-quality conditions or trends that represent a wide range of hydrologic or land-use variability. Long-term stations typically are located on major streams that represent an important water resource in the area and require data on an ongoing basis for various management concerns. A monitoring network in the Tongue River basin was expanded to 11 sites in 2004. These sites, plus three sites in the Powder River basin and one site in the Rosebud Creek basin, are operated to assist water managers with assessing the potential effects of coal-bed methane development.

Various water-quality measurements are made, either onsite or by laboratory analysis of samples, depending on the objective of the investigation. Several types of water-quality data that describe physical and chemical characteristics are routinely obtained in many sampling programs. Examples of commonly measured water-quality characteristics are dis-

solved solids, dissolved oxygen, dissolved nitrite plus nitrate, total phosphorus, and suspended sediment. Guideline concentrations and standards have been established by the State of Montana (<http://www.deq.state.mt.us/wqinfo/Circulars/WQB-7.PDF>) and U.S. Environmental Protection Agency (USEPA) (<http://epa.gov/waterscience/standards/wqcriteria.html>) to provide values protective of human health and aquatic organisms.

The concentration of dissolved solids, which represents the mass (milligrams) of all constituents dissolved in a unit volume (liter) of water, can be determined either from the weight of dry residue that remains after evaporation of a known volume of water that has been filtered to remove particulate material, or estimated from the sum of the individual dissolved major-ion concentrations. An excessive concentration of dissolved solids can render the water unsuitable for certain uses such as human consumption, irrigation of crops, or livestock watering. Recommended guidelines compiled by the U.S. Department of Agriculture¹ indicate that water might not be suitable when dissolved-solids concentrations exceed 500 mg/L if used for human consumption,

1. U.S. Department of Agriculture, 2002, Natural Resources Conservation Service, Assessing water quality for agriculture and aquatic life uses: Environment Technical Note No. MT-1, 27 p.

1,000 mg/L if used for crop irrigation, and 10,000 mg/L if used for livestock watering.

Dissolved oxygen in surface water is essential for most aquatic organisms and is an indicator of the biochemical condition of the stream or lake. The solubility of oxygen in water is a function of water temperature and barometric pressure; therefore, the oxygen content in surface water is subject to considerable daily and seasonal change. Biological activities such as photosynthesis and decomposition also can cause rapid and large changes in dissolved-oxygen concentration. Dissolved-oxygen concentrations less than 5.0 mg/L for warm-water fish or less than 8.0 mg/L for cold-water fish may be detrimental to early life stages.²

Nitrogen (N) is an essential plant nutrient that occurs in several forms in water. Common sources of nitrogen are atmospheric deposition, soils, plant fertilizers, animal waste, and sewage or septic effluent. Nitrite and nitrate are inorganic forms of nitrogen that can occur in water, although nitrite is seldom present in large amounts in oxygenated water. Dissolved nitrate is a major nutrient for plants; consequently, large concentrations of nitrate in streams and lakes can cause rapid growth of aquatic plants. Nitrate concentrations in excess of 0.3 mg/L as N have the potential to stimulate growths of algae in the presence of adequate phosphorus.³ In addition, human health can be adversely affected if the nitrate concentration exceeds 10 mg/L as N in drinking water.^{2,4}

Phosphorus (P) is an essential plant nutrient that can stimulate excessive growth of aquatic plants. Total phosphorus includes the inorganic and organic forms of dissolved and suspended phosphorus and is commonly analyzed as an indicator of eutrophication potential. Although phosphorus can originate naturally from igneous and sedimentary rock formations, more common sources include sewage, detergents, fertilizer, and livestock waste. Total phosphorus concentrations to limit nuisance aquatic plant growth in streams should not exceed 0.03 mg/L as P in western Montana and 1.0 mg/L as P in eastern Montana.¹ Water-quality criteria

established by the USEPA⁵ also indicate that total phosphorus should not exceed 0.05 mg/L as P in streams discharging directly to lakes or 0.025 mg/L as P within lakes.

Suspended sediment is particulate material eroded from the land surface by either wind or water and maintained in suspension in streams by hydraulic energy. The quantity of suspended sediment in streams typically increases during periods of increased runoff, when large amounts of rainfall or snowmelt can rapidly erode soil and the increased stream-flow can scour channel sediments. Although large suspended-sediment concentrations can occur naturally in areas underlain by easily erodible geologic materials, land use that disturbs soils also can contribute substantial quantities of sediment to streams and lakes. The quantity of sediment in suspension has important physical and chemical implications for aquatic life. Sediment in suspension during high flow may be deposited in stream channels or lakes where water velocities decrease. In areas of sediment deposition, aquatic insects or fish eggs can be smothered, thereby rendering the bottom habitat unsuitable for their survival. Many chemical constituents such as some metals, phosphorus, and some pesticides tend to sorb strongly to sediment. As a result, chemicals may be readily transported from land sources into river systems where aquatic organisms could be exposed to toxic concentrations.

Statistical summaries of selected water-quality measurements made at eight long-term water-quality stations in Montana are presented in table 6. The range of values for each type of measurement is described by the minimum and maximum values. To compare current and long-term water-quality conditions, the range of values are summarized for both water year 2004 and the period of record through water year 2003. In addition, the central tendency of data collected over the period of record is described by the median (50th percentile).

-
2. Montana Department of Environmental Quality, 2004, Montana numeric water quality standards: Circular WBQ-7, 38 p., Administrative Rules of Montana 17.30.619.
 3. Mackenthun, K.M., 1969, The practice of water pollution biology: U.S. Department of the Interior, Federal Water Pollution Control Administration, Division of Technical Support, 281 p.
 4. U.S. Environmental Protection Agency, 1991, Maximum Contaminant Levels (section 141.62 of subpart G of part 141, National Revised Primary Drinking Water Regulations): U.S. Code of Federal Regulations Title 40, Parts 100 to 149, revised as of July 1, 1991, p. 673.

-
5. U.S. Environmental Protection Agency, 1986, Quality criteria for water, 1986: Washington, D.C., Office of Water Regulations and Standards, EPA 440/5-86-001, unpagged.

Table 6. Statistical summaries of selected water-quality measurements for long-term water-quality stations in Montana for water year 2004 and the period of record through water year 2003.

[Symbols: <, less than; --, no data]

Station number	Station name	Water year 2004			Period of record through water year 2003			
		Number of samples	Minimum	Maximum	Number of samples	Minimum	Maximum	Median
Dissolved solids, in milligrams per liter								
06089000	Sun River near Vaughn	0	--	--	306	155	1,100	462
06178500	East Poplar River at international boundary	4	945	1,060	267	97	1,480	940
06185500	Missouri River near Culbertson	8	325	398	239	221	579	403
06308500	Tongue River at Miles City	16	361	842	203	155	1,330	553
06326500	Powder River near Locate	11	891	2,260	218	408	3,450	1,460
06329500	Yellowstone River near Sidney	0	--	--	297	142	863	467
12301933	Kootenai River below Libby Dam, near Libby	2	138	148	242	55	211	139
12352500	Bitterroot River near Missoula	2	39	73	33	26	107	56
Dissolved oxygen, in milligrams per liter								
06089000	Sun River near Vaughn	0	--	--	47	7.4	13.2	10.9
06178500	East Poplar River at international boundary	4	6.4	10.0	263	.9	17.2	9.1
06185500	Missouri River near Culbertson	8	6.2	12.8	277	6.0	14.2	9.3
06308500	Tongue River at Miles City	16	7.0	14.4	192	6.5	15.6	8.7
06326500	Powder River near Locate	11	5.3	13.5	254	2.7	15.7	8.6
06329500	Yellowstone River near Sidney	11	8.1	12.4	419	4.4	15.0	9.1
12301933	Kootenai River below Libby Dam, near Libby	9	8.3	12.2	448	6.9	18.3	10.8
12352500	Bitterroot River near Missoula	0	--	--	33	8.2	15.2	10.6
Dissolved nitrite plus nitrate, in milligrams per liter as nitrogen								
06089000	Sun River near Vaughn	9	.157	.980	346	<.01	4.7	.62
06178500	East Poplar River at international boundary	4	<.016	.091	65	<.01	.29	.07
06185500	Missouri River near Culbertson	8	<.016	.213	165	<.005	.38	.005
06308500	Tongue River at Miles City	10	<.016	.520	141	<.02	.97	.04
06326500	Powder River near Locate	11	<.016	.505	156	<.01	1.8	.27
06329500	Yellowstone River near Sidney	11	<.06	.570	246	<.005	.73	.20
12301933	Kootenai River below Libby Dam, near Libby	9	.057	.127	310	<.05	.79	.10
12352500	Bitterroot River near Missoula	4	.012	.072	40	<.005	.17	.03
Total phosphorus, in milligrams per liter as phosphorus								
06089000	Sun River near Vaughn	9	.008	.14	120	<.01	.64	.03
06178500	East Poplar River at international boundary	4	.04	.09	269	<.01	.40	.03
06185500	Missouri River near Culbertson	8	.12	1.0	225	.01	.93	.09
06308500	Tongue River at Miles City	10	.006	2.6	167	<.01	1.9	.04
06326500	Powder River near Locate	11	.005	3.0	219	.008	26	.18
06329500	Yellowstone River near Sidney	11	.018	1.1	377	<.01	2.7	.09
12301933	Kootenai River below Libby Dam, near Libby	9	<.004	.006	523	<.001	.26	.008
12352500	Bitterroot River near Missoula	4	.005	.034	40	.004	.18	.021
Suspended sediment, in milligrams per liter								
06089000	Sun River near Vaughn	9	11	99	121	8	910	57
06178500	East Poplar River at international boundary	4	40	160	233	4	322	55
06185500	Missouri River near Culbertson	8	129	1,540	186	19	2,370	240
06308500	Tongue River at Miles City	16	14	4,560	178	5	14,000	86
06326500	Powder River near Locate	12	42	8,320	247	8	41,400	1,120
06329500	Yellowstone River near Sidney	18	14	2,230	361	10	15,500	307
12301933	Kootenai River below Libby Dam, near Libby	6	1	1	23	1	3	2
12352500	Bitterroot River near Missoula	4	2	25	42	1	186	9

GROUND WATER

Ground-Water Levels

Water levels were measured in 51 observation wells during water year 2004. Measurements in 24 wells in Lewis and Clark County were discontinued in August. Water levels in most of the observation wells primarily reflect the response of the ground-water system in the area to natural climatic conditions. However, several wells are within the zone of influence of human activities, and water levels in these wells can be affected by pumping or infiltration of applied irrigation water. Seventeen of the 51 observation wells are equipped with continuous water-level recorders and have varying lengths of record. One of the continuous recorders also provides near real-time data delivery with water-level data collected hourly and transmitted every 4 hours via satellite for display as part of the USGS National Water Information System program (accessed at <http://waterdata.usgs.gov/nwis>). Discrete data values from the continuous recorders are not presented in this report but are available at the USGS Montana District Office in Helena.

Water levels commonly fluctuate throughout the year and from year to year as a result of changes in climatic conditions or human activities. Little or no water was released to irrigation canals near wells 08S09W01CCCC01 (in Beaverhead County) and 23N24W34ADAA01 (in Sanders County) during water year 2004, resulting in reduced annual fluctuation of water levels in these two wells.

EXPLANATION OF THE RECORDS

The surface-water and ground-water records published in this report are for water year 2004 that began October 1, 2003, and ended September 30, 2004. A calendar of the water year is provided on the inside of the front cover. The records contain streamflow data, stage and content data for lakes and reservoirs, water-quality data for surface and ground water, and ground-water-level data. The locations of the stations and wells where the data were collected are shown in figures 6 through 8. The following sections of the introductory text are presented to provide users with a more detailed explanation of how the hydrologic data published in this report were collected, analyzed, computed, and arranged for presentation

DOWNSTREAM ORDER AND STATION NUMBER

Since October 1, 1950, hydrologic-station records in USGS reports have been listed in order of downstream direction along the main stream. All stations on a tributary enter-

ing upstream from a main-stream station are listed before that station. A station on a tributary entering between two main-stream stations is listed between those stations. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. The rank of any tributary on which a station is located with respect to the stream to which it is immediately tributary is indicated by an indention in that list of stations in the front of this report. Each indention represents one rank. This downstream order and system of indention indicates which stations are on tributaries between any two stations and the rank of the tributary on which each station is located.

As an added means of identification, each hydrologic station and partial-record station has been assigned a station number. These station numbers are in the same downstream order used in this report. In assigning a station number, no distinction is made between partial-record stations and other stations; therefore, the station number for a partial-record station indicates downstream-order position in a list composed of both types of stations. Gaps are consecutive. The complete 8-digit (or 10-digit) number for each station such as 09004100, which appears just to the left of the station name, includes a 2-digit part number "09" plus the 6-digit (or 8-digit) downstream order number "004100." In areas of high station density, an additional two digits may be added to the station identification number to yield a 10-digit number. The stations are numbered in downstream order as described above between stations of consecutive 8-digit numbers.

NUMBERING SYSTEM FOR WELLS AND MISCELLANEOUS SITES

The USGS well and miscellaneous site-numbering system is based on the grid system of latitude and longitude. The system provides the geographic location of the well or miscellaneous site and a unique number for each site. The number consists of 15 digits. The first 6 digits denote the degrees, minutes, and seconds of latitude, and the next 7 digits denote degrees, minutes, and seconds of longitude; the last 2 digits are a sequential number for wells within a 1-second grid. In the event that the latitude-longitude coordinates for a well and miscellaneous site are the same, a sequential number such as "01," "02," and so forth, would be assigned as one would for wells (see fig. 4). The 8-digit, downstream order station numbers are not assigned to wells and miscellaneous sites where only random water-quality samples or discharge measurements are taken.

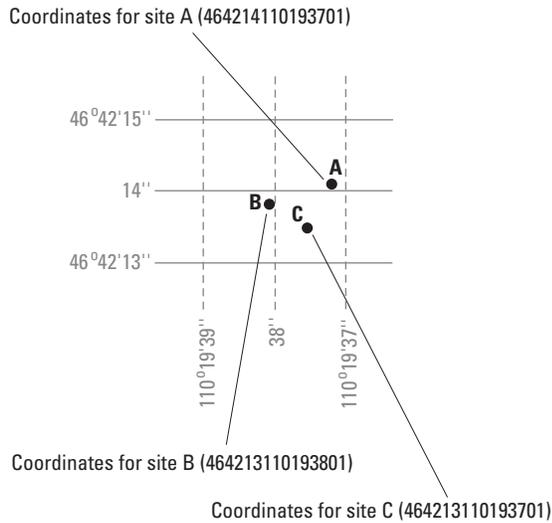


Figure 4. System for numbering wells and miscellaneous sites (latitude and longitude).

In addition to the well number that is based on latitude and longitude given for each well, another well number may be provided which in many States is based on the Public Land Survey System, a set of rectangular surveys that is used to identify land parcels. The location number consists of as many as 14 characters. The first three characters specify the township and its position south (S) or north (N) of the Montana Base Line. The next three characters specify the range and its position east (E) or west (W) of the Montana Principal Meridian. The next two characters are the section number. The next three to four characters designate the quarter section (160-acre tract), the quarter-quarter section (40-acre tract), the quarter-quarter-quarter section (10-acre tract), the quarter-quarter-quarter-quarter tract (2.5-acre tract), respectively, in which the well is located. The four subdivisions of the section are designated A, B, C, and D in a counter-clockwise direction, beginning in the northeastern quadrant. The last two characters in the location number specify a sequence number to distinguish between multiple wells in a single tract. For example, as shown in figure 5, well 30N33W05ABAB01 is the first well inventoried in the NW¹/₄ (B) of the NE¹/₄ (A) of the NW¹/₄ (B) of the NE¹/₄ (A) of section 5, in township 30 north, range 33 west.

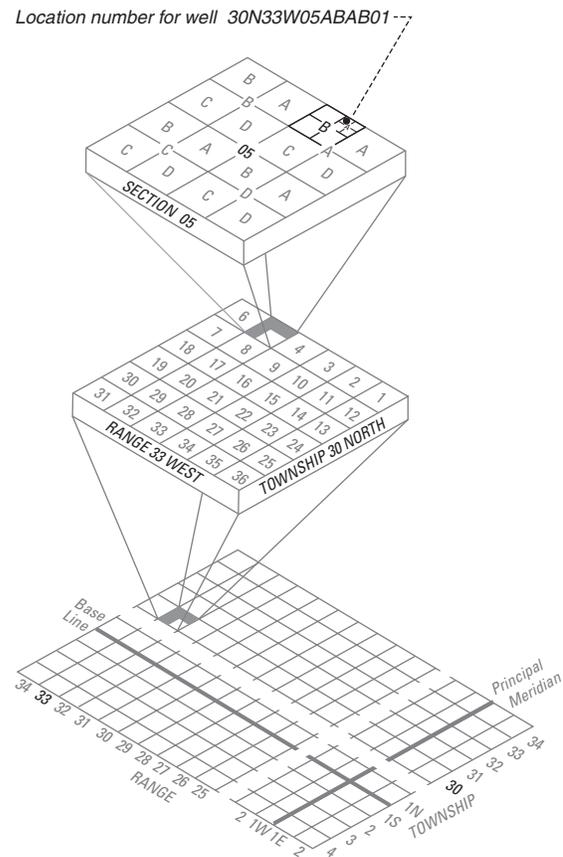


Figure 5. System for numbering wells and miscellaneous sites (township and range).

SPECIAL NETWORKS AND PROGRAMS

Hydrologic Benchmark Network is a network of 61 sites in small drainage basins in 39 States that was established in 1963 to provide consistent streamflow data representative of undeveloped watersheds nationwide, and from which data could be analyzed on a continuing basis for use in comparison and contrast with conditions observed in basins more obviously affected by human activities. At selected sites, water-quality information is being gathered on major ions and nutrients, primarily to assess the effects of acid deposition on stream chemistry. Additional information on the Hydrologic Benchmark Program may be accessed from <http://water.usgs.gov/hbn/>.

National Stream-Quality Accounting Network (NASQAN) is a network of sites used to monitor the water quality of large rivers within the Nation's largest river basins. From 1995 through 1999, a network of approximately 40 stations was operated in the Mississippi, Columbia, Colorado, and Rio Grande River basins. For the period 2000 through 2004, sampling was reduced to a few index stations on the Colorado and Columbia Rivers so that a network of 5 stations could be implemented on the Yukon River. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment (NAWQA) Program; (3) to characterize processes unique to large-river systems such as storage and re-mobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals. Additional information about the NASQAN Program may be accessed from <http://water.usgs.gov/nasqan/>.

The National Atmospheric Deposition Program/ National Trends Network (NADP/NTN) is a network of monitoring sites that provides continuous measurement and assessment of the chemical constituents in precipitation throughout the United States. As the lead Federal agency, the USGS works together with over 100 organizations to provide a long-term, spatial and temporal record of atmospheric deposition generated from this network of 250 precipitation-chemistry monitoring sites. The USGS supports 74 of these 250 sites. This long-term, nationally consistent monitoring program, coupled with ecosystem research, provides critical information toward a national scorecard to evaluate the effectiveness of ongoing and future regulations intended to reduce atmospheric emissions and subsequent impacts to the Nation's land and water resources. Reports and other information on the NADP/NTN Program, as well as data from the individual sites, may be accessed from <http://bqs.usgs.gov/acidrain/>.

The USGS National Water-Quality Assessment (NAWQA) Program is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; to provide an improved understanding

of the primary natural and human factors affecting these observed conditions and trends; and to provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Assessment activities are being conducted in 42 study units (major watersheds and aquifer systems) that represent a wide range of environmental settings nationwide and that account for a large percentage of the Nation's water use. A wide array of chemical constituents is measured in ground water, surface water, streambed sediments, and fish tissues. The coordinated application of comparative hydrologic studies at a wide range of spatial and temporal scales will provide information for water-resources managers to use in making decisions and a foundation for aggregation and comparison of findings to address water-quality issues of regional and national interest.

Communication and coordination between USGS personnel and other local, State, and Federal interests are critical components of the NAWQA Program. Each study unit has a local liaison committee consisting of representatives from key Federal, State, and local water-resources agencies, Indian nations, and universities in the study unit. Liaison committees typically meet semiannually to discuss their information needs, monitoring plans and progress, desired information products, and opportunities to collaborate efforts among the agencies. Additional information about the NAWQA Program may be accessed from <http://water.usgs.gov/nawqa/>.

The USGS National Streamflow Information Program (NSIP) is a long-term program with goals to provide framework streamflow data across the Nation. Included in the program are creation of a permanent Federally funded streamflow network, research on the nature of streamflow, regional assessments of streamflow data and databases, and upgrades in the streamflow information delivery systems. Additional information about NSIP may be accessed from <http://water.usgs.gov/nsip/>.

EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS

Data Collection and Computation

The base data collected at gaging stations (fig. 6) consist of records of stage and measurements of discharge of streams or canals, and stage, surface area, and volume of lakes or reservoirs. In addition, observations of factors affecting the stage-discharge relation or the stage-capacity relation, weather records, and other information are used to supplement base data in determining the daily flow or

volume of water in storage. Records of stage are obtained from a water-stage recorder that is either downloaded electronically in the field to a laptop computer or similar device or is transmitted using telemetry such as GOES satellite, land-line or cellular-phone modems, or by radio transmission. Measurements of discharge are made with a current meter or acoustic Doppler current profiler, using the general methods adopted by the USGS. These methods are described in standard textbooks, USGS Water-Supply Paper 2175, and the Techniques of Water-Resources Investigations of the United States Geological Survey (TWRIs), Book 3, Chapters A1 through A19 and Book 8, Chapters A2 and B2, which may be accessed from <http://water.usgs.gov/pubs/twri/>. The methods are consistent with the American Society for Testing and Materials (ASTM) standards and generally follow the standards of the International Organization for Standardization (ISO).

For stream-gaging stations, discharge-rating tables for any stage are prepared from stage-discharge curves. If extensions to the rating curves are necessary to express discharge greater than measured, the extensions are made on the basis of indirect measurements of peak discharge (such as slope-area or contracted-opening measurements, or computation of flow over dams and weirs), step-backwater techniques, velocity-area studies, and logarithmic plotting. The daily mean discharge is computed from gage heights and rating tables, then the monthly and yearly mean discharges are computed from the daily values. If the stage-discharge relation is subject to change because of frequent or continual change in the physical features of the stream channel, the daily mean discharge is computed by the shifting-control method in which correction factors based on individual discharge measurements and notes by engineers and observers are used when applying the gage heights to the rating tables. If the stage-discharge relation for a station is temporarily changed by the presence of aquatic growth or debris on the controlling section, the daily mean discharge is computed by the shifting-control method.

The stage-discharge relation at some stream-gaging stations is affected by backwater from reservoirs, tributary streams, or other sources. Such an occurrence necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in computing discharge. The slope or fall is obtained by means of an auxiliary gage at some distance from the base gage.

An index velocity is measured using ultrasonic or acoustic instruments at some stream-gaging stations and this index velocity is used to calculate an average velocity for the flow in the stream. This average velocity along with a stage-area relation is then used to calculate average discharge.

At some stations, stage-discharge relation is affected by changing stage. At these stations, the rate of change in stage is used as a factor in computing discharge.

At some stream-gaging stations in the northern United States, the stage-discharge relation is affected by ice in the winter; therefore, computation of the discharge in the usual manner is impossible. Discharge for periods of ice effect is computed on the basis of gage-height record and occasional winter-discharge measurements. Consideration is given to the available information on temperature and precipitation, notes by gage observers and hydrologists, and comparable records of discharge from other stations in the same or nearby basins.

For a lake or reservoir station, capacity tables giving the volume or contents for any stage are prepared from stage-area relation curves defined by surveys. The application of the stage to the capacity table gives the contents, from which the daily, monthly, or yearly changes are computed.

If the stage-capacity curve is subject to changes because of deposition of sediment in the reservoir, periodic resurveys of the reservoir are necessary to define new stage-capacity curves. During the period between reservoir surveys, the computed contents may be increasingly in error due to the gradual accumulation of sediment.

For some stream-gaging stations, periods of time occur when no gage-height record is obtained or the recorded gage height is faulty and cannot be used to compute daily discharge or contents. Such a situation can happen when the recorder stops or otherwise fails to operate properly, the intakes are plugged, the float is frozen in the well, or for various other reasons. For such periods, the daily discharges are estimated on the basis of recorded range in stage, prior and subsequent records, discharge measurements, weather records, and comparison with records from other stations in the same or nearby basins. Likewise, lake or reservoir volumes may be estimated on the basis of operator's log, prior and subsequent records, inflow-outflow studies, and other information.

Data Presentation

The records published for each continuous-record surface-water discharge station (stream-gaging station) consist of five parts: (1) the station manuscript or description; (2) the data table of daily mean values of discharge for the current water year with summary data; (3) a tabular statistical summary of monthly mean flow data for a designated period, by water year; (4) a summary statistics table that includes statistical data of annual, daily, and instantaneous flows as well as

data pertaining to annual runoff, 7-day low-flow minimums, and flow duration; and (5) a hydrograph of discharge.

Station Manuscript

The manuscript provides, under various headings, descriptive information, such as station location; period of record; historical extremes outside the period of record; record accuracy; and other remarks pertinent to station operation and regulation. The following information, as appropriate, is provided with each continuous record of discharge or lake content. Comments follow that clarify information presented under the various headings of the station description.

LOCATION.—Location information is obtained from the most accurate maps available. The location of the gaging station with respect to the cultural and physical features in the vicinity and with respect to the reference place mentioned in the station name is given. River mileages, given for most stations, were determined by methods given in Montana Department of Natural Resources and Conservation River Mile Index.^{6,7,8}

DRAINAGE AREA.—Drainage areas are measured using the most accurate maps available. Because the type of maps available varies from one drainage basin to another, the accuracy of drainage areas likewise varies. Drainage areas are updated as better maps become available.

PERIOD OF RECORD.—This term indicates the time period for which records have been published for the station or for an equivalent station. An equivalent station is one that was in operation at a time that the present station was not and whose location was such that its flow reasonably can be considered equivalent to flow at the present station.

REVISED RECORDS.—If a critical error in published records is discovered, a revision is included in the first report published following discovery of the error.

GAGE.—The type of gage in current use, the datum of the current gage referred to a standard datum, and a condensed

history of the types, locations, and datums of previous gages are given under this heading.

REMARKS.—All periods of estimated daily discharge either will be identified by date in this paragraph of the station description for water-discharge stations or flagged in the daily discharge table. (See section titled Identifying Estimated Daily Discharge.) Information is presented relative to the accuracy of the records, to special methods of computation, and to conditions that affect natural flow at the station. In addition, information may be presented pertaining to average discharge data for the period of record; to extremes data for the period of record and the current year; and, possibly, to other pertinent items. For reservoir stations, information is given on the dam forming the reservoir, the capacity, the outlet works and spillway, and the purpose and use of the reservoir.

COOPERATION.—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

EXTREMES OUTSIDE PERIOD OF RECORD.—Information here documents major floods or unusually low flows that occurred outside the stated period of record. The information may or may not have been obtained by the USGS.

REVISIONS.—Records are revised if errors in published records are discovered. Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based National data system, NWISWeb (<http://water.usgs.gov/nwis/nwis>). Users are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent data updates. Updates to NWISWeb are made on an annual basis.

Although rare, occasionally the records of a discontinued gaging station may need revision. Because no current or, possibly, future station manuscript would be published for these stations to document the revision in a REVISED RECORDS entry, users of data for these stations who obtained the record from previously published data reports may wish to contact the District Office (address given on the back of the title page of this report) to determine if the published records were revised after the station was discontinued. If, however, the data for a discontinued station were obtained by computer retrieval, the data would be current. Any published revision of data is always accompanied by revision of the corresponding data in computer storage.

Manuscript information for lake or reservoir stations differs from that for stream stations in the nature of the

-
6. Montana Department of Natural Resources and Conservation, 1976, River mile index of the Yellowstone River: Helena, Mont., 61 p.
 7. Montana Department of Natural Resources and Conservation, 1979, River mile index of the Missouri River: Helena, Mont., 142 p.
 8. Montana Department of Natural Resources and Conservation, 1984, River mile index of the Columbia River basin: Helena, Mont., p. 1-76.

REMARKS and in the inclusion of a stage-capacity table when daily volumes are given.

Data Table of Daily Mean Values

The daily table of discharge records for stream-gaging stations gives mean discharge for each day of the water year. In the monthly summary for the table, the line headed TOTAL gives the sum of the daily figures for each month; the line headed MEAN gives the arithmetic average flow in cubic feet per second for the month; and the lines headed MAX and MIN give the maximum and minimum daily mean discharges, respectively, for each month. Discharge for the month is expressed in cubic feet per second per square mile (line headed CFSM); or in inches (line headed IN); or in acre-feet (line headed AC-FT). Values for cubic feet per second per square mile and runoff in inches or in acre-feet may be omitted if extensive regulation or diversion is in effect or if the drainage area includes large noncontributing areas. At some stations, monthly and (or) yearly observed discharges are adjusted for reservoir storage or diversion, or diversion data or reservoir volumes are given. These values are identified by a symbol and a corresponding footnote.

Statistics of Monthly Mean Data

A tabular summary of the mean (line headed MEAN), maximum (MAX), and minimum (MIN) of monthly mean flows for each month for a designated period is provided below the mean values table. The water years of the first occurrence of the maximum and minimum monthly flows are provided immediately below those values. The designated period will be expressed as FOR WATER YEARS ___-___, BY WATER YEAR (WY), and will list the first and last water years of the range of years selected from the PERIOD OF RECORD paragraph in the station manuscript. The designated period will consist of all of the station record within the specified water years, including complete months of record for partial water years, and may coincide with the period of record for the station. The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated in the manuscript.

Summary Statistics

A table titled SUMMARY STATISTICS follows the statistics of monthly mean data tabulation. This table consists of four columns with the first column containing the line headings of the statistics being reported. The table provides a statistical summary of yearly, daily, and instantaneous flows, not only for the current water year but also for the previous calendar year and for a designated period, as appropriate. The designated period selected, WATER YEARS ___-___, will consist of all of the station records within the specified

water years, including complete months of record for partial water years, and may coincide with the period of record for the station. The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated in the manuscript. All of the calculations for the statistical characteristics designated ANNUAL (see line headings below), except for the ANNUAL 7-DAY MINIMUM statistic, are calculated for the designated period using complete water years. The other statistical characteristics may be calculated using partial water years.

The date or water year, as appropriate, of the first occurrence of each statistic reporting extreme values of discharge is provided adjacent to the statistic. Repeated occurrences may be noted in the REMARKS paragraph of the manuscript or in footnotes. Because the designated period may not be the same as the station period of record published in the manuscript, occasionally the dates of occurrence listed for the daily and instantaneous extremes in the designated-period column may not be within the selected water years listed in the heading. When the dates of occurrence do not fall within the selected water years listed in the heading, it will be noted in the REMARKS paragraph or in footnotes. Selected streamflow duration-curve statistics and runoff data also are given. Runoff data may be omitted if extensive regulation or diversion of flow is in effect in the drainage basin.

The following summary statistics data are provided with each continuous record of discharge. Comments that follow clarify information presented under the various line headings of the SUMMARY STATISTICS table.

ANNUAL TOTAL.—The sum of the daily mean values of discharge for the year.

ANNUAL MEAN.—The arithmetic mean for the individual daily mean discharges for the year noted or for the designated period.

HIGHEST ANNUAL MEAN.—The maximum annual mean discharge occurring for the designated period.

LOWEST ANNUAL MEAN.—The minimum annual mean discharge occurring for the designated period.

HIGHEST DAILY MEAN.—The maximum daily mean discharge for the year or for the designated period.

LOWEST DAILY MEAN.—The minimum daily mean discharge for the year or for the designated period.

ANNUAL 7-DAY MINIMUM.—The lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day

minimum flows use a climatic year (April 1-March 31). The date shown in the summary statistics table is the initial date of the 7-day period. This value should not be confused with the 7-day 10-year low-flow statistic.

MAXIMUM PEAK FLOW.—The maximum instantaneous peak discharge occurring for the water year or designated period. Occasionally the maximum flow for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak flow is given in the table and the maximum flow may be reported in a footnote or in the REMARKS paragraph in the manuscript.

MAXIMUM PEAK STAGE.—The maximum instantaneous peak stage occurring for the water year or designated period. Occasionally the maximum stage for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak stage is given in the table and the maximum stage may be reported in the REMARKS paragraph in the manuscript or in a footnote. If the dates of occurrence of the maximum peak stage and maximum peak flow are different, the REMARKS paragraph in the manuscript or a footnote may be used to provide further information.

INSTANTANEOUS LOW FLOW.—The minimum instantaneous discharge occurring for the water year or for the designated period.

ANNUAL RUNOFF.—Indicates the total quantity of water in runoff for a drainage area for the year. Data reports may use any of the following units of measurement in presenting annual runoff data:

Acre-foot (AC-FT) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Cubic feet per square mile (CFSM) is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

Inches (INCHES) indicate the depth to which the drainage area would be covered if all of the runoff for a given time period were uniformly distributed on it.

10 PERCENT EXCEEDS.—The discharge that has been exceeded 10 percent of the time for the designated period.

50 PERCENT EXCEEDS.—The discharge that has been exceeded 50 percent of the time for the designated period.

90 PERCENT EXCEEDS.—The discharge that has been exceeded 90 percent of the time for the designated period.

Identifying Estimated Daily Discharge

Estimated daily-discharge values published in the water-discharge tables of annual State data reports are identified. This identification is shown either by flagging individual daily values with the letter “e” and noting in a table footnote, “e—Estimated,” or by listing the dates of the estimated record in the REMARKS paragraph of the station description.

Accuracy of Field Data and Computed Results

The accuracy of streamflow data depends primarily on (1) the stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements, and (2) the accuracy of observations of stage, measurements of discharge, and interpretations of records.

The degree of accuracy of the records is stated in the REMARKS in the station description. “Excellent” indicates that about 95 percent of the daily discharges are within 5 percent of the true value; “good” within 10 percent; and “fair,” within 15 percent. “Poor” indicates that daily discharges have less than “fair” accuracy. Different accuracies may be attributed to different parts of a given record.

Values of daily mean discharge in this report are shown to the nearest hundredth of a cubic foot per second for discharges of less than 1 ft³/s; to the nearest tenths between 1.0 and 10 ft³/s; to whole numbers between 10 and 1,000 ft³/s; and to 3 significant figures above 1,000 ft³/s. The number of significant figures used is based solely on the magnitude of the discharge value. The same rounding rules apply to discharge values listed for partial-record stations.

Discharge at many stations, as indicated by the monthly mean, may not reflect natural runoff due to the effects of diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, values of cubic feet per second per square mile and of runoff in inches are not published unless satisfactory adjustments can be made for diversions, for changes in contents of reservoirs, or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur

if adjustments or losses are large in comparison with the observed discharge.

(see address that is shown on the back of the title page of this report).

Other Data Records Available

Information of a more detailed nature than that published for most of the stream-gaging stations such as discharge measurements, gage-height records, and rating tables is available from the District office. Also, most stream-gaging station records are available in computer-usable form and many statistical analyses have been made.

Information on the availability of unpublished data or statistical analyses may be obtained from the District office

Publications

The annual series of Water-Supply Papers that give information on quantity of surface waters in Montana are given in table 7. Data for the Hudson Bay basin is given in Part 5, for the Missouri River basin in Part 6, and for the Columbia River basin in Part 12.

Table 7. Water-Supply Paper numbers and parts for surface-water stations, 1899-1970.

Year	Part 5	Part 6	Part 12	Year	Part 5	Part 6	Part 12
1899		36,37	38				
1900	49	49	51,52				
1901	66,75	66,75	66,75	1926	625	626	632
1902	83,85	84	85	1927	645	646	652
1903	98,99,100	99	100	1928	665	666	672
1904	130	130	135	1929	685	686	692
1905	171	172	178	1930	700	701	707
1906	207	208	214	1931	715	716	722
1907	245	246	252	1932	730	731	737
1908	245	246	252	1933	745	746	752
1909	265	266	272	1934	760	761	767
1910	285	286	292	1935	785	786	792
1911	305	306	312	1936	805	806	812
1912	325	326	332A	1937	825	826	832
1913	355	356	362A	1938	855	856	862
1914	385	386	392	1939	875	876	882
1915	405	406	412	1940	895	896	902
1916	435	436	442	1941	925	926	932
1917	455	456	462	1942	955	956	962
1918	475	476	482	1943	975	976	982
1919	505	506	512	1944	1005	1006	1012
1920	505	506	512	1945	1035	1036	1042
1921	525	526	532	1946	1055	1056	1062
1922	545	546	552	1947	1085	1086	1092
1923	565	566	572	1948	1115	1116	1122
1924	585	586	592	1949	1145	1146	1152
1925	605	606	612	1950	1175	1176	1182

Table 7. Water-Supply Paper numbers and parts for surface-water stations, 1899-1970--Continued.

Year	Part 5	Part 6	Part 12	Year	Part 5	Part 6	Part 12
1951	1208	1209	1216	1961-65	1913	1916	1933
1952	1238	1239	1246	1966-70	2113	2116	2133
1953	1278	1279	1286				
1954	1338	1339	1346	1950	1308	1309	1316
1955	1388	1389	1396	Compilation			
1956	1438	1439	1446	1960	1728	1729	1736
1957	1508	1509	1516	Compilation			
1958	1558	1559	1566				
1959	1628	1629	1636				
1960	1708	1709	1716				

EXPLANATION OF PRECIPITATION RECORDS

Data Collection and Computation

Rainfall data generally are collected using electronic data loggers that measure the rainfall in 0.01-inch increments every 15 minutes using either a tipping-bucket rain gage or a collection well gage. Twenty-four hour rainfall totals are tabulated and presented. A 24-hour period extends from just past midnight of the previous day to midnight of the current day. Snowfall-affected data can result during cold weather when snow fills the rain-gage funnel and then melts as temperatures rise. Snowfall-affected data are subject to errors. Missing values are indicated by this symbol “---” in the table.

Data Presentation

Precipitation records collected at surface-water gaging stations are identified with the same station number and name as the stream-gaging station. Where a surface-water daily-record station is not available, the precipitation record is published with its own name and latitude-longitude identification number.

Information pertinent to the history of a precipitation station is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, period of record, and general remarks.

The following information is provided with each precipitation station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—See Data Presentation in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

INSTRUMENTATION.—Information on the type of rainfall collection system is given.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of records.

EXPLANATION OF WATER-QUALITY RECORDS

Collection and Examination of Data

Surface-water samples for analysis usually are collected at or near stream-gaging stations. The quality-of-water records are given immediately following the discharge records at these stations.

The descriptive heading for water-quality records gives the period of record for all water-quality data; the period of daily record for parameters that are measured on a daily basis (specific conductance, water temperature, sediment discharge, and so forth); extremes for the current year; and general remarks.

For ground-water records, no descriptive statements are given; however, the well number, depth of well, sampling date, or other pertinent data are given in the table containing the chemical analyses of the ground water.

Water Analysis

Most of the methods used for collecting and analyzing water samples are described in the TWRI, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

One sample can define adequately the water quality at a given time if the mixture of solutes throughout the stream cross-section is homogeneous. However, the concentration of solutes at different locations in the cross section may vary widely with different rates of water discharge, depending on the source of material and the turbulence and mixing of the stream. Some streams must be sampled at several verticals to obtain a representative sample needed for an accurate mean concentration and for use in calculating load.

Chemical-quality data published in this report are considered to be the most representative values available for the stations listed. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. In the rare case where an apparent inconsistency exists between a reported pH value and the relative abundance of carbon dioxide species (carbonate and bicarbonate), the inconsistency is the result of a slight uptake of carbon dioxide from the air by the sample between measurement of pH in the field and determination of carbonate and bicarbonate in the laboratory.

For chemical-quality stations equipped with digital monitors, the records consist of daily maximum and minimum values (and sometimes mean or median values) for each constituent measured, and are based on 15-minute or 1-hour intervals of recorded data beginning at 0000 hours and ending at 2359 hours for the day of record.

SURFACE-WATER-QUALITY RECORDS

Records of surface-water quality ordinarily are obtained at or near stream-gaging stations because discharge data are

useful in the interpretation of surface-water quality. Records of surface-water quality in this report involve a variety of types of data and measurement frequencies.

Classification of Records

Water-quality data for surface-water sites are grouped into one of three classifications. A *continuous-record station* is a site where data are collected on a regularly scheduled basis. Frequency may be one or more times daily, weekly, monthly, or quarterly. A *partial-record station* is a site where limited water-quality data are collected systematically over a period of years. Frequency of sampling is usually less than quarterly. A *miscellaneous sampling site* is a location other than a continuous- or partial-record station, where samples are collected to give better areal coverage to define water-quality conditions in the river basin.

A careful distinction needs to be made between *continuous records* as used in this report and *continuous recordings* that refer to a continuous graph or a series of discrete values recorded at short intervals. Some records of water quality, such as temperature and specific conductance, may be obtained through continuous recordings; however, because of costs, most data are obtained only monthly or less frequently. Locations of stations for which records on the quality of surface water appear in this report are shown in figure 7.

Accuracy of the Records

One of four accuracy classifications is applied for measured physical properties at continuous-record stations on a scale ranging from poor to excellent. The accuracy rating is based on data values recorded before any shifts or corrections are made. Additional consideration also is given to the amount of publishable record and to the amount of data that have been corrected or shifted.

Table 8. Rating classifications for continuous water-quality records.

[≤, less than or equal to; ±, plus or minus value shown; °C, degree Celsius; >, greater than; %, percent; mg/L, milligram per liter; pH unit, standard pH unit]

Measured physical property	Rating			
	Excellent	Good	Fair	Poor
Water temperature	≤ ±0.2 °C	> ±0.2 to 0.5 °C	> ±0.5 to 0.8 °C	> ±0.8 °C
Specific conductance	≤ ±3%	> ±3 to 10%	> ±10 to 15%	> ±15%
Dissolved oxygen	≤ ±0.3 mg/L	> ±0.3 to 0.5 mg/L	> ±0.5 to 0.8 mg/L	> ±0.8 mg/L
pH	≤ ±0.2 unit	> ±0.2 to 0.5 unit	> ±0.5 to 0.8 unit	> ±0.8 unit
Turbidity	≤ ±5%	> ±5 to 10%	> ±10 to 15%	> ±15%

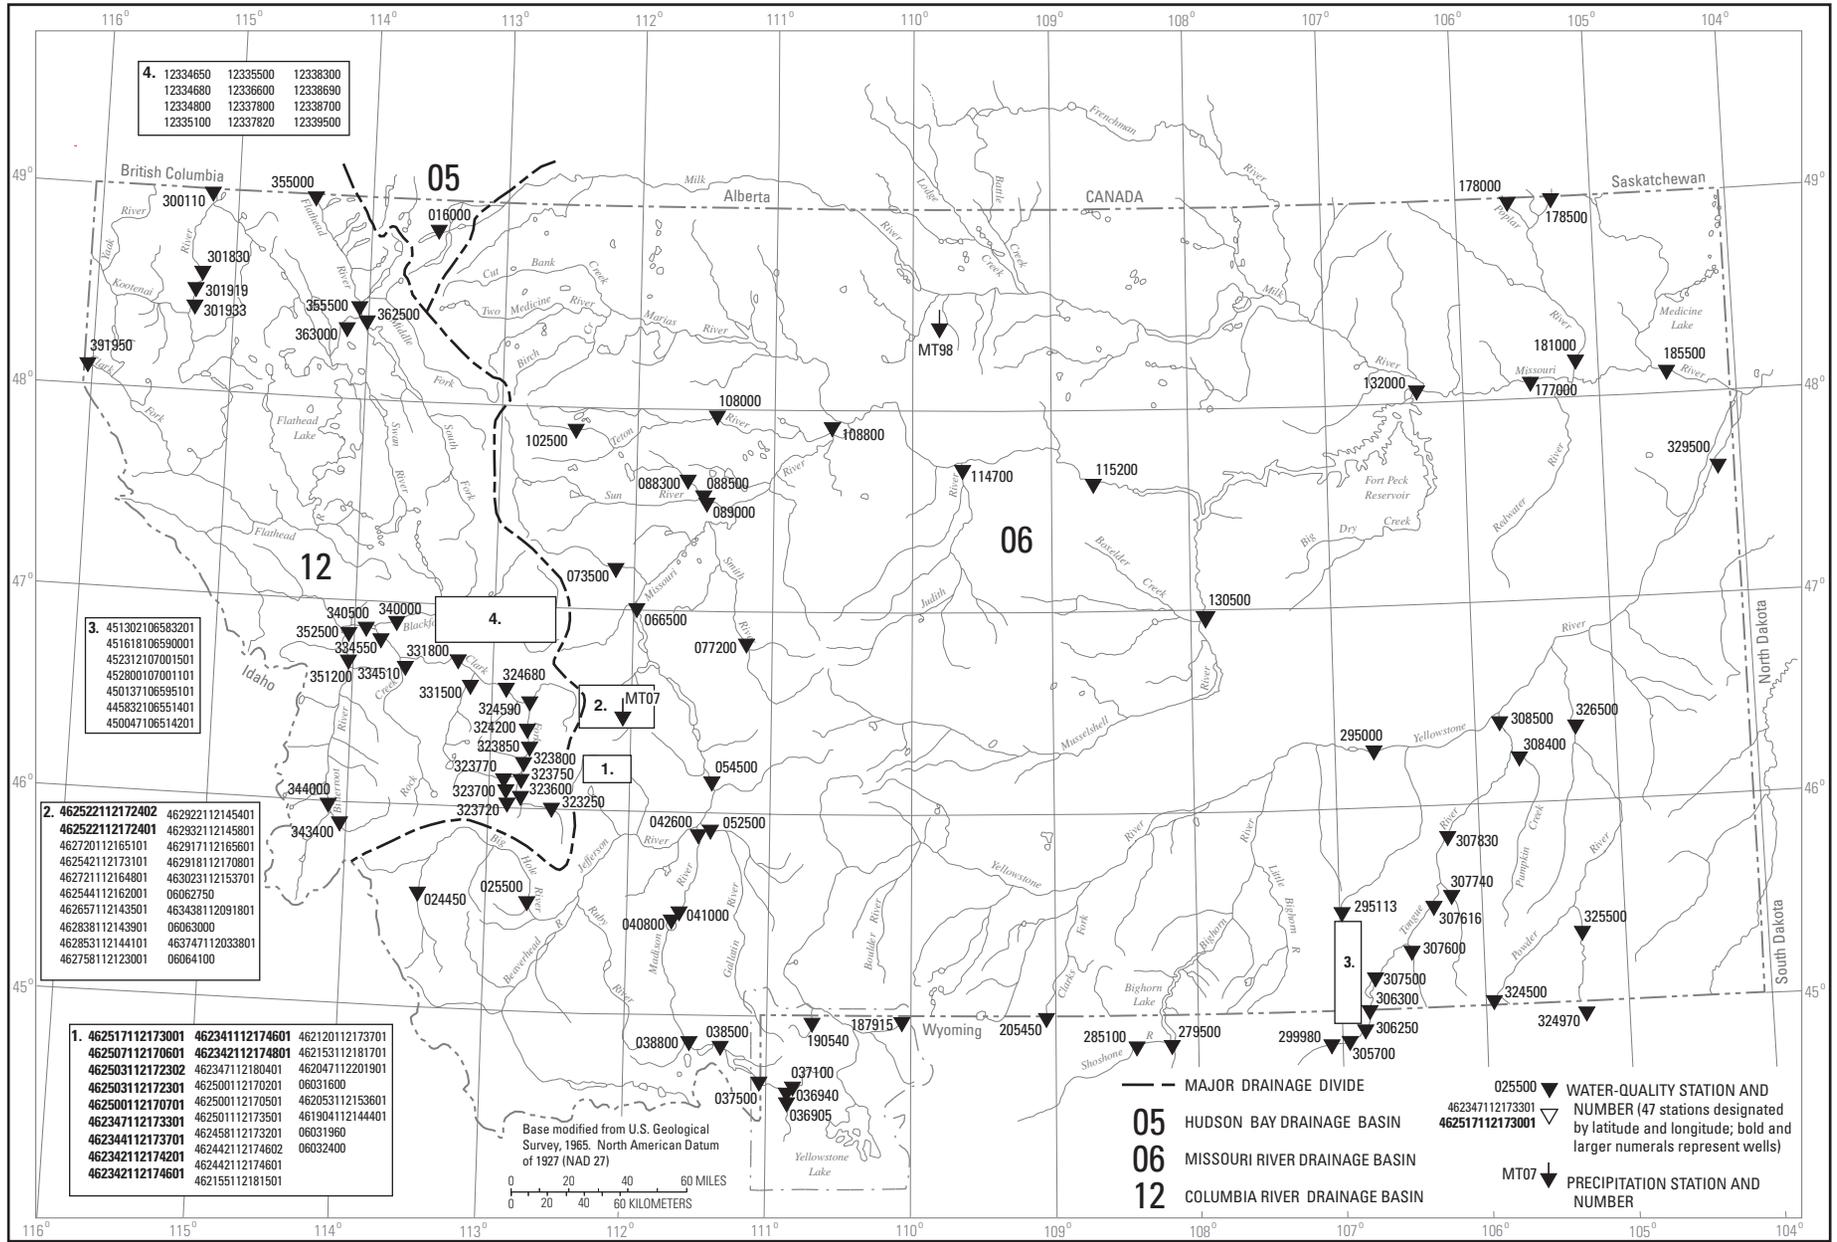


Figure 7. Location of water-quality and precipitation stations in Montana and adjacent areas, water year 2004.

Arrangement of Records

Water-quality records collected at a surface-water daily record station are published immediately following that record, regardless of the frequency of sample collection. Station number and name are the same for both records. Where a surface-water daily record station is not available or where the water quality differs significantly from that at the nearby surface-water station, the continuing water-quality record is published with its own station number and name in the regular downstream-order sequence. Water-quality data for partial-record stations and for miscellaneous sampling sites appear in separate tables following the table of discharge measurements at miscellaneous sites.

On-Site Measurements and Sample Collection

In obtaining water-quality data, a major concern is assuring that the data obtained represent the naturally occurring quality of the water. To ensure this, certain measurements, such as water temperature, pH, and dissolved oxygen, must be made on site when the samples are taken. To assure that measurements made in the laboratory also represent the naturally occurring water, carefully prescribed procedures must be followed in collecting the samples, in treating the samples to prevent changes in quality pending analysis, and in shipping the samples to the laboratory. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRIs Book 1, Chapter D2; Book 3, Chapters A1, A3, and A4; and Book 9, Chapters A1-A9. Most of the methods used for collecting and analyzing water samples are described in the TWRIs, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Also, detailed information on collecting, treating, and shipping samples can be obtained from the USGS District office (see address that is shown on the back of title page in this report).

Water Temperature

Water temperatures are measured at most of the water-quality stations. In addition, water temperatures are taken at the time of discharge measurements for water-discharge stations. For stations where water temperatures are taken manually once or twice daily, the water temperatures are taken at about the same time each day. Large streams have a small diurnal temperature change; shallow streams may have a daily range of several degrees and may follow closely the changes in air temperature. Some streams may be affected by waste-heat discharges.

At stations where recording instruments are used, either mean temperatures or maximum and minimum temperatures for each day are published. Water temperatures measured at

the time of water-discharge measurements are on file in the District office.

Sediment

Suspended-sediment concentrations are determined from samples collected by using depth-integrating samplers. Samples usually are obtained at several verticals in the cross section, or a single sample may be obtained at a fixed point and a coefficient applied to determine the mean concentration in the cross section.

During periods of rapidly changing flow or rapidly changing concentration, samples may be collected more frequently (twice daily or, in some instances, hourly). The published sediment discharges for days of rapidly changing flow or concentration were computed by the subdivided-day method (time-discharge weighted average). Therefore, for those days when the published sediment discharge value differs from the value computed as the product of discharge times mean concentration times 0.0027, the reader can assume that the sediment discharge for that day was computed by the subdivided-day method. For periods when no samples were collected, daily discharges of suspended sediment were estimated on the basis of water discharge, sediment concentrations observed immediately before and after the periods, and suspended-sediment loads for other periods of similar discharge.

At other stations, suspended-sediment samples are collected periodically at many verticals in the stream cross section. Although data collected periodically may represent conditions only at the time of observation, such data are useful in establishing seasonal relations between quality and streamflow and in predicting long-term sediment-discharge characteristics of the stream.

In addition to the records of suspended-sediment discharge, records of the periodic measurements of the particle-size distribution of the suspended sediment and bed material are included for some stations.

Laboratory Measurements

Samples for biochemical oxygen demand (BOD) and indicator bacteria are analyzed locally. All other samples are analyzed in the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used in analyzing sediment samples and computing sediment records are given in TWRI, Book 5, Chapter C1. Methods used by the USGS laboratories are given in the TWRIs, Book 1, Chapter D2; Book 3, Chapter C2; and Book 5, Chapters A1, A3, and A4. The TWRI publications may be accessed from

<http://water.usgs.gov/pubs/twri/>. These methods are consistent with ASTM standards and generally follow ISO standards.

Data Presentation

For continuing-record stations, information pertinent to the history of station operation is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, drainage area, period of record, type of data available, instrumentation, general remarks, cooperation, and extremes for parameters currently measured daily. Tables of chemical, physical, biological, radiochemical data, and so forth, obtained at a frequency less than daily are presented first. Tables of “daily values” of specific conductance, pH, water temperature, dissolved oxygen, and suspended sediment then follow in sequence.

In the descriptive headings, if the location is identical to that of the discharge gaging station, neither the LOCATION nor the DRAINAGE AREA statements are repeated. The following information is provided with each continuous-record station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

DRAINAGE AREA.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—This indicates the time periods for which published water-quality records for the station are available. The periods are shown separately for records of parameters measured daily or continuously and those measured less than daily. For those measured daily or continuously, periods of record are given for the parameters individually.

INSTRUMENTATION.—Information on instrumentation is given only if a water-quality monitor temperature record, sediment pumping sampler, or other sampling device is in operation at a station.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of the records.

COOPERATION.—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

EXTREMES.—Maximums and minimums are given only for parameters measured daily or more frequently. For parameters measured weekly or less frequently, true maximums or minimums may not have been obtained. Extremes, when given, are provided for both the period of record and for the current water year.

REVISIONS.—Records are revised if errors in published water-quality records are discovered. Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based National data system, NWISWeb (<http://waterdata.usgs.gov/nwis>). Users of USGS water-quality data are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent updates. Updates to the NWISWeb are made on an annual basis.

The surface-water-quality records for partial-record stations and miscellaneous sampling sites are published in separate tables following the table of discharge measurements at miscellaneous sites. No descriptive statements are given for these records. Each station is published with its own station number and name in the regular downstream-order sequence.

Remark Codes

The following remark codes may appear with the water-quality data in this section:

Printed Output	Remark
E	Value is estimated.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
M	Presence of material verified, but not quantified.
N	Presumptive evidence of presence of material.
U	Material specifically analyzed for, but not detected.
A	Value is an average.
V	Analyte was detected in both the environmental sample and the associated blanks.
S	Most probable value.

Water-Quality Control Data

The USGS National Water Quality Laboratory collects quality-control data on a continuing basis to evaluate selected analytical methods to determine long-term method detection levels (LT-MDLs) and laboratory reporting levels

(LRLs). These values are re-evaluated each year on the basis of the most recent quality-control data and, consequently, may change from year to year.

This reporting procedure limits the occurrence of false positive error. Falsely reporting a concentration greater than the LT-MDL for a sample in which the analyte is not present is 1 percent or less. Application of the LRL limits the occurrence of false negative error. The chance of falsely reporting a non-detection for a sample in which the analyte is present at a concentration equal to or greater than the LRL is 1 percent or less.

Accordingly, concentrations are reported as less than LRL for samples in which the analyte was either not detected or did not pass identification. Analytes detected at concentrations between the LT-MDL and the LRL and that pass identification criteria are estimated. Estimated concentrations will be noted with a remark code of "E." These data should be used with the understanding that their uncertainty is greater than that of data reported without the E remark code.

Data generated from quality-control (QC) samples are a requisite for evaluating the quality of the sampling and processing techniques as well as data from the actual samples themselves. Without QC data, environmental sample data cannot be adequately interpreted because the errors associated with the sample data are unknown. The various types of QC samples collected by this District office are described in the following section. Procedures have been established for the storage of water-quality-control data within the USGS. These procedures allow for storage of all derived QC data and are identified so that they can be related to corresponding environmental samples. These data are not presented in this report but are available from the District office.

Blank Samples

Blank samples are collected and analyzed to ensure that environmental samples have not been contaminated in the overall data-collection process. The blank solution used to develop specific types of blank samples is a solution that is free of the analytes of interest. Any measured value signal in a blank sample for an analyte (a specific component measured in a chemical analysis) that was absent in the blank solution is believed to be due to contamination. Many types of blank samples are possible; each is designed to segregate a different part of the overall data-collection process. The types of blank samples collected in this district are:

Field blank—A blank solution that is subjected to all aspects of sample collection, field processing preservation,

transportation, and laboratory handling as an environmental sample.

Trip blank—A blank solution that is put in the same type of bottle used for an environmental sample and kept with the set of sample bottles before and after sample collection.

Equipment blank—A blank solution that is processed through all equipment used for collecting and processing an environmental sample (similar to a field blank but normally done in the more controlled conditions of the office).

Sampler blank—A blank solution that is poured or pumped through the same field sampler used for collecting an environmental sample.

Filter blank—A blank solution that is filtered in the same manner and through the same filter apparatus used for an environmental sample.

Splitter blank—A blank solution that is mixed and separated using a field splitter in the same manner and through the same apparatus used for an environmental sample.

Preservation blank—A blank solution that is treated with the sampler preservatives used for an environmental sample.

Reference Samples

Reference material is a solution or material prepared by a laboratory. The reference material composition is certified for one or more properties so that it can be used to assess a measurement method. Samples of reference material are submitted for analysis to ensure that an analytical method is accurate for the known properties of the reference material. Generally, the selected reference material properties are similar to the environmental sample properties.

Replicate Samples

Replicate samples are a set of environmental samples collected in a manner such that the samples are thought to be essentially identical in composition. Replicate is the general case for which a duplicate is the special case consisting of two samples. Replicate samples are collected and analyzed to establish the amount of variability in the data contributed by some part of the collection and analytical process. Many types of replicate samples are possible, each of which may yield slightly different results in a dynamic hydrologic setting, such as a flowing stream. The types of replicate samples collected in this district are:

Concurrent samples—A type of replicate sample in which the samples are collected simultaneously with two or more samplers or by using one sampler and alternating the collection of samples into two or more compositing containers.

Sequential samples—A type of replicate sample in which the samples are collected one after the other, typically over a short time.

Split sample—A type of replicate sample in which a sample is split into subsamples, each subsample contemporaneous in time and space.

Spike Samples

Spike samples are samples to which known quantities of a solution with one or more well-established analyte concentrations have been added. These samples are analyzed to determine the extent of matrix interference or degradation on the analyte concentration during sample processing and analysis.

Publications

The annual series of Water-Supply Papers that gives information on quality of surface waters in Montana is shown in the following table. Data for Hudson Bay and Missouri River basins are given in parts 5-6 and data for Upper Columbia River basin are given in part 12.

Table 9. Water-Supply Paper numbers and parts for water-quality stations, 1947-70.

Year	Parts 5-6	Part 12	Year	Parts 5-6	Part 12
1946	1050	---	1961	1883	1885
1947	1102	---	1962	1943	1945
1948	1132	---	1963	1949	1951
1949	1162	1163	1964	1956	1959
1950	1187	1189	1965	1963	1966
1951	1198	1200	1966	1993	1996
1952	1251	1253	1967	2013	2016
1953	1291	1293	1968	2094, 2095	2100
1954	1351	1353	1969	2145	2150
1955	1401	1403	1970	2155	2160
1956	1451	1453			
1957	1521	1523			
1958	1572	1574			
1959	1643	1645			
1960	1743	1745			

EXPLANATION OF GROUND-WATER-LEVEL RECORDS

Generally, only ground-water-level data from selected wells with continuous recorders from a basic network of observation wells are published in this report. This basic network contains observation wells located so that the most significant data are obtained from the fewest wells in the most important aquifers.

Site Identification Numbers

Each well is identified by means of (1) a 15-digit number that is based on latitude and longitude and (2) a local number that is produced for local needs. (See NUMBERING SYSTEM FOR WELLS AND MISCELLANEOUS SITES in this report for a detailed explanation.)

Data Collection and Computation

Measurements are made in many types of wells, under varying conditions of access and at different temperatures; hence, neither the method of measurement nor the equipment can be standardized. At each observation well, however, the equipment and techniques used are those that will ensure that measurements at each well are consistent.

Most methods for collecting and analyzing water samples are described in the TWRI's referred to in the On-site Measurements and Sample Collection and the Laboratory Measurements sections in this report. In addition, TWRI Book 1, Chapter D2, describes guidelines for the collection and field analysis of ground-water samples for selected unstable constituents. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRI's Book 1, Chapter D2; Book 3, Chapters A1, A3, and A4; and Book 9, Chapters A1 through A9. The TWRI publications may be accessed from <http://water.usgs.gov/pubs/twri/>. The values in this report represent water-quality conditions at the time of sampling, as much as possible, and that are consistent with available sampling techniques and methods of analysis. These methods are consistent with ASTM standards and generally follow ISO standards. Trained personnel collected all samples. The wells sampled were pumped long enough to ensure that the water collected came directly from the aquifer and had not stood for a long time in the well casing where it would have been exposed to the atmosphere and to the material, possibly metal, comprising the casings.

Water-level measurements in this report are given in feet with reference to land-surface datum (lsd). Land-surface datum is a datum plane that is approximately at land surface

at each well. If known, the elevation of the land-surface datum above sea level is given in the well description. The height of the measuring point (MP) above or below land-surface datum is given in each well description. Water levels in wells equipped with recording gages are reported for every fifth day and the end of each month (EOM).

Water levels are reported to as many significant figures as can be justified by the local conditions. For example, in a measurement of a depth of water of several hundred feet, the error in determining the absolute value of the total depth to water may be a few tenths of a foot, whereas the error in determining the net change of water level between successive measurements may be only a hundredth or a few hundredths of a foot. For lesser depths to water the accuracy is greater. Accordingly, most measurements are reported to a hundredth of a foot, but some are given only to a tenth of a foot or a larger unit.

Data Presentation

Water-level data are presented in alphabetical order by county. The primary identification number for a given well is the 15-digit site identification number that appears in the upper left corner of the table. The secondary identification number is the local or county well number. Well locations are shown in figure 8.

Each well record consists of three parts: the well description, the data table of water levels observed during the water year, and, for most wells, a hydrograph following the data table. Well descriptions are presented in the headings preceding the tabular data.

The following comments clarify information presented in these various headings.

LOCATION.—This paragraph follows the well-identification number and reports the hydrologic-unit number and a geographic point of reference. Latitudes and longitudes used in this report are reported as North American Datum of 1927 unless otherwise specified.

HYDROGEOLOGIC UNIT.—This entry designates by name and geologic age the aquifer that the well taps.

WELL CHARACTERISTICS.—This entry describes the well in terms of depth, casing diameter and depth or screened interval, method of construction, use, and changes since construction.

INSTRUMENTATION.—This paragraph provides information on both the frequency of measurement and the collection method used, allowing the user to better evaluate the

reported water-level extremes by knowing whether they are based on continuous, monthly, or some other frequency of measurement.

DATUM.—This entry describes both the measuring point and the land-surface elevation at the well. The altitude of the land-surface datum is described in feet above the altitude datum; it is reported with a precision depending on the method of determination. The measuring point is described physically (such as top of casing, top of instrument shelf, and so forth), and in relation to land surface (such as 1.3 ft above land-surface datum). The elevation of the land-surface datum is described in feet above National Geodetic Vertical Datum of 1929 (NGVD 29); it is reported with a precision depending on the method of determination.

REMARKS.—This entry describes factors that may influence the water level in a well or the measurement of the water level, when various methods of measurement were begun, and the network (climatic, terrane, local, or areal effects) or the special project to which the well belongs.

PERIOD OF RECORD.—This entry indicates the time period for which records are published for the well, the month and year at the start of publication of water-level records by the USGS, and the words “to current year” if the records are to be continued into the following year. Time periods for which water-level records are available, but are not published by the USGS, may be noted.

EXTREMES FOR PERIOD OF RECORD.—This entry contains the highest and lowest instantaneously recorded or measured water levels of the period of published record, with respect to land-surface datum or sea level, and the dates of occurrence.

Water-Level Tables

A table of water levels follows the well description for each well. Water-level measurements in this report are given in feet with reference to either sea level or land-surface datum (lsd). Missing records are indicated by dashes in place of the water-level value.

For wells not equipped with recorders, water-level measurements were obtained periodically by steel or electric tape. Tables of periodic water-level measurements in these wells show the date of measurement and the measured water-level value.

Hydrographs

Hydrographs are a graphic display of water-level fluctuations over a period of time. In this report, current water

year and, when appropriate, period-of-record hydrographs are shown. Hydrographs that display periodic water-level measurements show points that may be connected with a dashed line from one measurement to the next. Hydrographs that display recorder data show a solid line representing the mean water level recorded for each day. Missing data are indicated by a blank space or break in a hydrograph. Missing data may occur as a result of recorder malfunctions, battery failures, or mechanical problems related to the response of the recorder's float mechanism to water-level fluctuations in a well.

GROUND-WATER-QUALITY DATA

Data Collection and Computation

The ground-water-quality data in this report were obtained as a part of special studies in specific areas. Consequently, a number of chemical analyses are presented for some wells within a county but not for others. As a result, the records for this year, by themselves, do not provide a balanced view of ground-water quality Statewide.

Most methods for collecting and analyzing water samples are described in the TWRI, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRI, Book 1, Chapter D2; Book 5, Chapters A1, A3, and A4; and Book 9, Chapters A1-A6. Also, detailed information on collecting, treating, and shipping samples may be obtained from the USGS District office (see address shown on back of title page in this report).

Laboratory Measurements

Analysis for sulfide and measurement of alkalinity, pH, water temperature, specific conductance, and dissolved oxygen are performed on site. All other sample analyses are performed at the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used by the USGS laboratory are given in TWRI, Book 1, Chapter D2; and Book 5, Chapters A1, A3, and A4, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

Publications

Publication of ground-water level data for the United States in Water-Supply Papers was begun by the USGS in 1935. From 1935 through 1939, a single Water-Supply Paper for each year covering the entire nation was issued (Water-Supply Papers 777, 817, 840, 845, and 886). From 1940 through 1974, separate Water-Supply Papers were issued for 6 sections of the United States. Water-level data

for Montana are in the Water-Supply Papers listed in the following table, each report containing one or more calendar years (January-December) of data. Data in this report are for the 12-month water year ending September 30. Information about reports and other data on ground water in Montana may be obtained from the District office, at the address given on the back of the title page.

Table 10. Water-Supply Paper numbers and parts for ground-water stations, 1940-74.

Year	WSP No. Pt. 5	Year	WSP No. Pt. 5	Year	WSP No. Pt.5
1940	910	1947	1100	1954	1325
1941	940	1948	1130	1955	1408
1942	948	1949	1160	1956-60	1760
1943	990	1950	1169	1961-65	1845
1944	1020	1951	1195	1966-70	1980
1945	1027	1952	1225	1971-74	2161
1946	1075	1953	1269		

ACCESS TO USGS WATER DATA

The USGS provides near real-time stage and discharge data for many of the gaging stations equipped with the necessary telemetry and historic daily mean and peak-flow discharge data for most current or discontinued gaging stations through the World Wide Web (WWW). These data may be accessed from <http://water.usgs.gov>.

Water-quality data and ground-water data also are available through the WWW. In addition, data can be provided in various machine-readable formats on various media. Information about the availability of specific types of data or products, and user charges, can be obtained locally from each Water Discipline District Office (see address that is shown on the back of the title page of this report).

DEFINITION OF TERMS

Specialized technical terms related to streamflow, water-quality, and other hydrologic data, as used in this report, are defined below. Terms such as algae, water level, and precipitation are used in their common everyday meanings, definitions of which are given in standard dictionaries. Not all terms defined in this alphabetical list apply to every State. See also table for converting English units to International System (SI) Units. Other glossaries that also define water-related terms are accessible from <http://water.usgs.gov/glossaries.html>.

Acid neutralizing capacity (ANC) is the equivalent sum of all bases or base-producing materials, solutes plus particulates, in an aqueous system that can be titrated with acid to an equivalence point. This term designates titration of an “unfiltered” sample (formerly reported as alkalinity).

Acre-foot (AC-FT, acre-ft) is a unit of volume, commonly used to measure quantities of water used or stored, equivalent to the volume of water required to cover 1 acre to a depth of 1 foot and equivalent to 43,560 cubic feet, 325,851 gallons, or 1,233 cubic meters. (See also “Annual runoff”)

Adenosine triphosphate (ATP) is an organic, phosphate-rich compound important in the transfer of energy in organisms. Its central role in living cells makes ATP an excellent indicator of the presence of living material in water. A measurement of ATP therefore provides a sensitive and rapid estimate of biomass. ATP is reported in micrograms per liter.

Adjusted discharge is discharge data that have been mathematically adjusted (for example, to remove the effects of a daily tide cycle or reservoir storage).

Algal growth potential (AGP) is the maximum algal dry weight biomass that can be produced in a natural water sample under standardized laboratory conditions. The growth potential is the algal biomass present at stationary phase and is expressed as milligrams dry weight of algae produced per liter of sample. (See also “Biomass” and “Dry weight”)

Alkalinity is the capacity of solutes in an aqueous system to neutralize acid. This term designates titration of a “filtered” sample.

Annual runoff is the total quantity of water that is discharged (“runs off”) from a drainage basin in a year. Data reports may present annual runoff data as volumes in acre-feet, as discharges per unit of drainage area in cubic feet per second per square mile, or as depths of water on the drainage basin in inches.

Annual 7-day minimum is the lowest mean value for any 7-consecutive-day period in a year. Annual 7-day minimum values are reported herein for the calendar year and the water year (October 1 through September 30). Most low-flow frequency analyses use a climatic year (April 1-March 31), which tends to prevent the low-flow period from being artificially split between adjacent years. The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day, 10-year low-flow statistic.)

Aroclor is the registered trademark for a group of polychlorinated biphenyls that were manufactured by the Monsanto Company prior to 1976. Aroclors are assigned specific 4-digit reference numbers dependent upon molecular type and degree of substitution of the biphenyl ring hydrogen atoms by chlorine atoms. The first two digits of a numbered aroclor represent the molecular type, and the last two digits represent the percentage weight of the hydrogen-substituted chlorine.

Artificial substrate is a device that purposely is placed in a stream or lake for colonization of organisms. The artificial substrate simplifies the community structure by standardizing the substrate from which each sample is collected. Examples of artificial substrates are basket samplers (made of wire cages filled with clean streamside rocks) and multi-plate samplers (made of hardboard) for benthic organism collection, and plexiglass strips for periphyton collection. (See also “Substrate”)

Ash mass is the mass or amount of residue present after the residue from a dry-mass determination has been ashed in a muffle furnace at a temperature of 500°C for 1 hour. Ash mass of zooplankton and phytoplankton is expressed in grams per cubic meter (g/m^3), and periphyton and benthic organisms in grams per square meter (g/m^2). (See also “Biomass” and “Dry mass”)

Aspect is the direction toward which a slope faces with respect to the compass.

Bacteria are microscopic unicellular organisms, typically spherical, rodlike, or spiral and threadlike in shape, often clumped into colonies. Some bacteria cause disease, whereas others perform an essential role in nature in the recycling of materials; for example, by decomposing organic matter into a form available for reuse by plants.

Bankfull stage, as used in this report, is the stage at which a stream first overflows its natural banks formed by floods with 1- to 3-year recurrence intervals.

Base discharge (for peak discharge) is a discharge value, determined for selected stations, above which peak discharge data are published. The base discharge at each station is selected so that an average of about three peak flows per year will be published. (See also “Peak flow”)

Base flow is sustained flow of a stream in the absence of direct runoff. It includes natural and human-induced streamflows. Natural base flow is sustained largely by ground-water discharge.

Bed material is the sediment mixture of which a stream-bed, lake, pond, reservoir, or estuary bottom is composed. (See also “Bedload” and “Sediment”)

Bedload is material in transport that primarily is supported by the streambed. In this report, bedload is considered to consist of particles in transit from the bed to the top of the bedload sampler nozzle (an elevation ranging from 0.25 to 0.5 foot). These particles are retained in the bedload sampler. A sample collected with a pressure-differential bedload sampler also may contain a component of the suspended load.

Bedload discharge (tons per day) is the rate of sediment moving as bedload, reported as dry weight, that passes through a cross section in a given time. NOTE: Bedload discharge values in this report may include a component of the suspended-sediment discharge. A correction may be necessary when computing the total sediment discharge by summing the bedload discharge and the suspended-sediment discharge. (See also “Bedload,” “Dry weight,” “Sediment,” and “Suspended-sediment discharge”)

Benthic organisms are the group of organisms inhabiting the bottom of an aquatic environment. They include a number of types of organisms, such as bacteria, fungi, insect larvae and nymphs, snails, clams, and crayfish. They are useful as indicators of water quality.

Biochemical oxygen demand (BOD) is a measure of the quantity of dissolved oxygen, in milligrams per liter, necessary for the decomposition of organic matter by microorganisms, such as bacteria.

Biomass is the amount of living matter present at any given time, expressed as mass per unit area or volume of habitat.

Biomass pigment ratio is an indicator of the total proportion of periphyton that are autotrophic (plants). This also is called the Autotrophic Index.

Blue-green algae (*Cyanophyta*) are a group of phytoplankton and periphyton organisms with a blue pigment in addition to a green pigment called chlorophyll. Blue-green algae can cause nuisance water-quality conditions in lakes and slow-flowing rivers; however, they are found commonly in streams throughout the year. The abundance of blue-green algae in phytoplankton samples is expressed as the number of cells per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter ($\mu\text{m}^3/\text{mL}$). The abundance of blue-green algae in periphyton samples is given in cells per square centimeter (cells/cm²) or biovolume per square centimeter ($\mu\text{m}^3/\text{cm}^2$). (See also “Phytoplankton” and “Periphyton”)

Bottom material (See “Bed material”)

Bulk electrical conductivity is the combined electrical conductivity of all material within a doughnut-shaped volume surrounding an induction probe. Bulk conductivity is affected by different physical and chemical properties of the material including the dissolved-solids content of the pore water, and the lithology and porosity of the rock.

Canadian Geodetic Vertical Datum 1928 is a geodetic datum derived from a general adjustment of Canada’s first order level network in 1928.

Cell volume (biovolume) determination is one of several common methods used to estimate biomass of algae in aquatic systems. Cell members of algae are used frequently in aquatic surveys as an indicator of algal production. However, cell numbers alone cannot represent true biomass because of considerable cell-size variation among the algal species. Cell volume (μm^3) is determined by obtaining critical cell measurements or cell dimensions (for example, length, width, height, or radius) for 20 to 50 cells of each important species to obtain an average biovolume per cell. Cells are categorized according to the correspondence of their cellular shape to the nearest geometric solid or combinations of simple solids (for example, spheres, cones, or cylinders). Representative formulae used to compute biovolume are as follows:

$$\text{sphere } \frac{4}{3} \pi r^3 \quad \text{cone } \frac{1}{3} \pi r^2 h \quad \text{cylinder } \pi r^2 h.$$

pi (π) is the ratio of the circumference to the diameter of a circle; pi = 3.14159...

From cell volume, total algal biomass expressed as biovolume ($\mu\text{m}^3/\text{mL}$) is thus determined by multiplying the number of cells of a given species by its average cell volume and then summing these volumes for all species.

Cells/volume refers to the number of cells of any organism that is counted by using a microscope and grid or counting cell. Many planktonic organisms are multicelled and are counted according to the number of contained cells per sample volume, and generally are reported as cells or units per milliliter (mL) or liter (L).

Cfs-day (See “Cubic foot per second-day”)

Channel bars, as used in this report, are the lowest prominent geomorphic features higher than the channel bed.

Chemical oxygen demand (COD) is a measure of the chemically oxidizable material in the water and furnishes an

approximation of the amount of organic and reducing material present. The determined value may correlate with BOD or with carbonaceous organic pollution from sewage or industrial wastes. [See also “Biochemical oxygen demand (BOD)”]

Clostridium perfringens (*C. perfringens*) is a spore-forming bacterium that is common in the feces of human and other warmblooded animals. Clostridial spores are being used experimentally as an indicator of past fecal contamination and the presence of microorganisms that are resistant to disinfection and environmental stresses. (See also “Bacteria”)

Coliphages are viruses that infect and replicate in coliform bacteria. They are indicative of sewage contamination of water and of the survival and transport of viruses in the environment.

Color unit is produced by 1 milligram per liter of platinum in the form of the chloroplatinate ion. Color is expressed in units of the platinum-cobalt scale.

Confined aquifer is a term used to describe an aquifer containing water between two relatively impermeable boundaries. The water level in a well tapping a confined aquifer stands above the top of the confined aquifer and can be higher or lower than the water table that may be present in the material above it. In some cases, the water level can rise above the ground surface, yielding a flowing well.

Contents is the volume of water in a reservoir or lake. Unless otherwise indicated, volume is computed on the basis of a level pool and does not include bank storage.

Continuous-record station is a site where data are collected with sufficient frequency to define daily mean values and variations within a day.

Control designates a feature in the channel that physically affects the water-surface elevation and thereby determines the stage-discharge relation at the gage. This feature may be a constriction of the channel, a bedrock outcrop, a gravel bar, an artificial structure, or a uniform cross section over a long reach of the channel.

Control structure, as used in this report, is a structure on a stream or canal that is used to regulate the flow or stage of the stream or to prevent the intrusion of saltwater.

Cubic foot per second (CFS, ft^3/s) is the rate of discharge representing a volume of 1 cubic foot passing a given point in 1 second. It is equivalent to approximately 7.48 gallons per second or approximately 449 gallons per minute, or

0.02832 cubic meters per second. The term “second-foot” sometimes is used synonymously with “cubic foot per second” but is now obsolete.

Cubic foot per second-day (CFS-DAY, Cfs-day, $[(\text{ft}^3/\text{s})/\text{d}]$) is the volume of water represented by a flow of 1 cubic foot per second for 24 hours. It is equivalent to 86,400 cubic feet, 1.98347 acre-feet, 646,317 gallons, or 2,446.6 cubic meters. The daily mean discharges reported in the daily value data tables numerically are equal to the daily volumes in cfs-days, and the totals also represent volumes in cfs-days.

Cubic foot per second per square mile [CFSM, $(\text{ft}^3/\text{s})/\text{mi}^2$] is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area. (See also “Annual runoff”)

Daily mean suspended-sediment concentration is the time-weighted mean concentration of suspended sediment passing a stream cross section during a 24-hour day. (See also “Sediment” and “Suspended-sediment concentration”)

Daily record station is a site where data are collected with sufficient frequency to develop a record of one or more data values per day. The frequency of data collection can range from continuous recording to data collection on a daily or near-daily basis.

Data collection platform (DCP) is an electronic instrument that collects, processes, and stores data from various sensors, and transmits the data by satellite data relay, line-of-sight radio, and/or landline telemetry.

Data logger is a microprocessor-based data acquisition system designed specifically to acquire, process, and store data. Data usually are downloaded from onsite data loggers for entry into office data systems.

Datum is a surface or point relative to which measurements of height and/or horizontal position are reported. A vertical datum is a horizontal surface used as the zero point for measurements of gage height, stage, or elevation; a horizontal datum is a reference for positions given in terms of latitude-longitude, State Plane coordinates, or Universal Transverse Mercator (UTM) coordinates. (See also “Gage datum,” “Land-surface datum,” “National Geodetic Vertical Datum of 1929,” and “North American Vertical Datum of 1988”)

Diatoms (*Bacillariophyta*) are unicellular or colonial algae with a siliceous cell wall. The abundance of diatoms in phytoplankton samples is expressed as the number of cells

per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter (mm^3/mL). The abundance of diatoms in periphyton samples is given in cells per square centimeter (cells/cm^2) or biovolume per square centimeter (mm^3/cm^2). (See also “Phytoplankton” and “Periphyton”)

Diel is of or pertaining to a 24-hour period of time; a regular daily cycle.

Discharge, or flow, is the rate that matter passes through a cross section of a stream channel or other water body per unit of time. The term commonly refers to the volume of water (including, unless otherwise stated, any sediment or other constituents suspended or dissolved in the water) that passes a cross section in a stream channel, canal, pipeline, and so forth, within a given period of time (cubic feet per second). Discharge also can apply to the rate at which constituents, such as suspended sediment, bedload, and dissolved or suspended chemicals, pass through a cross section, in which cases the quantity is expressed as the mass of constituent that passes the cross section in a given period of time (tons per day).

Dissolved refers to that material in a representative water sample that passes through a 0.45-micrometer membrane filter. This is a convenient operational definition used by Federal and State agencies that collect water-quality data. Determinations of “dissolved” constituent concentrations are made on sample water that has been filtered.

Dissolved oxygen (DO) is the molecular oxygen (oxygen gas) dissolved in water. The concentration in water is a function of atmospheric pressure, temperature, and dissolved-solids concentration of the water. The ability of water to retain oxygen decreases with increasing temperature or dissolved-solids concentration. Photosynthesis and respiration by plants commonly cause diurnal variations in dissolved-oxygen concentration in water from some streams.

Dissolved-solids concentration in water is the quantity of dissolved material in a sample of water. It is determined either analytically by the “residue-on-evaporation” method, or mathematically by totaling the concentrations of individual constituents reported in a comprehensive chemical analysis. During the analytical determination, the bicarbonate (generally a major dissolved component of water) is converted to carbonate. In the mathematical calculation, the bicarbonate value, in milligrams per liter, is multiplied by 0.4917 to convert it to carbonate. Alternatively, alkalinity concentration (as $\text{mg}/\text{L CaCO}_3$) can be converted to carbonate concentration by multiplying by 0.60.

Diversity index (H) (Shannon index) is a numerical expression of evenness of distribution of aquatic organisms. The formula for diversity index is:

$$\bar{d} = - \sum_{i \approx 1}^s \frac{n_i}{n} \log_2 \frac{n_i}{n},$$

where n_i is the number of individuals per taxon, n is the total number of individuals, and s is the total number of taxa in the sample of the community. Index values range from zero, when all the organisms in the sample are the same, to some positive number, when some or all of the organisms in the sample are different.

Drainage area of a stream at a specific location is that area upstream from the location, measured in a horizontal plane, that has a common outlet at the site for its surface runoff from precipitation that normally drains by gravity into a stream. Drainage areas given herein include all closed basins, or noncontributing areas, within the area unless otherwise specified.

Drainage basin is a part of the Earth’s surface that contains a drainage system with a common outlet for its surface runoff. (See “Drainage area”)

Dry mass refers to the mass of residue present after drying in an oven at 105°C , until the mass remains unchanged. This mass represents the total organic matter, ash and sediment, in the sample. Dry-mass values are expressed in the same units as ash mass. (See also “Ash mass,” “Biomass,” and “Wet mass”)

Dry weight refers to the weight of animal tissue after it has been dried in an oven at 65°C until a constant weight is achieved. Dry weight represents total organic and inorganic matter in the tissue. (See also “Wet weight”)

Embeddedness is the degree to which gravel-sized and larger particles are surrounded or enclosed by finer-sized particles. (See also “Substrate embeddedness class”)

Enterococcus bacteria commonly are found in the feces of humans and other warmblooded animals. Although some strains are ubiquitous and not related to fecal pollution, the presence of enterococci in water is an indication of fecal pollution and the possible presence of enteric pathogens. Enterococcus bacteria are those bacteria that produce pink to red colonies with black or reddish-brown precipitate after incubation at 41°C on mE agar (nutrient medium for bacterial growth) and subsequent transfer to EIA medium. Enterococci include *Streptococcus faecalis*, *Streptococ-*

cus feacium, *Streptococcus avium*, and their variants. (See also “Bacteria”)

EPT Index is the total number of distinct taxa within the insect orders Ephemeroptera, Plecoptera, and Trichoptera. This index summarizes the taxa richness within the aquatic insects that generally are considered pollution sensitive; the index usually decreases with pollution.

***Escherichia coli* (*E. coli*)** are bacteria present in the intestine and feces of warmblooded animals. *E. coli* are a member species of the fecal coliform group of indicator bacteria. In the laboratory, they are defined as those bacteria that produce yellow or yellow-brown colonies on a filter pad saturated with urea substrate broth after primary culturing for 22 to 24 hours at 44.5 °C on mTEC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Estimated (E) value of a concentration is reported when an analyte is detected and all criteria for a positive result are met. If the concentration is less than the method detection limit (MDL), an E code will be reported with the value. If the analyte is identified qualitatively as present, but the quantitative determination is substantially more uncertain, the National Water Quality Laboratory will identify the result with an E code even though the measured value is greater than the MDL. A value reported with an E code should be used with caution. When no analyte is detected in a sample, the default reporting value is the MDL preceded by a less than sign (<). For bacteriological data, concentrations are reported as estimated when results are based on non-ideal colony counts.

Euglenoids (*Euglenophyta*) are a group of algae that usually are free-swimming and rarely creeping. They have the ability to grow either photosynthetically in the light or heterotrophically in the dark. (See also “Phytoplankton”)

Extractable organic halides (EOX) are organic compounds that contain halogen atoms such as chlorine. These organic compounds are semivolatile and extractable by ethyl acetate from air-dried streambed sediment. The ethyl acetate extract is combusted, and the concentration is determined by microcoulometric determination of the halides formed. The concentration is reported as micrograms of chlorine per gram of the dry weight of the streambed sediment.

Fecal coliform bacteria are present in the intestines or feces of warmblooded animals. They often are used as indicators of the sanitary quality of the water. In the laboratory, they are defined as all organisms that produce blue colonies within 24 hours when incubated at 44.5°C plus or

minus 0.2°C on M-FC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Fecal streptococcal bacteria are present in the intestines of warmblooded animals and are ubiquitous in the environment. They are characterized as gram-positive, cocci bacteria that are capable of growth in brain-heart infusion broth. In the laboratory, they are defined as all the organisms that produce red or pink colonies within 48 hours at 35°C plus or minus 1.0°C on KF-streptococcus medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Filtered pertains to constituents in a water sample passed through a filter of specified pore diameter, most commonly 0.45 micrometer or less for inorganic analytes and 0.7 micrometer for organic analytes.

Filtered, recoverable is the amount of a given constituent that is in solution after the part of a representative water-suspended sediment sample that has passed through a filter has been extracted. Complete recovery is not achieved by the extraction procedure and thus the analytical determination represents something less than 95 percent of the total constituent concentration in the sample. To achieve comparability of analytical data, equivalent extraction procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results.

Fire algae (*Pyrrhophyta*) are free-swimming unicells characterized by a red pigment spot. (See also “Phytoplankton”)

Flow-duration percentiles are values on a scale of 100 that indicate the percentage of time for which a flow is not exceeded. For example, the 90th percentile of river flow is greater than or equal to 90 percent of all recorded flow rates.

Gage datum is a horizontal surface used as a zero point for measurement of stage or gage height. This surface usually is located slightly below the lowest point of the stream bottom such that the gage height is usually slightly greater than the maximum depth of water. Because the gage datum is not an actual physical object, the datum is usually defined by specifying the elevations of permanent reference marks such as bridge abutments and survey monuments, and the gage is set to agree with the reference marks. Gage datum is a local datum that is maintained independently of any national geodetic datum. However, if the elevation of the gage datum relative to the national

datum (North American Vertical Datum of 1988 or National Geodetic Vertical Datum of 1929) has been determined, then the gage readings can be converted to elevations above the national datum by adding the elevation of the gage datum to the gage reading.

Gage height (G.H.) is the water-surface elevation, in feet above the gage datum. If the water surface is below the gage datum, the gage height is negative. Gage height often is used interchangeably with the more general term “stage,” although gage height is more appropriate when used in reference to a reading on a gage.

Gage values are values that are recorded, transmitted, and/or computed from a gaging station. Gage values typically are collected at 5-, 15-, or 30-minute intervals.

Gaging station is a site on a stream, canal, lake, or reservoir where systematic observations of stage, discharge, or other hydrologic data are obtained.

Gas chromatography/flame ionization detector (GC/FID) is a laboratory analytical method used as a screening technique for semivolatile organic compounds that are extractable from water in methylene chloride.

Geomorphic channel units, as used in this report, are fluvial geomorphic descriptors of channel shape and stream velocity. Pools, riffles, and runs are types of geomorphic channel units considered for National Water-Quality Assessment (NAWQA) Program habitat sampling.

Green algae (*Chlorophyta*) are unicellular or colonial algae with chlorophyll pigments similar to those in terrestrial green plants. Some forms of green algae produce mats or floating “moss” in lakes. The abundance of green algae in phytoplankton samples is expressed as the number of cells per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter ($\mu\text{m}^3/\text{mL}$). The abundance of green algae in periphyton samples is given in cells per square centimeter (cells/cm²) or biovolume per square centimeter ($\mu\text{m}^3/\text{cm}^2$). (See also “Phytoplankton” and “Periphyton”)

Habitat, as used in this report, includes all nonliving (physical) aspects of the aquatic ecosystem, although living components like aquatic macrophytes and riparian vegetation also are usually included. Measurements of habitat typically are made over a wider geographic scale than are measurements of species distribution.

Habitat quality index is the qualitative description (level 1) of instream habitat and riparian conditions surrounding the reach sampled. Scores range from 0 to 100 percent with

higher scores indicative of desirable habitat conditions for aquatic life. Index only applicable to wadable streams.

Hardness of water is a physical-chemical characteristic that commonly is recognized by the increased quantity of soap required to produce lather. It is computed as the sum of equivalents of polyvalent cations (primarily calcium and magnesium) and is expressed as the equivalent concentration of calcium carbonate (CaCO₃).

High tide is the maximum height reached by each rising tide. The high-high and low-high tides are the higher and lower of the two high tides, respectively, of each tidal day. See NOAA Web site:

<http://www.csc.noaa.gov/text/glossary.html>

Hilsenhoff’s Biotic Index (HBI) is an indicator of organic pollution that uses tolerance values to weight taxa abundances; usually increases with pollution. It is calculated as follows:

$$HBI = \frac{\sum(n)(a)}{N},$$

where n is the number of individuals of each taxon, a is the tolerance value of each taxon, and N is the total number of organisms in the sample.

Horizontal datum (See “Datum”)

Hydrologic index stations referred to in this report are continuous-record gaging stations that have been selected as representative of streamflow patterns for their respective regions. Station locations are shown on index maps.

Hydrologic unit is a geographic area representing part or all of a surface drainage basin or distinct hydrologic feature as defined by the former Office of Water Data Coordination and delineated on the State Hydrologic Unit Maps by the USGS. Each hydrologic unit is identified by an 8-digit number.

Inch (IN., in.), in reference to streamflow, as used in this report, refers to the depth to which the drainage area would be covered with water if all of the runoff for a given time period were distributed uniformly on it. (See also “Annual runoff”)

Instantaneous discharge is the discharge at a particular instant of time. (See also “Discharge”)

International Boundary Commission Survey Datum refers to a geodetic datum established at numerous monu-

ments along the United States-Canada boundary by the International Boundary Commission.

Island, as used in this report, is a mid-channel bar that has permanent woody vegetation, is flooded once a year, on average, and remains stable except during large flood events.

Laboratory reporting level (LRL) generally is equal to twice the yearly determined long-term method detection level (LT-MDL). The LRL controls false negative error. The probability of falsely reporting a nondetection for a sample that contained an analyte at a concentration equal to or greater than the LRL is predicted to be less than or equal to 1 percent. The value of the LRL will be reported with a “less than” (<) remark code for samples in which the analyte was not detected. The National Water Quality Laboratory (NWQL) collects quality-control data from selected analytical methods on a continuing basis to determine LT-MDLs and to establish LRLs. These values are reevaluated annually on the basis of the most current quality-control data and, therefore, may change. The LRL replaces the term ‘non-detection value’ (NDV).

Land-surface datum (lsd) is a datum plane that is approximately at land surface at each ground-water observation well.

Latent heat flux (often used interchangeably with latent heat-flux density) is the amount of heat energy that converts water from liquid to vapor (evaporation) or from vapor to liquid (condensation) across a specified cross-sectional area per unit time. Usually expressed in watts per square meter.

Light-attenuation coefficient, also known as the extinction coefficient, is a measure of water clarity. Light is attenuated according to the Lambert-Beer equation:

$$I = I_o e^{-\lambda L},$$

where I_o is the source light intensity, I is the light intensity at length L (in meters) from the source, λ is the light-attenuation coefficient, and e is the base of the natural logarithm. The light-attenuation coefficient is defined as

$$\lambda = -\frac{1}{L} \log_e \frac{I}{I_o}.$$

Lipid is any one of a family of compounds that are insoluble in water and that make up one of the principal components of living cells. Lipids include fats, oils, waxes, and ste-

roids. Many environmental contaminants such as organochlorine pesticides are lipophilic.

Long-term method detection level (LT-MDL) is a detection level derived by determining the standard deviation of a minimum of 24 method detection limit (MDL) spike-sample measurements over an extended period of time. LT-MDL data are collected on a continuous basis to assess year-to-year variations in the LT-MDL. The LT-MDL controls false positive error. The chance of falsely reporting a concentration at or greater than the LT-MDL for a sample that did not contain the analyte is predicted to be less than or equal to 1 percent.

Low tide is the minimum height reached by each falling tide. The high-low and low-low tides are the higher and lower of the two low tides, respectively, of each tidal day. See NOAA Web site: <http://www.csc.noaa.gov/text/glossary.html>

Macrophytes are the macroscopic plants in the aquatic environment. The most common macrophytes are the rooted vascular plants that usually are arranged in zones in aquatic ecosystems and restricted in the area by the extent of illumination through the water and sediment deposition along the shoreline.

Mean concentration of suspended sediment (Daily mean suspended-sediment concentration) is the time-weighted concentration of suspended sediment passing a stream cross section during a given time period. (See also “Daily mean suspended-sediment concentration” and “Suspended-sediment concentration”)

Mean discharge (MEAN) is the arithmetic mean of individual daily mean discharges during a specific period. (See also “Discharge”)

Mean high or low tide is the average of all high or low tides, respectively, over a specific period.

Mean sea level is a local tidal datum. It is the arithmetic mean of hourly heights observed over the National Tidal Datum Epoch. Shorter series are specified in the name; for example, monthly mean sea level and yearly mean sea level. In order that they may be recovered when needed, such datums are referenced to fixed points known as benchmarks. (See also “Datum”)

Measuring point (MP) is an arbitrary permanent reference point from which the distance to water surface in a well is measured to obtain water level.

Megahertz is a unit of frequency. One megahertz equals one million cycles per second.

Membrane filter is a thin microporous material of specific pore size used to filter bacteria, algae, and other very small particles from water.

Metamorphic stage refers to the stage of development that an organism exhibits during its transformation from an immature form to an adult form. This developmental process exists for most insects, and the degree of difference from the immature stage to the adult form varies from relatively slight to pronounced, with many intermediates. Examples of metamorphic stages of insects are egg-larva-adult or egg-nymph-adult.

Method code is a one-character code that identifies the analytical or field method used to determine a value stored in the National Water Information System (NWIS).

Method detection limit (MDL) is the minimum concentration of a substance that can be measured and reported with 99-percent confidence that the analyte concentration is greater than zero. It is determined from the analysis of a sample in a given matrix containing the analyte. At the MDL concentration, the risk of a false positive is predicted to be less than or equal to 1 percent.

Method of Cubatures is a method of computing discharge in tidal estuaries based on the conservation of mass equation.

Methylene blue active substances (MBAS) indicate the presence of detergents (anionic surfactants). The determination depends on the formation of a blue color when methylene blue dye reacts with synthetic anionic detergent compounds.

Micrograms per gram (UG/G, $\mu\text{g/g}$) is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the element per unit mass (gram) of material analyzed.

Micrograms per kilogram (UG/KG, $\mu\text{g/kg}$) is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the constituent per unit mass (kilogram) of the material analyzed. One microgram per kilogram is equivalent to 1 part per billion.

Micrograms per liter (UG/L, $\mu\text{g/L}$) is a unit expressing the concentration of chemical constituents in water as mass (micrograms) of constituent per unit volume (liter) of water. One thousand micrograms per liter is equivalent to

1 milligram per liter. One microgram per liter is equivalent to 1 part per billion.

Microsiemens per centimeter (US/CM, $\mu\text{S/cm}$) is a unit expressing the amount of electrical conductivity of a solution as measured between opposite faces of a centimeter cube of solution at a specified temperature. Siemens is the International System of Units nomenclature. It is synonymous with mhos and is the reciprocal of resistance in ohms.

Milligrams per liter (MG/L, mg/L) is a unit for expressing the concentration of chemical constituents in water as the mass (milligrams) of constituent per unit volume (liter) of water. Concentration of suspended sediment also is expressed in milligrams per liter and is based on the mass of dry sediment per liter of water-sediment mixture.

Minimum reporting level (MRL) is the smallest measured concentration of a constituent that may be reliably reported by using a given analytical method.

Miscellaneous site, miscellaneous station, or miscellaneous sampling site is a site where streamflow, sediment, and/or water-quality data or water-quality or sediment samples are collected once, or more often on a random or discontinuous basis to provide better areal coverage for defining hydrologic and water-quality conditions over a broad area in a river basin.

Most probable number (MPN) is an index of the number of coliform bacteria that, more probably than any other number, would give the results shown by the laboratory examination; it is not an actual enumeration. MPN is determined from the distribution of gas-positive cultures among multiple inoculated tubes.

Multiple-plate samplers are artificial substrates of known surface area used for obtaining benthic invertebrate samples. They consist of a series of spaced, hardboard plates on an eyebolt.

Nanograms per liter (NG/L, ng/L) is a unit expressing the concentration of chemical constituents in solution as mass (nanograms) of solute per unit volume (liter) of water. One million nanograms per liter is equivalent to 1 milligram per liter.

National Geodetic Vertical Datum of 1929 (NGVD 29) is a fixed reference adopted as a standard geodetic datum for elevations determined by leveling. It formerly was called "Sea Level Datum of 1929" or "mean sea level." Although the datum was derived from the mean sea level at 26 tide stations, it does not necessarily represent local mean sea

level at any particular place. See NOAA Web site: <http://www.ngs.noaa.gov/faq.shtml#WhatVD29VD88> (See “North American Vertical Datum of 1988”)

Natural substrate refers to any naturally occurring immersed or submersed solid surface, such as a rock or tree, upon which an organism lives. (See also “Substrate”)

Nekton are the consumers in the aquatic environment and consist of large, free-swimming organisms that are capable of sustained, directed mobility.

Nonfilterable refers to the portion of the total residue retained by a filter.

North American Datum of 1927 (NAD 27) is the horizontal control datum for the United States that was defined by a location and azimuth on the Clarke spheroid of 1866.

North American Datum of 1983 (NAD 83) is the horizontal control datum for the United States, Canada, Mexico, and Central America that is based on the adjustment of 250,000 points including 600 satellite Doppler stations that constrain the system to a geocentric origin. NAD 83 has been officially adopted as the legal horizontal datum for the United States by the Federal government.

North American Vertical Datum of 1988 (NAVD 88) is a fixed reference adopted as the official civilian vertical datum for elevations determined by Federal surveying and mapping activities in the United States. This datum was established in 1991 by minimum-constraint adjustment of the Canadian, Mexican, and United States first-order terrestrial leveling networks.

Open or screened interval is the length of unscreened opening or of well screen through which water enters a well, in feet below land surface.

Organic carbon (OC) is a measure of organic matter present in aqueous solution, suspension, or bottom sediment. May be reported as dissolved organic carbon (DOC), particulate organic carbon (POC), or total organic carbon (TOC).

Organic mass or volatile mass of a living substance is the difference between the dry mass and ash mass and represents the actual mass of the living matter. Organic mass is expressed in the same units as for ash mass and dry mass. (See also “Ash mass,” “Biomass,” and “Dry mass”)

Organism count/area refers to the number of organisms collected and enumerated in a sample and adjusted to the number per area habitat, usually square meter (m²), acre,

or hectare. Periphyton, benthic organisms, and macrophytes are expressed in these terms.

Organism count/volume refers to the number of organisms collected and enumerated in a sample and adjusted to the number per sample volume, usually milliliter (mL) or liter (L). Numbers of planktonic organisms can be expressed in these terms.

Organochlorine compounds are any chemicals that contain carbon and chlorine. Organochlorine compounds that are important in investigations of water, sediment, and biological quality include certain pesticides and industrial compounds.

Parameter code is a 5-digit number used in the USGS computerized data system, National Water Information System (NWIS), to uniquely identify a specific constituent or property.

Partial-record station is a site where discrete measurements of one or more hydrologic parameters are obtained over a period of time without continuous data being recorded or computed. A common example is a crest-stage gage partial-record station at which only peak stages and flows are recorded.

Particle size is the diameter, in millimeters (mm), of a particle determined by sieve or sedimentation methods. The sedimentation method uses the principle of Stokes Law to calculate sediment particle sizes. Sedimentation methods (pipet, bottom-withdrawal tube, visual-accumulation tube, sedigraph) determine fall diameter of particles in either distilled water (chemically dispersed) or in native water (the river water at the time and point of sampling).

Particle-size classification, as used in this report, agrees with the recommendation made by the American Geophysical Union Subcommittee on Sediment Terminology. The classification is as follows:

Classification	Size (mm)	Method of analysis
Clay	>0.00024 - 0.004	Sedimentation
Silt	>0.004 - 0.062	Sedimentation
Sand	>0.062 - 2.0	Sedimentation/sieve
Gravel	>2.0 - 64.0	Sieve
Cobble	>64 - 256	Manual measurement
Boulder	>256	Manual measurement

The particle-size distributions given in this report are not necessarily representative of all particles in transport in the stream. For the sedimentation method, most of the organic

matter is removed, and the sample is subjected to mechanical and chemical dispersion before analysis in distilled water. Chemical dispersion is not used for native water analysis.

Peak flow (peak stage) is an instantaneous local maximum value in the continuous time series of streamflows or stages, preceded by a period of increasing values and followed by a period of decreasing values. Several peak values ordinarily occur in a year. The maximum peak value in a year is called the annual peak; peaks lower than the annual peak are called secondary peaks. Occasionally, the annual peak may not be the maximum value for the year; in such cases, the maximum value occurs at midnight at the beginning or end of the year, on the recession from or rise toward a higher peak in the adjoining year. If values are recorded at a discrete series of times, the peak recorded value may be taken as an approximation of the true peak, which may occur between the recording instants. If the values are recorded with finite precision, a sequence of equal recorded values may occur at the peak; in this case, the first value is taken as the peak.

Percent composition or percent of total is a unit for expressing the ratio of a particular part of a sample or population to the total sample or population, in terms of types, numbers, weight, mass, or volume.

Percent shading is a measure of the amount of sunlight potentially reaching the stream. A clinometer is used to measure left and right bank canopy angles. These values are added together, divided by 180, and multiplied by 100 to compute percentage of shade.

Periodic-record station is a site where stage, discharge, sediment, chemical, physical, or other hydrologic measurements are made one or more times during a year but at a frequency insufficient to develop a daily record.

Periphyton is the assemblage of microorganisms attached to and living upon submerged solid surfaces. Although primarily consisting of algae, they also include bacteria, fungi, protozoa, rotifers, and other small organisms. Periphyton are useful indicators of water quality.

Pesticides are chemical compounds used to control undesirable organisms. Major categories of pesticides include insecticides, miticides, fungicides, herbicides, and rodenticides.

pH of water is the negative logarithm of the hydrogen-ion activity. Solutions with pH less than 7.0 standard units are termed "acidic," and solutions with a pH greater than 7.0 are termed "basic." Solutions with a pH of 7.0 are neutral.

The presence and concentration of many dissolved chemical constituents found in water are affected, in part, by the hydrogen-ion activity of water. Biological processes including growth, distribution of organisms, and toxicity of the water to organisms also are affected, in part, by the hydrogen-ion activity of water.

Phytoplankton is the plant part of the plankton. They usually are microscopic, and their movement is subject to the water currents. Phytoplankton growth is dependent upon solar radiation and nutrient substances. Because they are able to incorporate as well as release materials to the surrounding water, the phytoplankton have a profound effect upon the quality of the water. They are the primary food producers in the aquatic environment and commonly are known as algae. (See also "Plankton")

Picocurie (PC, pCi) is one-trillionth (1×10^{-12}) of the amount of radioactive nuclide represented by a curie (Ci). A curie is the quantity of radioactive nuclide that yields 3.7×10^{10} radioactive disintegrations per second (dps). A picocurie yields 0.037 dps, or 2.22 dpm (disintegrations per minute).

Plankton is the community of suspended, floating, or weakly swimming organisms that live in the open water of lakes and rivers. Concentrations are expressed as a number of cells per milliliter (cells/mL) of sample.

Polychlorinated biphenyls (PCBs) are industrial chemicals that are mixtures of chlorinated biphenyl compounds having various percentages of chlorine. They are similar in structure to organochlorine insecticides.

Polychlorinated naphthalenes (PCNs) are industrial chemicals that are mixtures of chlorinated naphthalene compounds. They have properties and applications similar to polychlorinated biphenyls (PCBs) and have been identified in commercial PCB preparations.

Pool, as used in this report, is a small part of a stream reach with little velocity, commonly with water deeper than surrounding areas.

Primary productivity is a measure of the rate at which new organic matter is formed and accumulated through photosynthetic and chemosynthetic activity of producer organisms (chiefly, green plants). The rate of primary production is estimated by measuring the amount of oxygen released (oxygen method) or the amount of carbon assimilated (carbon method) by the plants.

Primary productivity (carbon method) is expressed as milligrams of carbon per area per unit time

[mg C/(m²/time)] for periphyton and macrophytes or per volume [mg C/(m³/time)] for phytoplankton. The carbon method defines the amount of carbon dioxide consumed as measured by radioactive carbon (carbon-14). The carbon-14 method is of greater sensitivity than the oxygen light- and dark-bottle method and is preferred for use with unenriched water samples. Unit time may be either the hour or day, depending on the incubation period. (See also “Primary productivity”)

Primary productivity (oxygen method) is expressed as milligrams of oxygen per area per unit time [mg O/(m²/time)] for periphyton and macrophytes or per volume [mg O/(m³/time)] for phytoplankton. The oxygen method defines production and respiration rates as estimated from changes in the measured dissolved-oxygen concentration. The oxygen light- and dark-bottle method is preferred if the rate of primary production is sufficient for accurate measurements to be made within 24 hours. Unit time may be either the hour or day, depending on the incubation period. (See also “Primary productivity”)

Radioisotopes are isotopic forms of elements that exhibit radioactivity. Isotopes are varieties of a chemical element that differ in atomic weight but are very nearly alike in chemical properties. The difference arises because the atoms of the isotopic forms of an element differ in the number of neutrons in the nucleus; for example, ordinary chlorine is a mixture of isotopes having atomic weights of 35 and 37, and the natural mixture has an atomic weight of about 35.453. Many of the elements similarly exist as mixtures of isotopes, and a great many new isotopes have been produced in the operation of nuclear devices such as the cyclotron. There are 275 isotopes of the 81 stable elements, in addition to more than 800 radioactive isotopes.

Reach, as used in this report, is a length of stream that is chosen to represent a uniform set of physical, chemical, and biological conditions within a segment. It is the principal sampling unit for collecting physical, chemical, and biological data.

Recoverable is the amount of a given constituent that is in solution after a representative water sample has been extracted or digested. Complete recovery is not achieved by the extraction or digestion and thus the determination represents something less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results. (See also “Bed material”)

Recurrence interval, also referred to as return period, is the average time, usually expressed in years, between occurrences of hydrologic events of a specified type (such as exceedances of a specified high flow or nonexceedance of a specified low flow). The terms “return period” and “recurrence interval” do not imply regular cyclic occurrence. The actual times between occurrences vary randomly, with most of the times being less than the average and a few being substantially greater than the average. For example, the 100-year flood is the flow rate that is exceeded by the annual maximum peak flow at intervals whose average length is 100 years (that is, once in 100 years, on average); almost two-thirds of all exceedances of the 100-year flood occur less than 100 years after the previous exceedance, half occur less than 70 years after the previous exceedance, and about one-eighth occur more than 200 years after the previous exceedance. Similarly, the 7-day, 10-year low flow (7Q₁₀) is the flow rate below which the annual minimum 7-day-mean flow dips at intervals whose average length is 10 years (that is, once in 10 years, on average); almost two-thirds of the nonexceedances of the 7Q₁₀ occur less than 10 years after the previous nonexceedance, half occur less than 7 years after, and about one-eighth occur more than 20 years after the previous nonexceedance. The recurrence interval for annual events is the reciprocal of the annual probability of occurrence. Thus, the 100-year flood has a 1-percent chance of being exceeded by the maximum peak flow in any year, and there is a 10-percent chance in any year that the annual minimum 7-day-mean flow will be less than the 7Q₁₀.

Replicate samples are a group of samples collected in a manner such that the samples are thought to be essentially identical in composition.

Return period (See “Recurrence interval”)

Riffle, as used in this report, is a shallow part of the stream where water flows swiftly over completely or partially submerged obstructions to produce surface agitation.

River mileage is the curvilinear distance, in miles, measured upstream from the mouth along the meandering path of a stream channel in accordance with Bulletin No. 14 (October 1968) of the Water Resources Council and typically is used to denote location along a river.

Run, as used in this report, is a relatively shallow part of a stream with moderate velocity and little or no surface turbulence.

Runoff is the quantity of water that is discharged (“runs off”) from a drainage basin during a given time period. Runoff data may be presented as volumes in acre-feet, as

mean discharges per unit of drainage area in cubic feet per second per square mile, or as depths of water on the drainage basin in inches. (See also “Annual runoff”)

Salinity is the total quantity of dissolved salts, measured by weight in parts per thousand. Values in this report are calculated from specific conductance and temperature. Seawater has an average salinity of about 35 parts per thousand (for additional information, refer to: Miller, R.L., Bradford, W.L., and Peters, N.E., 1988, Specific conductance: theoretical considerations and application to analytical quality control: U.S. Geological Survey Water-Supply Paper 2311, 16 p.)

Sea level, as used in this report, refers to one of the two commonly used national vertical datums (NGVD 1929 or NAVD 1988). See separate entries for definitions of these datums.

Sediment is solid material that originates mostly from disintegrated rocks; when transported by, suspended in, or deposited from water, it is referred to as “fluvial sediment.” Sediment includes chemical and biochemical precipitates and decomposed organic material, such as humus. The quantity, characteristics, and cause of the occurrence of sediment in streams are affected by environmental and land-use factors. Some major factors are topography, soil characteristics, land cover, and depth and intensity of precipitation.

Sensible heat flux (often used interchangeably with latent sensible heat-flux density) is the amount of heat energy that moves by turbulent transport through the air across a specified cross-sectional area per unit time and goes to heating (cooling) the air. Usually expressed in watts per square meter.

Seven-day, 10-year low flow ($7Q_{10}$) is the discharge below which the annual 7-day minimum flow falls in 1 year out of 10 on the long-term average. The recurrence interval of the $7Q_{10}$ is 10 years; the chance that the annual 7-day minimum flow will be less than the $7Q_{10}$ is 10 percent in any given year. (See also “Annual 7-day minimum” and “Recurrence interval”)

Shelves, as used in this report, are streambank features extending nearly horizontally from the flood plain to the lower limit of persistent woody vegetation.

Sodium adsorption ratio (SAR) is the expression of relative activity of sodium ions in exchange reactions within soil and is an index of sodium or alkali hazard to the soil. Sodium hazard in water is an index that can be used to evaluate the suitability of water for irrigating crops.

Soil heat flux (often used interchangeably with soil heat-flux density) is the amount of heat energy that moves by conduction across a specified cross-sectional area of soil per unit time and goes to heating (or cooling) the soil. Usually expressed in watts per square meter.

Soil-water content is the water lost from the soil upon drying to constant mass at 105°C; expressed either as mass of water per unit mass of dry soil or as the volume of water per unit bulk volume of soil.

Specific electrical conductance (conductivity) is a measure of the capacity of water (or other media) to conduct an electrical current. It is expressed in microsiemens per centimeter at 25°C. Specific electrical conductance is a function of the types and quantity of dissolved substances in water and can be used for approximating the dissolved-solids content of the water. Commonly, the concentration of dissolved solids (in milligrams per liter) is from 55 to 75 percent of the specific conductance (in microsiemens). This relation is not constant from stream to stream, and it may vary in the same source with changes in the composition of the water.

Stable isotope ratio (per MIL) is a unit expressing the ratio of the abundance of two radioactive isotopes. Isotope ratios are used in hydrologic studies to determine the age or source of specific water, to evaluate mixing of different water, as an aid in determining reaction rates, and other chemical or hydrologic processes.

Stage (See “Gage height”)

Stage-discharge relation is the relation between the water-surface elevation, termed stage (gage height), and the volume of water flowing in a channel per unit time.

Streamflow is the discharge that occurs in a natural channel. Although the term “discharge” can be applied to the flow of a canal, the word “streamflow” uniquely describes the discharge in a surface stream course. The term “streamflow” is more general than “runoff” as streamflow may be applied to discharge whether or not it is affected by diversion or regulation.

Substrate is the physical surface upon which an organism lives.

Substrate embeddedness class is a visual estimate of riffle streambed substrate larger than gravel that is surrounded or covered by fine sediment (<2 mm, sand or finer). Below

are the class categories expressed as the percentage covered by fine sediment:

0	no gravel or larger substrate	3	26-50 percent
1	> 75 percent	4	5-25 percent
2	51-75 percent	5	< 5 percent

Surface area of a lake is that area (acres) encompassed by the boundary of the lake as shown on USGS topographic maps, or other available maps or photographs. Because surface area changes with lake stage, surface areas listed in this report represent those determined for the stage at the time the maps or photographs were obtained.

Surficial bed material is the upper surface (0.1 to 0.2 foot) of the bed material that is sampled using U.S. Series Bed-Material Samplers.

Surrogate is an analyte that behaves similarly to a target analyte, but that is highly unlikely to occur in a sample. A surrogate is added to a sample in known amounts before extraction and is measured with the same laboratory procedures used to measure the target analyte. Its purpose is to monitor method performance for an individual sample.

Suspended is the amount (concentration) of undissolved material in a water-sediment mixture. Most commonly refers to that material retained on a 0.45-micrometer filter.

Suspended, recoverable is the amount of a given constituent that is in solution after the part of a representative water-suspended sediment sample that is retained on a 0.45-micrometer filter has been extracted or digested. Complete recovery is not achieved by the extraction or digestion procedures and thus the determination represents less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results. (See also "Suspended")

Suspended sediment is sediment carried in suspension by the turbulent components of the fluid or by the Brownian movement (a law of physics). (See also "Sediment")

Suspended-sediment concentration is the velocity-weighted concentration of suspended sediment in the sampled zone (from the water surface to a point approximately 0.3 foot above the bed) expressed as milligrams of dry sediment per liter of water-sediment mixture (mg/L). The analytical technique uses the mass of all of the sediment and the net weight of the water-sediment mixture in a sam-

ple to compute the suspended-sediment concentration. (See also "Sediment" and "Suspended sediment")

Suspended-sediment discharge (tons/d) is the rate of sediment transport, as measured by dry mass or volume, that passes a cross section in a given time. It is calculated in units of tons per day as follows: concentration (mg/L) x discharge (ft³/s) x 0.0027. (See also "Sediment," "Suspended sediment," and "Suspended-sediment concentration")

Suspended-sediment load is a general term that refers to a given characteristic of the material in suspension that passes a point during a specified period of time. The term needs to be qualified, such as "annual suspended-sediment load" or "sand-size suspended-sediment load," and so on. It is not synonymous with either suspended-sediment discharge or concentration. (See also "Sediment")

Suspended solids, total residue at 105°C concentration is the concentration of inorganic and organic material retained on a filter, expressed as milligrams of dry material per liter of water (mg/L). An aliquot of the sample is used for this analysis.

Suspended, total is the total amount of a given constituent in the part of a water-sediment sample that is retained on a 0.45-micrometer membrane filter. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. Knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to determine when the results should be reported as "suspended, total." Determinations of "suspended, total" constituents are made either by directly analyzing portions of the suspended material collected on the filter or, more commonly, by difference, on the basis of determinations of (1) dissolved and (2) total concentrations of the constituent. (See also "Suspended")

Synoptic studies are short-term investigations of specific water-quality conditions during selected seasonal or hydrologic periods to provide improved spatial resolution for critical water-quality conditions. For the period and conditions sampled, they assess the spatial distribution of selected water-quality conditions in relation to causative factors, such as land use and contaminant sources.

Taxa (Species) richness is the number of species (taxa) present in a defined area or sampling unit.

Taxonomy is the division of biology concerned with the classification and naming of organisms. The classification of organisms is based upon a hierarchical scheme beginning

with Kingdom and ending with Species at the base. The higher the classification level, the fewer features the organisms have in common. For example, the taxonomy of a particular mayfly, *Hexagenia limbata*, is the following:

Kingdom:	Animal
Phylum:	Arthropoda
Class:	Insecta
Order:	Ephemeroptera
Family:	Ephemeridae
Genus:	<i>Hexagenia</i>
Species:	<i>Hexagenia limbata</i>

Thalweg is the line formed by connecting points of minimum streambed elevation (deepest part of the channel).

Thermograph is an instrument that continuously records variations of temperature on a chart. The more general term “temperature recorder” is used in the table descriptions and refers to any instrument that records temperature whether on a chart, a tape, or any other medium.

Time-weighted average is computed by multiplying the number of days in the sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the total number of days. A time-weighted average represents the composition of water resulting from the mixing of flow proportionally to the duration of the concentration.

Tons per acre-foot (T/acre-ft) is the dry mass (tons) of a constituent per unit volume (acre-foot) of water. It is computed by multiplying the concentration of the constituent, in milligrams per liter, by 0.00136.

Tons per day (T/DAY, tons/d) is a common chemical or sediment discharge unit. It is the quantity of a substance in solution, in suspension, or as bedload that passes a stream section during a 24-hour period. It is equivalent to 2,000 pounds per day, or 0.9072 metric ton per day.

Total is the amount of a given constituent in a representative whole-water (unfiltered) sample, regardless of the constituent’s physical or chemical form. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent present in both the dissolved and suspended phases of the sample. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total.” (Note that the word “total” does double duty here, indicating both that the sample consists of a water-suspended sediment

mixture and that the analytical method determined at least 95 percent of the constituent in the sample.)

Total coliform bacteria are a particular group of bacteria that are used as indicators of possible sewage pollution. This group includes coliforms that inhabit the intestine of warmblooded animals and those that inhabit soils. They are characterized as aerobic or facultative anaerobic, gram-negative, nonspore-forming, rod-shaped bacteria that ferment lactose with gas formation within 48 hours at 35°C. In the laboratory, these bacteria are defined as all the organisms that produce colonies with a golden-green metallic sheen within 24 hours when incubated at 35°C plus or minus 1.0°C on M-Endo medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 milliliters of sample. (See also “Bacteria”)

Total discharge is the quantity of a given constituent, measured as dry mass or volume, that passes a stream cross section per unit of time. When referring to constituents other than water, this term needs to be qualified, such as “total sediment discharge,” “total chloride discharge,” and so on.

Total in bottom material is the amount of a given constituent in a representative sample of bottom material. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total in bottom material.”

Total length (fish) is the straight-line distance from the anterior point of a fish specimen’s snout, with the mouth closed, to the posterior end of the caudal (tail) fin, with the lobes of the caudal fin squeezed together.

Total load refers to all of a constituent in transport. When referring to sediment, it includes suspended load plus bed load.

Total organism count is the number of organisms collected and enumerated in any particular sample. (See also “Organism count/volume”)

Total recoverable is the amount of a given constituent in a whole-water sample after a sample has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all particulate matter is not achieved by the digestion treatment, and thus the determination represents something less than the “total” amount (that is, less than

95 percent) of the constituent present in the dissolved and suspended phases of the sample. To achieve comparability of analytical data for whole-water samples, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures may produce different analytical results.

Total sediment discharge is the mass of suspended-sediment plus bed-load transport, measured as dry weight, that passes a cross section in a given time. It is a rate and is reported as tons per day. (See also “Bedload,” “Bedload discharge,” “Sediment,” “Suspended sediment,” and “Suspended-sediment concentration”)

Total sediment load or **total load** is the sediment in transport as bedload and suspended-sediment load. The term may be qualified, such as “annual suspended-sediment load” or “sand-size suspended-sediment load,” and so on. It differs from total sediment discharge in that load refers to the material, whereas discharge refers to the quantity of material, expressed in units of mass per unit time. (See also “Sediment,” “Suspended-sediment load,” and “Total load”)

Transect, as used in this report, is a line across a stream perpendicular to the flow and along which measurements are taken, so that morphological and flow characteristics along the line are described from bank to bank. Unlike a cross section, no attempt is made to determine known elevation points along the line.

Turbidity is an expression of the optical properties of a liquid that causes light rays to be scattered and absorbed rather than transmitted in straight lines through water. Turbidity, which can make water appear cloudy or muddy, is caused by the presence of suspended and dissolved matter, such as clay, silt, finely divided organic matter, plankton and other microscopic organisms, organic acids, and dyes (ASTM International, 2003, D1889–00 Standard test method for turbidity of water, *in* ASTM International, Annual Book of ASTM Standards, Water and Environmental Technology, v. 11.01: West Conshohocken, Pennsylvania, 6 p.). The color of water, whether resulting from dissolved compounds or suspended particles, can affect a turbidity measurement. To ensure that USGS turbidity data can be understood and interpreted properly within the context of the instrument used and site conditions encountered, data from each instrument type are stored and reported in the National Water Information System (NWIS) using parameter codes and measurement reporting units that are specific to the instrument type, with specific instruments designated by the method code. The respective measurement units, many of which also are in use internationally, fall into two categories: (1) the designations NTU, NTRU, BU, AU, and NTMU signify the use of

a broad spectrum incident light in the wavelength range of 400-680 nanometers (nm), but having different light detection configurations; (2) The designations FNU, FNRU, FBU, FAU, and FNMU generally signify an incident light in the range between 780-900 nm, also with varying light detection configurations. These reporting units are equivalent when measuring a calibration solution (for example, formazin or polymer beads), but their respective instruments may not produce equivalent results for environmental samples. Specific reporting units are as follows:

NTU (Nephelometric Turbidity Units): white or broadband [400-680 nm] light source, 90 degree detection angle, one detector.

NTRU (Nephelometric Turbidity Ratio Units): white or broadband [400-680 nm] light source, 90 degree detection angle, multiple detectors with ratio compensation.

BU (Backscatter Units): white or broadband [400-680 nm] light source, 30 ± 15 degree detection angle (backscatter).

AU (Attenuation Units): white or broadband [400-680 nm] light source, 180 degree detection angle (attenuation).

NTMU (Nephelometric Turbidity Multibeam Units): white or broadband [400-680 nm] light source, multiple light sources, detectors at 90 degrees and possibly other angles to each beam.

FNU (Formazin Nephelometric Units): near infrared [780-900 nm] or monochrome light source, 90 degree detection angle, one detector.

FNRU (Formazin Nephelometric Ratio Units): near infrared [780-900 nm] or monochrome light source, 90 degree detection angle, multiple detectors, ratio compensation.

FBU (Formazin Backscatter Units): near infrared [780-900 nm] or monochrome light source, 30 ± 15 degree detection angle.

FAU (Formazin Attenuation Units): near infrared [780-900 nm] light source, 180 degree detection angle.

FNMU (Formazin Nephelometric Multibeam Units): near infrared [780-900 nm] or monochrome light source, multiple light sources, detectors at 90 degrees and possibly other angles to each beam.

For more information please see http://water.usgs.gov/owq/FieldManual/Chapter6/6.7_contents.html.

Ultraviolet (UV) absorbance (absorption) at 254 or 280 nanometers is a measure of the aggregate concentration of the mixture of UV absorbing organic materials dissolved in the analyzed water, such as lignin, tannin, humic substances, and various aromatic compounds. UV absorbance (absorption) at 254 or 280 nanometers is measured in UV absorption units per centimeter of path length of UV light through a sample.

Unconfined aquifer is an aquifer whose upper surface is a water table free to fluctuate under atmospheric pressure. (See “Water-table aquifer”)

Unfiltered pertains to the constituents in an unfiltered, representative water-suspended sediment sample.

Unfiltered, recoverable is the amount of a given constituent in a representative water-suspended sediment sample that has been extracted or digested. Complete recovery is not achieved by the extraction or digestion treatment and thus the determination represents less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results.

Vertical datum (See “Datum”)

Volatile organic compounds (VOCs) are organic compounds that can be isolated from the water phase of a sample by purging the water sample with inert gas, such as helium, and, subsequently, analyzed by gas chromatography. Many VOCs are human-made chemicals that are used and produced in the manufacture of paints, adhesives, petroleum products, pharmaceuticals, and refrigerants. They often are components of fuels, solvents, hydraulic fluids, paint thinners, and dry-cleaning agents commonly used in urban settings. VOC contamination of drinking-water supplies is a human-health concern because many are toxic and are known or suspected human carcinogens.

Water table is that surface in a ground-water body at which the water pressure is equal to the atmospheric pressure.

Water-table aquifer is an unconfined aquifer within which the water table is found.

Water year in USGS reports dealing with surface-water supply is the 12-month period October 1 through September 30. The water year is designated by the calendar year in which it ends and which includes 9 of the 12 months. Thus, the year ending September 30, 2002, is called the “2002 water year.”

Watershed (See “Drainage basin”)

WDR is used as an abbreviation for “Water-Data Report” in the REVISED RECORDS paragraph to refer to State annual hydrologic-data reports. (WRD was used as an abbreviation for “Water-Resources Data” in reports published prior to 1976.)

Weighted average is used in this report to indicate discharge-weighted average. It is computed by multiplying the discharge for a sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the sum of the discharges. A discharge-weighted average approximates the composition of water that would be found in a reservoir containing all the water passing a given location during the water year after thorough mixing in the reservoir.

Wet mass is the mass of living matter plus contained water. (See also “Biomass” and “Dry mass”)

Wet weight refers to the weight of animal tissue or other substance including its contained water. (See also “Dry weight”)

WSP is used as an acronym for “Water-Supply Paper” in reference to previously published reports.

Zooplankton is the animal part of the plankton. Zooplankton are capable of extensive movements within the water column and often are large enough to be seen with the unaided eye. Zooplankton are secondary consumers feeding upon bacteria, phytoplankton, and detritus. Because they are the grazers in the aquatic environment, the zooplankton are a vital part of the aquatic food web. The zooplankton community is dominated by small crustaceans and rotifers. (See also “Plankton”)