


Water Resources Data Ohio Water Year 2005

Volume 1. Ohio River Basin Excluding Project Data

By J.P. Mangus and S.R. Frum

Water-Data Report OH-05-1

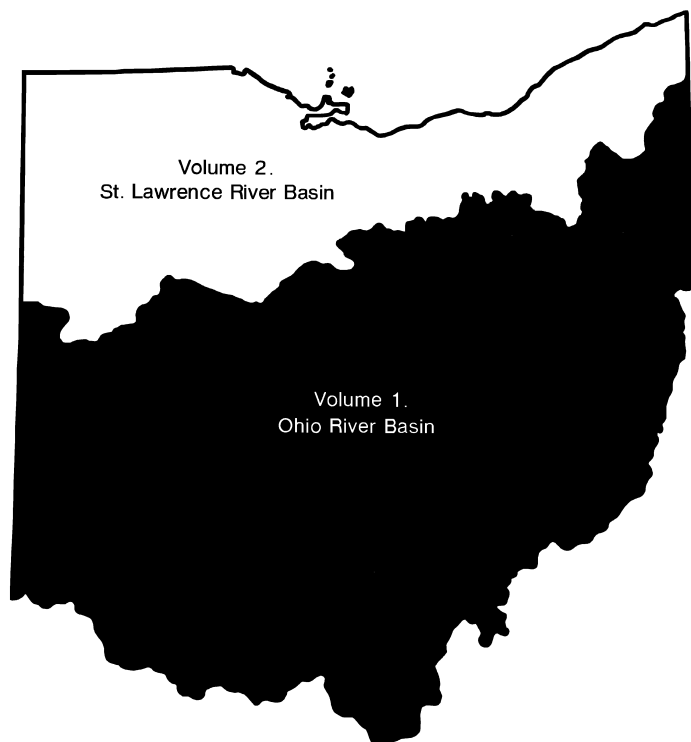

Prepared in cooperation with the
State of Ohio and with other agencies

U.S. Department of the Interior
U.S. Geological Survey



U.S. Department of the Interior

Gale A. Norton, Secretary

U.S. Geological Survey

P. Patrick Leahy, Acting Director

U.S. Geological Survey
6480 Doubletree Avenue
Columbus, OH 43229-1111
(614) 430-7700

Information about the USGS, Ohio Water Science Center is available on the Internet at
<http://oh.water.usgs.gov>

Information about all USGS reports and products is available by calling 1-888-ASK-USGS or on the Internet
via the World Wide Web at <http://www.usgs.gov/>

Additional earth science information is available by accessing the USGS home page at <http://www.usgs.gov/>

Preface

This volume of the annual hydrologic data report of Ohio is one of a series of annual reports that document hydrologic data gathered from the U.S. Geological Survey's surface- and ground-water data-collection networks in each State, Puerto Rico, and Trust Territories. These records of streamflow, ground-water levels, and quality of water provide the hydrologic information needed by State, local, and Federal agencies and the private sector for developing and managing our Nation's land and water resources. Hydrologic data for Ohio are contained in two volumes:

Volume 1. Ohio River Basin Excluding Project Data

Volume 2. St. Lawrence River Basin and Statewide Project Data

This report is the culmination of a concerted effort by dedicated personnel of the U.S. Geological Survey who collected, compiled, analyzed, verified, and organized the data, and who typed, edited, and assembled the report. In addition to the authors, who had primary responsibility for assuring that the information contained herein is accurate, complete, and adheres to Geological Survey policy and established guidelines, the following individuals contributed significantly to the collection, processing, and tabulation of the data:

E.E. Bertke	R.J. Haefner	V.E. Nichols
A.M.G. Brady	S.W. Hatch	J.W. Roberts
R.N. Bushon	C.A. Hawkins	T.L. Schumann
A.W. Coen III	G.A. Hren	K.H. Shaffer
R.A. Darner	C.A. Huitger	J.M. Sherwood
A.L. Dillenburg	S.D. Janosy	H.L. Shindel
C.M. Eberle	G.F. Koltun	B.N. Sroka
T.J. Eaton	D.O. Kumfer	D.E. Straub
D.P. Finnegan	J.D. Lageman	J.S. Tertuliani
D.S. Francy	B.E. Mailot	M.A. Thomas
R.P. Frehs	J.A. McClure	M.A. Tibbetts
S.M. Fuller	K.D. Metzker	S.A. Vivian

This report was prepared in cooperation with the State of Ohio and with other agencies under the general supervision of J.R. Morris, Director, USGS Ohio Water Science Center.

Contents

	Page
Preface	iii
Report Documentation Page	iv
Surface-Water Stations, in Downstream Order, for which Records are Published	vii
Ground-Water Stations for which Records are Published	x
Discontinued Surface-Water-Discharge Stations	xix
Discontinued Surface-Water-Quality Stations	xxiv
Introduction	1
Cooperation	1
Summary of Hydrologic Conditions	2
Precipitation	2
Surface Water	3
Streamflow	3
Water Quality	3
Ground Water	7
Ground-Water Levels	8
Downstream Order and Station Number	11
Numbering System for Wells and Miscellaneous Sites	11
Special Networks and Programs	11
Explanation of Stage- and Water-Discharge Records	12
Data Collection and Computation	12
Data Presentation	13
Station Manuscript	13
Peak Discharge Greater than Base Discharge	14
Data Table of Daily Mean Values	14
Statistics of Monthly Mean Data	14
Summary Statistics	14
Identifying Estimated Daily Discharge	16
Accuracy of Field Data and Computed Results	16
Other Data Records Available	16
Explanation of Precipitation Records	16
Data Collection and Computation	16
Data Presentation	16
Explanation of Water-Quality Records	17
Collection and Examination of Data	17
Water Analysis	17
Surface-Water-Quality Records	17
Classification of Records	17
Accuracy of the Records	17
Arrangement of Records	18
Onsite Measurements and Sample Collection	18
Water Temperature	18
Sediment	19
Laboratory Measurements	19
Data Presentation	19
Remark Codes	20
Water-Quality Control Data	20
Blank Samples	20
Reference Samples	21
Replicate Samples	21
Spike Samples	21

	Page
Explanation of Ground-Water-Level Records	21
Site Identification Numbers	21
Data Collection and Computation	21
Data Presentation	22
Water-Level Tables	22
Hydrographs	23
Ground-Water-Quality Data	23
Data Collection and Computation	23
Laboratory Measurements	23
Access to USGS Water Data	23
Definition of Terms	23
Surface-Water Records	41
Discharge at Partial-Record Stations and Miscellaneous Sites	199
Peak Discharge and Stage at Continuous-Record Surface Discharge Stations	205
Ground-Water Records	212
Index	317
Factors for converting inch-pound units to International System units (SI)	Inside back cover

Figures

1a, 1b. Location of data-collection stations	xiv, xv
1c, 1d. Location of data-collection wells	xvi, xvii
2. Physiographic divisions and location of hydrologic index stations	2
3. Streamflow during water year 2005 compared with median streamflow for period 1971–2000 for four representative gaging stations	4
4. Streamflow and concentrations of selected constituents measured in water year 2005 and the distribution of those characteristics from measurements made during water years 1996–2004, Auglaize River near Ft. Jennings, Ohio	5
5. Streamflow and concentrations of selected constituents measured in water year 2005 and the distribution of those characteristics from measurements made during water years 1996–2004, Maumee River at Waterville, Ohio	6
6. Geographic distribution of principal aquifers in Ohio	8
7. Sample of 1-year and 5-year hydrographs of well H-1 (391717084393300), completed in an unconfined unconsolidated aquifer	9
8. Sample of 1-year and 5-year hydrographs of well U-4 (401826083255200), completed in a confined carbonate-rock aquifer	10
9. System for numbering wells and miscellaneous sites (latitude and longitude)	11

Surface-Water Stations, in Downstream Order, for which Records are Published

[Letters after station names designate type of data: (c) chemical, (d) discharge, (e) contents and (or) elevation, (M) water-quality monitor, (HBM) hydrologic bench mark, (S) daily suspended-sediment data]

	Page
OHIO RIVER BASIN	
BEAVER RIVER BASIN	41
03091500 Mahoning River at Pricetown (d)	41
03093000 Eagle Creek at Phalanx Station (d)	42
03094000 Mahoning River at Leavittsburg (d)	43
03097550 Mahoning River at Ohio Edison Power Plant at Niles (d)	44
03098600 Mahoning River below West Avenue at Youngstown (d)	45
LITTLE BEAVER CREEK BASIN	46
03109500 Little Beaver Creek near East Liverpool (d)	46
YELLOW CREEK BASIN	47
03110000 Yellow Creek near Hammondsville (d)	47
SHORT CREEK BASIN	48
03111500 Short Creek near Dillonvale (d)	48
WHEELING CREEK BASIN	49
03111548 Wheeling Creek below Blaine (d)	49
CAPTINA CREEK BASIN	50
03113990 Captina Creek at State Route 148 at Armstrongs Mills (d)	50
LITTLE MUSKINGUM RIVER BASIN	51
03115400 Little Muskingum River at Bloomfield (d)	51
MUSKINGUM RIVER BASIN	52
Tuscarawas River (head of Muskingum River):	
03116077 Chippewa Creek at Miller Road at Sterling (d)	52
03117000 Tuscarawas River at Massillon (d)	53
03117500 Sandy Creek at Waynesburg (d)	54
Nimishillen Creek (head of Sandy Creek):	
03118000 Middle Branch Nimishillen Creek at Canton (d)	55
03118500 Nimishillen Creek at North Industry (d)	56
Conotton Creek (head of Tuscarawas River):	
03121850 Huff Run at Mineral City (dM)	57
03124500 Sugar Creek at Strasburg (d)	65
03129000 Tuscarawas River at Newcomerstown (d)	66
Mohican River (continuation of Black Fork):	
03136500 Kokosing River at Mount Vernon (d)	67
03139000 Killbuck Creek at Killbuck (d)	68
03140000 Mill Creek near Coshocton (d)	69
03140500 Muskingum River near Coshocton (d)	70

	Page
MUSKINGUM RIVER BASIN—CONTINUED	
Wills Creek:	
03141870 Leatherwood Creek near Kipling (d)	71
03142000 Wills Creek at Cambridge (d)	72
03144000 Wakatomika Creek near Frazeyburg (d)	73
Licking River:	
03145000 South Fork Licking River near Hebron (d)	74
03146500 Licking River near Newark (d)	75
03149500 Salt Creek at Chandlersville (d)	76
03150000 Muskingum River at McConnelsville (d)	77
HOCKING RIVER BASIN	78
03157000 Clear Creek near Rockbridge (d)	78
03157500 Hocking River at Enterprise (d)	79
03158200 Monday Creek at Doanville (dM)	80
03159246 Sunday Creek below Millfield (dM)	88
03159500 Hocking River at Athens (d)	96
SHADE RIVER BASIN	97
03159540 Shade River near Chester (d)	97
RACCOON CREEK BASIN	98
03201902 Raccoon Creek at Bolins Mills (d)	98
03201980 Little Raccoon Creek near Ewington (cdM)	99
03202000 Raccoon Creek at Adamsville (d)	107
SYMMES CREEK BASIN	108
03205470 Symmes Creek at Aid (d)	108
SCIOTO RIVER BASIN	109
03219500 Scioto River near Prospect (dM)	109
03220000 Mill Creek near Bellepoint (d)	117
03220510 Scioto River at O'Shaughnessy Dam (M)	118
03221000 Scioto River below O'Shaughnessy Dam near Dublin (d)	125
Olentangy River:	
03223425 Whetstone Creek at Mount Gilead (d)	126
03225500 Olentangy River near Delaware (d)	127
03226800 Olentangy River near Worthington (d)	128
03227500 Scioto River at Columbus (d)	129
03228300 Big Walnut Creek at Sunbury (d)	130
03228500 Big Walnut Creek at Central College (d)	138
03228560 Rocky Fork at Gahanna (d)	139
03228750 Alum Creek near Kilbourne (d)	140
03228805 Alum Creek at Africa (d)	141
03229500 Big Walnut Creek at Rees (d)	142
03230310 Little Darby Creek at West Jefferson (d)	143
03230450 Hellbranch Run near Harrisburg (d)	144
03230500 Big Darby Creek at Darbyville (cdS)	149
03230800 Deer Creek at Mt. Sterling (d)	150
03231500 Scioto River at Chillicothe (d)	151
03232000 Paint Creek near Greenfield (d)	152

	Page
SCIOTO RIVER BASIN—CONTINUED	
03232500 Rocky Fork near Barretts Mills (d)	153
03234300 Paint Creek at Chillicothe (d)	154
03234500 Scioto River at Higby (d)	155
03237020 Scioto River at Piketon (d)	156
Reservoirs in Scioto River Basin	157
03220500 O'Shaughnessy Reservoir near Dublin (e)	157
03221500 Griggs Reservoir near Columbus (e)	157
03228400 Hoover Reservoir at Central College (e)	157
UPPER TWIN CREEK BASIN	159
03237280 Upper Twin Creek at McGaw (dHBM)	159
OHIO BRUSH CREEK BASIN	160
03237500 Ohio Brush Creek near West Union (d)	160
WHITE OAK CREEK BASIN	161
03238500 White Oak Creek near Georgetown (d)	161
LITTLE MIAMI RIVER BASIN	162
03240000 Little Miami River near Oldtown (d)	162
03241500 Massies Creek at Wilberforce (d)	163
03244936 O'Bannon Creek near Loveland (d)	164
03245500 Little Miami River at Milford (d)	165
03247500 East Fork Little Miami River at Perintown (d)	166
SHEPHERD CREEK BASIN	167
391059084345500 West Branch Shepherd Creek at River Mile 0.40 near Mount Airy (d)	167
391040084344200 West Branch Shepherd Creek at River Mile 0.01 near Mount Airy (d)	168
391040084343800 Middle Branch Shepherd Creek at River Mile 0.04 near Mount Airy (d)	169
391035084344300 East Branch Shepherd Creek near Mount Airy (d)	170
GREAT MIAMI RIVER BASIN	171
03260706 Bokengehalas Creek at De Graff (d)	171
03261500 Great Miami River at Sidney (d)	172
03261950 Loramie Creek near Newport (d)	173
03262000 Loramie Creek at Lockington (d)	174
03262700 Great Miami River at Troy (d)	175
03263000 Great Miami River at Taylorsville (d)	176
03264000 Greenville Creek near Bradford (d)	177
03265000 Stillwater River at Pleasant Hill (d)	178
03266000 Stillwater River at Englewood (d)	179
03266560 Mad River at West Liberty (d)	180
03267000 Mad River near Urbana (d)	181
03267900 Mad River at St. Paris Pike at Eagle City (d)	182
03269500 Mad River near Springfield (d)	183
03270000 Mad River near Dayton (d)	184
03270500 Great Miami River at Dayton (d)	185

	Page
GREAT MIAMI RIVER BASIN—CONTINUED	
03271000 Wolf Creek at Dayton (d)	186
03271510 Great Miami River near Linden Avenue at Miamisburg (M)	187
03271601 Great Miami River below Miamisburg (d)	194
03272000 Twin Creek near Germantown (d)	195
03272100 Great Miami River at Middletown (d)	196
03272700 Sevenmile Creek at Camden (d)	197
03274000 Great Miami River at Hamilton (d)	198

Ground-Water Stations for which Records are Published

[Letters after station names designate type of data: (I) water level]

	Well number	Local number	Page
ASHLAND COUNTY			212
Northeast of Ashland (I)	40530308217070.....	AS-2.....	212
Ashland (I)	40542508217300.....	AS-3.....	213
ATHENS COUNTY			214
Athens (I)	39200408207160.....	AT-2A	214
Athens (I)	392009082072200.....	AT-5	215
Nelsonville (I)	392630082130400.....	AT-6	216
AUGLAIZE COUNTY			217
Southwest of New Hampshire (I)	403233083574500.....	AU-3.....	217
BELMONT COUNTY			218
Mount Olivett (I)	400118081082200.....	B-3	218
BROWN COUNTY			219
Fincastle (I)	385932083412400.....	BR-20.....	219
BUTLER COUNTY			220
East of Ross (I)	391904084371800.....	BU-12.....	220
Fairfield (I)	391942084345700.....	BU-18.....	221
Fairfield (I)	392017084345200.....	BU-7.....	222
East of Hamilton (I)	392048084311400.....	BU-8.....	223
Southwest of Trenton (I)	392737084291300.....	BU-16.....	224
Southwest of Trenton(I)	392743084295500.....	BU-17.....	225
Middletown (I)	392939084231700.....	BU-3.....	226
Middletown (I)	393202084241500.....	BU-15.....	227
CARROLL COUNTY			228
North of Carrollton (I)	403709081052800.....	C-1.....	228
CHAMPAIGN COUNTY			229
Urbana (I)	400638083453900.....	CH-3.....	229
CLARK COUNTY			230
New Carlisle (I)	395639084012200.....	CL-9.....	230
Northwest of Springfield (I)	395840083495200.....	CL-7.....	231
COSHOCTON COUNTY			232
North of Conesville (I)	401256081525100.....	CS-3	232
Coshocton (I)	401734081523800.....	CS-2A	233
DARKE COUNTY			234
East of Greenville (I)	400514084345700.....	D-2	234
DELAWARE COUNTY			235
Delaware (I)	402126083040400.....	DL-3	235

FAIRFIELD COUNTY	236
Southwest of Amanda (I)	393450082403600 F-7 236
Lancaster (I)	393913082330900 F-8 237
Lancaster (I)	394257082362900 F-6 238
West Rushville (I)	394544082271000 F-1 239
Baltimore (I)	395053082361900 F-5 240
FAYETTE COUNTY	241
West of Washington Court House (I)	393153083322000 FA-1 241
FRANKLIN COUNTY	242
Shadeville (I)	394956083002700 FR-18 242
Shadeville (I)	395055083000600 FR-19 243
Columbus (I)	400101083021800 FR-10 244
GALLIA COUNTY	245
East of Crown City (I)	383638082103300 G-2 245
GREENE COUNTY	246
Trebein (I)	394217083594100 GR-12 246
North of Xenia (I)	394411083561300 GR-1 247
North of Xenia (I)	394425083551100 GR-10 248
HAMILTON COUNTY	249
Cincinnati (I)	391039084291500 H-11 249
Southeast of Miami (I)	391101084172100 H-3 250
Cincinnati (I)	391201084281600 H-10 251
Southeast of Harrison (I)	391214084470100 H-1 252
Wyoming (I)	391341084275300 H-8 253
Evendale (I)	391442084262900 H-7 254
Glendale (I)	391608084254400 H-6 255
South of Ross (I)	391733084392400 H-2 256
Southwest of Ross (I)	391817084393300 H-4 257
HARDIN COUNTY	258
Alger (I)	404218083503700 HN-1 258
HOCKING COUNTY	259
Logan (I)	393200082235300 HK-1 259
KNOX COUNTY	260
Mount Vernon (I)	402344082300700 K-1 260
Fredericktown (I)	402747082374300 K-4 261
Bellville (I)	403136082363100 K-5 262
LICKING COUNTY	263
Reynoldsburg (I)	395717082454200 LI-5 263
North of Hebron (I)	395830082291700 LI-6 264
St. Louisville	400848082251100 LI-4 265
LOGAN COUNTY	266
West Liberty (I)	401510083444400 LO-3 266

MADISON COUNTY	267
London (I)	395301083272200..... M-2 267
London (I)	395352083292000..... M-5A..... 268
Northwest of London (I)	395357083304400..... M-4 269
North of London (I)	395740083255700..... M-3 270
MAHONING COUNTY	271
Canfield (I)	410042080453800..... MA-1..... 271
MARION COUNTY	272
Southwest of New Bloomington (I)	403413083170500..... MN-4 272
LaRue (I)	403443083230400..... MN-1 273
West of Marion (I)	403601083110400..... MN-2 274
MEDINA COUNTY	275
Wadsworth (I)	410032081422900..... MD-5..... 275
MERCER COUNTY	276
Coldwater (I)	402833084375200..... MR-2..... 276
MIAMI COUNTY	277
Northeast of Tipp City (I)	395848084085500..... MI-3 277
MONTGOMERY COUNTY	278
West Carrollton (I)	394012084151700..... MT-55 278
West Carrollton (I)	394025084162800..... MT-49 279
Dayton (I)	394425084113200..... MT-3 280
Dayton (I)	394533084113800..... MT-6 281
Dayton (I)	394811084095000..... MT-74 282
MUSKINGUM COUNTY	283
Zanesville (I)	395804081593200..... MU-1A..... 283
PICKAWAY COUNTY	284
South of Circleville (I)	393327082571600..... PK-7 284
South of Circleville (I)	393402082572500..... PK-4 285
Circleville (I)	393637082572200..... PK-6A 286
North of Ashville (I)	394503082583800..... PK-10 287
North of Ashville (I)	394503082583801..... PK-11 288
Orient (I)	394742083094800..... PK-9 289
PIKE COUNTY	290
West of Piketon (I)	390359083015100..... PI-2 290
PORTAGE COUNTY	291
Windham (I)	411401081025000..... PO-1 291
PREBLE COUNTY	292
East of Easton (I)	394438084335900..... PR-2 292
RICHLAND COUNTY	293
Mansfield (I)	404625082305100..... R-4..... 293
Shiloh (I)	405753082360800..... R-3..... 294
ROSS COUNTY	295
West of Bainbridge (I)	391341083172200..... RO-7 295
Southwest of Bourneville (I)	391544083095700..... RO-6..... 296

SHELBY COUNTY	297
Sidney (I)	401707084103100 SH-5 297
STARK COUNTY	298
Canton (I)	404939081203800 ST-5A 298
North Canton (I)	405211081253500 ST-27 299
TUSCARAWAS COUNTY	300
Dover (I)	403207081293800 U-3 300
Strasburg (I)	403557081313600 U-4 301
North of Strasburg (I)	403653081321800 TU-1 302
Strasburg (I)	403823081324200 TU-5 303
UNION COUNTY	304
Southeast of Raymond (I)	401826083255200 U-4 304
East of East Liberty (I)	402010083321900 U-5 305
VINTON COUNTY	310
McArthur (I)	391452082282900 V-1 306
North of McArthur (I)	392016082272400 V-100 307
WARREN COUNTY	308
Kings Mills (I)	392119084142000 W-6 308
Lebanon (I)	392517084181700 W-7 309
Lebanon (I)	392517084181701 W-8 310
East of Monroe (I)	392712084191700 W-5 311
WASHINGTON COUNTY	312
North of Marietta (I)	392553081281600 WA-2 312
WAYNE COUNTY	313
Wooster (I)	404655081553100 WN-8 313
Wooster (I)	404802081583100 WN-2A 314
Sterling (I)	405745081510200 WN-7 315
Rittman (I)	405805081462300 WN-6 316

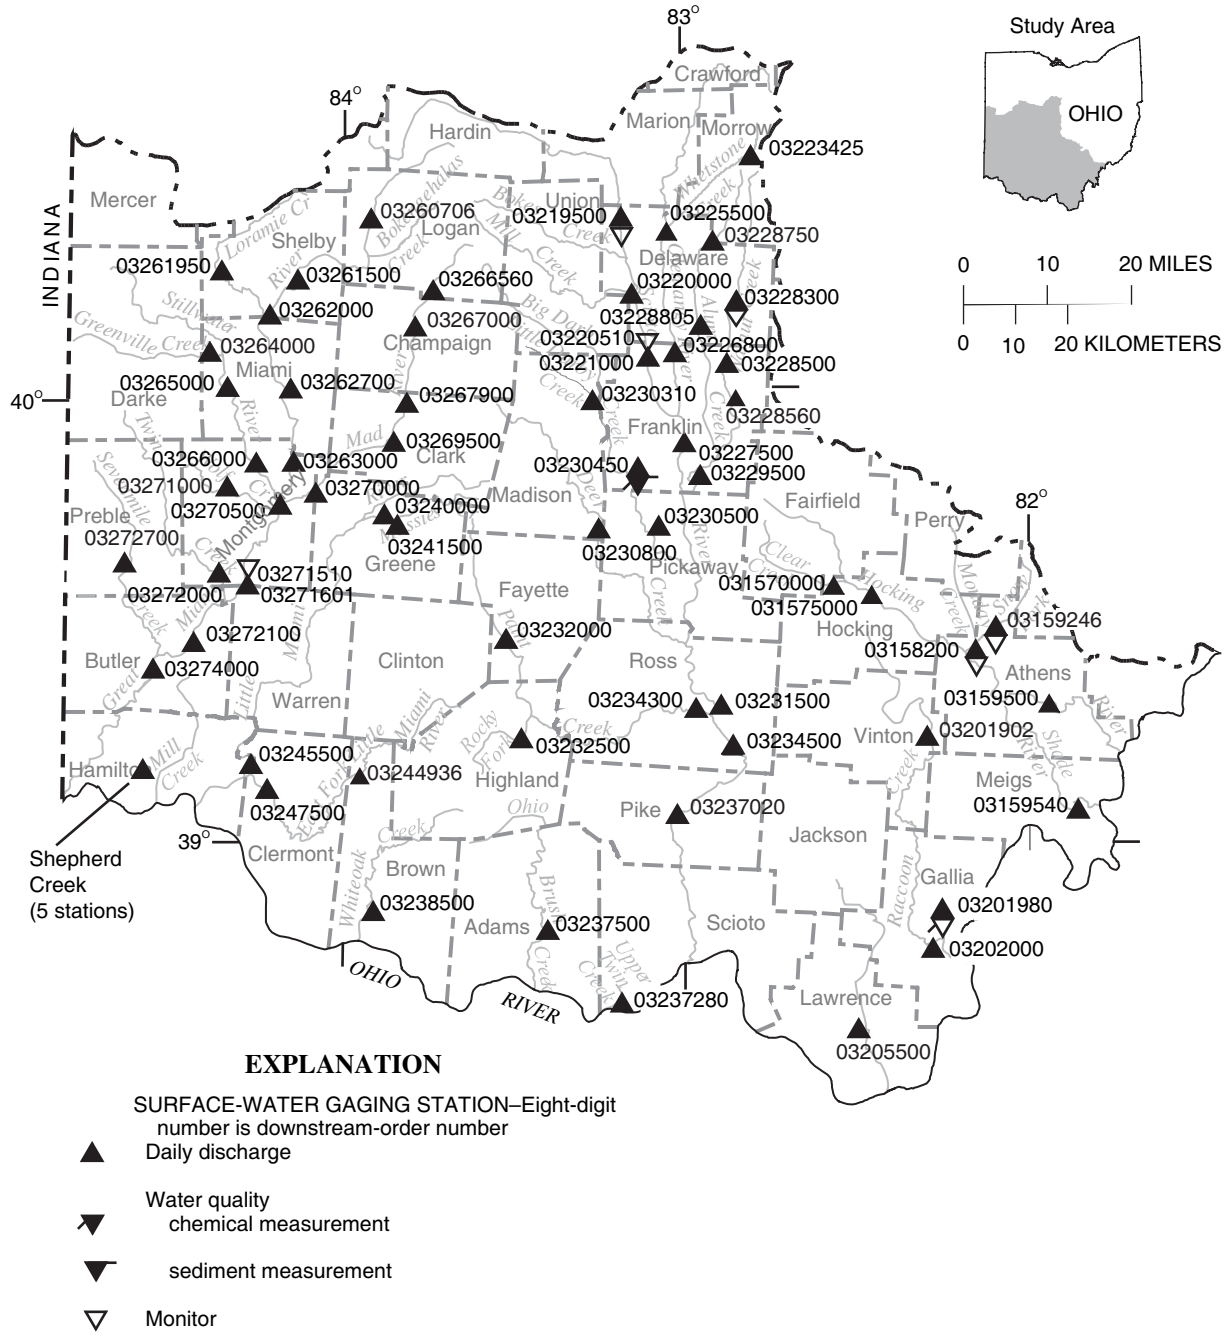


Figure 1a. Location of data-collection stations.

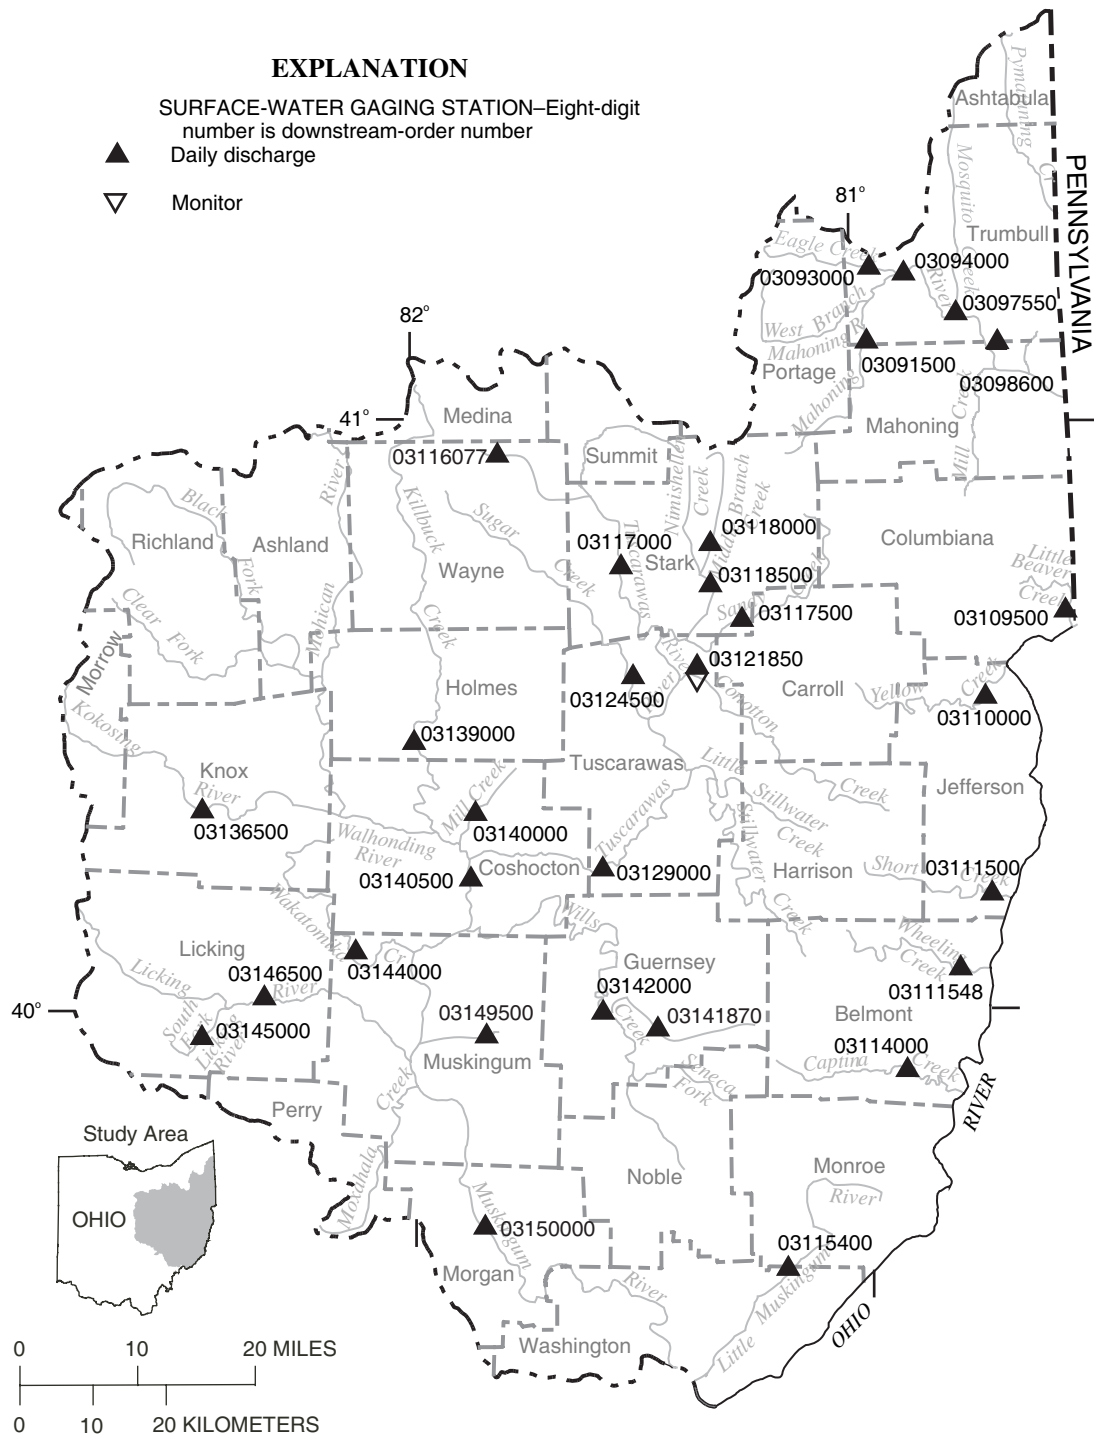


Figure 1b. Location of data-collection stations.

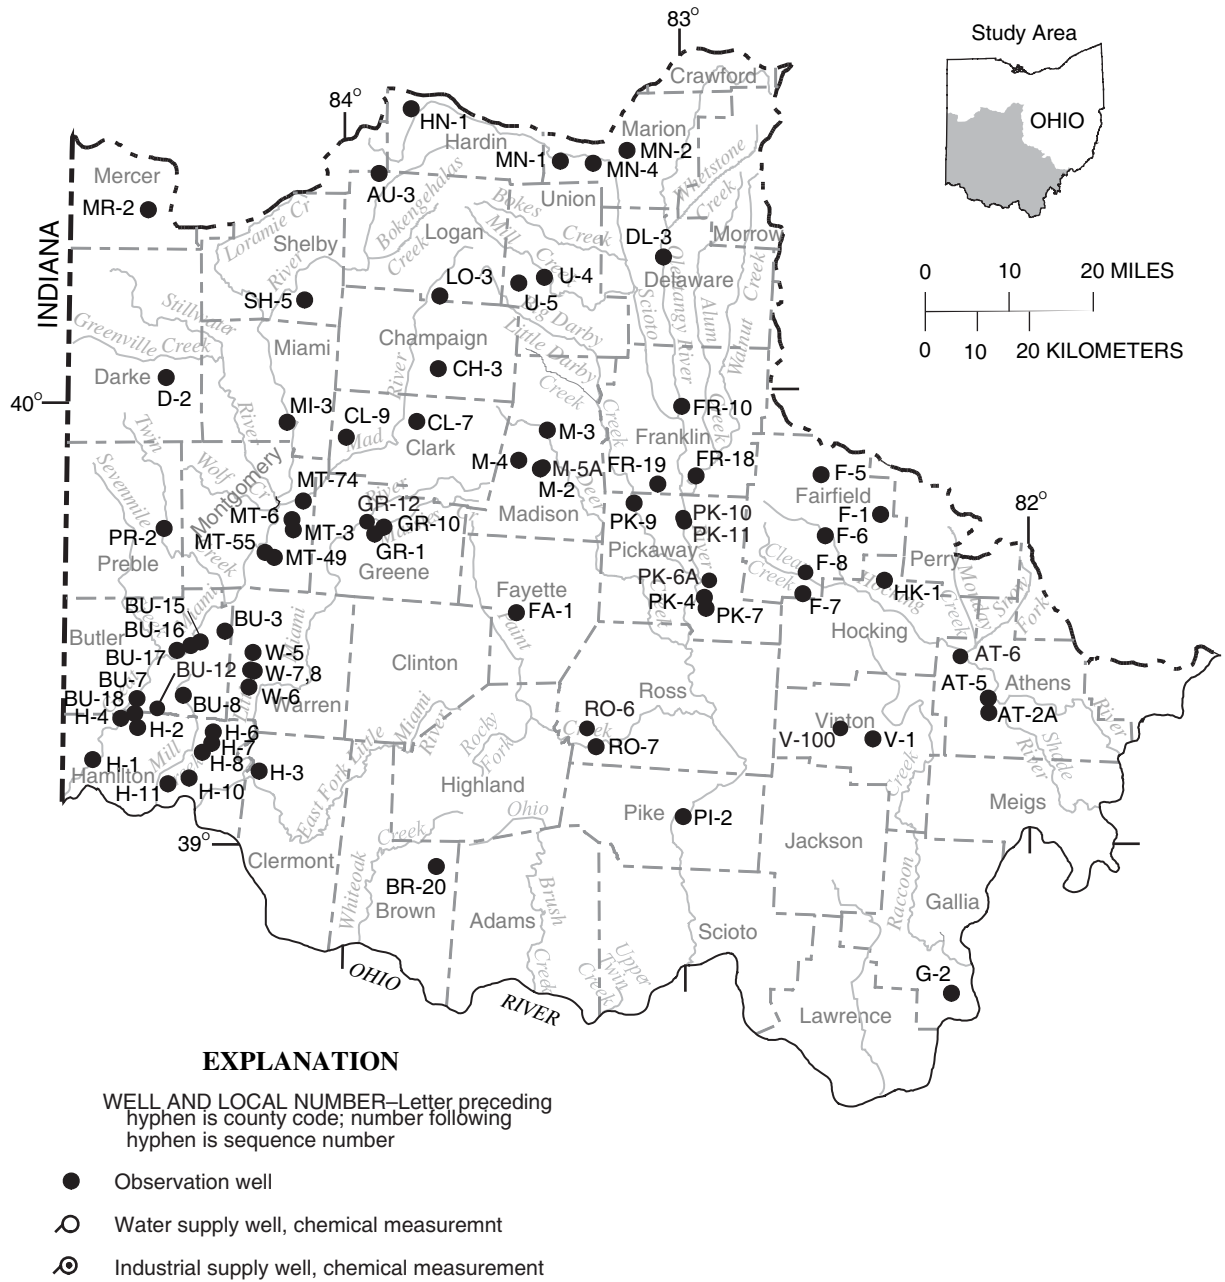


Figure 1c. Location of data-collection wells.

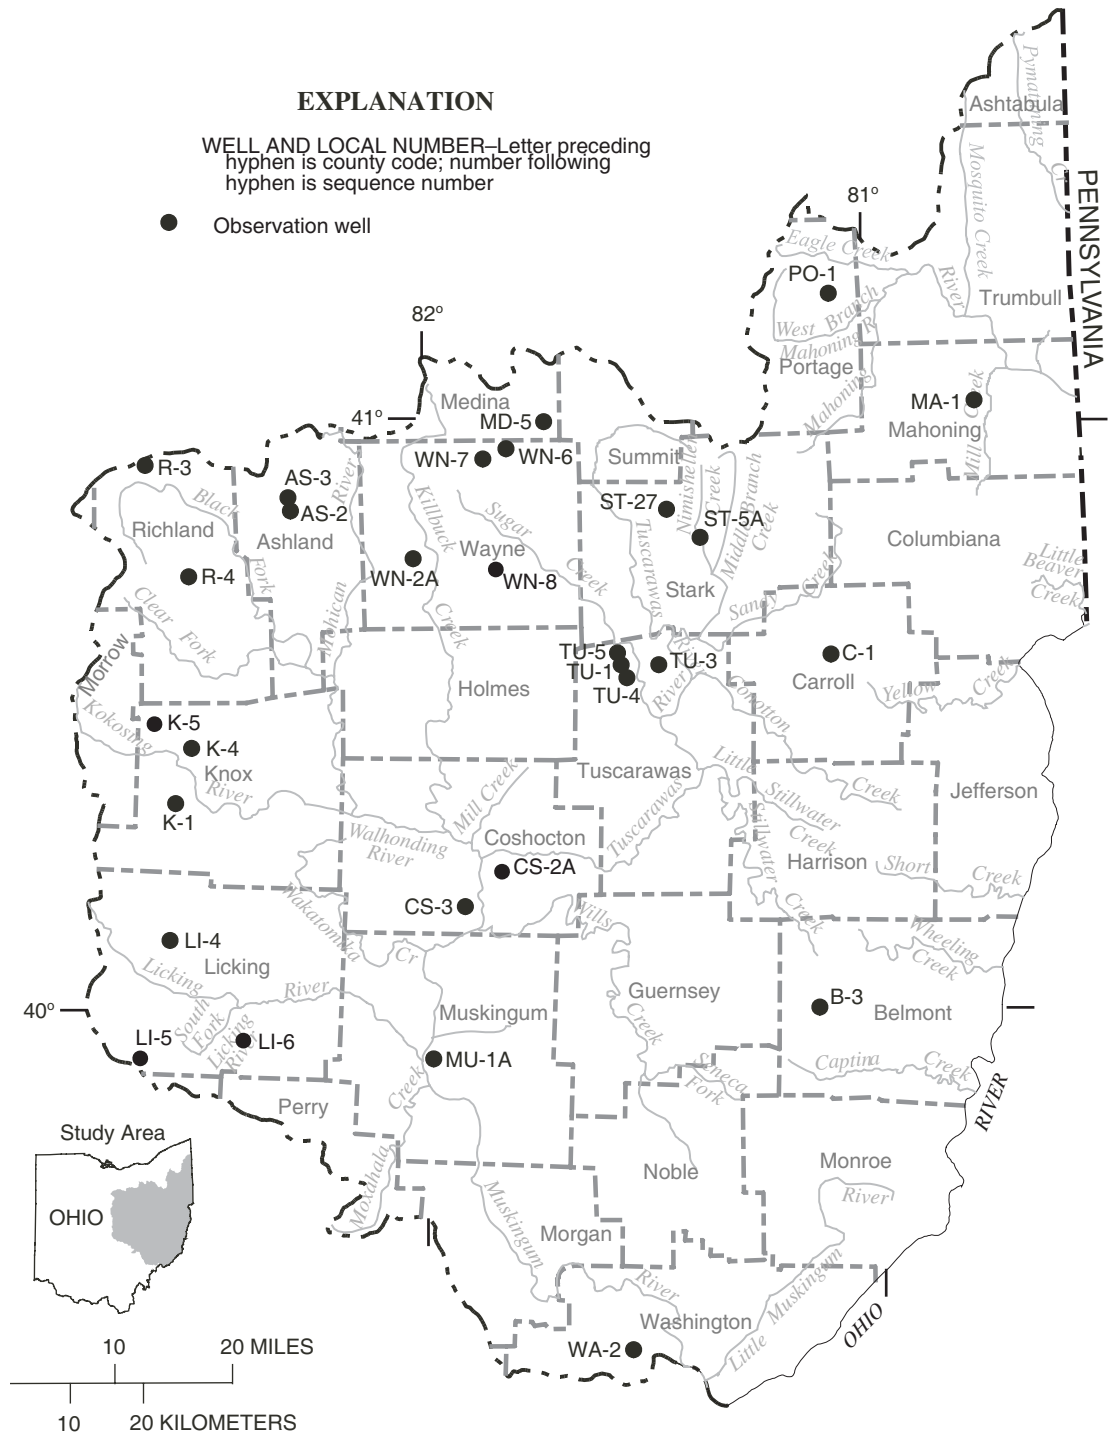


Figure 1d. Location of data-collection wells.

Discontinued Surface-Water-Discharge Stations

The following continuous-record surface-water-discharge or stage-only stations (gaging stations) have been discontinued. Daily discharge or stage records were collected and published for the period of record, expressed in water years, shown for each station. Those stations with an asterisk (*) after the station number are currently operated as crest-stage partial-record stations. Discontinued project stations with less than 3 years of record have not been included. Information regarding these stations may be obtained from the USGS Ohio Water Science Center at the address given on the back side of the title page of this report.

Station name	Station number	Drainage area (in square miles)	Period of record
Mahoning River at Alliance	03086500*	89.2	1941–93
Beech Creek near Bolton	03087000	17.4	1944–51
Deer Creek at Limaville	03088000	33.2	1942–51
Mahoning River near Deerfield	03088500	175	1924–31
Willow Creek near Deerfield	03089000	11.6	1941–43
Mill Creek near Berlin Center	03089500	19.1	1942–72
Mahoning River below Berlin Dam near Berlin Center	03090500	48	1931–91
Kale Creek near Pricetown	03092000	21.9	1941–93
West Branch Mahoning River near Ravenna	03092090*	21.8	1966–93
West Branch Mahoning River below MJ Kerwin Dam at Wayland	03092460	81.7	1969–91
West Branch Mahoning River near Newton Falls	03092500	96.3	1927–82
Duck Creek at Leavittsburg	03093500	32.3	1941–48
Mahoning River at Warren	03094500	594	1925–35
Mosquito Creek below Mosquito Creek Dam near Cortland	03095500	97.5	1926–29 1943–91
Mosquito Creek at Niles	03096000	138	1929–51
Meander Creek at Ohlestown	03096500	78.4	1926–29
Meander Creek at Mineral Ridge	03097500	84.3	1929–51
Mahoning River at Youngstown	03098000	898	1922–82
Mill Creek at Youngstown	03098500	66.3	1944–71 1999–2000
Mahoning River at Lowellville	03099500	1073	1944–72 1974–1991 1999–2000
Pymatuning Creek at Kinsman	03102950*	96.7	1966–94
Lisbon Creek at Lisbon	03109000	6.19	1947–62
Stateline Creek near Negley	03109320	3.09	1977–79
Yellow Creek at Hammondsville	03110500	164	1915–35
Consol Run near Bloomingdale	03110983	.98	1979–81
Captina Creek at Armstrongs Mill	03114000	134	1986–35 1958–2003
Little Muskingum River at Fay	03115500	258	1915–18 1926–35
Montrose Run at Montrose	03115969	0.263	1993–98
Schocalog Run at Montrose	03115970	1.59	1994–98
Schocalog Run at Fairlawn	03115971	2.13	1992–98

Station name	Station number	Drainage area (in square miles)	Period of record
Schocalog Run at Copley Junction	03115973*	3.65	1992–2004
Tuscarawas River at Clinton	03116000	174	1926–79
Chippewa Creek at Easton	03116200	146	1961–82
Tuscarawas River at Crystal Springs	03116500	435	1922–29
Sandy Creek at Sandyville	03119000	481	1924–47
McGuire Creek below Leesville Dam near Leesville	03120500*	48.3	1939–91 1992
Indian Fork below Atwood Dam near New Cumberland	03121500	70	1961–75
Tuscarawas River below Dover Dam near Dover	03122500*	1,045	1924–91
Sugar Creek above Beach City Dam at Beach City	03123000	160	1945–75
Sugar Creek below Beach City Dam near Beach City	03124000	300	1939–91
Home Creek near New Philadelphia	03125000	1.64	1937–80
Stillwater Creek at Piedmont	03126000*	122	1939–91
Stillwater Creek at Tippecanoe	03127000*	282	1939–91
Stillwater Creek at Urichsville	03127500	367	1922–91
Clear Fork Tributary near Hanover	03127970	.68	1978–81
Little Stillwater Creek below Tappan Dam at Tappan	03128500	71.1	1939–91
Black Fork below Charles Mills Dam near Mifflin	03130000	217	1939–91
Touby Run at Mansfield	03130500	5.44	1947–78
Rocky Fork near Mansfield	03131000	39	1925–32
Black Fork at Loudonville	03131500*	349	1931–91
Clear Fork at Butler	03132000	136	1945–75
Clear Fork at Newville	03132500	174	1935–39
Clear Fork below Pleasant Hill Dam near Perrysville	03133500*	198	1939–91
Jerome Fork at Jeromeville	03134000	120	1926–49
Lake Fork below Mohicanville Dam	03135000*	271	1939–93
Lake Fork near Loudonville	03135500	344	1931–32 1935–39
Mohican River at Greer	03136000	948	1922–82
Kokosing River near Lucerne	03136175	59.5	2000–2004
North Branch Kokosing River near Federicktown	03136400	45.5	1973–78
Kokosing River at Millwood	03137000	455	1922–74
Walhonding River below Mohawk Dam at Nellie	03138500	1,505	1922–91
Killbuck Creek at Layland	03139500	503	1924–30
Seneca Fork below Senecaville Dam near Senecaville	03141500*	118	1938–91
Salt Fork near Cambridge	03142200	55.6	1956–68
Salt Fork below Salt Fork Dam near Cambridge	03142295	159	1971–79
Wills Creek at Birds Run	03142500	730	1928–39
Wills Creek below Wills Creek Dam at Wills Creek	03143500	842	1939–91
Sand Fork near Wakatomika	03144400	1.34	1978–83
Opossum Run Tributary near Wakatomika	03144450	1.27	1978–83
Muskingum River at Dresden	03144500	5,993	1922–85
Raccoon Creek at Granville	03145500	82.7	1940–48
North Fork Licking River at Utica	03146000	116	1940–48 1970–83

Station name	Station number	Drainage area (in square miles)	Period of record
Licking River at Toboso	03147000	672	1903–06 1922–61
Licking River below Dillon Dam near Dillon Falls	03147500*	742	1940–92
Meigs Creek near Beverly	03150250	136	1972–75
Muskingum River at Beverly	03150300	7,627	1993–99
Hunters Run at Lancaster	03156000	10.0	1956–80
Hocking River at Lancaster	03156400	48.2	1956–75
Hocking River near Lancaster	03156500	90.3	1924–32
Clear Fork near Logan	03158000	14.8	1942–47
Snow Fork Monday Creek at Buchtel	03158195	24.4	1981 1997–2002
Sunday Creek at Glouster	03159000	104	1952–81
Hocking River below Athens	03159510	957	1977–93
East Branch Shade River near Tupper Plains	03159555	37.5	1980–82 1983–85
Sandy Run above Big Four Hollow Creek near Lake Hope	03201600	.98	1971–82
Big Four Hollow Creek below East Fork near Lake Hope	03201660	.73	1979–81
Big Four Hollow Creek near Lake Hope	03201700	1.01	1971–83
Hull Hollow Creek near Lake Hope	03201720	.22	1979–81
Sandy Run near Lake Hope	03201800	4.99	1958–79
Zinns Run near Radcliff	03201929	3.41	1988–91
Strongs Run near Ewington	03201947	15.8	1988–91
Symmes Creek at Getaway	03205500	335	1938–47
Scioto River at LaRue	03217500	257	1927–35 1939–51
Little Scioto River above Marion	03218000	72.4	1939–72
Little Scioto River at Sewage Treatment Plant near Marion	03218500	85.8	1925–36 1938–39
Little Scioto River near Marion	03219000	93.3	1924–25 1939
Bokes Creek near Warrenburg	03219590	83.2	1982–97
Eagon Run near Warrenburg	03219600	.123	1950–62
Olentangy River near New Winchester	03222500	49.4	1947–49
Olentangy River at Clairdon	03223000	157	1947–98
Whetstone Creek near Shawtown	03223500	61.8	1947–55
Shaw Creek at Shawtown	03224000	25.4	1947–55
Whetstone Creek near Ashley	03224500	98.7	1955–74
Olentangy River at Delaware	03226000	421	1922–24
Olentangy River at Stratford	03226500	445	1934–36 1938–58
Rush Run at Worthington	03226865	1.65	1979–82
Linworth Road Creek at Columbus	03226870	2.03	1979–82
Bethel Road Creek at Columbus	03226875	.22	1979–82
Olentangy River at Henderson Road at Columbus	03226885	518	1978–82
Scioto Big Run at Briggsdale	03228000	11.0	1947–58

Station name	Station number	Drainage area (in square miles)	Period of record
Alum Creek at Columbus	03229000	189	1923–35 1938–98
Scioto River near Circleville	03230000	2,638	1939–56
Scioto River at Circleville	03230700*	3,217	1974–79 1990
Deer Creek at Pancoastburg	03230900*	277	1964–98
Deer Creek at Williamsport	03231000	333	1927–35 1939–56 1962–92
Rattlesnake Creek at Centerfield	03232300	209	1971–82
Paint Creek below Paint Creek Dam near Bainbridge	03232470	570	1968–92
Paint Creek at Bourneville	03234000*	807	1921–37 1938–98
Salt Creek at Tarlton	03235000	11.5	1947–61
Tar Hollow Creek at Tar Hollow State Park	03235500	1.35	1947–79
Salt Creek near Londonderry	03236000	286	1939–50
Little Salt Creek near Jackson	03236500	76.1	1925–32
Little Miami River near Selma	03239000	48.9	1952–58
North Fork Little Miami River near Pitchin	03239500	28.9	1951–58
North Fork Massies Creek at Cedarville	03240500	28.9	1954–68
South Fork Massies Creek at Cedarville	03241000	17.1	1954–68
Little Miami River at Spring Valley	03242000	360	1926–35 1940–51
Little Miami River near Spring Valley	03242050	366	1968–85
Caesar Creek near Xenia	03242150	71.4	1900 1968–84
Anderson Fork near New Burlington	03242200	77.8	1968–84
Caesar Creek at Harveysburg	03242300	209	1961–75
Caesar Creek near Wellman	03242350	239	1965–74
Little Miami River near Fort Ancient	03242500	680	1940–51
Todd Fork near Wilmington	03243000	22.2	1923 1943–44
Cowan Creek near Wilmington	03243500	32.0	1943–50
Todd Fork near Roachester	03244000	219	1952–75
East Fork Little Miami River near Dodsonville	03246000	91.4	1947–48
East Fork Little Miami River near Marathon	03246200	195	1968–84
East Fork Little Miami River near Williamsburg	03246500	237	1949–53 1961–74 1999–2000
East Fork Little Miami River near Bantam	03247000	330	1949–53
East Fork Little Miami River near Batavia	03247050	352	1965–94
Shayler Run near Perintown	03247400	11.8	1968–73
Little Miami River at Plainville	03248000	1,713	1965–71
Mill Creek at Reading	03255500	73.0	1939–91
West Fork Mill Creek at Mount Healthy	03256000	7.90	1949–53
West Fork Mill Creek near Greenhills	03257000	29.9	1945–53

Station name	Station number	Drainage area (in square miles)	Period of record
West Fork Mill Creek at Woodlawn	03257500	32.2	1953–86
West Fork Mill Creek at Lockland	03258000	35.6	1939–57
Mill Creek at Carthage	03259000*	115	1946–2002
Mill Creek at Mitchell Avenue at Cincinnati	03259500	135	1941–44 1990
Stony Creek near DeGraff	03260800	59.1	1958–76
Bokengehalas Creek near DeGraff	03260700	36.3	1957–92
Great Miami River at Quincy	03261000	405	1947–49
Great Miami River at Piqua	03262500	866	1915–17
Greenville Creek near Greenville	03263500	142	1930–31
Mad River at Zanesfield	03266500	7.31	1947–78
Mad River at Tremont City	03267500	264	1931–33 1966–75
Chapman Creek at Tremont City	03267600	24.0	1968–69
Moore Run near Eagle City	03267700	18.2	1966–72
Buck Creek near New Moorefield	03267950	30.5	1967–77
East Fork Buck Creek near New Moorefield	03267960	28.7	1967–77
Buck Creek at New Moorefield	03268000	65.3	1943–58
Beaver Creek near Springfield	03268500	39.2	1943–58 1973–76
Buck Creek at Springfield	03269000	139	1915–21 1925–49 1973–74
Wolf Creek at Trotwood	03270800	22.7	1963–86
Great Miami River at Miamisburg	03271500*	2,711	1916–20 1924–35 1952–95
Twin Creek near Ingomar	03271800	197	1962–99
Sevenmile Creek at Collinsville	03272800	120	1960–72
Sevenmile Creek at Sevenmile	03273000	135	1915–20
Fourmile Creek near Hamilton	03273500	307	1938–60
Great Miami River at Venice	03274500	3,789	1915–27 1932–33

Discontinued Surface-Water-Quality Stations

The following continuous-record surface-water-quality stations have been discontinued. Daily records of temperature, specific conductance, pH, dissolved oxygen, or sediment were collected and published for the period of record, expressed in water years, shown for each station. Discontinued project stations with less than 3 years of record have not been included. Information regarding these stations may be obtained from the USGS Ohio Water Science Center at the address given on the back side of the title page of this report.

[Letters designate type of record: do, dissolved oxygen; pH, pH; s, sediment; sc, specific conductance; t, temperature]

Station name	Station number	Drainage area (in square miles)	Type of record	Period of record
Beech Creek near Bolton	03087000	17.4	t	1943–51
Mahoning River above Duck Creek at Leavittsburg	03093800	542	do, pH, sc, t	1968–81
Mahoning River at Warren	03094500	594	t	1924–35
Mahoning River at Lowellville	03099500	1,073	t	1953–61
			do, pH, sc t	1963–67
Mahoning River at Ohio–Pennsylvania State Line	03099510	1,075	do, pH, sc, t	1967–91
Ohio River at Stratton	03110700	23,500	t	1961
			sc	1964–70
Consol Run near Bloomingdale	03110983	.98	s	1979–81
Tuscarawas River at Navarre	03117100	534	do, pH, sc, t	1968–84
			do, pH, sc, t	1987–91
Black Fork at Londonville	03131500	349	do, pH, sc, t	1968–76
Sand Fork near Wakatomika	03144400	1.34	s	1978–81
North Fork Licking River at Utica	03146000	116	t	1970–73
Licking River near Newark	03146500	537	t	1962–68
			do, pH, sc, t	1968–80
Muskingum River at Philo	03149200	7,196	do, pH, sc, t	1965–74
Muskingum River near Beverly	03150300	7,626	t	1963–70
			sc	1964–70
North Branch Hunters Run near Hooker	03155900	104	s	1956–62
Hocking River at Athens	03159500	943	t	1954–64
			s	1956–65
			sc	1964–65
Hocking River below Athens	03159510	957	do, sc, t	1966–80
			pH	1972–80
Sandy Run above Big Four Hollow Creek near Lake Hope	03201600	98	pH, sc, t	1971–78
Big Four Hollow Creek near Lake Hope	03201700	1.01	pH, sc, t	1971–83
			s	1978–83
Sandy Run near Lake Hope	03201800	4.99	do, sc, t.	1970–78
Raccoon Creek at Adamsville	03202000	585	do, pH, sc, t	1967–84
			s	1969–74
			s	1985
Whetstone Creek near Ashley	03224500	98.7	sc	1964–68
Olentangy River near Worthington	03226800	497	t	1955–68
			s	1978–81
Rush Run at Worthington	03226865	1.65	s	1978–81

[Letters designate type of record: do, dissolved oxygen; pH, pH; s, sediment; sc, specific conductance; t, temperature]

Station name	Station number	Drainage area (in square miles)	Type of record	Period of record
Linworth Road Creek at Columbus	03226870	2.03	s	1978–81
Bethel Road Creek at Columbus	03226875	.22	s	1978–81
Olentangy River at Henderson Road at Columbus	03226885	518	s	1978–81
Alum Creek at Africa	03228805	122	sc, t	1965–70
Scioto River below Shadeville	03229600	2,266	do, sc, t pH	1965–80 1971–80
Little Darby Creek at West Jefferson	03230310	162	s	1992–98
Big Darby Creek at Darbyville	03230500	534	s	1965–77 1992–98
Scioto River at Chillicothe	03231500	3,849	t	1951 1953–81 do, sc 1965–81 pH 1971–81 do, pH, sc, t 1985–2002
Paint Creek near Greenfield	03232000	249	t	1974–78
Rattlesnake Creek at Centerfield	03232300	209	t	1974–78
Paint Creek at Chillicothe	03234300	1,136	do, pH, sc, t	1985–2002
Scioto River at Higby	03234500	5,131	s	1959–74 1979–82 do, pH, sc, t 1967–93 1996–2002
Salt Creek near Londonderry	03235995	268	t	1973–74
Scioto River at Lucasville	03237100	6,178	t sc	1956–74 1965–74
Little Miami River near Selma	03239000	48.9	s, t	1952–58
North Fork Little Miami River near Pitchin	03239500	28.9	s, t	1952–58
North Fork Massies Creek at Cedarville	03240500	28.9	s, t	1954–68
South Fork Massies Creek near Cedarville	03241000	17.1	s, t	1954–68
Little Miami River near Spring Valley	03242050	366	do, pH, sc, t	1968–80
Caesar Creek at Harveysburg	03242300	209	sc, t	1970–75
Todd Fork near Roachester	03244000	219	s, t	1952–58
Little Miami River at Miamiville	03245300	1,189	do, pH, sc, t	1970–75
Little Miami River at Milford	03245500	1,203	do, pH, sc, t s	1975–84 1978–84
East Fork Little Miami River at Williamsburg	03246500	237	sc, t	1970–75
Great Miami River at Tipp City	03262745	970	do, pH, sc, t	1978–80
Mad River at Eagle City	03267800	307	s t	1965–69 1965–69 2002–2004
Buck Creek at New Moorefield	03268000	65.3	do, pH, sc	2002–2004
Buck Creek at New Moorefield	03268000	65.3	sc, t	1970–76
Mad River near Dayton	03270000	635	do, pH, sc, t	1968–80
Great Miami River near Stewart Street at Dayton	03271075	2,587	do, pH, sc, t	1978–80
Great Miami River near Miamisburg	03271600	2,715	do, pH, sc, t	1964–78
Great Miami River at Rockdale	03272410	3,275	do, pH, sc, t	1978–80

[Letters designate type of record: do, dissolved oxygen; pH, pH; s, sediment; sc, specific conductance; t, temperature]

Station name	Station number	Drainage area (in square miles)	Type of record	Period of record
Great Miami River at New Baltimore	03274600	3,814	sc, t do, sc, t pH	1966 1968–82 1975–82
Great Miami River at Elizabethtown	03276600	5,356	t sc	1956–74 1964–74

Introduction

The Water Resources Discipline of the U.S. Geological Survey (USGS), in cooperation with state agencies, obtains a large amount of data each water year (a water year is the 12-month period from October 1 through September 30 and is identified by the calendar year in which it ends) pertaining to the water resources of Ohio. These data, accumulated during many years, constitute a valuable data base for developing an improved understanding of the water resources of the State. To make these data readily available to interested parties outside the USGS, they are published annually in this report series entitled "Water Resources Data—Ohio."

This report (in two volumes) includes records on surface water and ground water in the State. Specifically, it contains (1) discharge records for streamflow-gaging stations, miscellaneous sites, and crest-stage stations, (2) stage and content records for streams, lakes, and reservoirs, (3) water-quality data for streamflow-gaging stations, wells, synoptic sites, and partial-record sites, and (4) water-level data for observation wells. Locations of lake- and streamflow-gaging stations, water-quality stations, and observation wells for which data are presented in this volume are shown in figures 1a through 1d (located after Contents). The data in this report represent that part of the National Water Information System collected by the USGS and cooperating State and Federal agencies in Ohio.

This series of annual reports for Ohio began with the 1961 water year with a report that contained only data relating to the quantities of surface water. For the 1964 water year, a similar report was introduced that contained only data relating to water quality. Beginning with the 1975 water year, the report was changed to present (in two or three volumes) data on quantities of surface water, quality of surface and ground water, and ground-water levels.

Prior to the introduction of this series, and for several years concurrent with it, water-resources data for Ohio were published in a series of USGS Water-Supply Papers. Data on stream discharge and stage and on lake or reservoir contents and stage through September 1960 were published annually under the title "Surface-Water Supply of the United States, Parts 3 and 4." For the 1961 through 1970 water years, the data were published in two 5-year reports. Data on chemical quality, temperature, and suspended sediment for the 1941 through 1970 water years were published annually under the title "Quality of Surface Waters of the United States," and ground-water levels for the 1935 through 1974 water years were published under the title "Ground-Water Levels in the United States." The above-mentioned Water-Supply Papers can be found in libraries of the principal cities of the United States and can be purchased from the U.S. Geological Survey, Information Services, Box 25286, Denver, CO 80225.

Publications similar to this report are published annually by the USGS for all states. These official USGS reports are identified by means of a number consisting of the two-letter

state abbreviation, the last two digits of the water year, and the volume number. For example, this volume is identified as "U.S. Geological Survey Water-Data Report OH-05-1." For archiving and general distribution, the reports for 1971–74 water years are also identified as water-data reports. These water-data reports can be purchased in paper copy or in microfiche from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

USGS water data can be accessed on the World Wide Web at <http://water.usgs.gov>. Data at this Web site include historical daily values and peaks, real-time water data, and spatial data. (The USGS Ohio Water Science Center's Web site can be accessed at <http://oh.water.usgs.gov>.)

Additional information for specific reports may be obtained by writing to the address given on the back of title page or by telephoning (614) 430-7700.

Cooperation

The USGS has had cooperative agreements for the collection of water-resources data since 1898. The following organizations assisted in collecting data in this report:

- Cities of Akron, Canton, Columbus (Water Division and Sewerage and Drainage Division), Fremont, and Westerville
- Counties of Geauga, Lake, Lucas, Lorain, Madison, Medina, Ross, and Summit
- Coshocton Soil and Water Conservation District
- Eastgate Development and Transportation Agency
- Miami Conservancy District
- Mill Creek Valley Conservancy District
- National Park Service
- Northeast Ohio Regional Sewer District
- Ohio Departments of Natural Resources (Mineral Resources Management, Water, and Wildlife Divisions) and Transportation
- Ohio Environmental Protection Agency
- Ohio Water Development Authority
- Ohio Lake Erie Office
- Ottawa Soil and Water District
- University of Toledo
- U.S. Army Corps of Engineers (Buffalo, Huntington, Louisville, and Pittsburgh Districts)
- U.S. Environmental Protection Agency, Office of Research and Development
- Villages of North Olmstead and South Russell

Summary of Hydrologic Conditions

Ohio is part of three physiographic provinces. Each province has its own distinctive hydrologic characteristics. The topography of the Till Plains Section of the Central Lowlands Physiographic Province (fig. 2) consists of gently rolling ground moraine, bands of terminal moraine, and outwash-filled valleys. Glaciation altered the courses of most streams in this area. The Eastern Lake Section (fig. 2) consists of wide expanses of level or nearly level land interrupted only by the sporadic sandy ridges that are the last visible remnants of glacial-lake beaches. Much of the area was swamp prior to development, and marshes are still present along Lake Erie near Toledo. The Lexington Plain Section of the Interior Low Plateaus Province (fig. 2) is characterized by rolling terrain and a few isolated large hills and ridges. The “barbed” drainage pattern formed when small streams were captured as their headwaters cut back into the hills over time. Streams have carved the Kanawha Section of the Appalachian Plateaus Province (fig. 2) into an intricate series of hollows and steep-sided ridges. Only the large streams in the section have any appreciable flood plain. In the southern New York Section (fig. 2), successive waves of glaciation have subdued the relief, buried many preglacial valleys, and rerouted many streams.

Precipitation

The average annual precipitation in Ohio is about 38 inches. The annual precipitation decreases from around 42 inches on the southern border to about 32 inches in the northwest. An anomalous area of high precipitation (as much as 44 inches) in northeastern Ohio results from air masses that pick up moisture and heat from Lake Erie and subsequently release precipitation over a range of hills stretching northeastward from Cleveland.

Monthly precipitation typically is greatest from May through July and least in October, December, and February. Of the approximate 38 inches of average annual precipitation, about 10 inches runs off immediately, 2 inches is retained at or near the surface and evaporates and transpires, and 26 inches enters the ground. Of the 26 inches that enters the ground, 20 inches is retained in the unsaturated zone and is later lost by evapotranspiration. The remaining 6 inches reaches the water table. Of this 6 inches, 2 inches eventually discharges to streams, and the rest is lost by evapotranspiration and consumptive use. Average runoff ranges from about 15 to 18 inches along the southern border to about 8 to 12 inches along most of the northern border, except in the northeast, where runoff is as much as 20 inches. The pattern of streamflow differs from the pattern of precipitation because of the

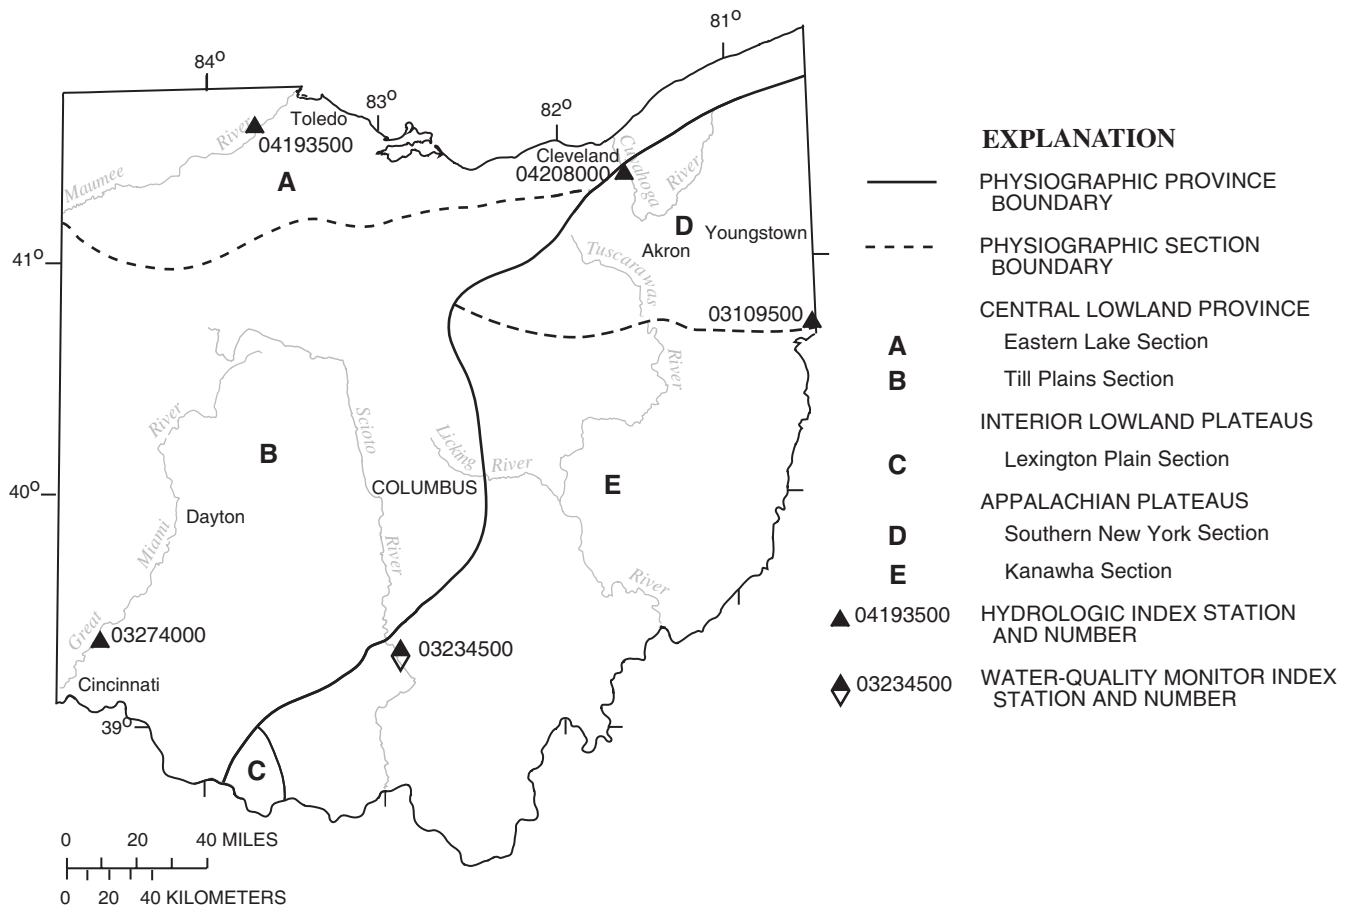


Figure 2. Physiographic divisions and location of hydrologic index stations.

contributions of snowmelt to streamflow in the early spring and the reduction in flows by evapotranspiration from June through September.

Surface Water

Streamflow

Streamflow-data-collection stations are distributed irregularly throughout the State and tend to be concentrated on the main river systems. The stations are used to sample a wide variety of conditions. The drainage areas range from less than four to more than 6,330 square miles and represent a wide diversity of topography and other physical characteristics. Streamflow ranges from unregulated to highly regulated.

Statewide Streamflow, Water Year 2005.

Streamflow conditions during water year 2005 were as follows:

October–January. At the beginning of water year 2005, streamflow was in the normal range in southwest Ohio and was above normal¹ elsewhere. Excessive flows prevailed statewide in response to above-average precipitation through the period. Heavy rain and snowmelt in early January produced significant flooding across much of the State. Peak flows in some basins were the highest since 1964.

February–April. Streamflow fell into the normal range in February and March due to below-average precipitation. Streamflow fell into the below-normal range by April.

May–June. Above-average precipitation in late April produced excessive flows that persisted through June.

July. Streamflow returned to the normal range in response to near-average precipitation.

August–September. Above-average precipitation statewide produced excessive flows throughout the period. At the end of water year 2005, streamflow was in the normal range in southwest Ohio and above normal elsewhere.

A comparison of streamflows for 2005 with long-term median flows at four representative stations is shown in figure 3.

Water Quality

Water-quality data in Ohio are collected on a short-term basis in conjunction with local or regional studies. On a long-term basis, water-quality data in Ohio are collected at fixed stations. The only active long-term monitoring program in Ohio is the National Water-Quality Assessment (NAWQA) Program, a program designed to assess the status and trends in the quality of ground- and surface-water resources in major hydrologic systems (study units) of the United States. Sampling in NAWQA began in 1991 in the Nation and in March 1996 at some sites in Ohio as part of the Lake Erie-Lake St. Clair (LERI) study unit. Sampling began in 1999 at some sites as part of the Great Miami and Little Miami River Basins (MIAM) study unit. In 2001, watersheds in the MIAM study unit were combined with those in the White River Basin study unit in Indiana to form the White and Great and Little Miami River Basins (WHMI) study unit. During 2005, the WHMI NAWQA was not sampled. The LERI NAWQA was in its low-intensity data-collection phase during 2005; water-quality data were collected at two fixed stations six times per year. Samples at NAWQA sites are collected over a range of streamflows and are analyzed for major anions and cations, nutrients, pesticides, suspended sediment, and selected physical properties.

Several continuous years of water-quality data collected as part of the NAWQA program for two sites—the Auglaize River at Fort Jennings and the Maumee River at Waterville—are shown in figures 4 and 5. Streamflows and concentrations of selected constituents measured during the previous 9-year period (1996 to 2004) are shown in boxplots, along with results of analysis of samples collected in water year 2005.

The values for streamflow measured at the time of water-quality sampling during 2005 were similar to those found in the previous 9-year period. For the Auglaize River, two samples were collected at low flow during 2005 (below the 25th percentile for the previous 9-year period), three were collected at moderate flow (between the 25th and 75th percentiles), and one was collected at high flow (above the 75th percentile). For the Maumee River, two samples were collected at low flow, three at moderate flow, and one at high flow.

¹ In this report, “normal” is defined as being between the 25th and 75th percentiles of measured values for a base or reference period. For streamflow, the base period is 1971–2000; for ground water, the reference period is 1951–2000.

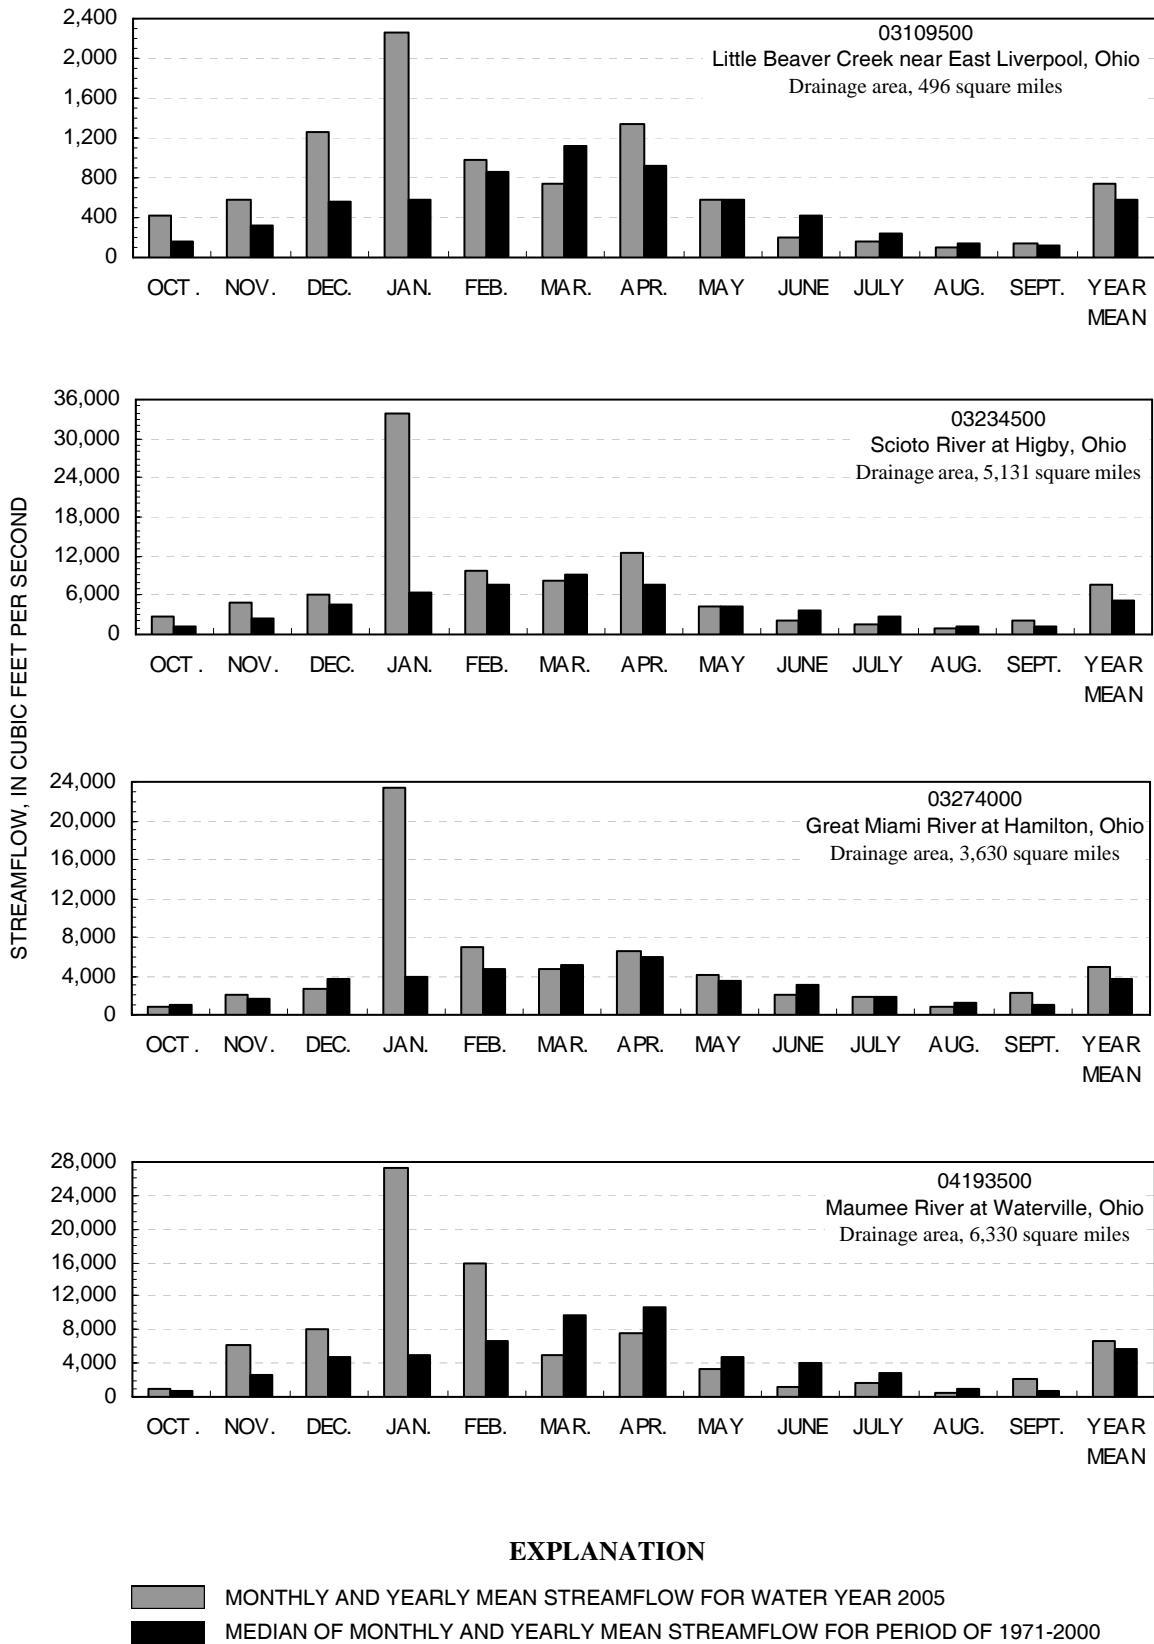


Figure 3. Streamflow during water year 2005 compared with median streamflow for period 1971–2000 for four representative gaging stations.

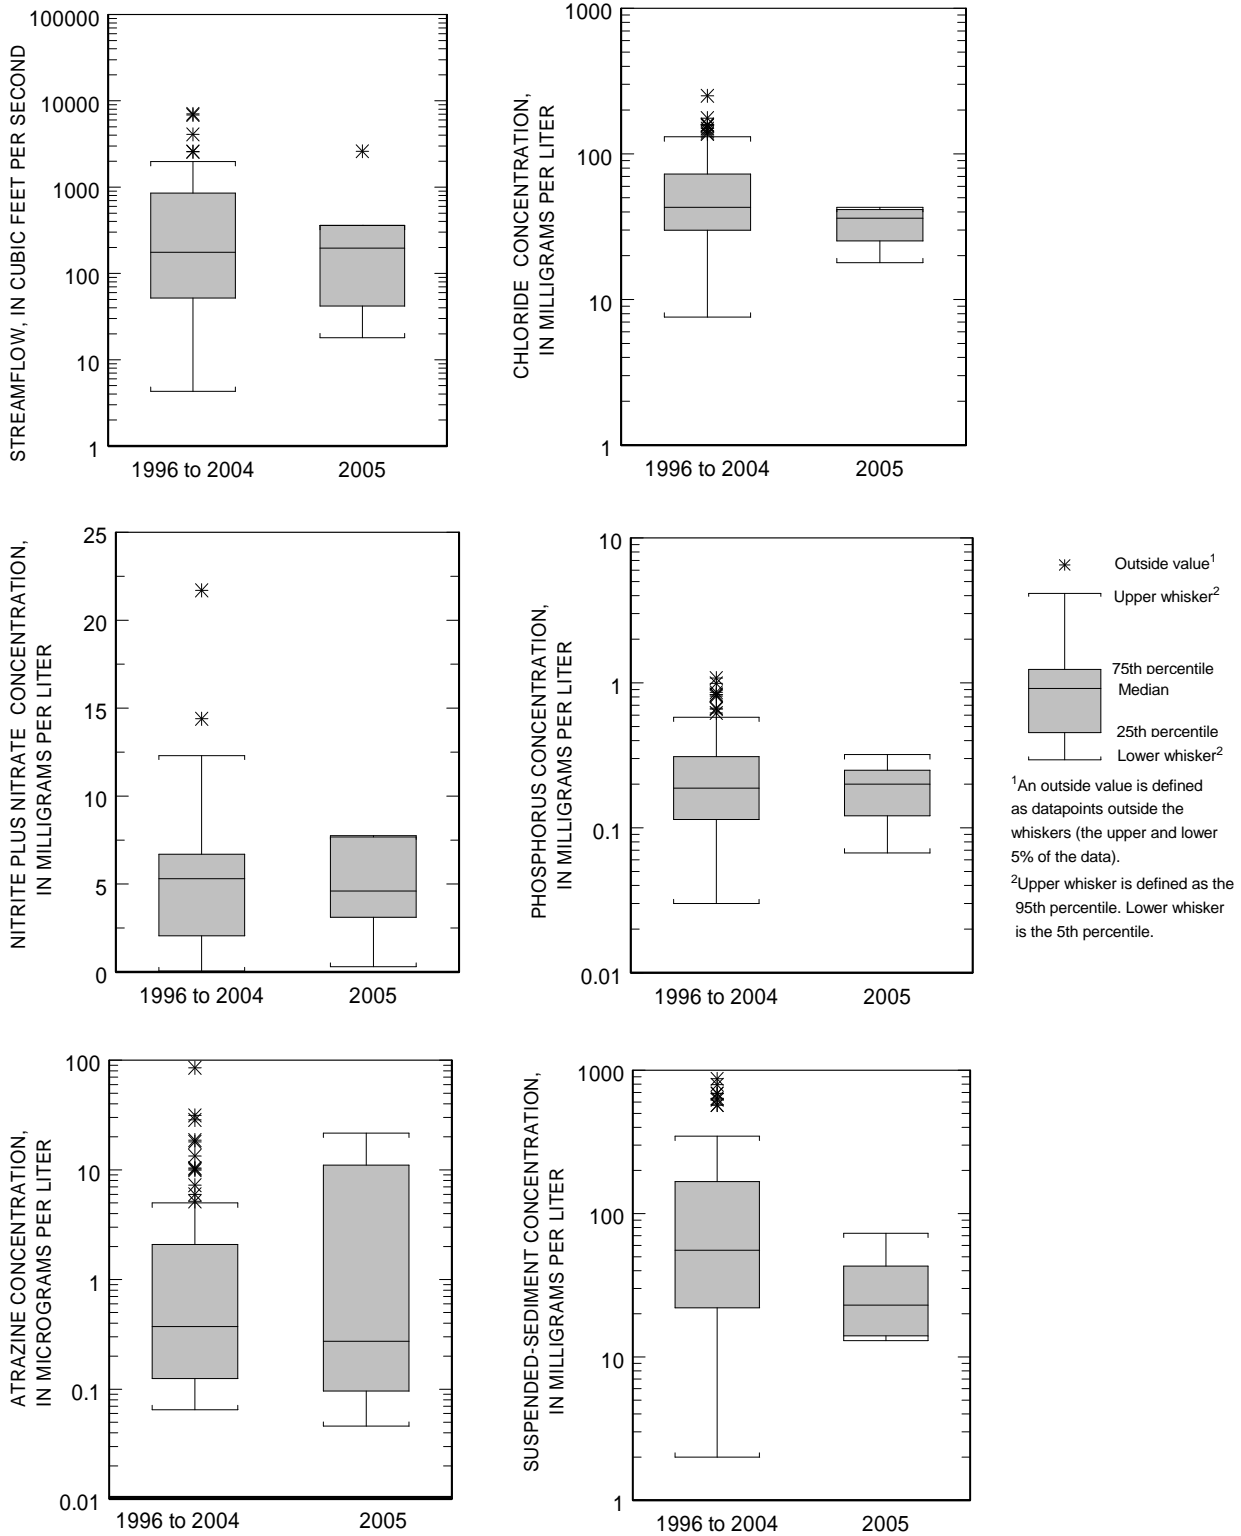


Figure 4. Streamflow and concentrations of selected constituents measured in water year 2005 and the distribution of those characteristics from measurements made during water years 1996–2004, Auglaize River near Ft. Jennings, Ohio.

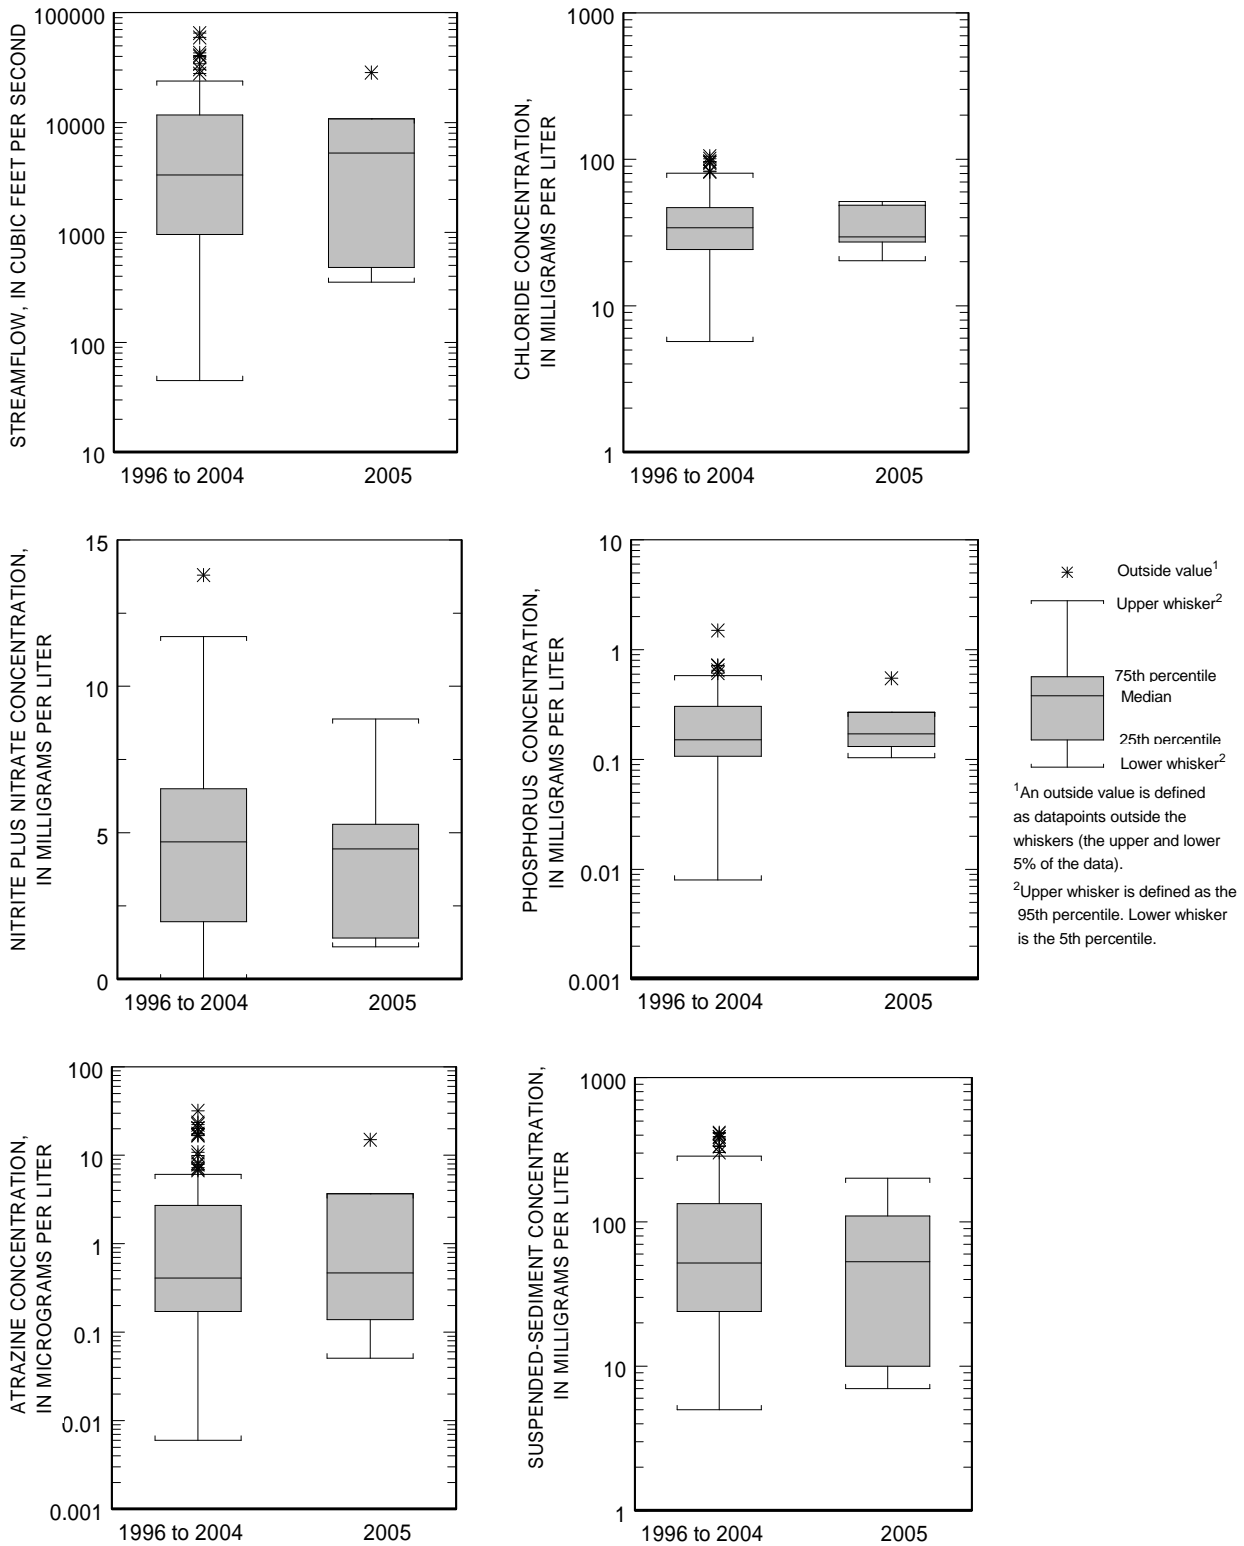


Figure 5. Streamflow and concentrations of selected constituents measured in water year 2005 and the distribution of those characteristics from measurements made during water years 1996–2004, Maumee River at Waterville, Ohio.

Elevated chloride concentrations are commonly associated with municipal or industrial point sources of wastewater. Chloride concentrations determined for the six samples in 2005 for the Auglaize River ranged from 17.9 to 43.0 milligrams per liter (mg/L) with a median of 36.2 mg/L. All chloride concentrations in 2005 were equal to or less than the median of the previous 9-year period (43.0 mg/L). For the Maumee River, chloride concentrations in 2005 ranged from 20.3 to 51.6 mg/L with a median of 29.6 mg/L; the median for the previous 9-year period was 34.2 mg/L.

None of the samples collected for nitrate plus nitrite during 2005 at these two sites exceeded the U.S. Environmental Protection Agency's Maximum Contaminant Level for finished drinking water (10 mg/L, as N). In Ohio, fertilizers are a major source of nitrate. Concentrations in the Auglaize River and the Maumee River in 2005 were in the same range as those found during the previous 9-year period.

Agricultural runoff and municipal and industrial point sources are the principal sources of phosphorus in Ohio. Increased phosphorus concentrations may lead to a high rate of plant-material production in water and eutrophication of the receiving water. During 2005, median concentrations of total phosphorus were 0.200 mg/L for the Auglaize River and 0.171 mg/L for the Maumee River. For the previous 9-year period of the Auglaize and Maumee Rivers, medians were similar (0.188 and 0.152 mg/L, respectively).

The Auglaize and Maumee Rivers drain areas of heavy herbicide use. Atrazine was detected in five out of six samples collected at the Auglaize River. Atrazine concentrations determined in 2005 for the Auglaize River ranged from 0.046 microgram per liter ($\mu\text{g/L}$) to 21.7 $\mu\text{g/L}$, with four out of five detections being <1 $\mu\text{g/L}$. Atrazine concentrations determined in 2005 for the Maumee River varied widely, ranging from 0.051 to 15.0 $\mu\text{g/L}$. One sample from the Auglaize River and two samples from the Maumee River exceeded the U.S. Environmental Protection Agency's Maximum Contaminant Level of 3 $\mu\text{g/L}$.

Elevated suspended-sediment concentrations result from periods of high streamflows and are exacerbated by increased development and agriculture. Suspended-sediment concentrations in the Auglaize River in 2005 were lower than those found during the previous 9-year period; the median value for 2005 was 23 mg/L, whereas the median for the previous period was 56 mg/L. At the Maumee River, concentrations during 2005 were similar to concentrations measured during 1996–2004; median concentrations were 53 and 52 mg/L, respectively.

Ground Water

Ground water serves the needs of 46 percent of Ohio's population. An estimated 800 million gallons of ground water per day is withdrawn for public-supply, domestic, industrial, and agricultural purposes. Many people in Ohio depend on ground water as the only practical source of supply.

Ohio's unconsolidated aquifers are composed of either coarse- or fine-grained sediments. Both types are composed mainly of materials of glacial origin. The coarse-grained unconsolidated aquifers generally consist of highly permeable sand and gravel. Much of the sand and gravel is alluvium derived from glaciofluvial outwash along the courses of some modern streams; thus, these aquifers sometimes are referred to as "watercourse" aquifers. Coarse-grained unconsolidated aquifers in the northwestern corner of the State (fig. 6) underlie glacial till, are locally confined under artesian pressure, and are highly productive. Extensive kame-terrace deposits of water-bearing gravel and sand are widely used ground-water sources in northeastern Ohio. The fine-grained unconsolidated aquifers are similar to the coarse-grained unconsolidated aquifers in form and origin but are less permeable because of higher percentages of mixed fine sand, silt, and clay. Included in the fine-grained unconsolidated aquifers are tills that contain thin or localized stratified lenses of sand and gravel.

Ground-water supply for much of the unglaciated upland area of southeastern Ohio is from bedrock aquifers composed of shaly sandstone and thin limestone. These strata, which range from Mississippian to Permian in age, are dominated by low-yielding shales and shaly sandstones that include numerous coal-bearing strata. In some places, small water supplies are available from fractured coal beds. Several sandstone aquifers in northeastern Ohio are of regional extent and are major ground-water sources for individual and small public supplies. These include the Berea and Black Hand Sandstones of Mississippian age and several sandstone members of the Pottsville and Allegheny Formations of Pennsylvanian age. The Lake Erie coastline of northeastern Ohio is underlain by shale of Devonian and Mississippian age (fig. 6) that yields only small amounts of water to wells. Silurian-age limestone and dolomite and Devonian limestone comprise the carbonate aquifer system (fig. 6) of much of western Ohio. Glacial cover is uneven and consists of valley fill and terminal moraine in some places. The northeastern part of western Ohio contains an area of high-yielding wells that tap a preferentially weathered zone, which developed when a carbonate section was periodically exposed as land mass during the Paleozoic Era. The southwestern corner of Ohio near Cincinnati is underlain by shale and a thin limestone aquifer of Ordovician age. Away from the watercourse (coarse unconsolidated) aquifers that traverse the area, the rocks that form the uplands yield only very small amounts of ground water.

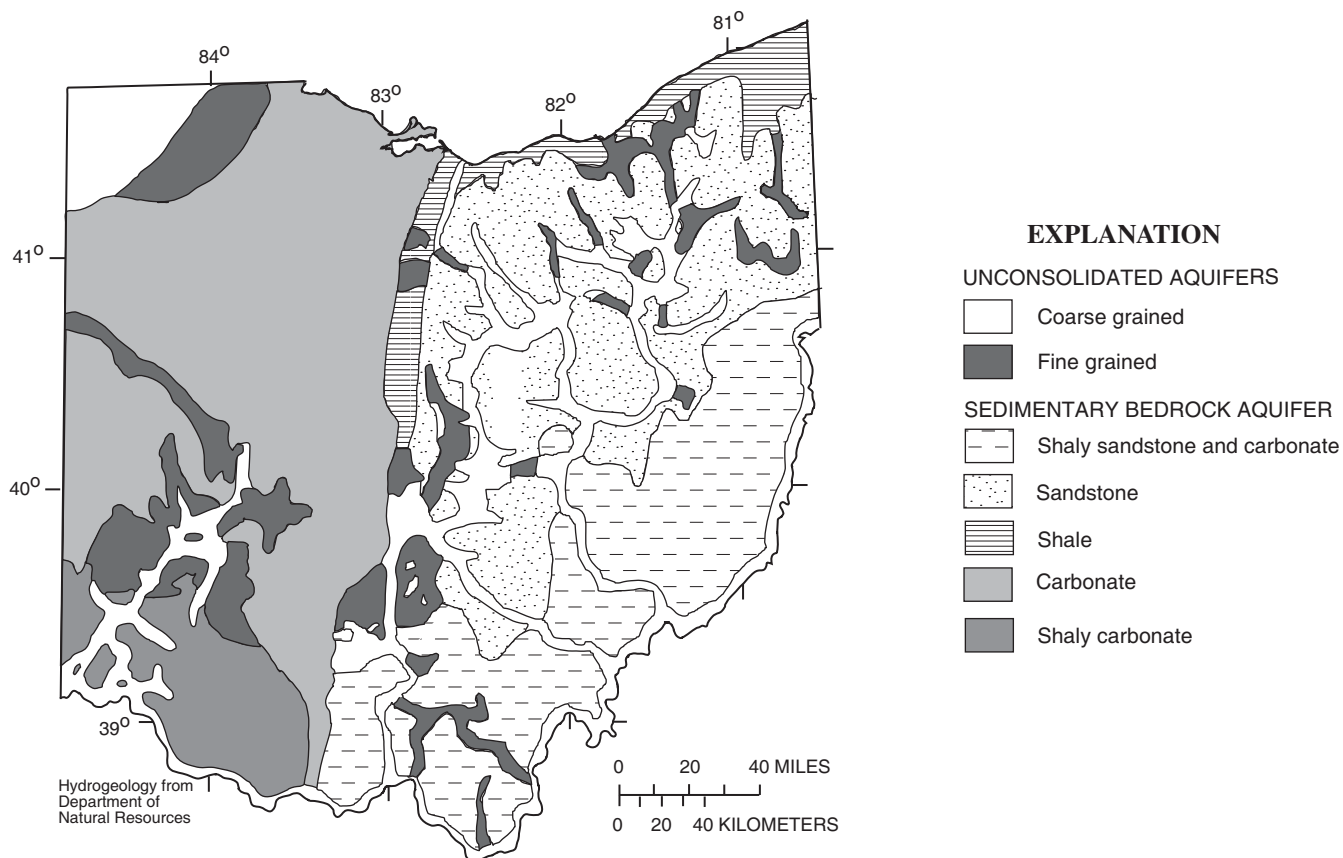


Figure 6. Geographic distribution of principal aquifers in Ohio.

Ground-Water Levels

Most ground-water observation wells in Ohio tap unconsolidated sand and gravel aquifers associated with the State's principal streams. Sample 1-year and 5-year hydrographs of a well completed in an unconfined unconsolidated sand-and-gravel aquifer are shown in figure 7. The observation-well network also includes some bedrock wells in areas where consolidated aquifers are heavily used for water supply, such as in the carbonate-rock region of northwestern Ohio. Sample 1-year and 5-year hydrographs of a well completed in a confined carbonate-rock aquifer are shown in figure 8. The yearly low for most wells occurs during the winter months, especially in cold, dry years or near the end of the growing season. Highs for the year usually occur from March through June, which is the peak of the recharge season. The yearly water-level fluctuation due to climatic conditions in water-table and confined-aquifer wells is commonly 3 to 5 feet but can be as much as 10 feet.

Ground-water conditions in Ohio during water year 2005 were as follows:

October–January. At the beginning of water year 2005, ground-water levels were generally above normal throughout Ohio except for unconsolidated aquifers in the southwest, where levels

were below normal. Ground-water levels rose throughout the period due to above-average precipitation. Above-normal levels prevailed except in southwest Ohio, where ground-water levels remained below normal. Heavy rainfall and snowmelt in January produced significant rises throughout the State, and levels were generally above normal statewide.

February–March. There were general declines in ground-water levels statewide due to below-average precipitation. Levels remained above normal except in southwest Ohio, where they fell into the below-normal range.

April. Above-average precipitation in April produced net rises throughout the State, and ground-water levels remained above normal except in southwest Ohio.

May–September. Seasonal declines prevailed throughout the period. Ground-water levels in unconsolidated aquifers in southern Ohio were below normal for the entire period. Levels in the rest of Ohio fell from above normal to near normal by July. Seasonal declines continued, and levels were generally below normal statewide at the end of water year 2005.

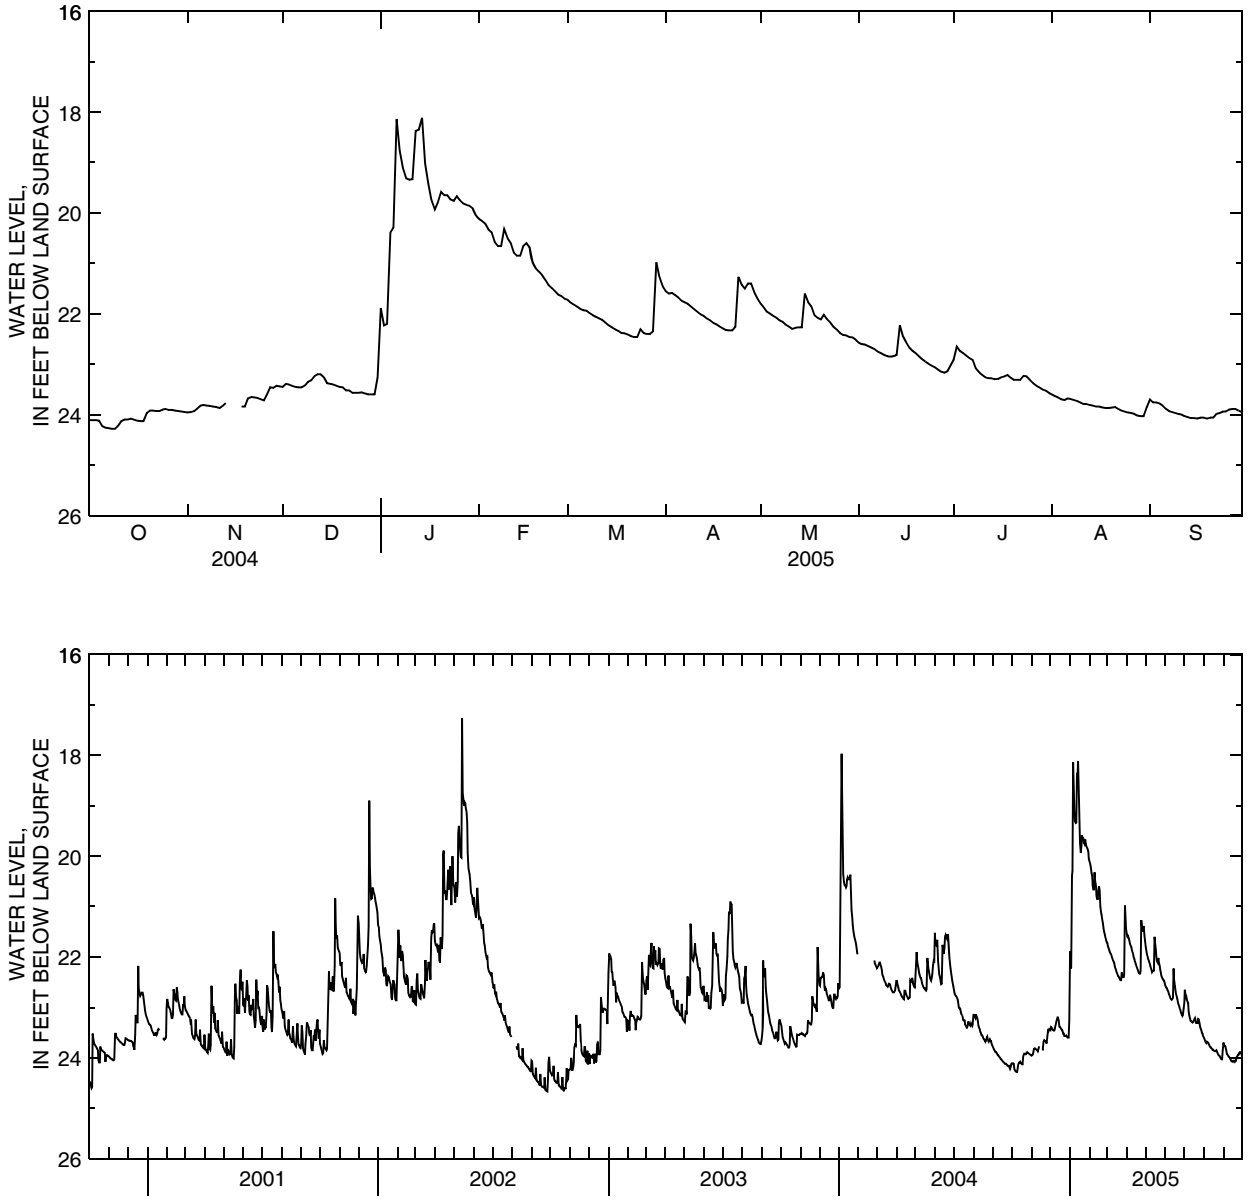


Figure 7. Sample of 1-year and 5-year hydrographs of well H-1 (391717084393300), completed in an unconfined unconsolidated aquifer.

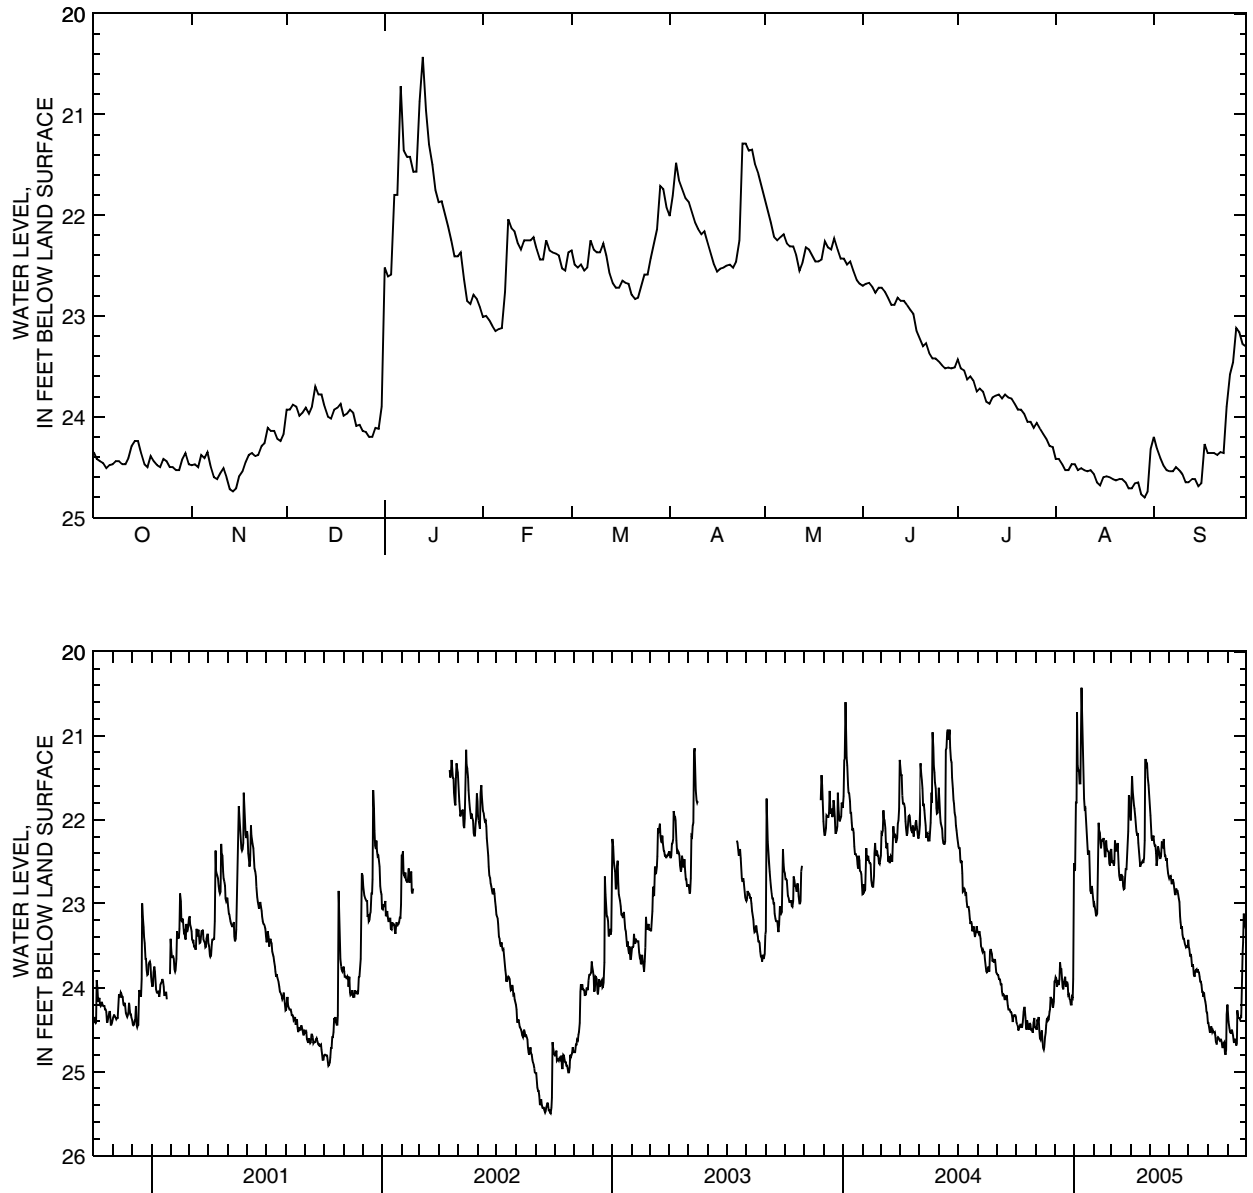


Figure 8. Sample of 1-year and 5-year hydrographs of well U-4 (401826083255200), completed in a confined carbonate-rock aquifer.

Downstream Order and Station Number

Since October 1, 1950, hydrologic-station records in USGS reports have been listed in order of downstream direction along the main stream. All stations on a tributary entering upstream from a main-stream station are listed before that station. A station on a tributary entering between two main-stream stations is listed between those stations. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. The rank of any tributary on which a station is located with respect to the stream to which it is immediately tributary is indicated by an indentation in that list of stations in the front of this report. Each indentation represents one rank. This downstream order and system of indentation indicates which stations are on tributaries between any two stations and the rank of the tributary on which each station is located.

As an added means of identification, each hydrologic station and partial-record station has been assigned a station number. These station numbers are in the same downstream order used in this report. In assigning a station number, no distinction is made between partial-record stations and other stations; therefore, the station number for a partial-record station indicates downstream-order position in a list composed of both types of stations. Gaps are consecutive. The complete 8-digit (or 10-digit) number for each station such as 09004100, which appears just to the left of the station name, includes a 2-digit part number "09" plus the 6-digit (or 8-digit) downstream order number "004100." In areas of high station density, an additional two digits may be added to the station identification number to yield a 10-digit number. The stations are numbered in downstream order as described above between stations of consecutive 8-digit numbers.

Numbering System for Wells and Miscellaneous Sites

The USGS well and miscellaneous site-numbering system is based on the grid system of latitude and longitude. The system provides the geographic location of the well or miscellaneous site and a unique number for each site. The number consists of 15 digits. The first 6 digits denote the degrees, minutes, and seconds of latitude, and the next 7 digits denote degrees, minutes, and seconds of longitude; the last 2 digits are a sequential number for wells within a 1-second grid. In the event that the latitude-longitude coordinates for a well and miscellaneous site are the same, a sequential number such as "01," "02," and so forth, would be assigned as one would for wells (see fig. 9). The 8-digit, downstream order station numbers are not assigned to wells and miscellaneous sites where only random water-quality samples or discharge measurements are taken.

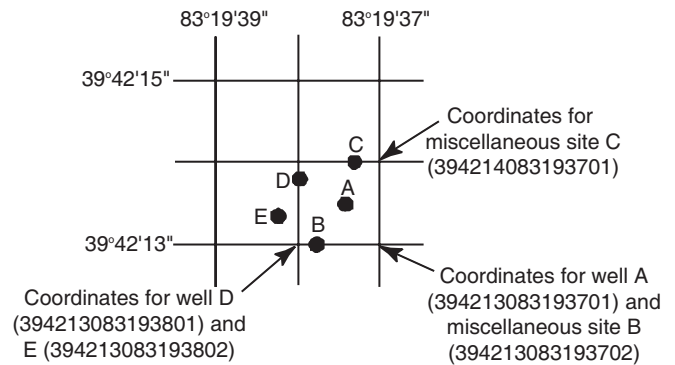


Figure 9. System for numbering wells and miscellaneous sites (latitude and longitude).

Special Networks and Programs

Hydrologic Benchmark Network is a network of 61 sites in small drainage basins in 39 States that was established in 1963 to provide consistent streamflow data representative of undeveloped watersheds nationwide, and from which data could be analyzed on a continuing basis for use in comparison and contrast with conditions observed in basins more obviously affected by human activities. At selected sites, water-quality information is being gathered on major ions and nutrients, primarily to assess the effects of acid deposition on stream chemistry. Additional information on the Hydrologic Benchmark Program may be accessed from <http://ny.cf.er.usgs.gov/hbn/>.

National Stream-Quality Accounting Network (NASQAN) is a network of sites used to monitor the water quality of large rivers within the Nation's largest river basins. From 1995 through 1999, a network of approximately 40 stations was operated in the Mississippi, Columbia, Colorado, and Rio Grande River basins. For the period 2000 through 2004, sampling was reduced to a few index stations on the Colorado and Columbia Rivers so that a network of five stations could be implemented on the Yukon River. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment (NAWQA) Program; (3) to characterize processes unique to large-river systems such as storage and remobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on

the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals. Additional information about the NASQAN Program may be accessed from <http://water.usgs.gov/nasqan/>.

The National Atmospheric Deposition Program/ National Trends Network (NADP/NTN) is a network of monitoring sites that provides continuous measurement and assessment of the chemical constituents in precipitation throughout the United States. As the lead Federal agency, the USGS works together with over 100 organizations to provide a long-term, spatial and temporal record of atmospheric deposition generated from this network of 250 precipitation-chemistry monitoring sites. The USGS supports 74 of these 250 sites. This long-term, nationally consistent monitoring program, coupled with ecosystem research, provides critical information toward a national scorecard to evaluate the effectiveness of ongoing and future regulations intended to reduce atmospheric emissions and subsequent impacts to the Nation's land and water resources. Reports and other information on the NADP/NTN Program, as well as data from the individual sites, may be accessed from <http://bqs.usgs.gov/acidrain/>.

The USGS National Water-Quality Assessment (NAWQA) Program is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; to provide an improved understanding of the primary natural and human factors affecting these observed conditions and trends; and to provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Assessment activities are being conducted in 42 study units (major watersheds and aquifer systems) that represent a wide range of environmental settings nationwide and that account for a large percentage of the Nation's water use. A wide array of chemical constituents is measured in ground water, surface water, streambed sediments, and fish tissues. The coordinated application of comparative hydrologic studies at a wide range of spatial and temporal scales will provide information for water-resources managers to use in making decisions and a foundation for aggregation and comparison of findings to address water-quality issues of regional and national interest.

Communication and coordination between USGS personnel and other local, State, and Federal interests are critical components of the NAWQA Program. Each study unit has a local liaison committee consisting of representatives from key Federal, State, and local water-resources agencies, Indian nations, and universities in the study unit. Liaison committees typically meet semiannually to discuss their information needs, monitoring plans and progress, desired information products, and opportunities for collaboration among the agencies. Additional information about the NAWQA Program may be accessed from <http://water.usgs.gov/nawqa/>.

The USGS National Streamflow Information Program (NSIP) is a long-term program with goals to provide framework streamflow data across the Nation. Included in the

program are creation of a permanent Federally funded streamflow network, research on the nature of streamflow, regional assessments of streamflow data and databases, and upgrades in the streamflow information delivery systems. Additional information about NSIP may be accessed from <http://water.usgs.gov/nsip/>.

Explanation of Stage- and Water-Discharge Records

Data Collection and Computation

The base data collected at gaging stations (fig. 1a and 1b) consist of records of stage and measurements of discharge of streams or canals, and stage, surface area, and volume of lakes or reservoirs. In addition, observations of factors affecting the stage-discharge relation or the stage-capacity relation, weather records, and other information are used to supplement base data in determining the daily flow or volume of water in storage. Records of stage are obtained from a water-stage recorder that is either downloaded electronically in the field to a laptop computer or similar device or is transmitted using telemetry such as GOES satellite, land-line or cellular-phone modems, or by radio transmission. Measurements of discharge are made with a current meter or acoustic Doppler current profiler, using the general methods adopted by the USGS. These methods are described in standard textbooks, USGS Water-Supply Paper 2175, and the Techniques of Water-Resources Investigations of the United States Geological Survey (TWRIs), Book 3, Chapters A1 through A19 and Book 8, Chapters A2 and B2, which may be accessed from <http://water.usgs.gov/pubs/twri/>. The methods are consistent with the American Society for Testing and Materials (ASTM) standards and generally follow the standards of the International Organization for Standardization (ISO).

For stream-gaging stations, discharge-rating tables for any stage are prepared from stage-discharge curves. If extensions to the rating curves are necessary to express discharge greater than measured, the extensions are made on the basis of indirect measurements of peak discharge (such as slope-area or contracted-opening measurements, or computation of flow over dams and weirs), step-backwater techniques, velocity-area studies, and logarithmic plotting. The daily mean discharge is computed from gage heights and rating tables, then the monthly and yearly mean discharges are computed from the daily values. If the stage-discharge relation is subject to change because of frequent or continual change in the physical features of the stream channel, the daily mean discharge is computed by the shifting-control method in which correction factors that are based on individual discharge measurements and notes by engineers and observers are used when applying the gage heights to the rating tables. If the stage-discharge relation for a station is temporarily changed by the presence of aquatic

growth or debris on the controlling section, the daily mean discharge is computed by the shifting-control method.

The stage-discharge relation at some stream-gaging stations is affected by backwater from reservoirs, tributary streams, or other sources. Such an occurrence necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in computing discharge. The slope or fall is obtained by means of an auxiliary gage at some distance from the base gage.

An index velocity is measured using ultrasonic or acoustic instruments at some stream-gaging stations, and this index velocity is used to calculate an average velocity for the flow in the stream. This average velocity along with a stage-area relation is then used to calculate average discharge.

At some stations, the stage-discharge relation is affected by changing stage. At these stations, the rate of change in stage is used as a factor in computing discharge.

At some stream-gaging stations in the northern United States, the stage-discharge relation is affected by ice in the winter; therefore, computation of the discharge in the usual manner is impossible. Discharge for periods of ice effect is computed on the basis of gage-height record and occasional winter-discharge measurements. Consideration is given to the available information on temperature and precipitation, notes by gage observers and hydrologists, and comparable records of discharge from other stations in the same or nearby basins.

For a lake or reservoir station, capacity tables giving the volume or contents for any stage are prepared from stage-area relation curves defined by surveys. The application of the stage to the capacity table gives the contents, from which the daily, monthly, or yearly changes are computed.

If the stage-capacity curve is subject to changes because of deposition of sediment in the reservoir, periodic resurveys of the reservoir are necessary to define new stage-capacity curves. During the period between reservoir surveys, the computed contents may be increasingly in error due to the gradual accumulation of sediment.

For some stream-gaging stations, periods of time occur when no gage-height record is obtained or the recorded gage height is faulty and cannot be used to compute daily discharge or contents. Such a situation can happen when the recorder stops or otherwise fails to operate properly, the intakes are plugged, the float is frozen in the well, or for various other reasons. For such periods, the daily discharges are estimated on the basis of recorded range in stage, prior and subsequent records, discharge measurements, weather records, and comparison with records from other stations in the same or nearby basins. Likewise, lake or reservoir volumes may be estimated on the basis of operator's log, prior and subsequent records, inflow-outflow studies, and other information.

Data Presentation

The records published for each continuous-record surface-water discharge station (stream-gaging station) consist of five parts: (1) the station manuscript or description; (2) the data table of daily mean values of discharge for the current water year with summary data; (3) a tabular statistical summary of monthly mean flow data for a designated period, by water year; (4) a summary statistics table that includes statistical data of annual, daily, and instantaneous flows as well as data pertaining to annual runoff, 7-day low-flow minimums, and flow duration; and (5) a hydrograph of discharge.

Station Manuscript

The manuscript provides, under various headings, descriptive information, such as station location; period of record; historical extremes outside the period of record; record accuracy; and other remarks pertinent to station operation and regulation. The following information, as appropriate, is provided with each continuous record of discharge or lake content. Comments follow that clarify information presented under the various headings of the station description.

LOCATION.—Location information is obtained from the most accurate maps available. The location of the gaging station with respect to the cultural and physical features in the vicinity and with respect to the reference place mentioned in the station name is given. River mileages, given for only a few stations, were determined by methods given in "River Mileage Measurement," Bulletin 14, Revision of October 1968, prepared by the Water Resources Council or were provided by the U.S. Army Corps of Engineers.

DRAINAGE AREA.—Drainage areas are measured using the most accurate maps available. Because the type of maps available varies from one drainage basin to another, the accuracy of drainage areas likewise varies. Drainage areas are updated as better maps become available.

PERIOD OF RECORD.—This term indicates the time period for which records have been published for the station or for an equivalent station. An equivalent station is one that was in operation at a time that the present station was not and whose location was such that its flow reasonably can be considered equivalent to flow at the present station.

REVISED RECORDS.—If a critical error in published records is discovered, a revision is included in the first report published following discovery of the error.

GAGE.—The type of gage in current use, the datum of the current gage referred to a standard datum, and a condensed history of the types, locations, and datums of previous gages are given under this heading.

REMARKS.—All periods of estimated daily discharge either will be identified by date in this paragraph of the station description for water-discharge stations or flagged in the daily discharge table. (See section titled Identifying Estimated Daily Discharge.) Information is presented relative to the accuracy of

the records, to special methods of computation, and to conditions that affect natural flow at the station. In addition, information may be presented pertaining to average discharge data for the period of record; to extremes data for the period of record and the current year; and, possibly, to other pertinent items. For reservoir stations, information is given on the dam forming the reservoir, the capacity, the outlet works and spillway, and the purpose and use of the reservoir.

COOPERATION.—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

EXTREMES OUTSIDE PERIOD OF RECORD.—Information here documents major floods or unusually low flows that occurred outside the stated period of record. The information may or may not have been obtained by the USGS.

REVISIONS.—Records are revised if errors in published records are discovered. Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based national data system, NWISWeb (<http://water.usgs.gov/nwis/nwis>). Users are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent data updates. Updates to NWISWeb are made on an annual basis.

Although rare, occasionally the records of a discontinued gaging station may need revision. Because no current or, possibly, future station manuscript would be published for these stations to document the revision in a REVISED RECORDS entry, users of data for these stations who obtained the record from previously published data reports may wish to contact the USGS Water Science Center (address given on the back of the title page of this report) to determine if the published records were revised after the station was discontinued. If, however, the data for a discontinued station were obtained by computer retrieval, the data would be current. Any published revision of data is always accompanied by revision of the corresponding data in computer storage.

Manuscript information for lake or reservoir stations differs from that for stream stations in the nature of the REMARKS and in the inclusion of a stage-capacity table when daily volumes are given.

Peak Discharge Greater than Base Discharge

Tables of peak discharge above base discharge are included for some stations where secondary instantaneous peak discharge data are used in flood-frequency studies of highway and bridge design, flood-control structures, and other flood-related projects. The base discharge value is selected so an average of three peaks a year will be reported. This base discharge value has a recurrence interval of approximately 1.1 years or a 91-percent chance of exceedence in any 1 year.

Data Table of Daily Mean Values

The daily table of discharge records for stream-gaging stations gives mean discharge for each day of the water year. In the monthly summary for the table, the line headed TOTAL gives the sum of the daily figures for each month; the line headed MEAN gives the arithmetic average flow in cubic feet per second for the month; and the lines headed MAX and MIN give the maximum and minimum daily mean discharges, respectively, for each month. Discharge for the month is expressed in cubic feet per second per square mile (line headed CFSM); or in inches (line headed IN); or in acre-feet (line headed AC-FT). Values for cubic feet per second per square mile and runoff in inches or in acre-feet may be omitted if extensive regulation or diversion is in effect or if the drainage area includes large noncontributing areas. At some stations, monthly and (or) yearly observed discharges are adjusted for reservoir storage or diversion, or diversion data or reservoir volumes are given. These values are identified by a symbol and a corresponding footnote.

Statistics of Monthly Mean Data

A tabular summary of the mean (line headed MEAN), maximum (MAX), and minimum (MIN) of monthly mean flows for each month for a designated period is provided below the mean values table. The water years of the first occurrence of the maximum and minimum monthly flows are provided immediately below those values. The designated period will be expressed as FOR WATER YEARS __-__, BY WATER YEAR (WY), and will list the first and last water years of the range of years selected from the PERIOD OF RECORD paragraph in the station manuscript. The designated period will consist of all of the station record within the specified water years, including complete months of record for partial water years, and may coincide with the period of record for the station. The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated in the manuscript.

Summary Statistics

A table titled SUMMARY STATISTICS follows the statistics of monthly mean data tabulation. This table consists of four columns with the first column containing the line headings of the statistics being reported. The table provides a statistical summary of yearly, daily, and instantaneous flows, not only for the current water year but also for the previous calendar year and for a designated period, as appropriate. The designated period selected, WATER YEARS __-__, will consist of all of the station records within the specified water years, including complete months of record for partial water years, and may coincide with the period of record for the station. The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated

in the manuscript. All of the calculations for the statistical characteristics designated ANNUAL (see line headings below), except for the ANNUAL 7-DAY MINIMUM statistic, are calculated for the designated period using complete water years. The other statistical characteristics may be calculated using partial water years.

The date or water year, as appropriate, of the first occurrence of each statistic reporting extreme values of discharge is provided adjacent to the statistic. Repeated occurrences may be noted in the REMARKS paragraph of the manuscript or in footnotes. Because the designated period may not be the same as the station period of record published in the manuscript, occasionally the dates of occurrence listed for the daily and instantaneous extremes in the designated-period column may not be within the selected water years listed in the heading. When the dates of occurrence do not fall within the selected water years listed in the heading, it will be noted in the REMARKS paragraph or in footnotes. Selected streamflow duration-curve statistics and runoff data also are given. Runoff data may be omitted if extensive regulation or diversion of flow is in effect in the drainage basin.

The following summary statistics data are provided with each continuous record of discharge. Comments that follow clarify information presented under the various line headings of the SUMMARY STATISTICS table.

ANNUAL TOTAL.—The sum of the daily mean values of discharge for the year.

ANNUAL MEAN.—The arithmetic mean for the individual daily mean discharges for the year noted or for the designated period.

HIGHEST ANNUAL MEAN.—The maximum annual mean discharge occurring for the designated period.

LOWEST ANNUAL MEAN.—The minimum annual mean discharge occurring for the designated period.

HIGHEST DAILY MEAN.—The maximum daily mean discharge for the year or for the designated period.

LOWEST DAILY MEAN.—The minimum daily mean discharge for the year or for the designated period.

ANNUAL 7-DAY MINIMUM.—The lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climatic year (April 1-March 31). The date shown in the summary statistics table is the initial date of the 7-day period. This value should not be confused with the 7-day 10-year low-flow statistic.

MAXIMUM PEAK FLOW.—The maximum instantaneous peak discharge occurring for the

water year or designated period. Occasionally the maximum flow for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak flow is given in the table and the maximum flow may be reported in a footnote or in the REMARKS paragraph in the manuscript.

MAXIMUM PEAK STAGE.—The maximum instantaneous peak stage occurring for the water year or designated period. Occasionally the maximum stage for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak stage is given in the table and the maximum stage may be reported in the REMARKS paragraph in the manuscript or in a footnote. If the dates of occurrence of the maximum peak stage and maximum peak flow are different, the REMARKS paragraph in the manuscript or a footnote may be used to provide further information.

INSTANTANEOUS LOW FLOW.—The minimum instantaneous discharge occurring for the water year or for the designated period.

ANNUAL RUNOFF.—Indicates the total quantity of water in runoff for a drainage area for the year. Data reports may use any of the following units of measurement in presenting annual runoff data:

Acre-foot (AC-FT) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Cubic feet per square mile (CFSM) is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

Inches (INCHES) indicate the depth to which the drainage area would be covered if all of the runoff for a given time period were uniformly distributed on it.

10 PERCENT EXCEEDS.—The discharge that has been exceeded 10 percent of the time for the designated period.

50 PERCENT EXCEEDS.—The discharge that has been exceeded 50 percent of the time for the designated period.

90 PERCENT EXCEEDS.—The discharge that has been exceeded 90 percent of the time for the designated period.

Data collected at partial-record stations follow the information for continuous-record sites. Data for partial-record discharge stations are presented in two tables. The first table lists annual maximum stage and discharge at crest-stage stations, and the second table lists discharge measurements at low-flow partial-record stations. The tables of partial-record stations are followed by a listing of discharge measurements made at sites other than continuous-record or partial-record stations. These measurements are often made in times of drought or flood to give better areal coverage to those events. Those measurements and others collected for a special reason are called measurements at miscellaneous sites.

Identifying Estimated Daily Discharge

Estimated daily-discharge values published in the water-discharge tables of annual State data reports are identified. This identification is shown either by flagging individual daily values with the letter “e” and noting in a table footnote, “e—Estimated,” or by listing the dates of the estimated record in the REMARKS paragraph of the station description.

Accuracy of Field Data and Computed Results

The accuracy of streamflow data depends primarily on (1) the stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements, and (2) the accuracy of observations of stage, measurements of discharge, and interpretations of records.

The degree of accuracy of the records is stated in the REMARKS in the station description. “Excellent” indicates that about 95 percent of the daily discharges are within 5 percent of the true value; “good” within 10 percent; and “fair,” within 15 percent. “Poor” indicates that daily discharges have less than “fair” accuracy. Different accuracies may be attributed to different parts of a given record.

Values of daily mean discharge in this report are shown to the nearest hundredth of a cubic foot per second for discharges of less than 1 ft³/s; to the nearest tenths between 1.0 and 10 ft³/s; to whole numbers between 10 and 1,000 ft³/s; and to three significant figures above 1,000 ft³/s. The number of significant figures used is based solely on the magnitude of the discharge value. The same rounding rules apply to discharge values listed for partial-record stations.

Discharge at many stations, as indicated by the monthly mean, may not reflect natural runoff due to the effects of diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, values of cubic feet per second per square mile and of runoff in inches are not published unless satisfactory adjustments can be made for diversions, for

changes in contents of reservoirs, or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur if adjustments or losses are large in comparison with the observed discharge.

Other Data Records Available

Information of a more detailed nature than that published for most of the stream-gaging stations such as discharge measurements, gage-height records, and rating tables is available from the USGS Water Science Center. Also, most stream-gaging station records are available in computer-usable form and many statistical analyses have been made.

Information on the availability of unpublished data or statistical analyses may be obtained from the USGS Water Science Center. (See address that is shown on the back of the title page of this report.)

Explanation of Precipitation Records

Data Collection and Computation

Rainfall data generally are collected using electronic data loggers that measure the rainfall in 0.01-inch increments every 15 minutes using either a tipping-bucket rain gage or a collection well gage. Twenty-four hour rainfall totals are tabulated and presented. A 24-hour period extends from just past midnight of the previous day to midnight of the current day. Snowfall-affected data can result during cold weather when snow fills the rain-gage funnel and then melts as temperatures rise. Snowfall-affected data are subject to errors. Missing values are indicated by this symbol “---” in the table.

Data Presentation

Precipitation records collected at surface-water gaging stations are identified with the same station number and name as the stream-gaging station. Where a surface-water daily-record station is not available, the precipitation record is published with its own name and latitude-longitude identification number.

Information pertinent to the history of a precipitation station is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, period of record, and general remarks.

The following information is provided with each precipitation station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation in the
EXPLANATION OF STAGE- AND WATER-

DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—See Data Presentation in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

INSTRUMENTATION.—Information on the type of rainfall collection system is given.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of records.

Explanation of Water-Quality Records

Collection and Examination of Data

Surface-water samples for analysis usually are collected at or near stream-gaging stations. The quality-of-water records are given immediately following the discharge records at these stations.

The descriptive heading for water-quality records gives the period of record for all water-quality data; the period of daily record for parameters that are measured on a daily basis (specific conductance, water temperature, sediment discharge, and so forth); extremes for the current year; and general remarks.

For ground-water records, no descriptive statements are given; however, the well number, depth of well, sampling date, or other pertinent data are given in the table containing the chemical analyses of the ground water.

Water Analysis

Most of the methods used for collecting and analyzing water samples are described in the TWRI, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

One sample can define adequately the water quality at a given time if the mixture of solutes throughout the stream cross section is homogeneous. However, the concentration of solutes at different locations in the cross section may vary widely with different rates of water discharge, depending on the source of material and the turbulence and mixing of the stream. Some streams must be sampled at several verticals to obtain a representative sample needed for an accurate mean concentration and for use in calculating load.

Chemical-quality data published in this report are considered to be the most representative values available for the stations listed. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. In the rare case where an apparent inconsistency exists between a reported pH value and the relative abundance

of carbon dioxide species (carbonate and bicarbonate), the inconsistency is the result of a slight uptake of carbon dioxide from the air by the sample between measurement of pH in the field and determination of carbonate and bicarbonate in the laboratory.

For chemical-quality stations equipped with digital monitors, the records consist of daily maximum and minimum values (and sometimes mean or median values) for each constituent measured and are based on 15-minute or 1-hour intervals of recorded data beginning at 0000 hours and ending at 2400 hours for the day of record.

Surface-Water-Quality Records

Records of surface-water quality ordinarily are obtained at or near stream-gaging stations because discharge data are useful in the interpretation of surface-water quality. Records of surface-water quality in this report involve a variety of types of data and measurement frequencies.

Classification of Records

Water-quality data for surface-water sites are grouped into one of three classifications. A *continuous-record station* is a site where data are collected on a regularly scheduled basis. Frequency may be one or more times daily, weekly, monthly, or quarterly. A *partial-record station* is a site where limited water-quality data are collected systematically over a period of years. Frequency of sampling is usually less than quarterly. A *miscellaneous sampling site* is a location other than a continuous- or partial-record station, where samples are collected to give better areal coverage to define water-quality conditions in the river basin.

A careful distinction needs to be made between *continuous records* as used in this report and *continuous recordings* that refer to a continuous graph or a series of discrete values recorded at short intervals. Some records of water quality, such as temperature and specific conductance, may be obtained through continuous recordings; however, because of costs, most data are obtained only monthly or less frequently. Locations of stations for which records on quality of surface water appear in this report are shown in figures 1a and 1b.

Accuracy of the Records

One of four accuracy classifications is applied for measured physical properties at continuous-record stations on a scale ranging from poor to excellent. (See table on the following page.) The accuracy rating is based on data values recorded before any shifts or corrections are made. Additional consideration also is given to the amount of publishable record and to the amount of data that have been corrected or shifted.

Rating the accuracy of continuous water-quality records

[\leq , less than or equal to; \pm , plus or minus value shown; $^{\circ}\text{C}$, degree Celsius; $>$, greater than; %, percent; mg/L, milligram per liter; pH unit, standard pH unit]

Measured field parameter	Ratings of accuracy (Based on combined fouling and calibration drift corrections applied to the record)			
	Excellent	Good	Fair	Poor
Water temperature	$\leq \pm 0.2^{\circ}\text{C}$	$> \pm 0.2 - 0.5^{\circ}\text{C}$	$> \pm 0.5 - 0.8^{\circ}\text{C}$	$> \pm 0.8^{\circ}\text{C}$
Specific conductance	$\leq \pm 3\%$	$> \pm 3 - 10\%$	$> \pm 10 - 15\%$	$> \pm 15\%$
Dissolved oxygen	$\leq \pm 0.3\text{ mg/L}$ or $\leq \pm 5\%$, whichever is greater	$> \pm 0.3 - 0.5\text{ mg/L}$ or $> \pm 5 - 10\%$, whichever is greater	$> \pm 0.5 - 0.8\text{ mg/L}$ or $> \pm 10 - 15\%$, whichever is greater	$> \pm 0.8\text{ mg/L}$ or $> \pm 15\%$, whichever is greater
pH	$\leq \pm 0.2$ units	$> \pm 0.2 - 0.5$ units	$> \pm 0.5 - 0.8$ units	$> \pm 0.8$ units
Turbidity	$\leq \pm 0.5$ turbidity units or $\leq \pm 5\%$, whichever is greater	$> \pm 0.5 - 1.0$ turbidity units or $> \pm 5 - 10\%$, whichever is greater	$> \pm 1.0 - 1.5$ turbidity units or $> \pm 10 - 15\%$, whichever is greater	$> \pm 1.5$ turbidity units or $> \pm 15\%$, whichever is greater

Arrangement of Records

Water-quality records collected at a surface-water daily record station are published immediately following that record, regardless of the frequency of sample collection. Station number and name are the same for both records. Where a surface-water daily record station is not available or where the water quality differs significantly from that at the nearby surface-water station, the continuing water-quality record is published with its own station number and name in the regular downstream-order sequence. Water-quality data for partial-record stations and for miscellaneous sampling sites appear in separate tables following the table of discharge measurements at miscellaneous sites.

Onsite Measurements and Sample Collection

In obtaining water-quality data, a major concern is assuring that the data obtained represent the naturally occurring quality of the water. To ensure this, certain measurements, such as water temperature, pH, and dissolved oxygen, must be made on site when the samples are collected. To assure that measurements made in the laboratory also represent the naturally occurring water, carefully prescribed procedures must be followed in collecting the samples, in treating the samples to prevent changes in quality pending analysis, and in shipping the samples to the laboratory. Procedures for onsite measurements and for collecting, treating, and shipping samples are given in TWRIs Book 1, Chapter D2; Book 3,

Chapters A1, A3, and A4; and Book 9, Chapters A1-A9. Most of the methods used for collecting and analyzing water samples are described in the TWRIs, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Also, detailed information on collecting, treating, and shipping samples can be obtained from the USGS Water Science Center. (See address that is shown on the back of title page in this report.)

Water Temperature

Water temperatures are measured at most of the water-quality stations. In addition, water temperatures are taken at the time of discharge measurements for water-discharge stations. For stations where water temperatures are taken manually once or twice daily, the water temperatures are taken at about the same time each day. Large streams have a small diurnal temperature change; shallow streams may have a daily range of several degrees and may follow closely the changes in air temperature. Some streams may be affected by waste-heat discharges.

At stations where recording instruments are used, either mean temperatures or maximum and minimum temperatures for each day are published. Water temperatures measured at the time of water-discharge measurements are on file in the USGS Water Science Center.

Sediment

Suspended-sediment concentrations are determined from samples collected by using depth-integrating samplers. Samples usually are obtained at several verticals in the cross section, or a single sample may be obtained at a fixed point and a coefficient applied to determine the mean concentration in the cross section.

During periods of rapidly changing flow or rapidly changing concentration, samples may be collected more frequently (twice daily or, in some instances, hourly). The published sediment discharges for days of rapidly changing flow or concentration are computed by the subdivided-day method (time-discharge weighted average). Therefore, for those days when the published sediment discharge value differs from the value computed as the product of discharge times mean concentration times 0.0027, the reader can assume that the sediment discharge for that day was computed by the subdivided-day method. For periods when no samples were collected, daily discharges of suspended sediment were estimated on the basis of water discharge, sediment concentrations observed immediately before and after the periods, and suspended-sediment loads for other periods of similar discharge.

At other stations, suspended-sediment samples are collected periodically at many verticals in the stream cross section. Although data collected periodically may represent conditions only at the time of observation, such data are useful in establishing seasonal relations between quality and streamflow and in predicting long-term sediment-discharge characteristics of the stream.

In addition to the records of suspended-sediment discharge, records of the periodic measurements of the particle-size distribution of the suspended sediment and bed material are included for some stations.

Laboratory Measurements

Samples for biochemical oxygen demand (BOD) and indicator bacteria are analyzed locally. All other samples are analyzed in the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used in analyzing sediment samples and computing sediment records are given in TWRI, Book 5, Chapter C1. Methods used by the USGS laboratories are given in the TWRI, Book 1, Chapter D2; Book 3, Chapter C2; and Book 5, Chapters A1, A3, and A4. The TWRI publications may be accessed from <http://water.usgs.gov/pubs/twri/>. These methods are consistent with ASTM standards and generally follow ISO standards.

Data Presentation

For continuing-record stations, information pertinent to the history of station operation is provided in descriptive headings

preceding the tabular data. These descriptive headings give details regarding location, drainage area, period of record, type of data available, instrumentation, general remarks, cooperation, and extremes for parameters currently measured daily. Tables of chemical, physical, biological, radiochemical data, and so forth, obtained at a frequency less than daily are presented first. Tables of “daily values” of specific conductance, pH, water temperature, dissolved oxygen, and suspended sediment then follow in sequence.

In the descriptive headings, if the location is identical to that of the discharge gaging station, neither the LOCATION nor the DRAINAGE AREA statements are repeated. The following information is provided with each continuous-record station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

DRAINAGE AREA.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—This indicates the time periods for which published water-quality records for the station are available. The periods are shown separately for records of parameters measured daily or continuously and those measured less than daily. For those measured daily or continuously, periods of record are given for the parameters individually.

INSTRUMENTATION.—Information on instrumentation is given only if a water-quality monitor temperature record, sediment pumping sampler, or other sampling device is in operation at a station.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of the records.

COOPERATION.—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

EXTREMES.—Maximums and minimums are given only for parameters measured daily or more frequently. For parameters measured weekly or less frequently, true maximums or minimums may not have been obtained. Extremes, when given, are provided for both the period of record and for the current water year.

REVISIONS.—Records are revised if errors in published water-quality records are discovered.

Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based national data system, NWISWeb (<http://waterdata.usgs.gov/nwis>). Users of USGS water-quality data are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent updates. Updates to the NWISWeb are made on an annual basis.

The surface-water-quality records for partial-record stations and miscellaneous sampling sites are published in separate tables following the table of discharge measurements at miscellaneous sites. No descriptive statements are given for these records. Each station is published with its own station number and name in the regular downstream-order sequence.

Remark Codes

The following remark codes may appear with the water-quality data in this section:

Printed output	Remark
E or e	Estimated value.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
M	Presence of material verified, but not quantified.
N	Presumptive evidence of presence of material.
U	Material specifically analyzed for, but not detected.
A	Value is an average.
V	Analyte was detected in both the environmental sample and the associated blanks.
S	Most probable value.

Water-Quality Control Data

The USGS National Water Quality Laboratory collects quality-control data on a continuing basis to evaluate selected analytical methods to determine long-term method detection levels (LT-MDLs) and laboratory reporting levels (LRLs). These values are re-evaluated each year on the basis of the most recent quality-control data and, consequently, may change from year to year.

This reporting procedure limits the occurrence of false positive error. Falsely reporting a concentration greater than the LT-MDL for a sample in which the analyte is not present is 1 percent or less. Application of the LRL limits the occurrence of false negative error. The chance of falsely reporting a nondetection for a sample in which the analyte is present at a concentration equal to or greater than the LRL is 1 percent or less.

Accordingly, concentrations are reported as less than LRL for samples in which the analyte either was not detected or did not pass identification. Analytes detected at concentrations between the LT-MDL and the LRL and that pass identification criteria are estimated. Estimated concentrations will be noted with a remark code of “E.” These data should be used with the understanding that their uncertainty is greater than that of data reported without the E remark code.

Data generated from quality-control (QC) samples are a requisite for evaluating the quality of the sampling and processing techniques as well as data from the actual samples themselves. Without QC data, environmental sample data cannot be adequately interpreted because the errors associated with the sample data are unknown. The various types of QC samples collected by this USGS Water Science Center are described in the following section. Procedures have been established for the storage of water-quality-control data within the USGS. These procedures allow for storage of all derived QC data and are identified so that they can be related to corresponding environmental samples. These data are not presented in this report but are available from the USGS Water Science Center.

Blank Samples

Blank samples are collected and analyzed to ensure that environmental samples have not been contaminated in the overall data-collection process. The blank solution used to develop specific types of blank samples is a solution that is free of the analytes of interest. Any measured value signal in a blank sample for an analyte (a specific component measured in a chemical analysis) that was absent in the blank solution is believed to be due to contamination. Many types of blank samples are possible; each is designed to segregate a different part of the overall data-collection process. The types of blank samples collected in this USGS Water Science Center are:

Field blank—A blank solution that is subjected to all aspects of sample collection, field processing preservation, transportation, and laboratory handling as an environmental sample.

Trip blank—A blank solution that is put in the same type of bottle used for an environmental sample and kept with the set of sample bottles before and after sample collection.

Equipment blank—A blank solution that is processed through all equipment used for collecting and processing an environmental sample (similar to a field blank but normally done in the more controlled conditions of the office).

Sampler blank—A blank solution that is poured or pumped through the same field sampler used for collecting an environmental sample.

Filter blank—A blank solution that is filtered in the same manner and through the same filter apparatus used for an environmental sample.

Splitter blank—A blank solution that is mixed and separated using a field splitter in the same manner and through the same apparatus used for an environmental sample.

Preservation blank—A blank solution that is treated with the sampler preservatives used for an environmental sample.

Reference Samples

Reference material is a solution or material prepared by a laboratory. The reference material composition is certified for one or more properties so that it can be used to assess a measurement method. Samples of reference material are submitted for analysis to ensure that an analytical method is accurate for the known properties of the reference material. Generally, the selected reference material properties are similar to the environmental sample properties.

Replicate Samples

Replicate samples are a set of environmental samples collected in a manner such that the samples are thought to be essentially identical in composition. Replicate is the general case for which a duplicate is the special case consisting of two samples. Replicate samples are collected and analyzed to establish the amount of variability in the data contributed by some part of the collection and analytical process. Many types of replicate samples are possible, each of which may yield slightly different results in a dynamic hydrologic setting, such as a flowing stream. The types of replicate samples collected in this district are:

Concurrent samples—A type of replicate sample in which the samples are collected simultaneously with two or more samplers or by using one sampler and alternating the collection of samples into two or more compositing containers.

Sequential samples—A type of replicate sample in which the samples are collected one after the other, typically over a short time.

Split sample—A type of replicate sample in which a sample is split into subsamples, each subsample contemporaneous in time and space.

Spike Samples

Spike samples are samples to which known quantities of a solution with one or more well-established analyte

concentrations have been added. These samples are analyzed to determine the extent of matrix interference or degradation on the analyte concentration during sample processing and analysis.

Explanation of Ground-Water-Level Records

Generally, only ground-water-level data from selected wells with continuous recorders from a basic network of observation wells are published in this report. This basic network contains observation wells located so that the most significant data are obtained from the fewest wells in the most important aquifers.

Site Identification Numbers

Each well is identified by means of (1) a 15-digit number that is based on latitude and longitude and (2) a local number that is produced for local needs. (See NUMBERING SYSTEM FOR WELLS AND MISCELLANEOUS SITES in this report for a detailed explanation).

Data Collection and Computation

Measurements are made in many types of wells, under varying conditions of access and at different temperatures; hence, neither the method of measurement nor the equipment can be standardized. At each observation well, however, the equipment and techniques used are those that will ensure that measurements at each well are consistent.

Most methods for collecting and analyzing water samples are described in the TWRI's referred to in the Onsite Measurements and Sample Collection and the Laboratory Measurements sections in this report. In addition, TWRI Book 1, Chapter D2, describes guidelines for the collection and field analysis of ground-water samples for selected unstable constituents. Procedures for onsite measurements and for collecting, treating, and shipping samples are given in TWRI's Book 1, Chapter D2; Book 3, Chapters A1, A3, and A4; and Book 9, Chapters A1 through A9. The TWRI publications may be accessed from <http://water.usgs.gov/pubs/twri/>. The values in this report represent water-quality conditions at the time of sampling, as much as possible, and that are consistent with available sampling techniques and methods of analysis. These methods are consistent with ASTM standards and generally follow ISO standards. Trained personnel collected all samples. The wells sampled were pumped long enough to ensure that the water collected came directly from the aquifer and had not stood for a long time in the well casing where it would have been exposed to the atmosphere and to the material, possibly metal, comprising the casings.

Water-level measurements in this report are given in feet with reference to land-surface datum (lsd). Land-surface datum is a datum plane that is approximately at land surface at each well. If known, the elevation of the land-surface datum above sea level is given in the well description. The height of the measuring point (MP) above or below land-surface datum is given in each well description. Water levels in wells equipped with recording gages are reported for every fifth day and the end of each month (EOM).

Water levels are reported to as many significant figures as can be justified by the local conditions. For example, in a measurement of a depth of water of several hundred feet, the error in determining the absolute value of the total depth to water may be a few tenths of a foot, whereas the error in determining the net change of water level between successive measurements may be only a hundredth or a few hundredths of a foot. For lesser depths to water the accuracy is greater. Accordingly, most measurements are reported to a hundredth of a foot, but some are given only to a tenth of a foot or a larger unit.

Data Presentation

Water-level data are presented in alphabetical order by county. The primary identification number for a given well is the 15-digit site identification number that appears in the upper left corner of the table. The secondary identification number is the local or county well number. Well locations are shown and each well is identified by its local or county well number on a map in this report (figs. 1c and 1d).

Each well record consists of three parts: the well description, the data table of water levels observed during the water year, and, for most wells, a hydrograph following the data table. Well descriptions are presented in the headings preceding the tabular data.

The following comments clarify information presented in these various headings.

LOCATION.—This paragraph follows the well-identification number and reports the hydrologic-unit number and a geographic point of reference. Latitudes and longitudes used in this report are reported as North American Datum of 1927 unless otherwise specified.

AQUIFER.—This entry designates by name and geologic age the aquifer that the well taps.

WELL CHARACTERISTICS.—This entry describes the well in terms of depth, casing diameter and depth or screened interval, method of construction, use, and changes since construction.

INSTRUMENTATION.—This paragraph provides information on both the frequency of measurement and the collection method used, allowing the user to better evaluate the reported

water-level extremes by knowing whether they are based on continuous, monthly, or some other frequency of measurement.

DATUM.—This entry describes both the measuring point and the land-surface elevation at the well. The altitude of the land-surface datum is described in feet above the altitude datum; it is reported with a precision depending on the method of determination. The measuring point is described physically (such as top of casing, top of instrument shelf, and so forth), and in relation to land surface (such as 1.3 ft above land-surface datum). The elevation of the land-surface datum is described in feet above National Geodetic Vertical Datum of 1929 (NGVD 29); it is reported with a precision depending on the method of determination.

REMARKS.—This entry describes factors that may affect the water level in a well or the measurement of the water level, when various methods of measurement were begun, and the network (climatic, terrane, local, or areal effects) or the special project to which the well belongs.

PERIOD OF RECORD.—This entry indicates the time period for which records are published for the well, the month and year at the start of publication of water-level records by the USGS, and the words “to current year” if the records are to be continued into the following year. Time periods for which water-level records are available, but are not published by the USGS, may be noted.

EXTREMES FOR PERIOD OF RECORD.—This entry contains the highest and lowest instantaneously recorded or measured water levels of the period of published record, with respect to land-surface datum or sea level, and the dates of occurrence.

Water-Level Tables

A table of water levels follows the well description for each well. Water-level measurements in this report are given in feet with reference to either sea level or land-surface datum (lsd). Missing records are indicated by dashes in place of the water-level value.

For wells not equipped with recorders, water-level measurements were obtained periodically by steel or electric tape. Tables of periodic water-level measurements in these wells show the date of measurement and the measured water-level value.

Hydrographs

Hydrographs are a graphic display of water-level fluctuations over a period of time. In this report, current water year and, when appropriate, period-of-record hydrographs are shown. Hydrographs that display periodic water-level measurements show points that may be connected with a dashed line from one measurement to the next. Hydrographs that display recorder data show a solid line representing the mean water level recorded for each day. Missing data are indicated by a blank space or break in a hydrograph. Missing data may occur as a result of recorder malfunctions, battery failures, or mechanical problems related to the response of the recorder's float mechanism to water-level fluctuations in a well.

Ground-Water-Quality Data

Data Collection and Computation

The ground-water-quality data in this report were obtained as a part of special studies in specific areas. Consequently, a number of chemical analyses are presented for some wells within a county but not for others. As a result, the records for this year, by themselves, do not provide a balanced view of ground-water quality statewide.

Most methods for collecting and analyzing water samples are described in the TWRI, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Procedures for onsite measurements and for collecting, treating, and shipping samples are given in TWRI, Book 1, Chapter D2; Book 5, Chapters A1, A3, and A4 and Book 9, Chapters A1-A6. Also, detailed information on collecting, treating, and shipping samples may be obtained from the USGS Water Science Center. (See address shown on back of title page in this report.)

Laboratory Measurements

Analysis for sulfide and measurement of alkalinity, pH, water temperature, specific conductance, and dissolved oxygen are performed onsite. All other sample analyses are performed at the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used by the USGS laboratory are given in TWRI, Book 1, Chapter D2; and Book 5, Chapters A1, A3, and A4, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

Access to USGS Water Data

The USGS provides near real-time stage and discharge data for many of the gaging stations equipped with the necessary

telemetry and historic daily mean and peak-flow discharge data for most current or discontinued gaging stations through the World Wide Web (WWW). These data may be accessed from <http://water.usgs.gov>.

Water-quality data and ground-water data also are available through the WWW. In addition, data can be provided in various machine-readable formats on various media. Information about the availability of specific types of data or products, and user charges, can be obtained locally from each USGS Water Science Center. (See address that is shown on the back of the title page of this report.)

Definition of Terms

Specialized technical terms related to streamflow, water-quality, and other hydrologic data, as used in this report, are defined below. Definitions of common terms such as algae, water level, and precipitation are given in standard dictionaries. Not all terms defined in this alphabetical list apply to every State. See also table for converting English units to International System (SI) units. Other glossaries that also define water-related terms are accessible from <http://water.usgs.gov/glossaries.html>.

Acid neutralizing capacity (ANC) is the equivalent sum of all bases or base-producing materials, solutes plus particulates, in an aqueous system that can be titrated with acid to an equivalence point. This term designates titration of an "unfiltered" sample (formerly reported as alkalinity.)

Acre-foot (AC-FT, acre-ft) is a unit of volume, commonly used to measure quantities of water used or stored, equivalent to the volume of water required to cover 1 acre to a depth of 1 foot and equivalent to 43,560 cubic feet, 325,851 gallons, or 1,233 cubic meters. (See also "Annual runoff".)

Adenosine triphosphate (ATP) is an organic, phosphate-rich compound important in the transfer of energy in organisms. Its central role in living cells makes ATP an excellent indicator of the presence of living material in water. A measurement of ATP therefore provides a sensitive and rapid estimate of biomass. ATP is reported in micrograms per liter.

Algal growth potential (AGP) is the maximum algal dry weight biomass that can be produced in a natural water sample under standardized laboratory conditions. The growth potential is the algal biomass present at stationary phase and is expressed as milligrams dry weight of algae produced per liter of sample. (See also "Biomass" and "Dry weight".)

Alkalinity is the capacity of solutes in an aqueous system to neutralize acid. This term designates titration of a “filtered” sample.

Annual runoff is the total quantity of water that is discharged (“runs off”) from a drainage basin in a year. Data reports may present annual runoff data as volumes in acre-feet, as discharges per unit of drainage area in cubic feet per second per square mile, or as depths of water on the drainage basin in inches.

Annual 7-day minimum is the lowest mean value for any 7-consecutive-day period in a year. Annual 7-day minimum values are reported herein for the calendar year and the water year (October 1 through September 30). Most low-flow frequency analyses use a climatic year (April 1-March 31), which tends to prevent the low-flow period from being artificially split between adjacent years. The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day, 10-year low-flow statistic.)

Aroclor is the registered trademark for a group of poly-chlorinated biphenyls that were manufactured by the Monsanto Company prior to 1976. Aroclors are assigned specific 4-digit reference numbers dependent upon molecular type and degree of substitution of the biphenyl ring hydrogen atoms by chlorine atoms. The first two digits of a numbered aroclor represent the molecular type, and the last two digits represent the percentage weight of the hydrogen-substituted chlorine.

Artificial substrate is a device that purposely is placed in a stream or lake for colonization of organisms. The artificial substrate simplifies the community structure by standardizing the substrate from which each sample is collected. Examples of artificial substrates are basket samplers (made of wire cages filled with clean streamside rocks) and multiplate samplers (made of hardboard) for benthic organism collection, and plexiglass strips for periphyton collection. (See also “Substrate”)

Ash mass is the mass or amount of residue present after the residue from a dry-mass determination has been ashed in a muffle furnace at a temperature of 500 °C for 1 hour. Ash mass of zooplankton and phytoplankton is expressed in grams per cubic meter (g/m^3), and periphyton and benthic organisms in grams per square meter (g/m^2). (See also “Biomass” and “Dry mass”)

Aspect is the direction toward which a slope faces with respect to the compass.

Bacteria are microscopic unicellular organisms, typically spherical, rodlike, or spiral and threadlike in shape, often clumped into colonies. Some bacteria cause disease, whereas others perform an essential role in nature in the recycling of materials; for example, by decomposing organic matter into a form available for reuse by plants.

Bankfull stage, as used in this report, is the stage at which a stream first overflows its natural banks formed by floods with 1- to 3-year recurrence intervals.

Base discharge (for peak discharge) is a discharge value, determined for selected stations, above which peak discharge data are published. The base discharge at each station is selected so that an average of about three peak flows per year will be published. (See also “Peak flow”)

Base flow is sustained flow of a stream in the absence of direct runoff. It includes natural and human-induced streamflows. Natural base flow is sustained largely by ground-water discharge.

Bed material is the sediment mixture of which a stream-bed, lake, pond, reservoir, or estuary bottom is composed. (See also “Bedload” and “Sediment”)

Bedload is material in transport that primarily is supported by the streambed. In this report, bedload is considered to consist of particles in transit from the bed to the top of the bedload sampler nozzle (an elevation ranging from 0.25 to 0.5 foot). These particles are retained in the bedload sampler. A sample collected with a pressure-differential bedload sampler also may contain a component of the suspended load.

Bedload discharge (tons per day) is the rate of sediment moving as bedload, reported as dry weight, that passes through a cross section in a given time. NOTE: Bedload discharge values in this report may include a component of the suspended-sediment discharge. A correction may be necessary when computing the total sediment discharge by summing the bedload discharge and the suspended-sediment discharge. (See also “Bedload,” “Dry weight,” “Sediment,” and “Suspended-sediment discharge”)

Benthic organisms are the group of organisms inhabiting the bottom of an aquatic environment. They include a number of types of organisms, such as bacteria, fungi, insect larvae and nymphs, snails, clams, and crayfish. They are useful as indicators of water quality.

Biochemical oxygen demand (BOD) is a measure of the quantity of dissolved oxygen, in milligrams per liter, necessary for the decomposition of organic matter by microorganisms, such as bacteria.

Biomass is the amount of living matter present at any given time, expressed as mass per unit area or volume of habitat.

Biomass pigment ratio is an indicator of the total proportion of periphyton that are autotrophic (plants). This also is called the Autotrophic Index.

Blue-green algae (Cyanophyta) are a group of phytoplankton and periphyton organisms with a blue pigment in addition to a green pigment called chlorophyll. Blue-green algae can cause nuisance water-quality conditions in lakes and slow-flowing rivers; however, they are found commonly in streams throughout the year. The abundance of blue-green algae in phytoplankton samples is expressed as the number of cells per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter ($\mu\text{m}^3/\text{mL}$). The abundance of blue-green algae in periphyton samples is given in cells per square centimeter (cells/cm^2) or biovolume per square centimeter ($\mu\text{m}^3/\text{cm}^2$). (See also "Phytoplankton" and "Periphyton")

Bottom material (See "Bed material")

Bulk electrical conductivity is the combined electrical conductivity of all material within a doughnut-shaped volume surrounding an induction probe. Bulk conductivity is affected by different physical and chemical properties of the material including the dissolved-solids content of the pore water, and the lithology and porosity of the rock.

Canadian Geodetic Vertical Datum 1928 is a geodetic datum derived from a general adjustment of Canada's first order level network in 1928.

Cell volume (biovolume) determination is one of several common methods used to estimate biomass of algae in aquatic systems. Cell members of algae are used frequently in aquatic surveys as an indicator of algal production. However, cell numbers alone cannot represent true biomass because of considerable cell-size variation among the algal species. Cell volume (μm^3) is determined by obtaining critical cell measurements or cell dimensions (for example, length, width, height, or radius) for 20 to 50 cells of each important species to obtain an average

biovolume per cell. Cells are categorized according to the correspondence of their cellular shape to the nearest geometric solid or combinations of simple solids (for example, spheres, cones, or cylinders). Representative formulae used to compute biovolume are as follows:

$$\text{sphere } 4/3 \pi \rho^3 \quad \text{cone } 1/3 \pi r^2 h \quad \text{cylinder } \pi r^2 h$$

pi (π) is the ratio of the circumference to the diameter of a circle; $\pi = 3.14159\dots$

From cell volume, total algal biomass expressed as biovolume ($\mu\text{m}^3/\text{mL}$) is thus determined by multiplying the number of cells of a given species by its average cell volume and then summing these volumes for all species.

Cells/volume refers to the number of cells of any organism that is counted by using a microscope and grid or counting cell. Many planktonic organisms are multicelled and are counted according to the number of contained cells per sample volume, and generally are reported as cells or units per milliliter (mL) or liter (L).

Cfs-day (See "Cubic foot per second-day")

Channel bars, as used in this report, are the lowest prominent geomorphic features higher than the channel bed.

Chemical oxygen demand (COD) is a measure of the chemically oxidizable material in the water and furnishes an approximation of the amount of organic and reducing material present. The determined value may correlate with BOD or with carbonaceous organic pollution from sewage or industrial wastes. [See also "Biochemical oxygen demand (BOD)"]

***Clostridium perfringens* (*C. perfringens*)** is a spore-forming bacterium that is common in the feces of human and other warmblooded animals. Clostridial spores are being used experimentally as an indicator of past fecal contamination and the presence of microorganisms that are resistant to disinfection and environmental stresses. (See also "Bacteria")

Coliphages are viruses that infect and replicate in coliform bacteria. They are indicative of sewage contamination of water and of the survival and transport of viruses in the environment.

Color unit is produced by 1 milligram per liter of platinum in the form of the chloroplatinate ion. Color is expressed in units of the platinum-cobalt scale.

Confined aquifer is a term used to describe an aquifer containing water between two relatively

impermeable boundaries. The water level in a well tapping a confined aquifer stands above the top of the confined aquifer and can be higher or lower than the water table that may be present in the material above it. In some cases, the water level can rise above the ground surface, yielding a flowing well.

Contents is the volume of water in a reservoir or lake. Unless otherwise indicated, volume is computed on the basis of a level pool and does not include bank storage.

Continuous-record station is a site where data are collected with sufficient frequency to define daily mean values and variations within a day.

Control designates a feature in the channel that physically affects the water-surface elevation and thereby determines the stage-discharge relation at the gage. This feature may be a constriction of the channel, a bedrock outcrop, a gravel bar, an artificial structure, or a uniform cross section over a long reach of the channel.

Control structure, as used in this report, is a structure on a stream or canal that is used to regulate the flow or stage of the stream or to prevent the intrusion of saltwater.

Cubic foot per second (CFS, ft³/s) is the rate of discharge representing a volume of 1 cubic foot passing a given point in 1 second. It is equivalent to approximately 7.48 gallons per second or approximately 449 gallons per minute, or 0.02832 cubic meters per second. The term “second-foot” sometimes is used synonymously with “cubic foot per second” but is now obsolete.

Cubic foot per second-day (CFS-DAY, Cfs-day, [(ft³/s)/d]) is the volume of water represented by a flow of 1 cubic foot per second for 24 hours. It is equivalent to 86,400 cubic feet, 1.98347 acre-feet, 646,317 gallons, or 2,446.6 cubic meters. The daily mean discharges reported in the daily value data tables numerically are equal to the daily volumes in cfs-days, and the totals also represent volumes in cfs-days.

Cubic foot per second per square mile [CFSM, (ft³/s)/mi²] is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area. (See also “Annual runoff”)

Daily mean suspended-sediment concentration is the time-weighted mean concentration of suspended sediment passing a stream cross section during a 24-hour day. (See also

“Sediment” and “Suspended-sediment concentration”)

Daily record station is a site where data are collected with sufficient frequency to develop a record of one or more data values per day. The frequency of data collection can range from continuous recording to data collection on a daily or near-daily basis.

Data collection platform (DCP) is an electronic instrument that collects, processes, and stores data from various sensors, and transmits the data by satellite data relay, line-of-sight radio, and/or landline telemetry.

Data logger is a microprocessor-based data acquisition system designed specifically to acquire, process, and store data. Data usually are downloaded from onsite data loggers for entry into office data systems.

Datum is a surface or point relative to which measurements of height and/or horizontal position are reported. A vertical datum is a horizontal surface used as the zero point for measurements of gage height, stage, or elevation; a horizontal datum is a reference for positions given in terms of latitude-longitude, State Plane coordinates, or Universal Transverse Mercator (UTM) coordinates. (See also “Gage datum,” “Land-surface datum,” “National Geodetic Vertical Datum of 1929,” and “North American Vertical Datum of 1988”)

Diatoms (Bacillariophyta) are unicellular or colonial algae with a siliceous cell wall. The abundance of diatoms in phytoplankton samples is expressed as the number of cells per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter (μm³/mL). The abundance of diatoms in periphyton samples is given in cells per square centimeter (cells/cm²) or biovolume per square centimeter (μm³/cm²). (See also “Phytoplankton” and “Periphyton”)

Diel is of or pertaining to a 24-hour period of time; a regular daily cycle.

Discharge, or **flow**, is the rate that matter passes through a cross section of a stream channel or other water body per unit of time. The term commonly refers to the volume of water (including, unless otherwise stated, any sediment or other constituents suspended or dissolved in the water) that passes a cross section in a stream channel, canal, pipeline, and so forth, within a given period of time (cubic feet per second). Discharge also can apply to the rate at which constituents, such as suspended

sediment, bedload, and dissolved or suspended chemicals, pass through a cross section, in which cases the quantity is expressed as the mass of constituent that passes the cross section in a given period of time (tons per day).

Dissolved refers to that material in a representative water sample that passes through a 0.45-micrometer membrane filter. This is a convenient operational definition used by Federal and State agencies that collect water-quality data. Determinations of “dissolved” constituent concentrations are made on sample water that has been filtered.

Dissolved oxygen (DO) is the molecular oxygen (oxygen gas) dissolved in water. The concentration in water is a function of atmospheric pressure, temperature, and dissolved-solids concentration of the water. The ability of water to retain oxygen decreases with increasing temperature or dissolved-solids concentration. Photosynthesis and respiration by plants commonly cause diurnal variations in dissolved-oxygen concentration in water from some streams.

Dissolved-solids concentration in water is the quantity of dissolved material in a sample of water. It is determined either analytically by the “residue-on-evaporation” method, or mathematically by totaling the concentrations of individual constituents reported in a comprehensive chemical analysis. During the analytical determination, the bicarbonate (generally a major dissolved component of water) is converted to carbonate. In the mathematical calculation, the bicarbonate value, in milligrams per liter, is multiplied by 0.4917 to convert it to carbonate. Alternatively, alkalinity concentration (as mg/L CaCO₃) can be converted to carbonate concentration by multiplying by 0.60.

Diversity index (H) (Shannon index) is a numerical expression of evenness of distribution of aquatic organisms. The formula for diversity index is:

$$\bar{d} = - \sum_{i=1}^s \frac{n_i}{n} \log_2 \frac{n_i}{n} ,$$

where n_i is the number of individuals per taxon, n is the total number of individuals, and s is the total number of taxa in the sample of the community. Index values range from zero, when all the organisms in the sample are the same, to some positive number, when some or all of the organisms in the sample are different.

Drainage area of a stream at a specific location is that area upstream from the location, measured in a horizontal plane, that has a common outlet at the site for its surface runoff from precipitation that normally drains by gravity into a stream. Drainage areas given herein include all closed basins, or noncontributing areas, within the area unless otherwise specified.

Drainage basin is a part of the Earth’s surface that contains a drainage system with a common outlet for its surface runoff. (See “Drainage area”)

Dry mass refers to the mass of residue present after drying in an oven at 105 °C, until the mass remains unchanged. This mass represents the total organic matter, ash and sediment, in the sample. Dry-mass values are expressed in the same units as ash mass. (See also “Ash mass,” “Biomass,” and “Wet mass”)

Dry weight refers to the weight of animal tissue after it has been dried in an oven at 65 °C until a constant weight is achieved. Dry weight represents total organic and inorganic matter in the tissue. (See also “Wet weight”)

Embeddedness is the degree to which gravel-sized and larger particles are surrounded or enclosed by finer-sized particles. (See also “Substrate embeddedness class”)

Enterococcus bacteria commonly are found in the feces of humans and other warmblooded animals. Although some strains are ubiquitous and not related to fecal pollution, the presence of enterococci in water is an indication of fecal pollution and the possible presence of enteric pathogens. Enterococcus bacteria are those bacteria that produce pink to red colonies with black or reddish-brown precipitate after incubation at 41 °C on mE agar (nutrient medium for bacterial growth) and subsequent transfer to EIA medium. Enterococci include *Streptococcus faecalis*, *Streptococcus faecium*, *Streptococcus avium*, and their variants. (See also “Bacteria”)

EPT Index is the total number of distinct taxa within the insect orders Ephemeroptera, Plecoptera, and Trichoptera. This index summarizes the taxa richness within the aquatic insects that generally are considered pollution sensitive; the index usually decreases with pollution.

Escherichia coli (*E. coli*) are bacteria present in the intestine and feces of warmblooded animals. *E. coli* are a member species of the fecal coliform

group of indicator bacteria. In the laboratory, they are defined as those bacteria that produce yellow or yellow-brown colonies on a filter pad saturated with urea substrate broth after primary culturing for 22 to 24 hours at 44.5 °C on mTEC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Estimated (E) value of a concentration is reported when an analyte is detected and all criteria for a positive result are met. If the concentration is less than the method detection limit (MDL), an E code will be reported with the value. If the analyte is identified qualitatively as present, but the quantitative determination is substantially more uncertain, the National Water Quality Laboratory will identify the result with an E code even though the measured value is greater than the MDL. A value reported with an E code should be used with caution. When no analyte is detected in a sample, the default reporting value is the MDL preceded by a less than sign (<). For bacteriological data, concentrations are reported as estimated when results are based on non-ideal colony counts.

Euglenoids (Euglenophyta) are a group of algae that usually are free-swimming and rarely creeping. They have the ability to grow either photosynthetically in the light or heterotrophically in the dark. (See also “Phytoplankton”)

Extractable organic halides (EOX) are organic compounds that contain halogen atoms such as chlorine. These organic compounds are semivolatile and extractable by ethyl acetate from air-dried streambed sediment. The ethyl acetate extract is combusted, and the concentration is determined by microcoulometric determination of the halides formed. The concentration is reported as micrograms of chlorine per gram of the dry weight of the streambed sediment.

Fecal coliform bacteria are present in the intestines or feces of warmblooded animals. They often are used as indicators of the sanitary quality of the water. In the laboratory, they are defined as all organisms that produce blue colonies within 24 hours when incubated at 44.5° C plus or minus 0.2 °C on M-FC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Fecal streptococcal bacteria are present in the intestines of warmblooded animals and are ubiquitous in the environment. They are characterized as gram-positive, cocci bacteria that are capable of growth in brain-heart infusion broth. In the laboratory, they are defined as all the organisms that produce red or pink colonies within 48 hours at 35 °C plus or minus 1.0 °C on KF-streptococcus medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample. (See also “Bacteria”)

Filtered pertains to constituents in a water sample passed through a filter of specified pore diameter, most commonly 0.45 micrometer or less for inorganic analytes and 0.7 micrometer for organic analytes.

Filtered, recoverable is the amount of a given constituent that is in solution after the part of a representative water-suspended sediment sample that has passed through a filter has been extracted. Complete recovery is not achieved by the extraction procedure and thus the analytical determination represents something less than 95 percent of the total constituent concentration in the sample. To achieve comparability of analytical data, equivalent extraction procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results.

Fire algae (Pyrrhophyta) are free-swimming unicells characterized by a red pigment spot. (See also “Phytoplankton”)

Flow-duration percentiles are values on a scale of 100 that indicate the percentage of time for which a flow is exceeded. For example, the 90th percentile of river flow is greater than or equal to 90 percent of all recorded flow rates.

Gage datum is a horizontal surface used as a zero point for measurement of stage or gage height. This surface usually is located slightly below the lowest point of the stream bottom such that the gage height is usually slightly greater than the maximum depth of water. Because the gage datum is not an actual physical object, the datum is usually defined by specifying the elevations of permanent reference marks such as bridge abutments and survey monuments, and the gage is set to agree with the reference marks. Gage datum is a local datum that is maintained independently of any national geodetic datum. However, if the elevation of the gage datum relative to the national datum (North American Vertical Datum of 1988 or National Geodetic

Vertical Datum of 1929) has been determined, then the gage readings can be converted to elevations above the national datum by adding the elevation of the gage datum to the gage reading.

Gage height (G.H.) is the water-surface elevation, in feet above the gage datum. If the water surface is below the gage datum, the gage height is negative. Gage height often is used interchangeably with the more general term “stage,” although gage height is more appropriate when used in reference to a reading on a gage.

Gage values are values that are recorded, transmitted, and/or computed from a gaging station. Gage values typically are collected at 5-, 15-, or 30-minute intervals.

Gaging station is a site on a stream, canal, lake, or reservoir where systematic observations of stage, discharge, or other hydrologic data are obtained.

Gas chromatography/flame ionization detector (GC/FID) is a laboratory analytical method used as a screening technique for semivolatile organic compounds that are extractable from water in methylene chloride.

Geomorphic channel units, as used in this report, are fluvial geomorphic descriptors of channel shape and stream velocity. Pools, riffles, and runs are types of geomorphic channel units considered for National Water-Quality Assessment (NAWQA) Program habitat sampling.

Green algae (Chlorophyta) are unicellular or colonial algae with chlorophyll pigments similar to those in terrestrial green plants. Some forms of green algae produce mats or floating “moss” in lakes. The abundance of green algae in phytoplankton samples is expressed as the number of cells per milliliter (cells/mL) or biovolume in cubic micrometers per milliliter ($\mu\text{m}^3/\text{mL}$). The abundance of green algae in periphyton samples is given in cells per square centimeter (cells/cm²) or biovolume per square centimeter ($\mu\text{m}^3/\text{cm}^2$). (See also “Phytoplankton” and “Periphyton”)

Habitat, as used in this report, includes all nonliving (physical) aspects of the aquatic ecosystem, although living components like aquatic macrophytes and riparian vegetation also are usually included. Measurements of habitat typically are made over a wider geographic scale than are measurements of

species distribution.

Habitat quality index is the qualitative description (level 1) of instream habitat and riparian conditions surrounding the reach sampled. Scores range from 0 to 100 percent with higher scores indicative of desirable habitat conditions for aquatic life. Index only applicable to wadable streams.

Hardness of water is a physical-chemical characteristic that commonly is recognized by the increased quantity of soap required to produce lather. It is computed as the sum of equivalents of polyvalent cations (primarily calcium and magnesium) and is expressed as the equivalent concentration of calcium carbonate (CaCO₃).

High tide is the maximum height reached by each rising tide. The high-high and low-high tides are the higher and lower of the two high tides, respectively, of each tidal day. See NOAA Web site: <http://www.csc.noaa.gov/text/glossary.html> (See “High water”)

Hilsenhoff’s Biotic Index (HBI) is an indicator of organic pollution that uses tolerance values to weight taxa abundances; usually increases with pollution. It is calculated as follows:

$$HBI = \frac{\sum(n)(a)}{N}$$

where n is the number of individuals of each taxon, a is the tolerance value of each taxon, and N is the total number of organisms in the sample.

Horizontal datum (See “Datum”)

Hydrologic index stations referred to in this report are continuous-record gaging stations that have been selected as representative of streamflow patterns for their respective regions. Station locations are shown on index maps.

Hydrologic unit is a geographic area representing part or all of a surface drainage basin or distinct hydrologic feature as defined by the former Office of Water Data Coordination and delineated on the State Hydrologic Unit Maps by the USGS. Each hydrologic unit is identified by an 8-digit number.

Inch (IN., in.), in reference to streamflow, as used in this report, refers to the depth to which the drainage area would be covered with water if all of the runoff for a given time period were distributed uniformly on it. (See also “Annual runoff”)

Instantaneous discharge is the discharge at a particular instant of time. (See also “Discharge”)

International Boundary Commission Survey

Datum refers to a geodetic datum established at numerous monuments along the United States-Canada boundary by the International Boundary Commission.

Island, as used in this report, is a mid-channel bar that has permanent woody vegetation, is flooded once a year, on average, and remains stable except during large flood events.

Laboratory reporting level (LRL) generally is equal to twice the yearly determined long-term method detection level (LT-MDL). The LRL controls false negative error. The probability of falsely reporting a nondetection for a sample that contained an analyte at a concentration equal to or greater than the LRL is predicted to be less than or equal to 1 percent. The value of the LRL will be reported with a “less than” (<) remark code for samples in which the analyte was not detected. The National Water Quality Laboratory (NWQL) collects quality-control data from selected analytical methods on a continuing basis to determine LT-MDLs and to establish LRLs. These values are reevaluated annually on the basis of the most current quality-control data and, therefore, may change. The LRL replaces the term ‘non-detection value’ (NDV).

Land-surface datum (lsd) is a datum plane that is approximately at land surface at each ground-water observation well.

Latent heat flux (often used interchangeably with latent heat-flux density) is the amount of heat energy that converts water from liquid to vapor (evaporation) or from vapor to liquid (condensation) across a specified cross-sectional area per unit time. Usually expressed in watts per square meter.

Light-attenuation coefficient, also known as the extinction coefficient, is a measure of water clarity. Light is attenuated according to the Lambert-Beer equation::

$$I = I_0 e^{-\lambda L} ,$$

where I_0 is the source light intensity, I is the light intensity at length L (in meters) from the source, λ is the light-attenuation coefficient, and e is the base of the natural logarithm. The light-attenuation coefficient is defined as

$$\lambda = -\frac{1}{L} \log_e \frac{I}{I_0} .$$

Lipid is any one of a family of compounds that are insoluble in water and that make up one of the

principal components of living cells. Lipids include fats, oils, waxes, and steroids. Many environmental contaminants such as organochlorine pesticides are lipophilic.

Long-term method detection level (LT-MDL) is a detection level derived by determining the standard deviation of a minimum of 24 method detection limit (MDL) spike-sample measurements over an extended period of time. LT-MDL data are collected on a continuous basis to assess year-to-year variations in the LT-MDL. The LT-MDL controls false positive error. The chance of falsely reporting a concentration at or greater than the LT-MDL for a sample that did not contain the analyte is predicted to be less than or equal to 1 percent.

Low tide is the minimum height reached by each falling tide. The high-low and low-low tides are the higher and lower of the two low tides, respectively, of each tidal day. See *NOAA Web site: <http://www.csc.noaa.gov/text/glossary.html>* (See “Low water”)

Macrophytes are the macroscopic plants in the aquatic environment. The most common macrophytes are the rooted vascular plants that usually are arranged in zones in aquatic ecosystems and restricted in the area by the extent of illumination through the water and sediment deposition along the shoreline.

Mean concentration of suspended sediment (Daily mean suspended-sediment concentration) is the time-weighted concentration of suspended sediment passing a stream cross section during a given time period. (See also “Daily mean suspended-sediment concentration” and “Suspended-sediment concentration”)

Mean discharge (MEAN) is the arithmetic mean of individual daily mean discharges during a specific period. (See also “Discharge”)

Mean high or low tide is the average of all high or low tides, respectively, over a specific period.

Mean sea level is a local tidal datum. It is the arithmetic mean of hourly heights observed over the National Tidal Datum Epoch. Shorter series are specified in the name; for example, monthly mean sea level and yearly mean sea level. In order that they may be recovered when needed, such datums are referenced to fixed points known as benchmarks. (See also “Datum”)

Measuring point (MP) is an arbitrary permanent reference point from which the distance to water surface in a well is measured to obtain water level.

Megahertz is a unit of frequency. One megahertz equals one million cycles per second.

Membrane filter is a thin microporous material of specific pore size used to filter bacteria, algae, and other very small particles from water.

Metamorphic stage refers to the stage of development that an organism exhibits during its transformation from an immature form to an adult form. This developmental process exists for most insects, and the degree of difference from the immature stage to the adult form varies from relatively slight to pronounced, with many intermediates. Examples of metamorphic stages of insects are egg-larva-adult or egg-nymph-adult.

Method code is a one-character code that identifies the analytical or field method used to determine a value stored in the National Water Information System (NWIS).

Method detection limit (MDL) is the minimum concentration of a substance that can be measured and reported with 99-percent confidence that the analyte concentration is greater than zero. It is determined from the analysis of a sample in a given matrix containing the analyte. At the MDL concentration, the risk of a false positive is predicted to be less than or equal to 1 percent.

Method of Cubatures is a method of computing discharge in tidal estuaries based on the conservation of mass equation.

Methylene blue active substances (MBAS) indicate the presence of detergents (anionic surfactants). The determination depends on the formation of a blue color when methylene blue dye reacts with synthetic anionic detergent compounds.

Micrograms per gram (UG/G, $\mu\text{g/g}$) is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the element per unit mass (gram) of material analyzed.

Micrograms per kilogram (UG/KG, $\mu\text{g/kg}$) is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the constituent per unit mass (kilogram) of the material analyzed. One microgram per kilogram is equivalent to 1 part per billion.

Micrograms per liter (UG/L, $\mu\text{g/L}$) is a unit expressing the concentration of chemical constituents in water as mass (micrograms) of constituent per unit volume (liter) of water. One thousand micrograms per liter is equivalent to

1 milligram per liter. One microgram per liter is equivalent to 1 part per billion.

Microsiemens per centimeter (US/CM, $\mu\text{S/cm}$) is a unit expressing the amount of electrical conductivity of a solution as measured between opposite faces of a centimeter cube of solution at a specified temperature. Siemens is the International System of Units nomenclature. It is synonymous with mhos and is the reciprocal of resistance in ohms.

Milligrams per liter (MG/L, mg/L) is a unit for expressing the concentration of chemical constituents in water as the mass (milligrams) of constituent per unit volume (liter) of water. Concentration of suspended sediment also is expressed in milligrams per liter and is based on the mass of dry sediment per liter of water-sediment mixture.

Minimum reporting level (MRL) is the smallest measured concentration of a constituent that may be reliably reported by using a given analytical method.

Miscellaneous site, miscellaneous station, or miscellaneous sampling site is a site where streamflow, sediment, and/or water-quality data or water-quality or sediment samples are collected once, or more often on a random or discontinuous basis to provide better areal coverage for defining hydrologic and water-quality conditions over a broad area in a river basin.

Most probable number (MPN) is an index of the number of coliform bacteria that, more probably than any other number, would give the results shown by the laboratory examination; it is not an actual enumeration. MPN is determined from the distribution of gas-positive cultures among multiple inoculated tubes.

Multiple-plate samplers are artificial substrates of known surface area used for obtaining benthic invertebrate samples. They consist of a series of spaced, hardboard plates on an eyebolt.

Nanograms per liter (NG/L, ng/L) is a unit expressing the concentration of chemical constituents in solution as mass (nanograms) of solute per unit volume (liter) of water. One million nanograms per liter is equivalent to 1 milligram per liter.

National Geodetic Vertical Datum of 1929 (NGVD 29) is a fixed reference adopted as a standard geodetic datum for elevations determined by leveling. It formerly was called "Sea Level Datum of 1929" or "mean sea level."

Although the datum was derived from the mean sea level at 26 tide stations, it does not necessarily represent local mean sea level at any particular place. See NOAA Web site: <http://www.ngs.noaa.gov/faq.shtml#WhatVD29VD88> (See “North American Vertical Datum of 1988”)

Natural substrate refers to any naturally occurring immersed or submersed solid surface, such as a rock or tree, upon which an organism lives. (See also “Substrate”)

Nekton are the consumers in the aquatic environment and consist of large, free-swimming organisms that are capable of sustained, directed mobility.

Nonfilterable refers to the portion of the total residue retained by a filter.

North American Datum of 1927 (NAD 27) is the horizontal control datum for the United States that was defined by a location and azimuth on the Clarke spheroid of 1866.

North American Datum of 1983 (NAD 83) is the horizontal control datum for the United States, Canada, Mexico, and Central America that is based on the adjustment of 250,000 points including 600 satellite Doppler stations that constrain the system to a geocentric origin. NAD 83 has been officially adopted as the legal horizontal datum for the United States by the Federal government.

North American Vertical Datum of 1988 (NAVD 88) is a fixed reference adopted as the official civilian vertical datum for elevations determined by Federal surveying and mapping activities in the United States. This datum was established in 1991 by minimum-constraint adjustment of the Canadian, Mexican, and United States first-order terrestrial leveling networks.

Open or screened interval is the length of unscreened opening or of well screen through which water enters a well, in feet below land surface.

Organic carbon (OC) is a measure of organic matter present in aqueous solution, suspension, or bottom sediment. May be reported as dissolved organic carbon (DOC), particulate organic carbon (POC), or total organic carbon (TOC).

Organic mass or **volatile mass** of a living substance is the difference between dry mass and ash mass and represents actual mass of the living matter. Organic mass is expressed in the same units as for ash mass and dry mass. (See also “Ash mass,” “Biomass,” and “Dry mass”)

Organism count/area refers to the number of organisms collected and enumerated in a sample and adjusted to the number per area habitat, usually square meter (m²), acre, or hectare. Periphyton, benthic organisms, and macrophytes are expressed in these terms.

Organism count/volume refers to the number of organisms collected and enumerated in a sample and adjusted to the number per sample volume, usually milliliter (mL) or liter (L). Numbers of planktonic organisms can be expressed in these terms.

Organochlorine compounds are any chemicals that contain carbon and chlorine. Organochlorine compounds that are important in investigations of water, sediment, and biological quality include certain pesticides and industrial compounds.

Parameter code is a 5-digit number used in the USGS computerized data system, National Water Information System (NWIS), to uniquely identify a specific constituent or property.

Partial-record station is a site where discrete measurements of one or more hydrologic parameters are obtained over a period of time without continuous data being recorded or computed. A common example is a crest-stage gage partial-record station at which only peak stages and flows are recorded.

Particle size is the diameter, in millimeters (mm), of a particle determined by sieve or sedimentation methods. The sedimentation method uses the principle of Stokes Law to calculate sediment particle sizes. Sedimentation methods (pipet, bottom-withdrawal tube, visual-accumulation tube, sedigraph) determine fall diameter of particles in either distilled water (chemically dispersed) or in native water (the river water at the time and point of sampling).

Particle-size classification, as used in this report, agrees with the recommendation made by the American Geophysical Union Subcommittee on Sediment Terminology. The classification is as follows:

Classification	Size (millimeters)	Method of analysis
Clay	>0.00024–0.004	Sedimentation
Silt	>0.004–0.062	Sedimentation
Sand	>0.062–2.0	Sedimentation or sieve
Gravel	>2.0–64.0	Sieve
Cobble	>64–256	Manual measurement
Boulder	>256	Manual measurement

The particle-size distributions given in this report are not necessarily representative of all particles in transport in the stream. For the sedimentation method, most of the organic matter is removed, and the sample is subjected to mechanical and chemical dispersion before analysis in distilled water. Chemical dispersion is not used for native water analysis.

Peak flow (peak stage) is an instantaneous local maximum value in the continuous time series of streamflows or stages, preceded by a period of increasing values and followed by a period of decreasing values. Several peak values ordinarily occur in a year. The maximum peak value in a year is called the annual peak; peaks lower than the annual peak are called secondary peaks. Occasionally, the annual peak may not be the maximum value for the year; in such cases, the maximum value occurs at midnight at the beginning or end of the year, on the recession from or rise toward a higher peak in the adjoining year. If values are recorded at a discrete series of times, the peak recorded value may be taken as an approximation of the true peak, which may occur between the recording instants. If the values are recorded with finite precision, a sequence of equal recorded values may occur at the peak; in this case, the first value is taken as the peak.

Percent composition or percent of total is a unit for expressing the ratio of a particular part of a sample or population to the total sample or population, in terms of types, numbers, weight, mass, or volume.

Percent shading is a measure of the amount of sunlight potentially reaching the stream. A clinometer is used to measure left and right bank canopy angles. These values are added together, divided by 180, and multiplied by 100 to compute percentage of shade.

Periodic-record station is a site where stage, discharge, sediment, chemical, physical, or other hydrologic measurements are made one or more times during a year but at a frequency insufficient to develop a daily record.

Periphyton is the assemblage of microorganisms attached to and living upon submerged solid surfaces. Although primarily consisting of algae, they also include bacteria, fungi, protozoa, rotifers, and other small organisms. Periphyton are useful indicators of water quality.

Pesticides are chemical compounds used to control undesirable organisms. Major categories of

pesticides include insecticides, miticides, fungicides, herbicides, and rodenticides.

pH of water is the negative logarithm of the hydrogen-ion activity. Solutions with pH less than 7.0 standard units are termed "acidic," and solutions with a pH greater than 7.0 are termed "basic." Solutions with a pH of 7.0 are neutral. The presence and concentration of many dissolved chemical constituents found in water are affected, in part, by the hydrogen-ion activity of water. Biological processes including growth, distribution of organisms, and toxicity of the water to organisms also are affected, in part, by the hydrogen-ion activity of water.

Phytoplankton is the plant part of the plankton. They usually are microscopic, and their movement is subject to the water currents. Phytoplankton growth is dependent upon solar radiation and nutrient substances. Because they are able to incorporate as well as release materials to the surrounding water, the phytoplankton have a profound effect upon the quality of the water. They are the primary food producers in the aquatic environment and commonly are known as algae. (See also "Plankton")

Picocurie (PC, pCi) is one-trillionth (1×10^{-12}) of the amount of radioactive nuclide represented by a curie (Ci). A curie is the quantity of radioactive nuclide that yields 3.7×10^{10} radioactive disintegrations per second (dps). A picocurie yields 0.037 dps, or 2.22 dpm (disintegrations per minute).

Plankton is the community of suspended, floating, or weakly swimming organisms that live in the open water of lakes and rivers. Concentrations are expressed as a number of cells per milliliter (cells/mL) of sample.

Polychlorinated biphenyls (PCBs) are industrial chemicals that are mixtures of chlorinated biphenyl compounds having various percentages of chlorine. They are similar in structure to organochlorine insecticides.

Polychlorinated naphthalenes (PCNs) are industrial chemicals that are mixtures of chlorinated naphthalene compounds. They have properties and applications similar to polychlorinated biphenyls (PCBs) and have been identified in commercial PCB preparations.

Pool, as used in this report, is a small part of a stream reach with little velocity, commonly with water deeper than surrounding areas.

Primary productivity is a measure of the rate at which new organic matter is formed and accumulated through photo-synthetic and chemosynthetic activity of producer organisms (chiefly, green plants). The rate of primary production is estimated by measuring the amount of oxygen released (oxygen method) or the amount of carbon assimilated (carbon method) by the plants.

Primary productivity (carbon method) is expressed as milligrams of carbon per area per unit time [$\text{mg C}/(\text{m}^2/\text{time})$] for periphyton and macrophytes or per volume [$\text{mg C}/(\text{m}^3/\text{time})$] for phytoplankton. The carbon method defines the amount of carbon dioxide consumed as measured by radioactive carbon (carbon-14). The carbon-14 method is of greater sensitivity than the oxygen light- and dark-bottle method and is preferred for use with unenriched water samples. Unit time may be either the hour or day, depending on the incubation period. (See also “Primary productivity”)

Primary productivity (oxygen method) is expressed as milligrams of oxygen per area per unit time [$\text{mg O}/(\text{m}^2/\text{time})$] for periphyton and macrophytes or per volume [$\text{mg O}/(\text{m}^3/\text{time})$] for phytoplankton. The oxygen method defines production and respiration rates as estimated from changes in the measured dissolved-oxygen concentration. The oxygen light- and dark-bottle method is preferred if the rate of primary production is sufficient for accurate measurements to be made within 24 hours. Unit time may be either the hour or day, depending on the incubation period. (See also “Primary productivity”)

Radioisotopes are isotopic forms of elements that exhibit radioactivity. Isotopes are varieties of a chemical element that differ in atomic weight but are very nearly alike in chemical properties. The difference arises because the atoms of the isotopic forms of an element differ in the number of neutrons in the nucleus; for example, ordinary chlorine is a mixture of isotopes having atomic weights of 35 and 37, and the natural mixture has an atomic weight of about 35.453. Many of the elements similarly exist as mixtures of isotopes, and a great many new isotopes have been produced in the operation of nuclear devices such as the cyclotron. There are 275 isotopes of the 81 stable elements, in addition to more than 800 radioactive isotopes.

Reach, as used in this report, is a length of stream that is chosen to represent a uniform set of

physical, chemical, and biological conditions within a segment. It is the principal sampling unit for collecting physical, chemical, and biological data.

Recoverable is the amount of a given constituent that is in solution after a representative water sample has been extracted or digested. Complete recovery is not achieved by the extraction or digestion and thus the determination represents something less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results. (See also “Bed material”)

Recurrence interval, also referred to as return period, is the average time, usually expressed in years, between occurrences of hydrologic events of a specified type (such as exceedances of a specified high flow or nonexceedance of a specified low flow). The terms “return period” and “recurrence interval” do not imply regular cyclic occurrence. The actual times between occurrences vary randomly, with most of the times being less than the average and a few being substantially greater than the average. For example, the 100-year flood is the flow rate that is exceeded by the annual maximum peak flow at intervals whose average length is 100 years (that is, once in 100 years, on average); almost two-thirds of all exceedances of the 100-year flood occur less than 100 years after the previous exceedance, half occur less than 70 years after the previous exceedance, and about one-eighth occur more than 200 years after the previous exceedance. Similarly, the 7-day, 10-year low flow ($7Q_{10}$) is the flow rate below which the annual minimum 7-day-mean flow dips at intervals whose average length is 10 years (that is, once in 10 years, on average); almost two-thirds of the nonexceedances of the $7Q_{10}$ occur less than 10 years after the previous nonexceedance, half occur less than 7 years after, and about one-eighth occur more than 20 years after the previous nonexceedance. The recurrence interval for annual events is the reciprocal of the annual probability of occurrence. Thus, the 100-year flood has a 1-percent chance of being exceeded by the maximum peak flow in any year, and there is a 10-percent chance in any year that the annual minimum 7-day-mean flow will be less than the $7Q_{10}$.

Replicate samples are a group of samples collected in a manner such that the samples are thought to be essentially identical in composition.

Return period (See “Recurrence interval”)

Riffle, as used in this report, is a shallow part of the stream where water flows swiftly over completely or partially submerged obstructions to produce surface agitation.

River mileage is the curvilinear distance, in miles, measured upstream from the mouth along the meandering path of a stream channel in accordance with Bulletin No. 14 (October 1968) of the Water Resources Council and typically is used to denote location along a river.

Run, as used in this report, is a relatively shallow part of a stream with moderate velocity and little or no surface turbulence.

Runoff is the quantity of water that is discharged (“runs off”) from a drainage basin during a given time period. Runoff data may be presented as volumes in acre-feet, as mean discharges per unit of drainage area in cubic feet per second per square mile, or as depths of water on the drainage basin in inches. (See also “Annual runoff”)

Salinity is the total quantity of dissolved salts, measured by weight in parts per thousand. Values in this report are calculated from specific conductance and temperature. Seawater has an average salinity of about 35 parts per thousand (for additional information, refer to: Miller, R.L., Bradford, W.L., and Peters, N.E., 1988, Specific conductance: theoretical considerations and application to analytical quality control: U.S. Geological Survey Water-Supply Paper 2311, 16 p.)

Sea level, as used in this report, refers to one of the two commonly used national vertical datums (NGVD 1929 or NAVD 1988). See separate entries for definitions of these datums.

Sediment is solid material that originates mostly from disintegrated rocks; when transported by, suspended in, or deposited from water, it is referred to as “fluvial sediment.” Sediment includes chemical and biochemical precipitates and decomposed organic material, such as humus. The quantity, characteristics, and cause of the occurrence of sediment in streams are affected by environmental and land-use factors. Some major factors are topography, soil characteristics, land cover, and depth and intensity of precipitation.

Sensible heat flux (often used interchangeably with

latent sensible heat-flux density) is the amount of heat energy that moves by turbulent transport through the air across a specified cross-sectional area per unit time and goes to heating (cooling) the air. Usually expressed in watts per square meter.

Seven-day, 10-year low flow ($7Q_{10}$) is the discharge below which the annual 7-day minimum flow falls in 1 year out of 10 on the long-term average. The recurrence interval of the $7Q_{10}$ is 10 years; the chance that the annual 7-day minimum flow will be less than the $7Q_{10}$ is 10 percent in any given year. (See also “Annual 7-day minimum” and “Recurrence interval”)

Shelves, as used in this report, are streambank features extending nearly horizontally from the flood plain to the lower limit of persistent woody vegetation.

Sodium adsorption ratio (SAR) is the expression of relative activity of sodium ions in exchange reactions within soil and is an index of sodium or alkali hazard to the soil. Sodium hazard in water is an index that can be used to evaluate the suitability of water for irrigating crops.

Soil heat flux (often used interchangeably with soil heat-flux density) is the amount of heat energy that moves by conduction across a specified cross-sectional area of soil per unit time and goes to heating (or cooling) the soil. Usually expressed in watts per square meter.

Soil-water content is the water lost from the soil upon drying to constant mass at 105 °C; expressed either as mass of water per unit mass of dry soil or as the volume of water per unit bulk volume of soil.

Specific electrical conductance (conductivity) is a measure of the capacity of water (or other media) to conduct an electrical current. It is expressed in microsiemens per centimeter at 25 °C. Specific electrical conductance is a function of the types and quantity of dissolved substances in water and can be used for approximating the dissolved-solids content of the water. Commonly, the concentration of dissolved solids (in milligrams per liter) is from 55 to 75 percent of the specific conductance (in microsiemens). This relation is not constant from stream to stream, and it may vary in the same source with changes in the composition of the water.

Stable isotope ratio (per MIL) is a unit expressing the ratio of the abundance of two radioactive

isotopes. Isotope ratios are used in hydrologic studies to determine the age or source of specific water, to evaluate mixing of different water, as an aid in determining reaction rates, and other chemical or hydrologic processes.

Stage (See “Gage height”)

Stage-discharge relation is the relation between the water-surface elevation, termed stage (gage height), and the volume of water flowing in a channel per unit time.

Streamflow is the discharge that occurs in a natural channel. Although the term “discharge” can be applied to the flow of a canal, the word “streamflow” uniquely describes the discharge in a surface stream course. The term “streamflow” is more general than “runoff” as streamflow may be applied to discharge whether or not it is affected by diversion or regulation.

Substrate is the physical surface upon which an organism lives.

Substrate embeddedness class is a visual estimate of riffle streambed substrate larger than gravel that is surrounded or covered by fine sediment (<2 mm, sand or finer). Below are the class categories expressed as the percentage covered by fine sediment::

- 0 < no gravel or larger substrate.
- 1 > 75 percent.
- 2 51–75 percent.
- 3 26–51 percent.
- 4 5–25 percent.
- 5 < 5 percent.

Surface area of a lake is that area (acres) encompassed by the boundary of the lake as shown on USGS topographic maps, or other available maps or photographs. Because surface area changes with lake stage, surface areas listed in this report represent those determined for the stage at the time the maps or photographs were obtained.

Surficial bed material is the upper surface (0.1 to 0.2 foot) of the bed material that is sampled using U.S. Series Bed-Material Samplers.

Surrogate is an analyte that behaves similarly to a target analyte, but that is highly unlikely to occur in a sample. A surrogate is added to a sample in known amounts before extraction and is measured with the same laboratory procedures used to measure the target analyte. Its purpose is to monitor method performance for an individual sample.

Suspended is the amount (concentration) of undissolved material in a water-sediment mixture. Most commonly refers to that material retained on a 0.45-micrometer filter.

Suspended, recoverable is the amount of a given constituent that is in solution after the part of a representative water-suspended sediment sample that is retained on a 0.45-micrometer filter has been extracted or digested. Complete recovery is not achieved by the extraction or digestion procedures and thus the determination represents less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results. (See also “Suspended”)

Suspended sediment is sediment carried in suspension by the turbulent components of the fluid or by the Brownian movement (a law of physics). (See also “Sediment”)

Suspended-sediment concentration is the velocity-weighted concentration of suspended sediment in the sampled zone (from the water surface to a point approximately 0.3 foot above the bed) expressed as milligrams of dry sediment per liter of water-sediment mixture (mg/L). The analytical technique uses the mass of all of the sediment and the net weight of the water-sediment mixture in a sample to compute the suspended-sediment concentration. (See also “Sediment” and “Suspended sediment”)

Suspended-sediment discharge (tons/d) is the rate of sediment transport, as measured by dry mass or volume, that passes a cross section in a given time. It is calculated in units of tons per day as follows: concentration (mg/L) x discharge (ft³/s) x 0.0027. (See also “Sediment,” “Suspended sediment,” and “Suspended-sediment concentration”)

Suspended-sediment load is a general term that refers to a given characteristic of the material in suspension that passes a point during a specified period of time. The term needs to be qualified, such as “annual suspended-sediment load” or “sand-size suspended-sediment load,” and so on. It is not synonymous with either suspended-sediment discharge or concentration. (See also “Sediment”)

Suspended solids, total residue at 105° C concentration is the concentration of inorganic and organic material retained on a filter,

expressed as milligrams of dry material per liter of water (mg/L). An aliquot of the sample is used for this analysis.

Suspended, total is the total amount of a given constituent in the part of a water-sediment sample that is retained on a 0.45-micrometer membrane filter. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. Knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to determine when the results should be reported as “suspended, total.” Determinations of “suspended, total” constituents are made either by directly analyzing portions of the suspended material collected on the filter or, more commonly, by difference, on the basis of determinations of (1) dissolved and (2) total concentrations of the constituent. (See also “Suspended”)

Synoptic studies are short-term investigations of specific water-quality conditions during selected seasonal or hydrologic periods to provide improved spatial resolution for critical water-quality conditions. For the period and conditions sampled, they assess the spatial distribution of selected water-quality conditions in relation to causative factors, such as land use and contaminant sources.

Taxa (Species) richness is the number of species (taxa) present in a defined area or sampling unit.

Taxonomy is the division of biology concerned with the classification and naming of organisms. The classification of organisms is based upon a hierarchical scheme beginning with Kingdom and ending with Species at the base. The higher the classification level, the fewer features the organisms have in common. For example, the taxonomy of a particular mayfly, *Hexagenia limbata*, is the following:

Kingdom: Animal
 Phylum: Arthropoda
 Class: Insecta
 Order: Ephemeroptera
 Family: Ephemeridae
 Genus: *Hexagenia*
 Species: *Hexagenia limbata*

Thalweg is the line formed by connecting points of minimum streambed elevation (deepest part of the channel).

Thermograph is an instrument that continuously records variations of temperature on a chart. The

more general term “temperature recorder” is used in the table descriptions and refers to any instrument that records temperature whether on a chart, a tape, or any other medium.

Time-weighted average is computed by multiplying the number of days in the sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the total number of days. A time-weighted average represents the composition of water resulting from the mixing of flow proportionally to the duration of the concentration.

Tons per acre-foot (T/acre-ft) is the dry mass (tons) of a constituent per unit volume (acre-foot) of water. It is computed by multiplying the concentration of the constituent, in milligrams per liter, by 0.00136.

Tons per day (T/DAY, tons/d) is a common chemical or sediment discharge unit. It is the quantity of a substance in solution, in suspension, or as bedload that passes a stream section during a 24-hour period. It is equivalent to 2,000 pounds per day, or 0.9072 metric ton per day.

Total is the amount of a given constituent in a representative whole-water (unfiltered) sample, regardless of the constituent’s physical or chemical form. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent present in both the dissolved and suspended phases of the sample. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total.” (Note that the word “total” does double duty here, indicating both that the sample consists of a water-suspended sediment mixture and that the analytical method determined at least 95 percent of the constituent in the sample.)

Total coliform bacteria are a particular group of bacteria that are used as indicators of possible sewage pollution. This group includes coliforms that inhabit the intestine of warmblooded animals and those that inhabit soils. They are characterized as aerobic or facultative anaerobic, gram-negative, nonspore-forming, rod-shaped bacteria that ferment lactose with gas formation within 48 hours at 35 °C. In the laboratory, these bacteria are defined as all the organisms that produce colonies with a golden-green metallic sheen within 24 hours when incubated at 35 °C plus or minus 1.0 °C on M-

Endo medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 milliliters of sample. (See also “Bacteria”)

Total discharge is the quantity of a given constituent, measured as dry mass or volume, that passes a stream cross section per unit of time. When referring to constituents other than water, this term needs to be qualified, such as “total sediment discharge,” “total chloride discharge,” and so on.

Total in bottom material is the amount of a given constituent in a representative sample of bottom material. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total in bottom material.”

Total length (fish) is the straight-line distance from the anterior point of a fish specimen’s snout, with the mouth closed, to the posterior end of the caudal (tail) fin, with the lobes of the caudal fin squeezed together.

Total load refers to all of a constituent in transport. When referring to sediment, it includes suspended load plus bed load.

Total organism count is the number of organisms collected and enumerated in any particular sample. (See also “Organism count/volume”)

Total recoverable is the amount of a given constituent in a whole-water sample after a sample has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all particulate matter is not achieved by the digestion treatment, and thus the determination represents something less than the “total” amount (that is, less than 95 percent) of the constituent present in the dissolved and suspended phases of the sample. To achieve comparability of analytical data for whole-water samples, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures may produce different analytical results.

Total sediment discharge is the mass of suspended-sediment plus bed-load transport, measured as dry weight, that passes a cross section in a given time. It is a rate and is reported as tons per day. (See also “Bedload,” “Bedload

discharge,” “Sediment,” “Suspended sediment,” and “Suspended-sediment concentration”)

Total sediment load or total load is the sediment in transport as bedload and suspended-sediment load. The term may be qualified, such as “annual suspended-sediment load” or “sand-size suspended-sediment load,” and so on. It differs from total sediment discharge in that load refers to the material, whereas discharge refers to the quantity of material, expressed in units of mass per unit time. (See also “Sediment,” “Suspended-sediment load,” and “Total load”)

Transect, as used in this report, is a line across a stream perpendicular to the flow and along which measurements are taken, so that morphological and flow characteristics along the line are described from bank to bank. Unlike a cross section, no attempt is made to determine known elevation points along the line.

Turbidity is an expression of the optical properties of a liquid that causes light rays to be scattered and absorbed rather than transmitted in straight lines through water. Turbidity, which can make water appear cloudy or muddy, is caused by the presence of suspended and dissolved matter, such as clay, silt, finely divided organic matter, plankton and other microscopic organisms, organic acids, and dyes (ASTM International, 2003, D1889–00 Standard test method for turbidity of water, *in* ASTM International, Annual Book of ASTM Standards, Water and Environmental Technology, v. 11.01: West Conshohocken, Pennsylvania, 6 p.). The color of water, whether resulting from dissolved compounds or suspended particles, can affect a turbidity measurement. To ensure that USGS turbidity data can be understood and interpreted properly within the context of the instrument used and site conditions encountered, data from each instrument type are stored and reported in the National Water Information System (NWIS) using parameter codes and measurement reporting units that are specific to the instrument type, with specific instruments designated by the method code. The respective measurement units, many of which also are in use internationally, fall into two categories: (1) the designations NTU, NTRU, BU, AU, and NTMU signify the use of a broad spectrum incident light in the wavelength range of 400-680 nanometers (nm), but having different light detection configurations; (2) The designations FNU, FNRU, FBU, FAU, and FNMU generally signify an incident light in the range between 780-900 nm, also with varying light detection

configurations. These reporting units are equivalent when measuring a calibration solution (for example, formazin or polymer beads), but their respective instruments may not produce equivalent results for environmental samples. Specific reporting units are as follows:

NTU (Nephelometric Turbidity Units): white or broadband [400-680 nm] light source, 90 degree detection angle, one detector.

NTRU (Nephelometric Turbidity Ratio Units): white or broadband [400-680 nm] light source, 90 degree detection angle, multiple detectors with ratio compensation.

BU (Backscatter Units): white or broadband [400-680 nm] light source, 30 ± 15 degree detection angle (backscatter).

AU (Attenuation Units): white or broadband [400-680 nm] light source, 180 degree detection angle (attenuation).

NTMU (Nephelometric Turbidity Multibeam Units): white or broadband [400-680 nm] light source, multiple light sources, detectors at 90 degrees and possibly other angles to each beam.

FNU (Formazin Nephelometric Units): near infrared [780-900 nm] or monochrome light source, 90 degree detection angle, one detector.

FNRU (Formazin Nephelometric Ratio Units): near infrared [780-900 nm] or monochrome light source, 90 degree detection angle, multiple detectors, ratio compensation.

FBU (Formazin Backscatter Units): near infrared [780-900 nm] or monochrome light source, 30 ± 15 degree detection angle.

FAU (Formazin Attenuation Units): near infrared [780-900 nm] light source, 180 degree detection angle.

FNMU (Formazin Nephelometric Multibeam Units): near infrared [780-900 nm] or monochrome light source, multiple light sources, detectors at 90 degrees and possibly other angles to each beam.

For more information please see http://water.usgs.gov/owq/FieldManual/Chapter6/6.7_contents.html.

Ultraviolet (UV) absorbance (absorption) at 254 or 280 nanometers is a measure of the aggregate concentration of the mixture of UV absorbing organic materials dissolved in the analyzed water, such as lignin, tannin, humic substances, and various aromatic compounds. UV absorbance (absorption) at 254 or 280 nanometers is measured in UV absorption units

per centimeter of path length of UV light through a sample.

Unconfined aquifer is an aquifer whose upper surface is a water table free to fluctuate under atmospheric pressure. (See “Water-table aquifer”)

Unfiltered pertains to the constituents in an unfiltered, representative water-suspended sediment sample.

Unfiltered, recoverable is the amount of a given constituent in a representative water-suspended sediment sample that has been extracted or digested. Complete recovery is not achieved by the extraction or digestion treatment and thus the determination represents less than 95 percent of the constituent present in the sample. To achieve comparability of analytical data, equivalent extraction or digestion procedures are required of all laboratories performing such analyses because different procedures are likely to produce different analytical results.

Vertical datum (See “Datum”)

Volatile organic compounds (VOCs) are organic compounds that can be isolated from the water phase of a sample by purging the water sample with inert gas, such as helium, and, subsequently, analyzed by gas chromatography. Many VOCs are human-made chemicals that are used and produced in the manufacture of paints, adhesives, petroleum products, pharmaceuticals, and refrigerants. They often are components of fuels, solvents, hydraulic fluids, paint thinners, and dry-cleaning agents commonly used in urban settings. VOC contamination of drinking-water supplies is a human-health concern because many are toxic and are known or suspected human carcinogens.

Water table is that surface in a ground-water body at which the water pressure is equal to the atmospheric pressure.

Water-table aquifer is an unconfined aquifer within which the water table is found.

Water year in USGS reports dealing with surface-water supply is the 12-month period October 1 through September 30. The water year is designated by the calendar year in which it ends and which includes 9 of the 12 months. Thus, the year ending September 30, 2002, is called the “2002 water year.”

Watershed (See “Drainage basin”)

WDR is used as an abbreviation for “Water-Data Report” in the REVISED RECORDS paragraph

to refer to State annual hydrologic-data reports. (WRD was used as an abbreviation for “Water-Resources Data” in reports published prior to 1976.)

Weighted average is used in this report to indicate discharge-weighted average. It is computed by multiplying the discharge for a sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the sum of the discharges. A discharge-weighted average approximates the composition of water that would be found in a reservoir containing all the water passing a given location during the water year after thorough mixing in the reservoir.

Wet mass is the mass of living matter plus contained water. (See also “Biomass” and “Dry mass”)

Wet weight refers to the weight of animal tissue or other substance including its contained water. (See also “Dry weight”)

WSP is used as an acronym for “Water-Supply Paper” in reference to previously published reports.

Zooplankton is the animal part of the plankton. Zooplankton are capable of extensive movements within the water column and often are large enough to be seen with the unaided eye. Zooplankton are secondary consumers feeding upon bacteria, phytoplankton, and detritus. Because they are the grazers in the aquatic environment, the zooplankton are a vital part of the aquatic food web. The zooplankton community is dominated by small crustaceans and rotifers. (See also “Plankton”)