

DEPARTMENT OF THE INTERIOR  
U. S. GEOLOGICAL SURVEY

Prepared in cooperation with the  
WESTERN KANSAS GROUNDWATER MANAGEMENT DISTRICT NO. 1

**WATER-RESOURCES INVESTIGATIONS**  
**REPORT 86-4365**

Continuing studies are being made in west-central Kansas to provide up-to-date information that will aid in the management of ground water for irrigation. This report, prepared by the U.S. Geological Survey in cooperation with the Western Kansas Groundwater Management District No. 1, presents the results of the sixth in a series of studies that uses a statistical technique, called kriging, to produce hydrologic maps.

The kriging technique interpolates water-level altitudes at the center of each 1-square-mile section in the study area on the basis of water-level measurements from 169 observation wells. For this study, measurements made at each site during the winter months of 1984, 1985, and 1986 were averaged. These interpolated altitudes (1,859 in all), along with bedrock-surface and base-year water-level altitudes, were used to prepare a hydrologic map that illustrates percentage change in saturated thickness.

Saturated thickness, as used in this report, is the thickness of the High Plains aquifer between the ground-water surface, as indicated by water-level altitudes, and the bedrock surface. Because irrigation development in west-central Kansas was minimal prior to 1950, the saturated thickness during 1950 represented a nearly static condition in the aquifer. Thus, the decrease in saturated thickness of the aquifer since 1950 is related to the effects of irrigation withdrawals on the volume of water in storage.

Percentage changes in saturated thickness of the aquifer are shown on the map as negative (-) values for areas where the average 1984-86 water levels rose and as positive (+) sign) values for areas where the average water levels declined. Apparent increases in saturated thickness generally occurred in areas of sparse data or thin saturated thickness, and large errors were possible; therefore, zero and negative-changes in saturated thickness in areas of saturated thickness 100 percent may indicate that (1) the aquifer has been dewatered or (2) no saturated thickness occurred in that area during 1950. In general, percentage change in saturated thickness indicates the degree of stress on the aquifer in most areas resulting from irrigation pumping.

Dague, B.J., 1985a, January 1985 water levels, and data related to water-level changes, western and south-central Kansas U.S. Geological Survey Open-File Report 85-423, 162 p

1985b, Map showing percentage change in saturated thickness of the High Plains aquifer, west-central Kansas, 1950 to average 1983-85: U.S. Geological Survey Water-Resources Investigations Report 85-4255, scale 1:125,000, 1 sheet.

1986, January 1986 water levels, and data related to water-level changes, western and south-central Kansas: U.S. Geological Survey Open-File Report 86-317, 165 p.

Dunlap, L.E., and Spinazola, J.M., 1981, Hydrologic maps of the Ogallala aquifer, west-central Kansas, 1978-80: U.S. Geological Survey Open-File Report 81-908, scale 1:125,000, 4 sheets.

1984, Interpolating water-table altitudes in west-central Kansas using kriging techniques: U.S. Geological Survey Water-Supply Paper 2238, 19 p.

Karlínger, M.R., and Skriván, J.A., 1980, Kriging analysis of mean annual precipitation, Powder River basin, Montana and Wyoming: U.S. Geological Survey Water-Resources Investigations 80-50, 25 p.

Pabst, M.E., 1979, Maps showing saturated thickness, January 1979, and percentage decrease in saturated thickness, 1950-79, of unconsolidated aquifer, west-central Kansas: U.S. Geological Survey Open-File Report 79-1340, scale 1:125,000, 2 sheets.

1982, Map showing percentage change in saturated thickness of the High Plains aquifer, west-central Kansas, 1950 to average 1980-82: U.S. Geological Survey Open-File Report 82-1010, scale 1: 125,000, 2 sheets.

Pabst, M.E., and Dague, B.J., 1984a, January 1984 water levels and data related to water-level changes, western and south-central Kansas: U.S. Geological Survey Open-File Report 84-613, 162 p.

1984b, Map showing percentage change in saturated thickness of the High Plains aquifer, west-central Kansas, 1950 to average 1982-84: U.S. Geological Survey Water-Resources Investigations Report 84-4357, scale 1:125,000, 1 sheet.

Skrivan, J.A., and Karlinger, M.R., 1980, Semi-variogram estimation and universal kriging program: U.S. Department of Commerce, National Technical Information Service, PB81-129560, 98 p.


Spinazola, J.M., 1982, Hydrologic maps of the Ogallala aquifer, west-central Kansas, 1979-81: U.S. Geological Survey Open-File Report 82-258, scale 1:125,000, 4 sheets.

Stullken, L.E., and Pabst, M.E., 1982, Altitude and configuration of the water table in the High Plains aquifer of Kansas, pre-1950: U.S. Geological Survey Open-File Report 82-117, 10 p.

Watts, K.R., and Stullken, L.E., 1981, Generalized configuration of the base of the High Plains aquifer in Kansas: U.S. Geological Survey Open-File Report 81-344, scale 1:500,000, 1 sheet.

For those readers who may prefer to use the International System of Units (SI), the conversion factors for the inch-pound units used in this report are listed below.

<u>Multiply</u> <u>inch-pound unit</u>	<u>By</u>	<u>To obtain</u> <u>SI unit</u>
mile	1.609	kilometer
square mile	2.59	square kilometer

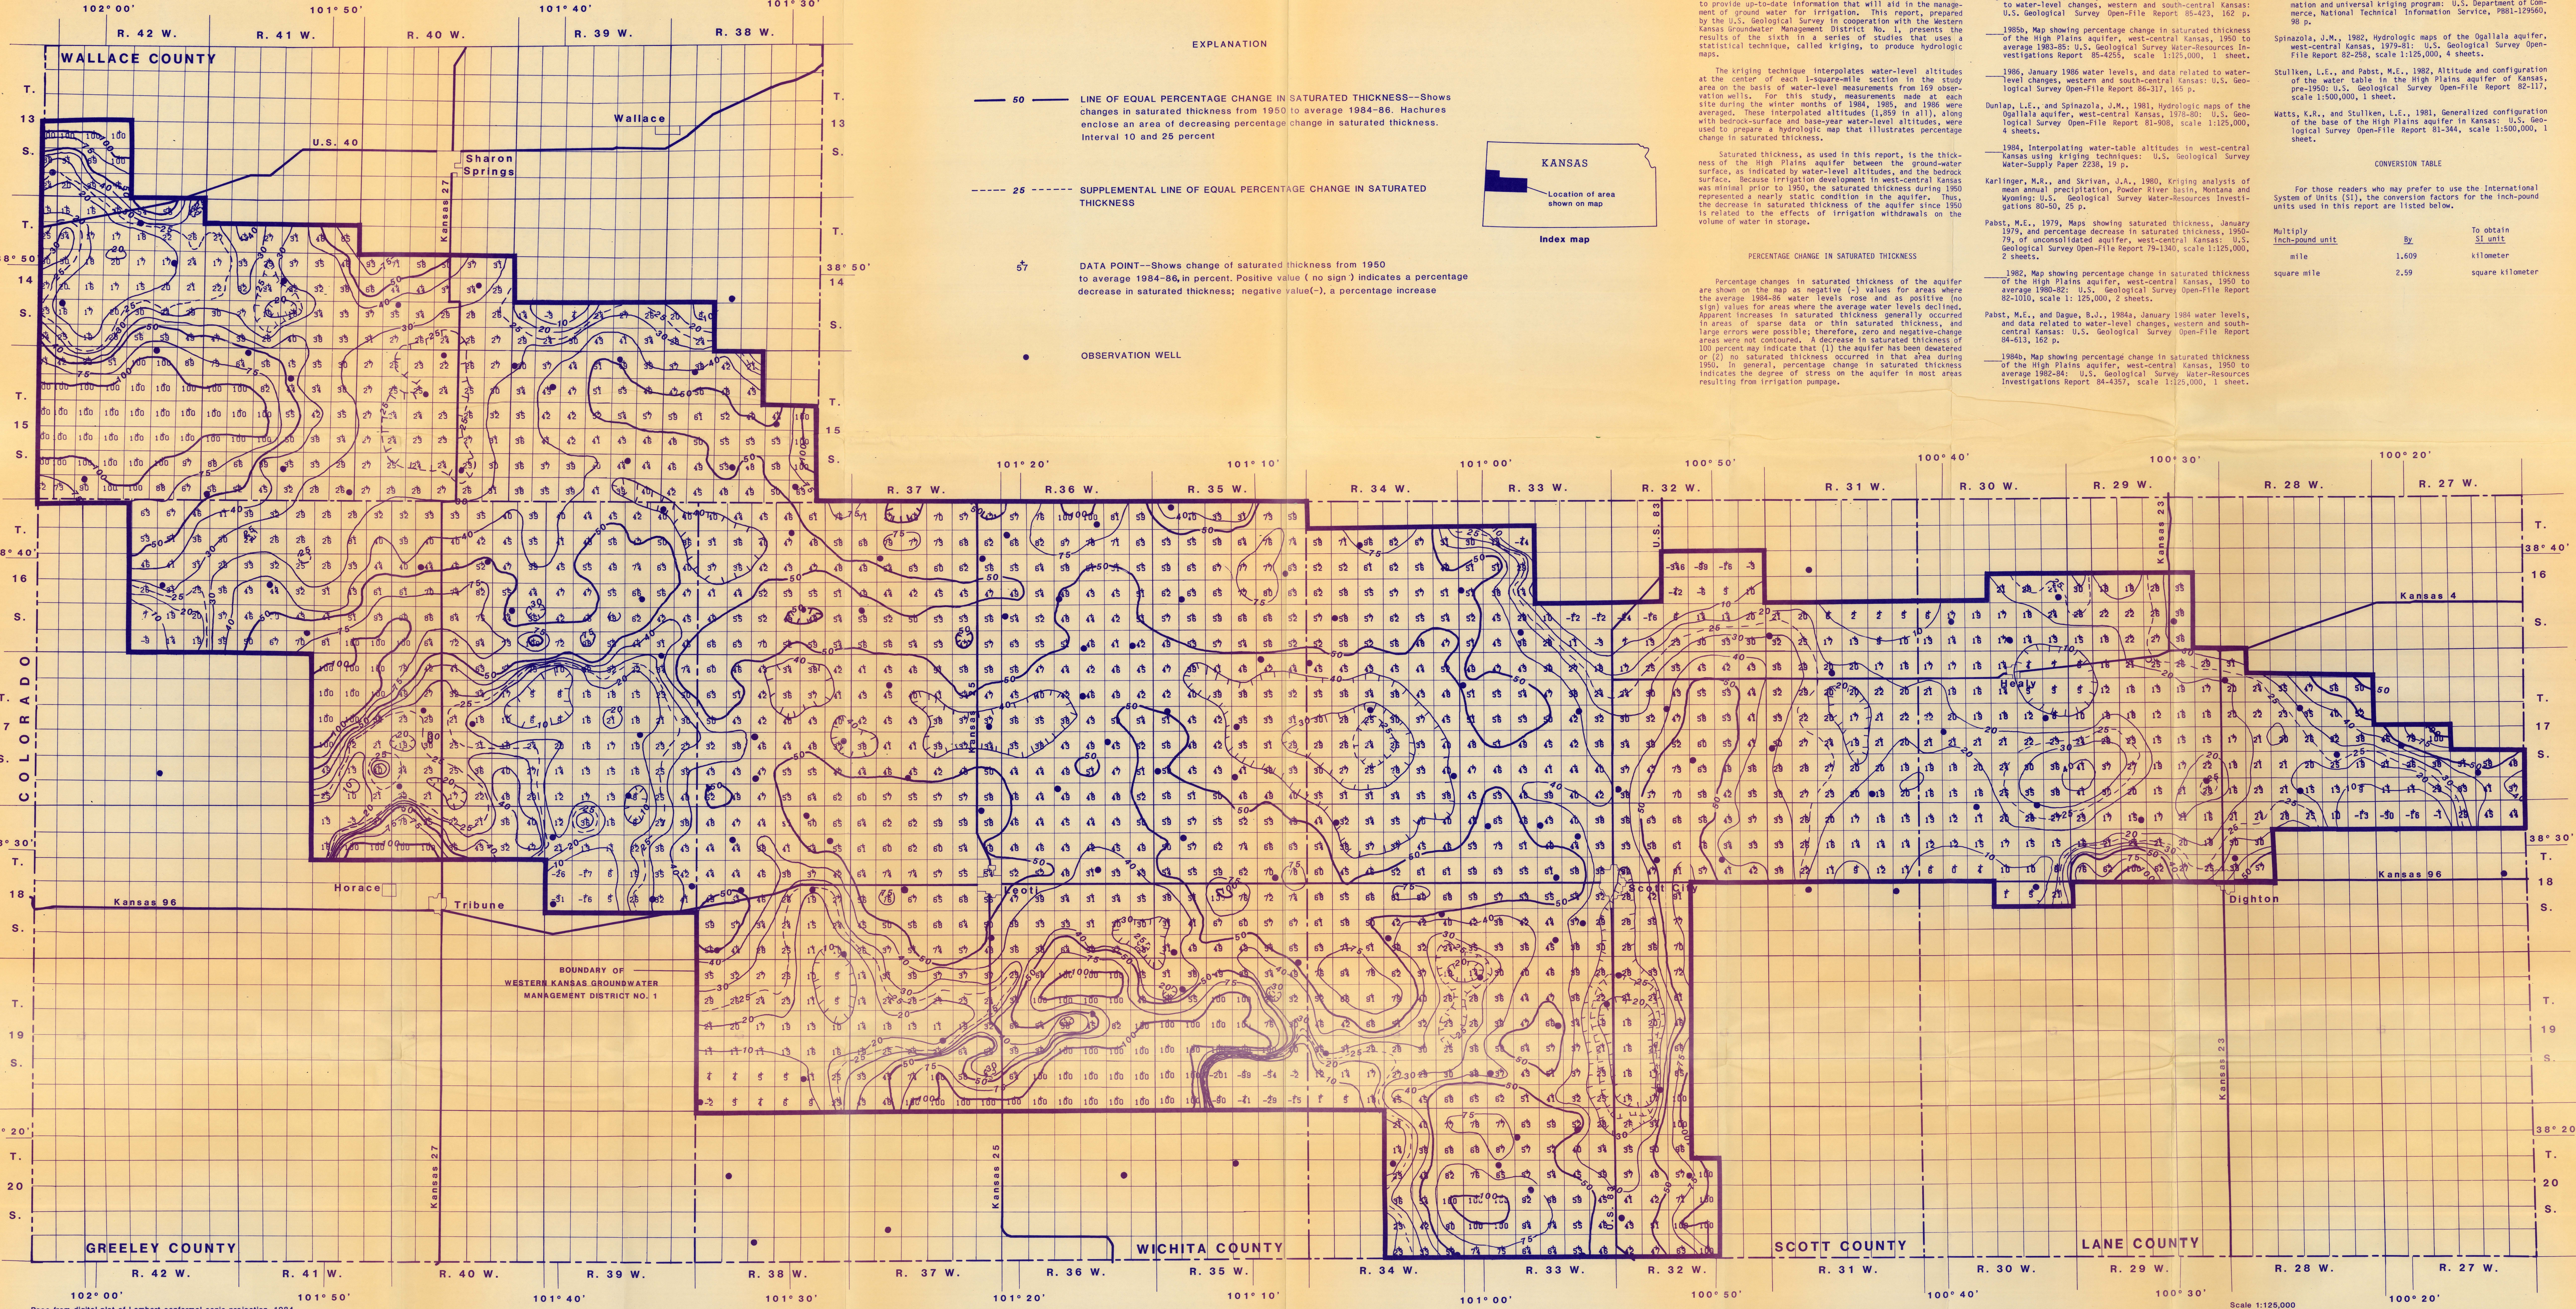

PERCENTAGE CHANGE IN SATURATED THICKNESS OF THE HIGH PLAINS AQUIFER, WEST-CENTRAL KANSAS, 1950 TO AVERAGE 1984-86

By  
Barbara J. Dague  
1986

