

AVAILABILITY AND QUALITY OF WATER FROM THE ALLUVIAL, GLACIAL-DRIFT, AND DAKOTA AQUIFERS AND WATER USE IN SOUTHWEST IOWA

by R.E. Hansen, C.A. Thompson, and P.E. VanDorpe

**U.S. GEOLOGICAL SURVEY
Water-Resources Investigations Report 91-4156**

**Prepared in cooperation with the
IOWA DEPARTMENT OF NATURAL RESOURCES,
GEOLOGICAL SURVEY BUREAU**



**Iowa City, Iowa
1992**

U.S. DEPARTMENT OF THE INTERIOR

MANUEL LUJAN, JR., Secretary

U.S. GEOLOGICAL SURVEY

Dallas L. Peck, Director

For additional information write to:

District Chief
U.S. Geological Survey
Rm. 269, Federal Building
400 South Clinton Street
Iowa City, Iowa 52244

**Copies of this report can be
purchased from:**

U.S. Geological Survey
Open-File Reports
Earth Science Information Center
Box 25425
Denver, Colorado 80225

CONTENTS

	Page
Abstract	1
Introduction.....	1
Purpose and scope	3
Method of investigation.....	3
Physiography and climate.....	3
Well-location numbering system	5
General hydrologic concepts	5
Drinking-water regulations	7
Acknowledgments.....	10
Availability and quality of ground water.....	10
Alluvial aquifers	10
Nishnabotna alluvial aquifer.....	12
Tarkio alluvial aquifer.....	17
Nodaway alluvial aquifer.....	18
One Hundred and Two alluvial aquifer	20
Glacial-drift aquifers	21
Loess aquifer	22
Inter-till sand and gravel aquifers.....	22
Basal sand and gravel aquifers	22
Buried-channel aquifers	24
Water quality.....	28
Dakota aquifer	29
Occurrence.....	29
Water quality.....	29
Water use.....	33
Municipal use, 1984.....	33
Rural domestic use, 1984	33
Livestock use, 1986.....	33
Permitted water use, 1987	35
Irrigation	35
Industrial.....	35
Commercial feedlots.....	35
Miscellaneous	35
Total water use	35
Surface water	36

CONTENTS--Continued

	Page
Water use--Continued	
Total water use--Continued	
Ground water	36
Future water demands	38
Summary	38
Selected references.....	39

ILLUSTRATIONS

	Page
Figure 1. Map showing location of test holes and observation wells drilled from 1985 to 1987	2
2. Map showing landform regions	4
3. Map showing average annual precipitation, 1951-80	6
4. Graphs of average monthly temperature and precipitation at Red Oak, 1951-80	7
5. Diagram of well-location numbering system	8
6. Diagram of hydrologic cycle.....	9
7. Diagram of east-west hydrogeologic section across study area	11
8. Diagram showing relation between nonpumping and pumping water levels	12
9. Map showing location of alluvial valleys and test holes and observation wells	13
10. Graphs of water levels in selected alluvial-aquifer wells, precipitation at Red Oak, and streamflow in the East Nishnabotna River at Red Oak.....	15
11. Piper diagram of mean water quality in the Nishnabotna alluvial aquifer	16
12. Piper diagram of mean water quality in the Tarkio, Nodaway, and One Hundred and Two alluvial aquifers	19
Figures 13-18. Maps showing:	
13. Altitude and thickness of inter-till sand and gravel deposits.....	23
14. Altitude and thickness of basal sand and gravel deposits.....	25
15. Bedrock topography	26

ILLUSTRATIONS--Continued

		Page
Figures 13-18. Maps showing:--Continued		
16.	Extent and thickness of the Fremont and Albany buried-channel aquifers.....	27
17.	Extent and thickness of the Dakota aquifer	30
18.	Potentiometric surface of the Dakota aquifer, 1986-88	31
19.	Piper diagram of historical water quality of the Dakota aquifer, 1950-86	32
20.	Map showing average daily municipal water use and source of water withdrawn, 1984	34
21.	Pie diagram of total water use	36
22.	Map showing total water use by county	37

TABLES

		Page
Table	1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87	43
	2. Ranges of hydraulic conductivity of selected earth materials	117
	3. U.S. Environmental Protection Agency drinking-water regulations	118
	4. Health advisory and risk-assessment concentrations for selected pesticides in drinking water	119
	5. Summary of nitrate analyses of samples from private wells, 1981-86	120
	6. Stratigraphic units in the study area	122
	7. Water levels in selected observation wells, 1986-88	123
	8. Water-quality properties and constituents, 1985-87.....	135
	9. Concentrations of dissolved trace elements in selected wells, 1985-87	150
	10. Concentrations of selected pesticides, 1985-87.....	152
	11. Statistical summary of historical, 1950-86, water-quality properties and constituents for alluvial aquifers	165
	12. Selected pesticide analyses for water samples from the Nishnabotna River system, 1985-87	168
	13. Selected pesticide analyses for water samples from the Tarkio, Nodaway, and One Hundred and Two River systems, 1986-87.....	169

TABLES--Continued

		Page
Table 14.	Thickness of glacial drift in southwest Iowa	169
15.	Water levels and potential yields of the Dakota aquifer.....	170
16.	Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer	171
17.	Water use by category, 1984.....	181
18.	Water source and use for municipal and rural-water systems in southwest Iowa.....	184

CONVERSION FACTORS AND VERTICAL DATUM

<i>Multiply</i>	<i>By</i>	<i>To obtain</i>
inch (in.)	25.40	millimeter (mm)
inch per month (in/mo)	25.40	millimeter per month (mm/mo)
inch per year (in/yr)	25.40	millimeter per year (mm/yr)
foot (ft)	0.3048	meter (m)
mile (mi)	1.609	kilometer (km)
acre	0.4047	hectare
square mile (mi ²)	2.590	square kilometer (km ²)
gallon (gal)	3.785	liter (L)
acre-foot (acre-ft)	1,233	cubic meter (m ³)
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second (m ³ /s)
gallon per minute (gal/min)	0.06309	liter per second (L/s)
gallon per day (gal/d)	0.003785	cubic meter per day (m ³ /d)
million gallons per day (Mgal/d)	0.04381	cubic meter per second (m ³ /s)
foot squared per day (ft ² /d)	0.09290	meter squared per day (m ² /d)

Temperature in degrees Fahrenheit (°F) can be converted to degrees Celsius (°C) as follows:

$$^{\circ}\text{C} = 5/9 \times (^{\circ}\text{F} - 32).$$

Sea level: In this report, "sea level" refers to the National Geodetic Vertical Datum of 1929--a geodetic datum derived from a general adjustment of the first-order level nets of the United States and Canada, formerly called Sea Level Datum of 1929.

AVAILABILITY AND QUALITY OF WATER FROM THE ALLUVIAL, GLACIAL-DRIFT, AND DAKOTA AQUIFERS AND WATER USE IN SOUTHWEST IOWA

by

R.E. Hansen¹, C.A. Thompson², and P.E. VanDorpe²

ABSTRACT

A ground-water resources investigation was conducted in southwest Iowa to describe the availability, quality, and use of water from the alluvial, glacial-drift, and Dakota aquifers in a nine-county area. Historical water quality was examined for each aquifer, and water samples were collected for major ions, trace metals, radionuclides, and selected pesticides. Selected aspects of surface-water resources in the study area also were examined to more fully evaluate alluvial aquifers. The flood plain of the Missouri River valley was not included except for the accounting of the water use in the area.

Four principal alluvial aquifers consisting of sand and gravel deposits in the valleys of the Nishnabotna, Tarkio, Nodaway, and One Hundred and Two Rivers are present. Yields to wells have been reported as large as 2,000 gallons per minute; however, most yields are less than 100 gallons per minute. Nitrate concentrations greater than the drinking-water regulation and agricultural herbicides have been detected in 6 of 27 samples from municipal water supplies.

Four types of glacial-drift aquifers are present--loess, inter-till sand and gravel, basal sand and gravel, and buried-channel aquifers. The glacial-drift aquifers are most commonly used by rural water users or users that do not have access to alluvial aquifers. These aquifers are discontinuous and unpredictable in location. Hydraulic and water-quality data generally are unavailable for these aquifers. Wells completed in loess commonly yield less than 10 gallons per minute, although there are reports of yields as large as 20 gallons per minute. Yields of 10 to 120 gallons per minute appear to be possible for

inter-till and basal sand and gravel aquifers. Yields of more than 150 gallons per minute are possible from some buried-channel aquifers.

The Dakota aquifer is comprised of bedrock of Cretaceous age and is present as erosional remnants and outliers in several counties, mainly Cass and Montgomery. Yields of more than 150 gallons per minute to wells completed in the Dakota aquifer have been reported, although yields of 20 gallons per minute or less are more typical. The drinking-water regulation for nitrate has been exceeded in some samples from the Dakota aquifer.

The quantity of water withdrawn for municipal, rural-domestic, livestock, and other permitted water users was determined for each of the three principal aquifer types. The total water use within the study area was about 91.8 million gallons per day; 35.3 percent was from alluvial ground-water sources. Alluvial aquifers supplied most of the water from ground-water sources. The largest use of water is for permitted irrigation purposes, mostly from the Missouri River alluvial aquifer.

INTRODUCTION

Many residents of southwest Iowa, a predominantly agricultural region, depend on ground water for municipal and domestic water supplies. The quality of water from deep bedrock aquifers limits the use of water from these aquifers for most purposes; however, water of acceptable quality is available from shallow aquifers. Although geographically widespread, the shallow aquifers are not found in all locations. The need for an improved understanding of the occurrence and availability of shallow ground-water resources of southwest Iowa has resulted in the hydrologic study of a nine-county area: Adair, Adams, Cass, Fremont, Mills, Montgomery, Page, Pottawattamie, and Taylor Counties (fig. 1). The study is the last of nine regional areal appraisals describing

¹ U.S. Geological Survey, Iowa City, Iowa.

² Iowa Department of Natural Resources, Geological Survey Bureau, Iowa City, Iowa.

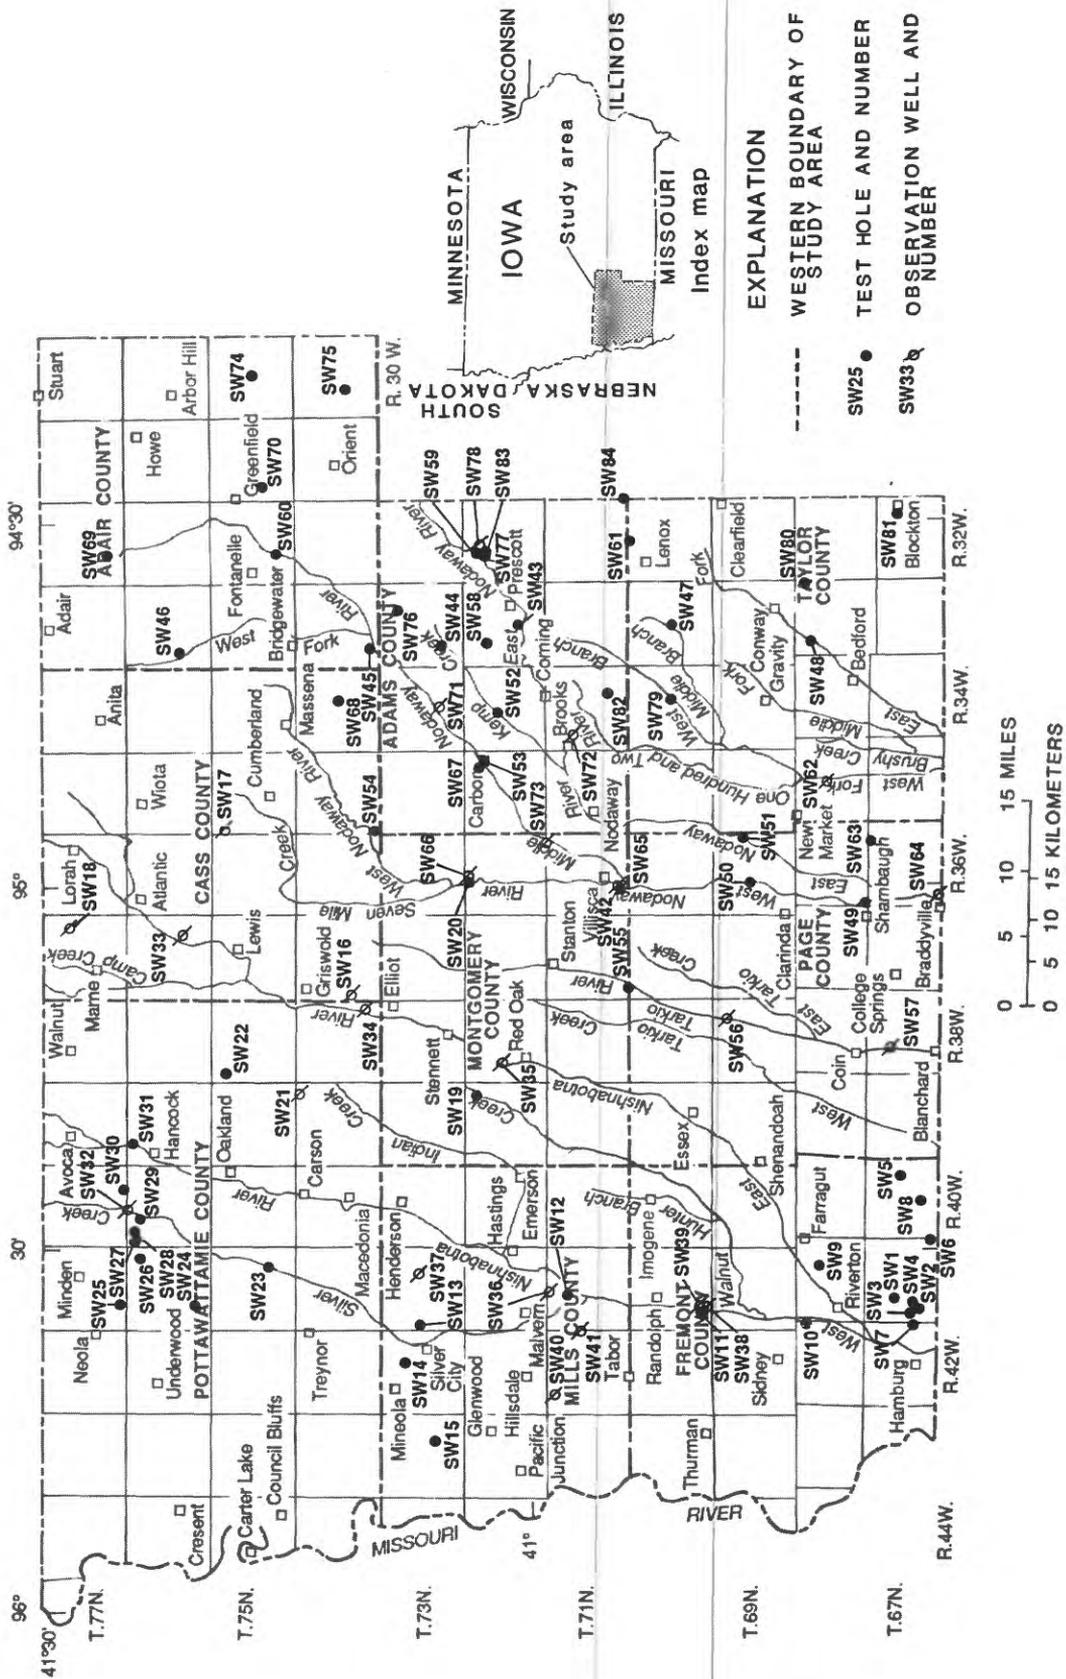


Figure 1. Location of test holes and observation wells drilled from 1985 to 1987.

ground-water resources in Iowa. The study is part of a cooperative program between the U.S. Geological Survey and the Geological Survey Bureau of the Iowa Department of Natural Resources. The stratigraphic nomenclature used throughout this report is that of the Iowa Department of Natural Resources, Geological Survey Bureau.

Purpose and Scope

This report describes the availability and quality of ground water from the alluvial, glacial-drift, and Dakota aquifers, and water use in southwest Iowa. Specifically, the report describes: (1) the location and areal extent of the aquifers, (2) the occurrence of ground water, (3) the chemical quality of the water in the aquifers, and (4) the quantity of water withdrawn from these aquifers and surface-water sources for various uses.

This report contains a general appraisal of the ground-water resources in southwest Iowa and is intended to provide background information to aid in the development of ground-water supplies. Selected aspects of surface-water resources in the area were included as a means of evaluating the alluvial aquifers. The Missouri River alluvial aquifer is not included in this study because of the relatively large quantity of water available from it that is adequate for most uses. In addition, the Missouri River alluvial aquifer is presently (1989) used by only about 10 percent of the water users in southwest Iowa. However, for some categories of water use it was not practical to determine or estimate quantities of water derived from outside the study area. Therefore, water use is summarized for each county within the study area.

Method of Investigation

Historical records were examined, and observation-well drilling was used to obtain data for specific aquifers in areas where little or no ground-water information was available. Logs of the test holes and observation wells, along with well-construction details, are in table 1 at the back of this report, and locations are shown in figure 1. Observation wells were constructed to monitor water-level changes and to obtain samples of ground water for chemical analysis.

Surface-water samples also were collected at several sites for chemical analysis. Municipal water-use information was obtained from local water departments.

Water-quality data obtained from the University of Iowa Hygienic Laboratory, the U.S. Geological Survey, and the Iowa Department of Natural Resources were used to aid in the assessment of water quality in each of the aquifers. Water samples were collected during this study by U.S. Geological Survey personnel. All water samples were analyzed by the University of Iowa Hygienic Laboratory. Details of the analytical methods and quality-control procedures can be obtained from the laboratory.

Physiography and Climate

Three general landform regions are present in Iowa--the Southern Iowa Drift Plain, the Western Loess Hills, and the Missouri Alluvial Plain (Prior, 1976; fig. 2). The Western Loess Hills and the Missouri Alluvial Plain regions comprise about 20 percent of the land area in southwest Iowa. These narrow regions, about 3 to 10 mi and 6 to 15 mi wide, respectively, parallel the western side of the study area. Most of southwest Iowa lies within the Southern Iowa Drift Plain.

The Southern Iowa Drift Plain is a landscape of steeply rolling hills and incised valleys that has evolved since the end of the pre-Illinoian glaciation. Extensive erosion has removed many of the original glacial landforms and left a characteristic, multi-level, stepped-erosion landscape (Ruhe, 1969; Bettis and Littke, 1987). The Western Loess Hills region is characterized by a thick loess cover and sharply ridged terrain. The Missouri Alluvial Plain is a broad, low-lying, level region adjacent to the Missouri River.

The total area of southwest Iowa is 4,982 mi² or about 9 percent of the total area of the State. Maximum topographic relief is about 555 ft. The highest land-surface altitude is just over 1,460 ft, several miles north of Anita in Cass County, and the lowest altitude is about 905 ft in the Missouri River valley at the southwest corner of the State.

The climate of southwest Iowa is subhumid. The average precipitation for southwest Iowa is 33.11 in/yr and varies from 31 in. in the northwest to more than 35 in. in the southern

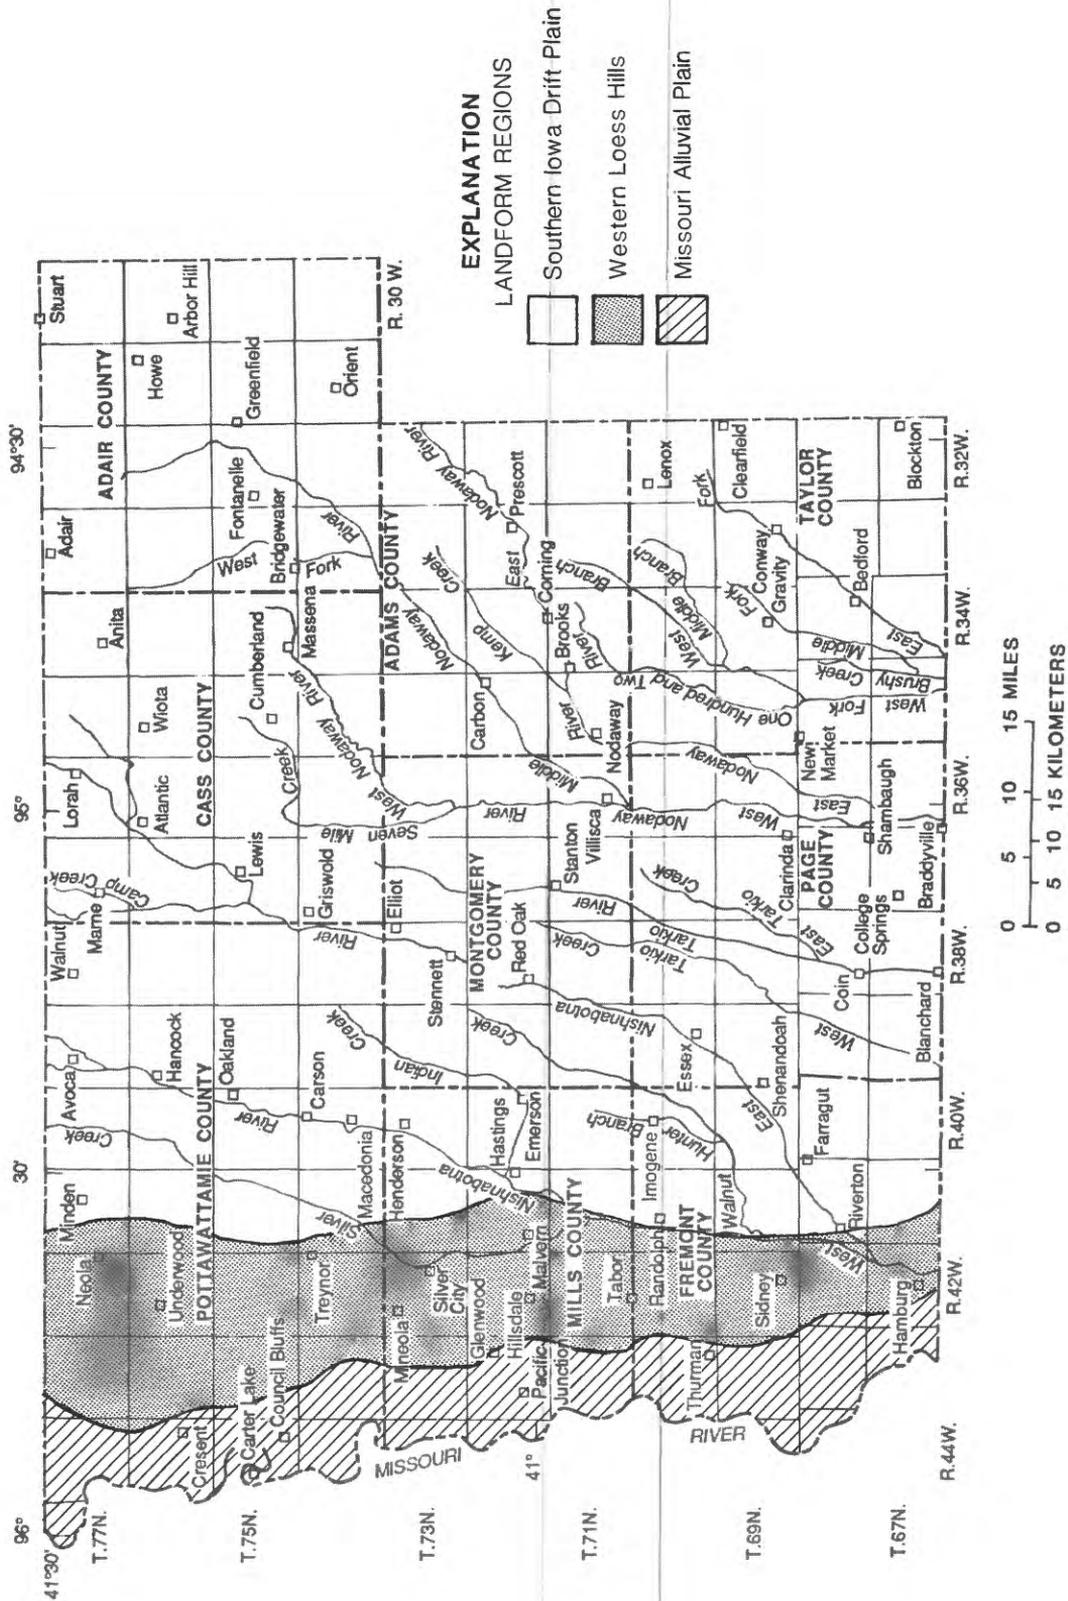


Figure 2. Landform regions (modified from Prior, 1976).

part of the study area (fig. 3). The period of greatest precipitation is during April through September (fig. 4). Average rainfall during this period is 4.3 in/mo at Red Oak in Montgomery County (National Oceanic and Atmospheric Administration, 1987). The average annual temperature for this area is 50.4 °F (National Oceanic and Atmospheric Administration, 1987). There is a large annual range in temperature (fig. 4); the hottest days occur in June, July, and August and the coldest in December, January, and February when the average monthly temperatures are below freezing.

Well-Location Numbering System

The wells and test holes referred to in this report are numbered according to a system of land survey in use by the U.S. Bureau of Land Management and the U.S. Geological Survey and is illustrated in figure 5. The first numeral denotes the township north of a base line, the second numeral denotes the range west of the fifth principal meridian, and the third numeral denotes the section in which the well is located. The letters A, B, C, and D designate the northeast, northwest, southwest, and southeast quarter of any area within a section. The first letter designates the location of the 160-acre quarter section; the second letter, the 40-acre quarter-quarter section; the third letter, the 10-acre quarter-quarter-quarter section; and the fourth letter, the 2.5-acre quarter-quarter-quarter-quarter section. Consecutive terminal numerals are added if more than one well or test hole is recorded within a 2.5-acre tract. For example, well 68-35-15BCDD is located in the southeast quarter of the southeast quarter of the southwest quarter of the northwest quarter of section 15 in Township 68 North and Range 35 West.

General Hydrologic Concepts

The term hydrology encompasses the distribution, movement, and quality of water. Water is in continual circulation between open bodies of water, the atmosphere, and the land. This dynamic circulation system is called the hydrologic cycle (fig. 6). This cycle has no recognized beginning, but for descriptive purposes the atmosphere is an adequate starting point. Water vapor in the atmosphere condenses and falls to earth as precipitation. Once removed

from the atmosphere, the water may follow several pathways within the hydrologic cycle. Much of the water may evaporate back into the atmosphere, some will pond or flow across the land surface, and some will infiltrate into the ground. Water on the land surface may evaporate to the atmosphere or infiltrate into the ground. Water in the ground may be evaporated or transpired by plants and returned to the atmosphere. Any excess water in the soil moves downward by gravity to where the soil or rock is saturated. The top of the saturated zone is called the water table. Water in the saturated zone moves through fractures and small openings between grains of soil and rock. The rate of movement of the water is controlled by the hydraulic conductivity of the material through which it moves and the hydraulic gradient. The water eventually moves to areas where it returns to the land surface and either enters the surface-runoff pathway or evaporates to the atmosphere, completing the cycle.

Hydraulic conductivity is a term used to express the ability of a material to transmit water. It is controlled, in part, by the size and connection between openings in earth materials. Gravel, well-sorted sand, poorly cemented sandstone, and fractured rocks generally have large hydraulic-conductivity values. These materials form aquifers. Fine-grained materials such as silt, clay, and shale usually have small hydraulic-conductivity values and retard ground-water movement. These materials form confining units. The potential range of hydraulic conductivities of some of the typical materials present in the study area is shown in table 2 at the back of this report. Transmissivity, a measure of the ability of an aquifer to transmit water through connected openings, is a product of the hydraulic conductivity and the aquifer thickness.

Water in aquifers overlain by confining units may rise by hydraulic pressure in wells to altitudes higher than the top of the aquifer. These aquifers are called artesian aquifers. The level to which water will rise in a well that penetrates an aquifer is called the potentiometric surface at that location. Generally, artesian aquifers occur at greater depths below the land surface than water-table aquifers. In a water-table aquifer, the upper water surface is in equilibrium with atmospheric pressure.

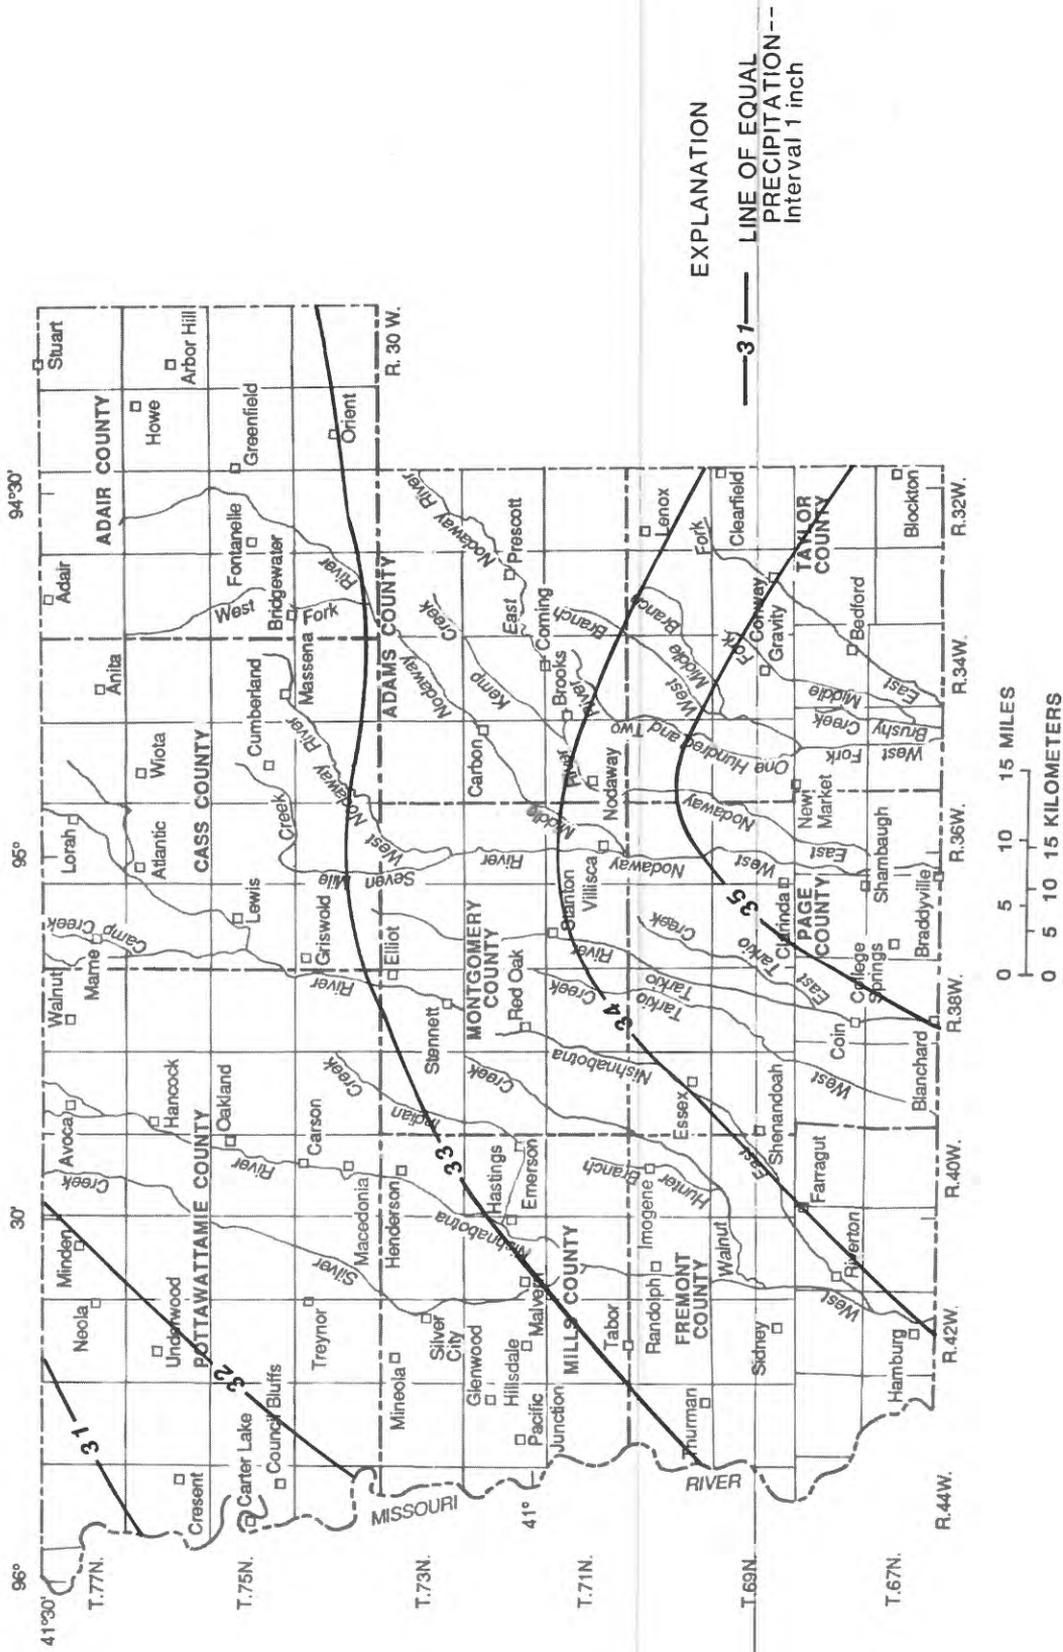


Figure 3. Average annual precipitation, 1951-80 (modified from Iowa Department of Agriculture and Land Stewardship, 1987).

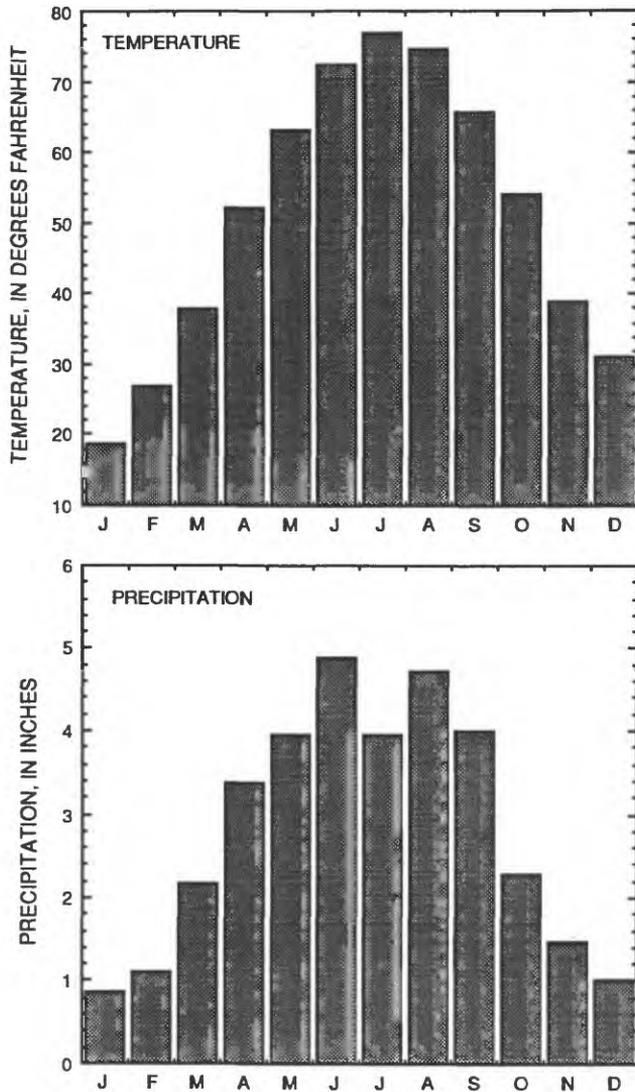


Figure 4. Average monthly temperature and precipitation at Red Oak, 1951-80 (data from National Oceanic and Atmospheric Administration, 1987).

Hydraulic gradient refers to the difference in water level between two points divided by the distance between the points. The movement of ground water is from areas of higher water level to areas of lower water level. The larger the gradient, the greater is the potential for flow to the point of lower water level. The most common method used to determine hydraulic gradients is to measure water levels in wells that penetrate the aquifer or aquifers of interest. Water-level altitudes then can be plotted and lines of equal water-level altitude drawn on a map. The direction of ground-water movement is downgradient and perpendicular to the lines of equal water-level altitude.

The water level in an aquifer fluctuates in response to recharge and discharge from the aquifer, usually indicating a change in the quantity of water stored in the aquifer. In Iowa, water-table aquifers near the land surface usually are recharged in the spring and fall by direct infiltration of precipitation or snowmelt. Recharge to these aquifers in the study area usually is sufficient to replace water losses caused by withdrawals from wells or natural ground-water movement. Aquifers that are confined by thick deposits of fine-grained materials are recharged at slow rates by leakage from above or below through the confining materials or by lateral movement of water through the aquifer from more distant recharge areas.

The suitability of ground water for various purposes is determined by the quantity of water available and by its chemical quality. As ground water moves through earth materials, it can dissolve minerals. In general, ground water becomes more mineralized with time and distance from the recharge area. Ground water in this report will be characterized by reference to the dominant anions and cations that it contains. Water is referred to as a cation-anion type, such as calcium-bicarbonate water. The dominant cations are calcium, magnesium, and sodium. The dominant anions are bicarbonate, sulfate, and chloride.

Drinking-Water Regulations

Public drinking-water regulations have been adopted by the U.S. Environmental Protection Agency as part of the Safe Drinking Water Act (PL 93-523). Primary regulations refer to Maximum Contaminant Levels (MCL), which are the maximum levels of contaminant permissible in a public-water supply. Secondary regulations apply to substances that affect aesthetic qualities of drinking water, such as taste and odor, and are not enforceable contaminant levels. In addition to aesthetic quality, health implications also may exist if considerably larger concentrations of the secondary-regulation substances occur. The National Drinking-Water Regulations are listed in table 3 at the back of this report.

Much of the current concern with regard to water quality in Iowa has focused on agricultural chemicals, particularly nitrate and pesticides.

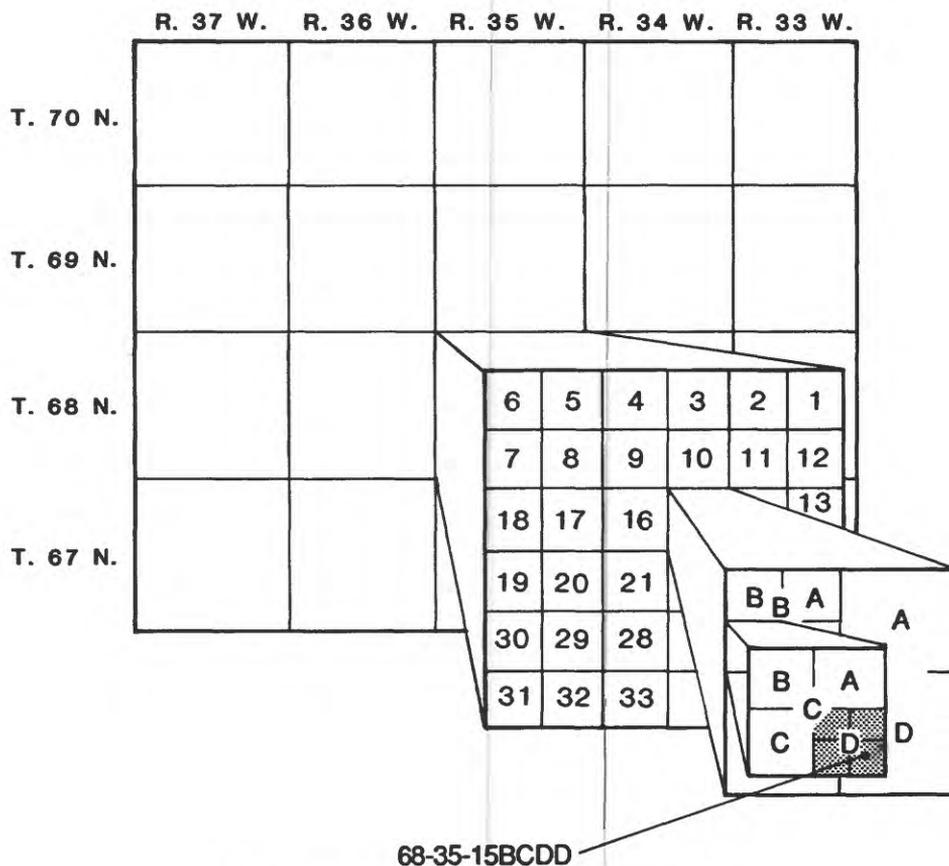



Figure 5. Well-location numbering system.

The occurrence of agricultural chemicals in Iowa's ground water is of concern not only because of acute health effects but also because of the potential hazard to health from long-term exposure to small concentrations. Large nitrate concentrations can cause methemoglobinemia (blue-baby syndrome) in infants, which may result in death. Long-term exposure to small concentrations of nitrate has been linked to birth defects, gastric cancer, and nervous-system impairment (Fraser and Chilvers, 1981; Dorsch and others, 1984; Forman and others, 1985). Much of the evidence for these additional adverse effects of nitrate is not established well yet.

The potential adverse health effects of pesticides are more difficult to assess as fewer studies have been done, particularly on the newer compounds. The U.S. Environmental Protection Agency is formulating approaches for dealing with pesticides in drinking water and has issued a proposed strategy (U.S. Environmental Protection Agency, written commun., 1989). This strategy has suggested the use of MCL regulations. However, at the present time

(1989), few MCLs have been set for pesticides (table 3). For many of the compounds, interim regulations will be based on standard risk-assessment procedures. For non-carcinogenic chemicals, health advisories will be established on a No Observable Effect Level (NOEL) basis. For carcinogenic chemicals, risk-assessment concentrations will be established that correspond to a carcinogenic risk of one-in-a-million. Some of the proposed health advisories and risk-assessment concentrations for pesticides commonly detected in drinking water in Iowa are listed in table 4 at the back of this report.

Private wells in southwest Iowa have larger nitrate concentrations than private wells in other parts of the State, based on summary data supplied by the University of Iowa Hygienic Laboratory (University of Iowa Hygienic Laboratory, written commun., 1988). In this report, nitrate refers to nitrate concentrations as nitrogen. The data set consists of private water-well analyses that were evaluated between 1981 and 1986. Well location is limited to a

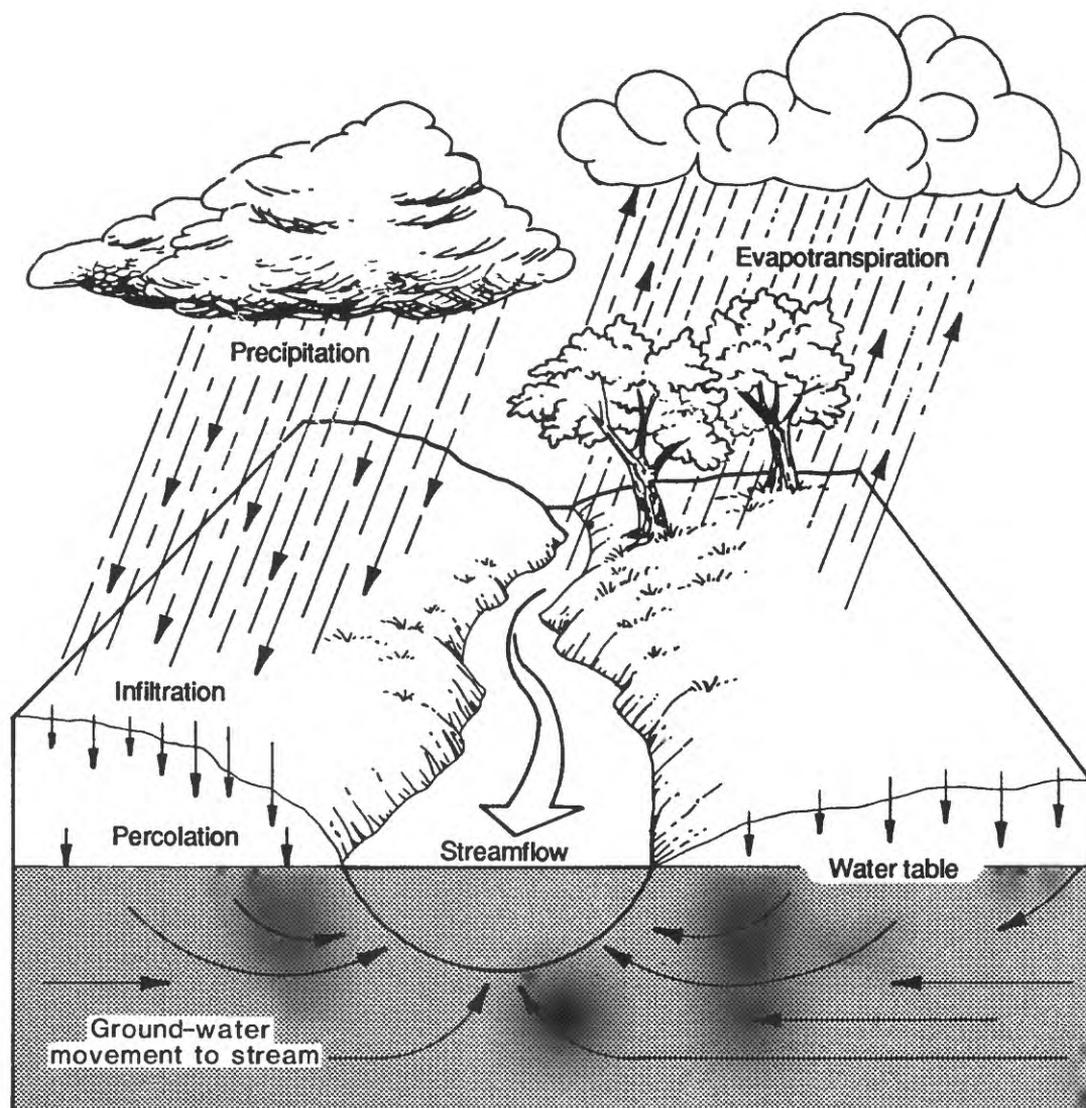

NOT TO SCALE

Figure 6. Hydrologic cycle.

mailing address and only occasionally is well depth reported by the individual submitting the sample. Thus, it is difficult to correlate these private analyses to aquifers. Private-well samples are voluntarily submitted and are usually submitted for a new well or when a known or suspected water-quality problem occurs. Private-well construction and maintenance are more variable than for municipal wells; thus, some of the analyses may reflect individual well problems. However, the large sample size of 3,437 wells generally compensates for any biases, and the data are believed to be a reasonable representation of overall nitrate concentration. The number and

percentage of water samples containing nitrate concentrations of more than 10 mg/L (milligrams per liter) in each county from 1981 to 1986 are listed in table 5 at the back of this report.

The larger nitrate concentrations can be explained, in part, by reference to well depth in the area. It has been documented in Iowa that shallow wells, less than 100 ft deep, are especially susceptible to contamination from agricultural chemicals and other surface-derived contaminants (Hallberg and Hoyer, 1982; Hallberg and others, 1983; Libra and others, 1984; Bruner and Hallberg, 1987). In southwest Iowa, few deep aquifers are available, and the

water quality in most of these deeper aquifers often is unacceptable because of large dissolved-solids concentrations. The use of shallow sources for private drinking-water supplies also is widespread. The reliance on shallow drinking-water supplies for private wells in southwest Iowa is the reason for the generally larger nitrate concentrations as compared to the remainder of the State and may account for the larger percentage of wells with constituents exceeding the MCL.

Acknowledgments

The authors acknowledge and thank those people who aided in the collection of data and provided technical support during the study. Drilling contractors provided information from their files and their personal observations. Information on municipal supplies and water use was provided by the many local water superintendents. Residents in the area cooperated in supplying information about their wells.

AVAILABILITY AND QUALITY OF GROUND WATER

The main sources of ground water in southwest Iowa are surficial deposits of Quaternary age and the Dakota Formation of Cretaceous age. The surficial deposits are composed of unconsolidated materials and can be divided into two general types--alluvium and glacial drift. The Dakota Formation is the uppermost bedrock in parts of the study area. Rocks of Pennsylvanian age, which underlie the entire area, form a regional confining unit. Although water may be available from some rocks of Pennsylvanian age, both quantity and quality generally are unacceptable for most uses. A diagrammatic east-west section illustrating the principal hydrogeologic units is shown in figure 7, and table 6 at the back of this report lists the generalized stratigraphy in southwest Iowa.

Alluvial Aquifers


Alluvium is water-deposited material commonly found in flood plains along streams and rivers and is comprised of permeable sand and gravel interbedded with less-permeable clay and silt. The entire sequence of permeable and less-permeable materials usually is considered as

an aquifer because of the degree of hydraulic connection between permeable zones.

Alluvial flood plains are present along the major streams in southwest Iowa. These flood plains are the broad, flat areas adjacent to the river, characterized by low relief and poor drainage. Terraces are remnants of former alluvial plains that have been eroded and are present along the valley margins of many streams. Terraces within the study area typically are considered part of the alluvial aquifer with which they are associated. At some locations, the river channels may be in direct contact with the sand and gravel, but in most areas the bottom of the river is within the finer grained alluvium. Soils in the alluvial valley commonly are silt loams or silty-clay loams that are developed on silty alluvium.

Recharge to alluvial aquifers normally occurs by infiltration of precipitation through the soil. The thick layer of fine-grained alluvial sediment that overlies the sand and gravel may prevent rapid infiltration and cause the aquifer to be semiconfined. Recharge and discharge relations in an alluvial aquifer also may be complicated by the presence of other aquifers that underlie or are adjacent to the alluvium. There are several areas in southwest Iowa where the Dakota aquifer underlies the alluvium. These aquifers may recharge the alluvium, or they may be recharged by the alluvium. Recharge to the aquifer, although slow, also occurs from water movement through the loess, along the loess-glacial till interface, or through glacial till. A description of the hydraulic relations among these aquifers is beyond the scope of this report.

Alluvial aquifers typically discharge to streams. Base flow is the term used to describe the ground water that discharges to a stream. Occasionally, during rainfall, stream levels will rise rapidly, causing the level of the stream to be higher than the surrounding water table. Water then flows from the stream into the aquifer. The quantity of water transferred between the stream and the aquifer depends on the hydraulic conductivity of the streambed, the water-table gradient, the permeability or hydraulic conductivity of the aquifer materials, and the amount of time the surface water is higher than the ground-water level. As the stream level decreases, the gradient reverses, and ground

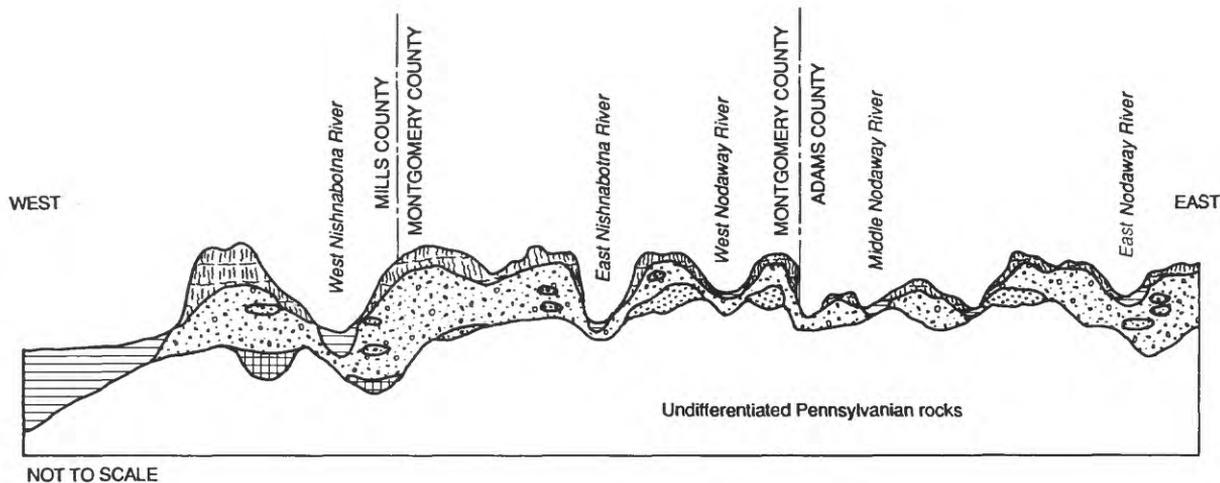

EXPLANATION

	LOESS		ALLUVIAL AQUIFER
	GLACIAL-DRIFT DEPOSIT		BURIED CHANNEL
	INTER-TILL SAND AND GRAVEL		DAKOTA FORMATION

Figure 7. East-west hydrogeologic section across study area.

water discharges to the stream. This temporary storage of water in the aquifer is termed bank storage. If the aquifer consists of fine-grained material, bank-storage capacity may be less than if the aquifer consists of sand and gravel.

Water levels in an alluvial aquifer change throughout the year and usually are highest in late spring and fall. Water levels usually decline in summer because of increased evapotranspiration. Research on other alluvial aquifers in Iowa (Thompson, 1986, 1987) indicates that water levels tend to respond rapidly to precipitation; however, the thick cover of fine-grained sediment present in the alluvial aquifers of southwest Iowa may slow this response. Water levels measured in observation wells during this study are listed in table 7 at the back of this report.

Water levels also are affected by withdrawals from wells. When a well is pumped, water can be withdrawn from storage over a large area, and water levels decline (fig. 8). Prolonged pumping

at high rates may eventually lower water levels below that of the stream, causing movement of water from the stream into the aquifer. The rate and area of water-level decline due to pumping depends on the aquifer boundaries, the hydraulic conductivity of the streambed, and the hydrogeologic properties of the aquifer.

The productivity of an aquifer is based, in part, on the thickness of the producing section. Areas of thicker sand and gravel generally will have larger yields. Additionally, areas where two aquifers are hydraulically connected, such as alluvium overlying the Dakota aquifer, may have larger yields. Specific-capacity data, a measure of aquifer yield, were gathered from historical records. From these data, and using an estimate for specific yield, transmissivities were calculated (Walton, 1960). The numbers presented in this report are a general guide to the availability of water because in alluvial systems the geology of the aquifer is highly variable and difficult to characterize. If large yields are needed, the aquifer needs to be evaluated by test

drilling and pumping to determine the specific aquifer characteristics at a particular site.

Major alluvial aquifers occur along the East and West Nishnabotna Rivers and the Nodaway River. Minor aquifers occur along the Tarkio and One Hundred and Two Rivers. Two previous studies have been done on the alluvial aquifers in southwest Iowa, both of which focused on the Nishnabotna alluvial aquifer (Knochenmus, 1962; Stone, 1971).

Nishnabotna Alluvial Aquifer

The Nishnabotna alluvial valley is divided into two main branches along the West and East Nishnabotna Rivers (fig. 9). Both branches begin north of the study area in west-central Iowa. The West Nishnabotna River enters the study area near Avoca in Pottawattamie County, and the East Nishnabotna River enters near Lorah in Cass County. The branches join southwest of Riverton in Fremont County. At the junction, the West Nishnabotna has a drainage area of 1,650 mi², and the East Nishnabotna has a drainage area of 1,150 mi². The valley merges with that of the Missouri River valley south of Hamburg. The total drainage area is 2,820 mi² where the Nishnabotna River leaves the State.

Both the West and East Nishnabotna valleys are broad with low relief. Low terraces form part of the aquifer. The West Nishnabotna valley averages 2 mi in width; average width of the East Nishnabotna valley is 1.5 mi. The West

Nishnabotna valley narrows to less than 1 mi from Carson to south of Macedonia. The same valley narrowing is present in the East Nishnabotna from just north of Stennett to Red Oak. In both cases, the widths of the valleys are constrained by the presence of Pennsylvanian bedrock at shallow depths. Topographic relief is considerable; the valley floor averages about 150 ft below the uplands.

Much of the Nishnabotna alluvial aquifer is comprised of thick fine-grained alluvial deposits. Data from 94 test holes indicate the fine-grained deposits range from 2 to 43 ft thick and average 21 ft thick. The range and average of the fine-grained deposits for the two aquifer branches are similar. The underlying sand and gravel ranges from 3 to 45 ft thick and averages 17 ft. The range of thickness of the sand and gravel for the two aquifer branches is similar, but the West Nishnabotna branch has a slightly greater average thickness, although the differences are not statistically significant. There is no systematic change in thickness along the valley in either the fine-grained increment or the sand and gravel. There is no apparent correlation between the thickness of the two units.

The Nishnabotna alluvial aquifer along the West Nishnabotna River is underlain by glacial drift, except for the area around Macedonia where the aquifer is underlain by Pennsylvanian rocks. The northern part of the Nishnabotna alluvial aquifer along the East Nishnabotna

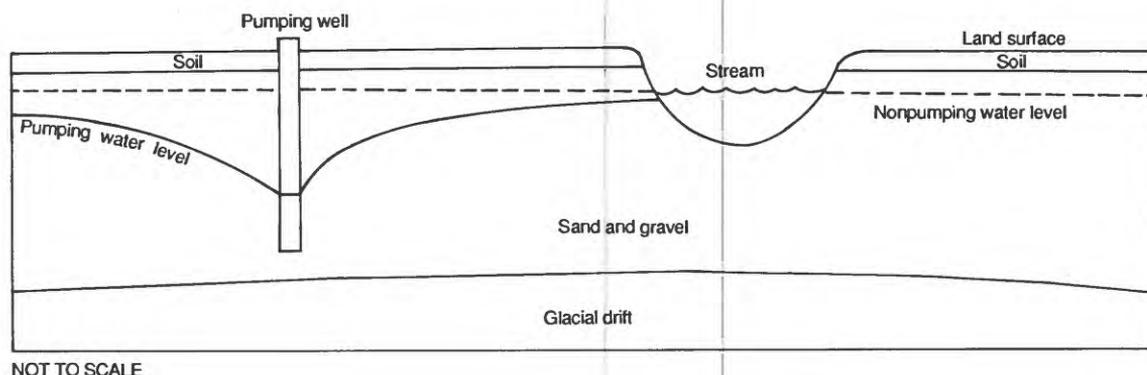


Figure 8. Relation between nonpumping and pumping water levels.

River in Cass and Montgomery Counties is mostly underlain by Pennsylvanian and Cretaceous rocks. The southern part of the aquifer in Page and Fremont Counties is underlain by glacial drift.

Aquifer hydraulic properties were estimated from specific-capacity data that were available for a few municipal wells. Assuming a storage coefficient of 0.01, transmissivities in the Nishnabotna alluvial aquifer along the West Nishnabotna River range from approximately 1,000 to 4,300 ft²/d. Along the East Nishnabotna River, specific-capacity data were available only for the southern part of the Nishnabotna alluvial aquifer at Shenandoah and Farragut. Again using an estimated storage coefficient of 0.01, transmissivities ranged from 1,700 to 8,000 ft²/d. Well yields of as much as 2,000 gal/min have been reported, but most wells are pumped at maximum rates of 100 to 250 gal/min.

Water levels were measured in most observation wells from July 1986 to June 1988 (table 7). Frequent measurements were made in two alluvial wells, SW34L and SW16L (fig. 9). In general, water levels were deeper beneath terraces than beneath the flood plain. Water levels in terrace wells (SW16U, SW33U, SW38U) ranged from 10.15 to 20.30 ft below land surface. Water levels in three wells located on the flood plain (SW34U, SW35U, SW36U) ranged from 2.06 to 12.58 ft below land surface. The maximum observed water-level change in any well was 10.46 ft in well SW36U. Water levels in the wells rise in response to increased precipitation and discharge in the adjoining rivers as shown in figure 10.

When available, water levels from wells completed in the upper and lower parts of the alluvium were compared to evaluate vertical gradients. At three of five sites measured, vertical gradients were usually downward. Reversals of gradient direction did occur at some sites, but could not be related to any specific cause. The other two sites showed predominately upward gradients, with well SW36L (table 7) indicating a strong upward gradient on August 6, 1986. It is unknown whether this was caused by interconnection with other aquifers. The deep well at SW36 was completed in a different lithologic unit than the shallow well.

More water-quality data are available for the Nishnabotna alluvial aquifer than for other aquifers in southwest Iowa. Water samples were analyzed for major ions, trace elements, radionuclides, and pesticides from 10 municipal wells and 2 observation wells in the Nishnabotna alluvial aquifer along the West Nishnabotna River and 6 municipal wells and 5 observation wells in the Nishnabotna alluvial aquifer along the East Nishnabotna River (tables 8 through 10 at the back of this report). Historical water analyses (1950-86) also were examined to determine changes with time and to provide a larger data base. The number of analyses, the range of concentrations, and the mean concentration for water-quality properties and constituents in samples from the Nishnabotna alluvial aquifer are shown in table 11 at the back of this report. Mean concentrations were calculated with "less than" values set to zero. The mean concentrations of selected constituents are plotted in figure 11.

The water in both branches of the aquifer is classified as a calcium bicarbonate type. Water from the observation wells had sulfate concentrations that were less than those from the municipal wells. This difference in concentration may be caused by municipal pumping that induces recharge from other aquifers with larger sulfate concentrations. Iron concentrations were large and were often larger than the secondary regulation for iron (table 3).

Nitrate concentrations vary from well to well in the alluvium, making it difficult to characterize water quality. Three data sets from different sources were examined to evaluate nitrate concentrations. Historical data, 1950 to 1986 (table 11), indicated mean nitrate concentration of 2.0 mg/L for 216 analyses; the mean nitrate concentration for 216 samples collected during an Iowa Department of Natural Resources project in 1987 was 2.4 mg/L (Thompson and VanDorpe, 1988); and the mean nitrate concentration for 19 samples collected during this study, 1985 to 1987, was 7.83 mg/L (table 8).

Differences in the data sets reflect the variability in nitrate concentrations due to well location, climatic patterns, sampling frequency, and time of year. Concentrations of nitrate were less than concentrations in samples from in the


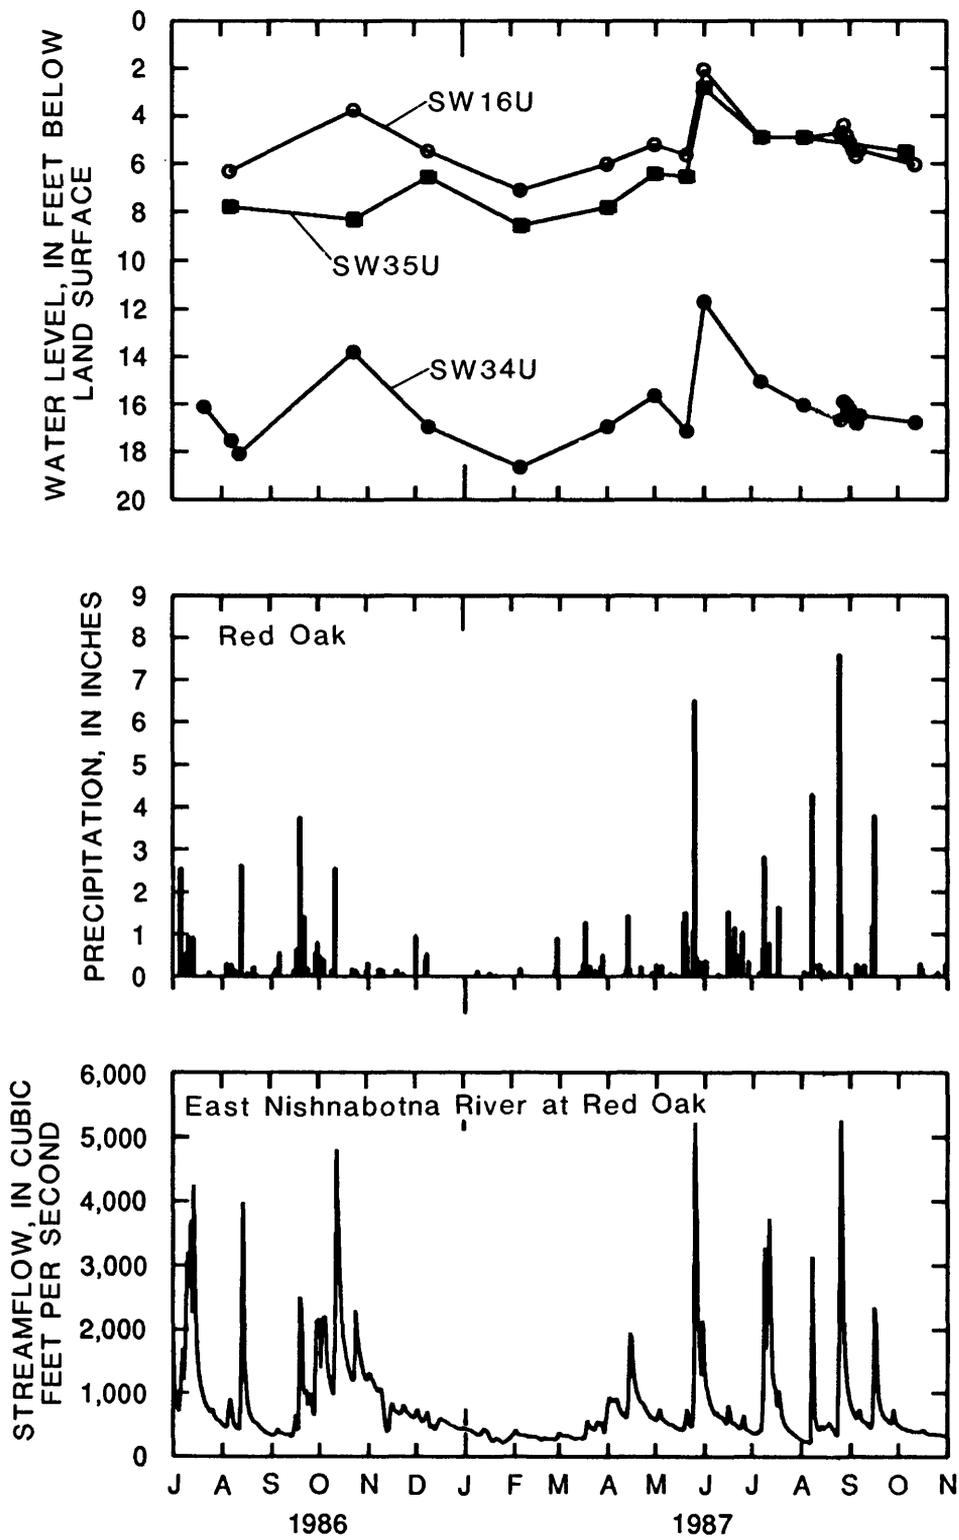


Figure 10. Water levels in selected alluvial-aquifer wells, precipitation at Red Oak, and streamflow in the East Nishnabotna River at Red Oak.

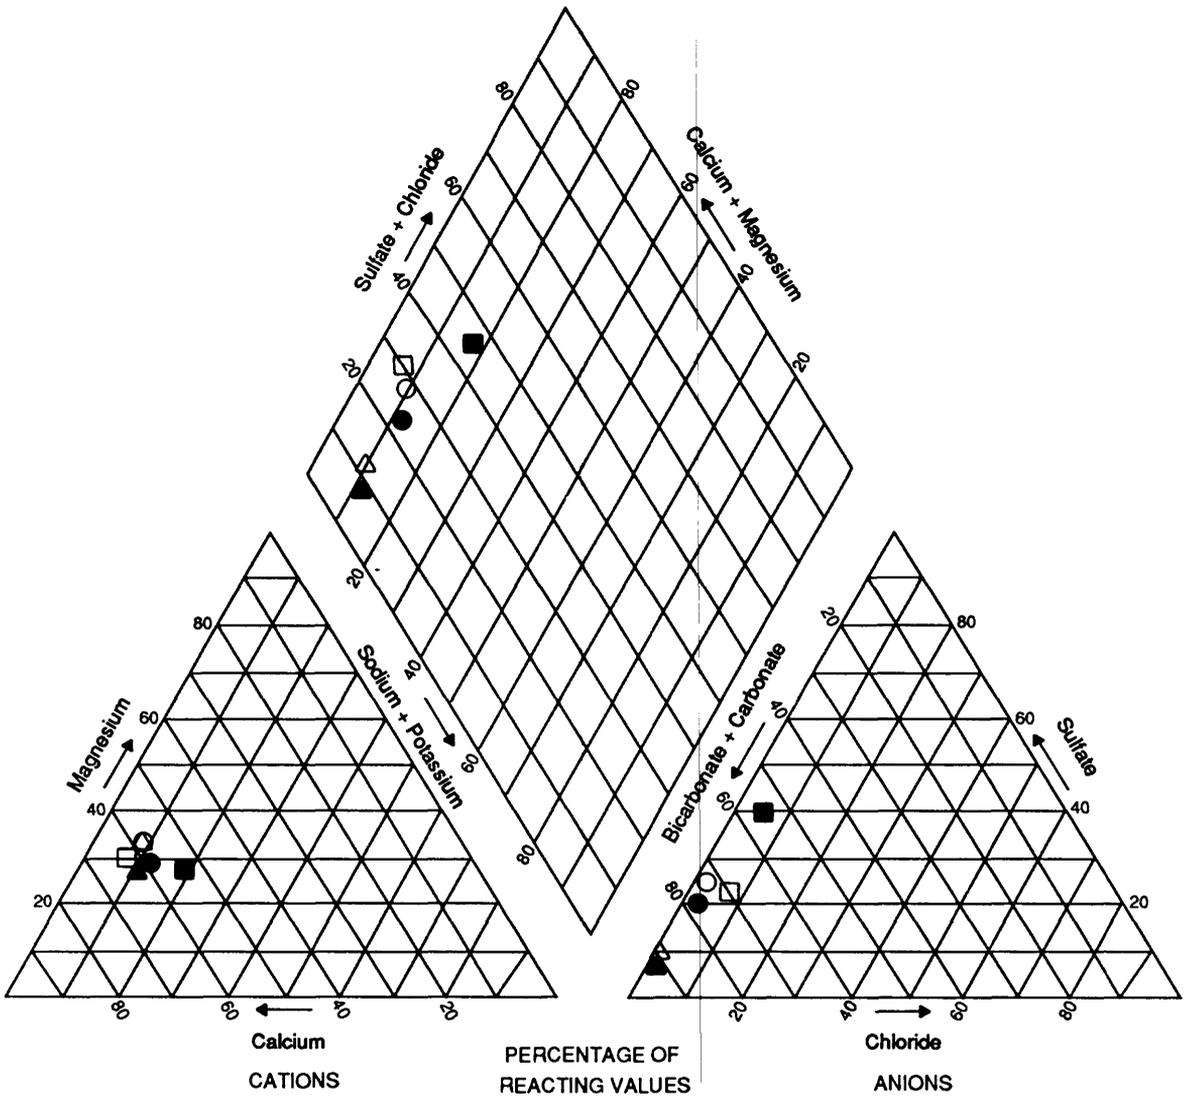

Calcium CATIONS PERCENTAGE OF REACTING VALUES Chloride ANIONS

EXPLANATION

MUNICIPAL WELLS

East Nishnabotna branch

- 1986-87, 4 samples
- 1950-86, 82 samples

West Nishnabotna branch

- 1986-87, 8 samples
- 1950-86, 102 samples

OBSERVATION WELLS

- ▲ East Nishnabotna branch, 3 samples
- △ West Nishnabotna branch, 2 samples

Figure 11. Mean water quality in the Nishnabotna alluvial aquifer.

alluvial aquifers of the Ocheyedan-Little Sioux and Rock Rivers in northwest Iowa (Thompson 1986, 1987). The mean nitrate concentrations were similar to those in the West Fork Des Moines River alluvial aquifer in north-central Iowa where denitrification has been postulated as a process for decreasing nitrate concentrations (Wehmeyer, 1988; Iowa Department of Natural Resources, Geological Survey Bureau, written commun., 1989). Denitrification or other possibilities for decreasing nitrate concentrations may be occurring in the fine-grained alluvium in the Nishnabotna alluvial aquifer but were not investigated during this study.

Large mean nitrate concentrations, greater than 3.0 mg/L, appear to correlate with well position within the valley. Many of the wells with large mean nitrate concentrations are located near the valley edge. It has been hypothesized (Thompson and VanDorpe, 1988) that the alluvial aquifer is being recharged by shallow ground-water flow from the uplands containing larger nitrate concentrations.

A comparison of nitrate concentrations with precipitation and discharge records using previously collected data (Thompson and VanDorpe, 1988) produced varied results. Nitrate concentrations appear to correlate with rainfall at 5 of 14 monitored sites, 9 municipal wells, and 5 observation wells. At the other sites there was no apparent response in nitrate concentrations to rainfall.

Mean nitrate concentrations from surface-water samples collected during this study from both branches of the Nishnabotna River were larger than 41 mg/L (table 8). This may indicate that upland shallow ground-water flow is discharged to the river by tributary streams. Additionally, larger nitrate concentrations could occur at or near the water table in the fine-grained alluvium and be discharged laterally to the river instead of infiltrating to greater depths within the alluvium.

Atrazine is the most frequently detected pesticide in southwest Iowa and is the most common pesticide detected in Iowa. This is attributed to its long history of continual, widespread usage and its solubility. Metolachlor was the only pesticide other than atrazine detected at more than one location in southwest

Iowa. The results of pesticide sampling of the Nishnabotna alluvial aquifer from all available data are summarized in table 12 at the back of this report. Table 12 includes 24 pesticide analyses from untreated municipal-well water samples and 17 analyses of treated municipal water samples collected by the U.S. Geological Survey between 1985 and 1987 (M.L. Clark, U.S. Geological Survey, oral commun., 1989); 6 samples collected from alluvial observation wells installed along the Nishnabotna River during this study (table 10); and analyses of 23 municipal-well samples and 33 observation-well samples available from a concurrent project (Thompson and VanDorpe, 1988). Concentrations of detected pesticides were less than proposed regulations (table 4) except for alachlor. All of the pesticide detections were from municipal wells. Local point-source contamination is possible; however, most of the well sites are upgradient from any known or suspected point sources of contamination. Municipal pumping may affect normal flow paths, drawing water from a larger contributing area. Surface water might also be a source of pesticides, but in general the wells are located away from the river and withdrawal rates are small enough to minimize any possible interaction.

Atrazine, cyanazine, alachlor, and metolachlor have been detected in surface-water samples from both the East and West Nishnabotna Rivers (table 10). Concentrations often are larger than those detected in ground water. Alachlor has exceeded the proposed regulations (table 4).

Tarkio Alluvial Aquifer

The Tarkio alluvial aquifer is present along three streams--the Tarkio River, West Tarkio Creek, and East Tarkio Creek (fig. 9). All three streams begin in Montgomery County. The Tarkio River at the Missouri border has a drainage area of 206 mi². Valley width varies from 0.25 to 1.25 mi and averages slightly more than 0.5 mi. West Tarkio Creek at the Missouri border has a drainage area of 92.5 mi². Valley width ranges from 0.25 to 0.75 mi and averages 0.5 mi. East Tarkio Creek joins the Tarkio River north of Coin where it has a drainage area of 58.2 mi². Average valley width is 0.4 mi.

The alluvial deposits along the main stem of the Tarkio River consist of a thin layer of sand and gravel, 4 to 9 ft thick, below a thick layer of fine-grained alluvium, 40 to 58 ft thick. No information is available on alluvial deposits along either East or West Tarkio Creeks. Because of the limited areal extent of all branches, only the main valley of the Tarkio River was investigated during this study. The only previous drilling information available is near the town of Coin (fig. 9), where the valley is underlain by glacial drift. Test holes at three other locations in Page County indicate that parts of the valley are underlain by Pennsylvanian shale.

Transmissivity was estimated from data collected at Blanchard (fig. 9). Assuming a storage coefficient of 0.01, transmissivities range from 210 to 250 ft²/d. Yields from the Blanchard municipal wells are 20 to 30 gal/min.

Water levels were measured in observation wells SW55, SW56, and SW57 (fig. 9) in October and November 1987 and ranged from 9.53 to 27.65 ft below ground level (table 7). Water levels generally decreased during the months measured, corresponding to a decrease in the discharge of the Tarkio River. The maximum water-level change in any well was 1.05 ft.

The water from observation wells SW55 and SW56 (fig. 9), located north of the town of Blanchard, can be classified as a calcium bicarbonate type (fig. 12). There are noticeable differences in water from the two observation wells. Well SW56 has an extremely small concentration of sulfate, 9 mg/L, but a larger sodium concentration, 41 mg/L, than detected in other alluvial-aquifer samples (table 8). Well SW55 has more typical concentrations of the two ions--sulfate, 52 mg/L, and sodium, 14 mg/L. Both observation wells have less sulfate and chloride than the other samples from municipal wells (table 11), which may be related to the effects of ground-water withdrawal. Nitrate concentrations are small, less than 0.1 mg/L for the observation wells, and ranging from 0.2 to 1.4 mg/L in the other samples. One surface-water sample from the Tarkio River near Blanchard had a nitrate concentration of 4.2 mg/L during October 1987 (table 8). Water from observation wells SW55 and SW56 does indicate some chemical anomalies. Ammonia as nitrogen

concentrations are large, 4.6 and 9.5 mg/L. There also is a larger than usual chemical oxygen demand, indicating a reducing environment may exist.

Observation wells SW55 and SW56 and the Tarkio River were sampled for pesticides in October 1987; none were detected (table 10). The well at Blanchard, the only municipal well in the Tarkio alluvial aquifer, did have a detection of atrazine, 0.25 µg/L (microgram per liter), in a sample of treated water during November 1986 (table 13 at the back of this report).

Nodaway Alluvial Aquifer

The Nodaway River is divided into three main streams--the West, Middle, and East Nodaway Rivers (fig. 9). The Middle Nodaway River begins in Adair County and joins the West Nodaway River just south of Villisca and has a drainage area of 341 mi². The East Nodaway River begins in Union County, south-central Iowa, and enters the study area in Adams County. A main tributary, Kemp Creek, flows into the East Nodaway River in Adams County northeast of Nodaway. The drainage area of the East Nodaway River at the junction with the West Nodaway River north of Braddyville is 334 mi². The Nodaway River leaves the State at Braddyville where it has a drainage area of 1,180 mi².

The alluvial valleys of the three main branches of the Nodaway River are moderately broad, ranging from 0.2 to 2 mi wide. The East Nodaway River valley has the smallest average width, 0.8 mi, and the Middle Nodaway River valley the largest, 1.2 mi. The valleys are constricted by bedrock outcrops at various points along their course. Low terraces are present along the valley margins and form part of the alluvial aquifer.

The sequence of alluvial sediments is similar to the other alluvial aquifers in southwest Iowa. On the basis of logs from 41 test holes, the fine-grained alluvium, ranging from 10 to 37 ft thick, overlies sand and gravel ranging from 0 to 30 ft thick. The fine-grained alluvium averages about 20 ft thick, and the sand and gravel averages about 10 ft thick. Ranges and averages are similar along all Nodaway River branches, except for the East Nodaway, which has a thicker layer of fine-grained alluvium. Most of the

alluvium is underlain by shale or limestone of Pennsylvanian age. The upper reaches of the East Nodaway River and Kemp Creek in Adams County are underlain by glacial drift.

The yield of the Nodaway alluvial aquifer is small because of the thin sand and gravel. Using an estimated storage coefficient of 0.01, transmissivities range from 90 to 570 ft²/d. Well yields range from 12 to 100 gal/min among the municipal wells that use the Nodaway alluvial aquifer. No irrigation permits have been issued for the Nodaway alluvial aquifer.

Water levels were measured in eight wells from September to November 1987 (table 7). Water levels varied from 1.00 to 21.53 ft below ground level. Water levels gradually decreased during the measurement period, as did discharge in the streams. The maximum water-level change observed in any well was 2.36 ft. All the sites are on the flood plain. However, the upper reaches of the river are more deeply incised, creating steeper water-table gradients and accounting for the large differences in water levels.

Water from the Nodaway alluvial aquifer is a calcium bicarbonate type as shown in figure 12. Historical data from 1950 to 1986 for the principal ions in samples from the Nodaway alluvial aquifer are summarized in table 11. A slight difference in anion concentration in samples exists between the observation wells and the municipal wells. Samples from the municipal wells usually have larger sulfate concentrations than samples from the observation wells. Pumping may induce flow from the underlying Pennsylvanian rocks, which generally have large concentrations of sulfate. Iron concentrations (table 8) ranged from less than 20 to 26,000 µg/L and commonly exceeded the secondary regulation of 300 µg/L (table 3). Nitrate concentrations in the Nodaway alluvial aquifer generally are less than 1.0 mg/L (table 8). Surface water in the basin also has large concentrations of nitrate, ranging from 2.0 to 4.9 mg/L for samples collected during October 1987 (table 8).

Pesticides were detected at only one municipal well completed in the Nodaway alluvial aquifer (table 13). An atrazine concentration of 0.28 µg/L and a cyanazine concentration of 0.1 µg/L were detected in a

sample from one well at Fontanelle during August 1986. During August 1987, only atrazine was detected at a concentration of 0.11 µg/L. There were 21 pesticide analyses from untreated ground-water samples available from 11 municipal wells in 8 towns and 7 observation wells. An additional seven municipal treated-water samples were available. All pesticides detected were less than proposed regulations (table 4).

Five surface-water samples were collected from the Nodaway River system during October 1987 (table 10). Atrazine was detected at two sampling sites at concentrations of 0.10 and 0.18 µg/L. No pesticides were detected in March 1982 in a sample from Clarinda (fig. 9), which uses water from the Nodaway River. Atrazine, 0.20 µg/L, was detected in a treated-water sample from Clarinda during November 1986. The Page Rural Water District, which also uses water from the Nodaway River, had detections of atrazine, 0.65 µg/L, and cyanazine, 0.31 µg/L, in a sample collected during July 1987.

One Hundred and Two Alluvial Aquifer

The One Hundred and Two River is divided into three main streams--the East Fork, Middle Fork, and West Fork (fig. 9). Most of the river is within Taylor County. The West Fork One Hundred and Two River, including the West and Middle Fork tributaries, has a drainage area of 212 mi² at the Missouri border. Drainage areas of the Middle and East Fork One Hundred and Two Rivers at the border are 62.1 and 111 mi², respectively. The valleys generally are narrow, ranging from 0.2 to 1 mi in width and averaging about 0.5 mi.

Information on the One Hundred and Two River alluvial deposits is limited. Data from seven boreholes were available and indicate 1 to 15 ft of sand and gravel underlying 6 to 38 ft of fine-grained alluvium. At three of the four test holes or observation wells drilled for this study, the aquifer is underlain by glacial drift. One site, well SW62 (fig. 9), in western Taylor County near New Market, is underlain by shale of Pennsylvanian age.

Observation well SW62 (fig. 9) was installed in the One Hundred and Two alluvial aquifer during this study. Water levels in that well decreased from 21.70 to 23.09 ft below ground

level during measurements made from September to November 1987 (table 7). The gradual decrease in water level corresponded to decreased precipitation and decreased discharge in the One Hundred and Two River during the same period. No data are available on specific capacity. Two towns, Conway and Gravity, currently use water from the One Hundred and Two alluvial aquifer, with well yields of 12 to 40 gal/min. The town of New Market previously used water from a well completed in the One Hundred and Two alluvial aquifer that had a yield of 50 gal/min.

One sample of water for chemical analysis was collected from observation well SW62 (table 8). There were an additional 16 analyses available from municipal wells (table 11). The water can be classified as a calcium bicarbonate type (fig. 12). Nitrate concentrations are small, ranging from less than 0.10 to 0.40 mg/L. A nitrate concentration of 1.0 mg/L was detected in a surface-water sample from the One Hundred and Two River near Bedford in October 1987. Iron concentrations (table 11) are large and are usually much larger than the secondary drinking-water regulation (table 3). No pesticides were detected in a sample from an observation well in October 1987 (table 10). Pesticide analyses were available for Conway and Gravity from samples of both treated and untreated water (table 13). Two pesticides, alachlor and atrazine, were detected at Conway; three pesticides, alachlor, metolachlor, and 2,4-D, were detected at Gravity. Concentrations of alachlor exceeded the proposed regulation (table 4). No pesticides were detected in a surface-water sample collected from the West Fork One Hundred and Two River during October 1987 (table 10).

Glacial-Drift Aquifers

Glacial drift, for the purposes of this report, includes all deposits that predominantly are glacial in origin or are the result of multiple periods of glaciation that occurred in the area. Loess and buried-channel deposits, although not strictly interpreted to be of glacial origin, have been included within the glacial-drift definition because of their stratigraphic association with deposits of glacial origin. The thickness of the glacial drift in southwest Iowa is about 200 ft over upland areas of the bedrock surface and


about 450 ft over some parts of valleys eroded into the bedrock surface. The typical known range of thickness of the glacial drift in southwest Iowa counties is shown in table 14 at the back of this report.

Loess, a wind-deposited material, mantles the other glacial-drift deposits in most areas of Iowa. Loess predominantly consists of silt-sized particles but also can be partially comprised of clay and minor quantities of fine sand. Loess deposits in southwest Iowa generally are less than 30 ft thick, except in the Western Loess Hills region (fig. 2) where the deposits generally are more than 50 ft thick and have a recorded maximum thickness of 152 ft. The loess deposits thin and decrease in particle size with distance from the Missouri River valley.

The glacial drift beneath the loess is a mixture of sediment transported and deposited by glaciers or resulting from meltwater between or during glacial periods. These deposits generally are classified into one of two types--glacial till and stratified drift. Glacial-till deposits are most prevalent in the study area and consist of an unsorted mixture of sand, silt, clay, gravel, and boulders. The stratified drift usually shows the effect of water transport during and between glacial periods by the degree of particle-size sorting in sand and gravel deposits. The stratified-drift sand and gravel deposits are discontinuous, generally thin and lenticular, and may be beneath or within the glacial till.

The fine-grained matrix characteristic of the glacial-till deposits and the discontinuity of the stratified-drift deposits make the glacial drift an effective confining material. However, aquifers underlying glacial drift can be recharged by slow vertical leakage. Stratified glacial drift within and at the base of the glacial till includes pockets or lenses of sand or sand and gravel that are sources of water.

Glacial-drift aquifers are most likely to occur in four settings (fig. 7). These are: (1) loess, (2) sand and gravel within the glacial till, (3) sand and gravel deposits at the base of the glacial-drift materials, and (4) sand and gravel deposits in former stream channels eroded into the bedrock surface and subsequently buried by glacial drift. Many rural domestic and livestock water supplies and several municipal supplies are

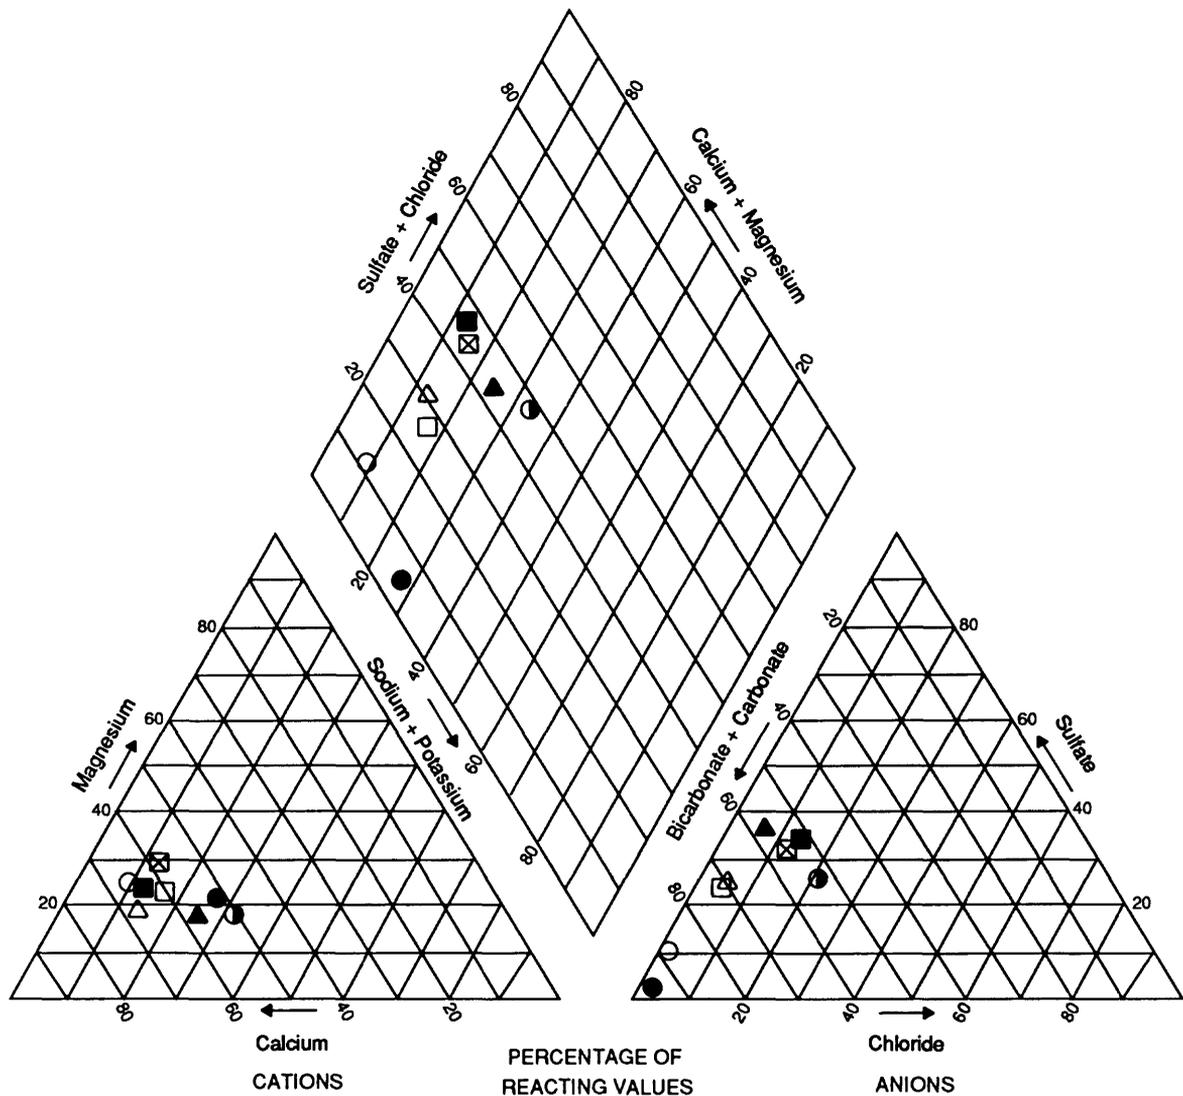

EXPLANATION

MUNICIPAL WELLS

- Tarkio, 1950-86, 7 samples
- Nodaway, 1987, 7 samples
- ⊠ Nodaway, 1950-86, 54 samples
- ▲ One Hundred and Two, 1950-86, 15 samples

OBSERVATION WELLS

- Tarkio, SW55
- Tarkio, SW56
- Nodaway, 7 samples
- △ One Hundred and Two, well SW62, 1 sample

Figure 12. Mean water quality in the Tarkio, Nodaway, and One Hundred and Two alluvial aquifers.

obtained from glacial-drift aquifers although, except for buried channels, these aquifers generally are not considered to be sources of large volumes of water.

Loess Aquifer

Loess usually is not considered to be an aquifer in most areas of Iowa because of low permeability. However, loess materials generally are more permeable than underlying glacial-till deposits and allow seepage of water to large-diameter wells at rates that may sustain small withdrawals. The loess is an important source of water for some southwest Iowa rural-domestic and livestock supplies because of its near-surface occurrence and the lack of other acceptable water sources. Most of the southeastern part of the study area has had to depend on these aquifers as a principal source of ground water because other sources of potable water are not economically available. Yields from wells completed in the loess usually produce less than 5 gal/min although 5- to 10-gal/min yields are not uncommon. Only a few well yields of more than 20 gal/min have been reported. No municipal wells are known that use these aquifers.

Water levels in wells in the loess usually represent the water-table surface. The water levels usually are not deep, often less than 20 ft. These shallow water levels are responsive to local precipitation, which is the source of recharge to these aquifers. When excess moisture is available, the aquifer will be recharged, and the water level will rise. During periods of drought, little moisture is available for recharge, and the water level will decline.

The most common type of well that is completed in the loess is a bored well less than 50 ft deep and usually from 12 to 48 in. in diameter. The large diameter provides additional area for seepage of water into the well and also increases the volume of water that is stored within the well bore. The use of multiple wells is a method of obtaining a larger quantity of water for a user. Several shallow wells can be located in an area without causing interference during pumping.

Inter-till Sand and Gravel Aquifers

The inter-till sand and gravel aquifers within the glacial drift are comprised of thin, lenticular,

and discontinuous sand or sand and gravel pockets. The location, altitude of the top, and the thickness of the sand and gravel deposits that have been recorded on available geological logs are shown in figure 13. Control points on the map without altitude and thickness data indicate a well location at which no sand or gravel deposits were logged. In general, the thicknesses of sand and gravel deposits, where present, is less than 10 ft. Only a few logs indicate recorded thicknesses greater than 15 ft.

Many rural residents use these inter-till sand and gravel aquifers. Often the yields are small, requiring the use of large-diameter seepage wells. At some locations, larger yields can be obtained, and several municipalities use this type of aquifer, including College Springs, Cumberland, Minden, and Underwood. Their wells are completed at depths from 22 to 156 ft, and well yields vary from 10 to 120 gal/min.

Basal Sand and Gravel Aquifers

The sand and gravel aquifers at the base of the glacial-drift materials are comprised of sand and gravel, intermixed with some silt, which were deposited on the bedrock surface. These deposits are discontinuous, generally on upland areas of the bedrock surface, and range from 1 to 39 ft thick. These aquifers typically are thinner in southwest Iowa than in areas to the north and east of the study area where the sand and gravel deposits in some locations are more than 100 ft thick. Most of the aquifer material is fine-to-coarse sand or sand and gravel. The altitude of the top and thickness of basal sand and gravel deposits are shown in figure 14. Control points on the map without altitude and thickness data indicate a well location at which no basal sand or gravel deposits were recorded.

It has been recognized by some geologists and drilling contractors (Darwin Evans, Brian Witzke, Greg Ludvigson, Iowa Department of Natural Resources, Geological Survey Bureau, and D. Weilage, drilling contractor, oral commun., 1987) that there are two distinct types of "sand" present: (1) glacial-derived sand, which contains carbonate grains, and (2) "salt and pepper" sand, which contains volcanic-rock fragments and plagioclase feldspar (Witzke and Ludvigson, 1988). The "salt and pepper" sand may be equivalent to Miocene or Miocene and

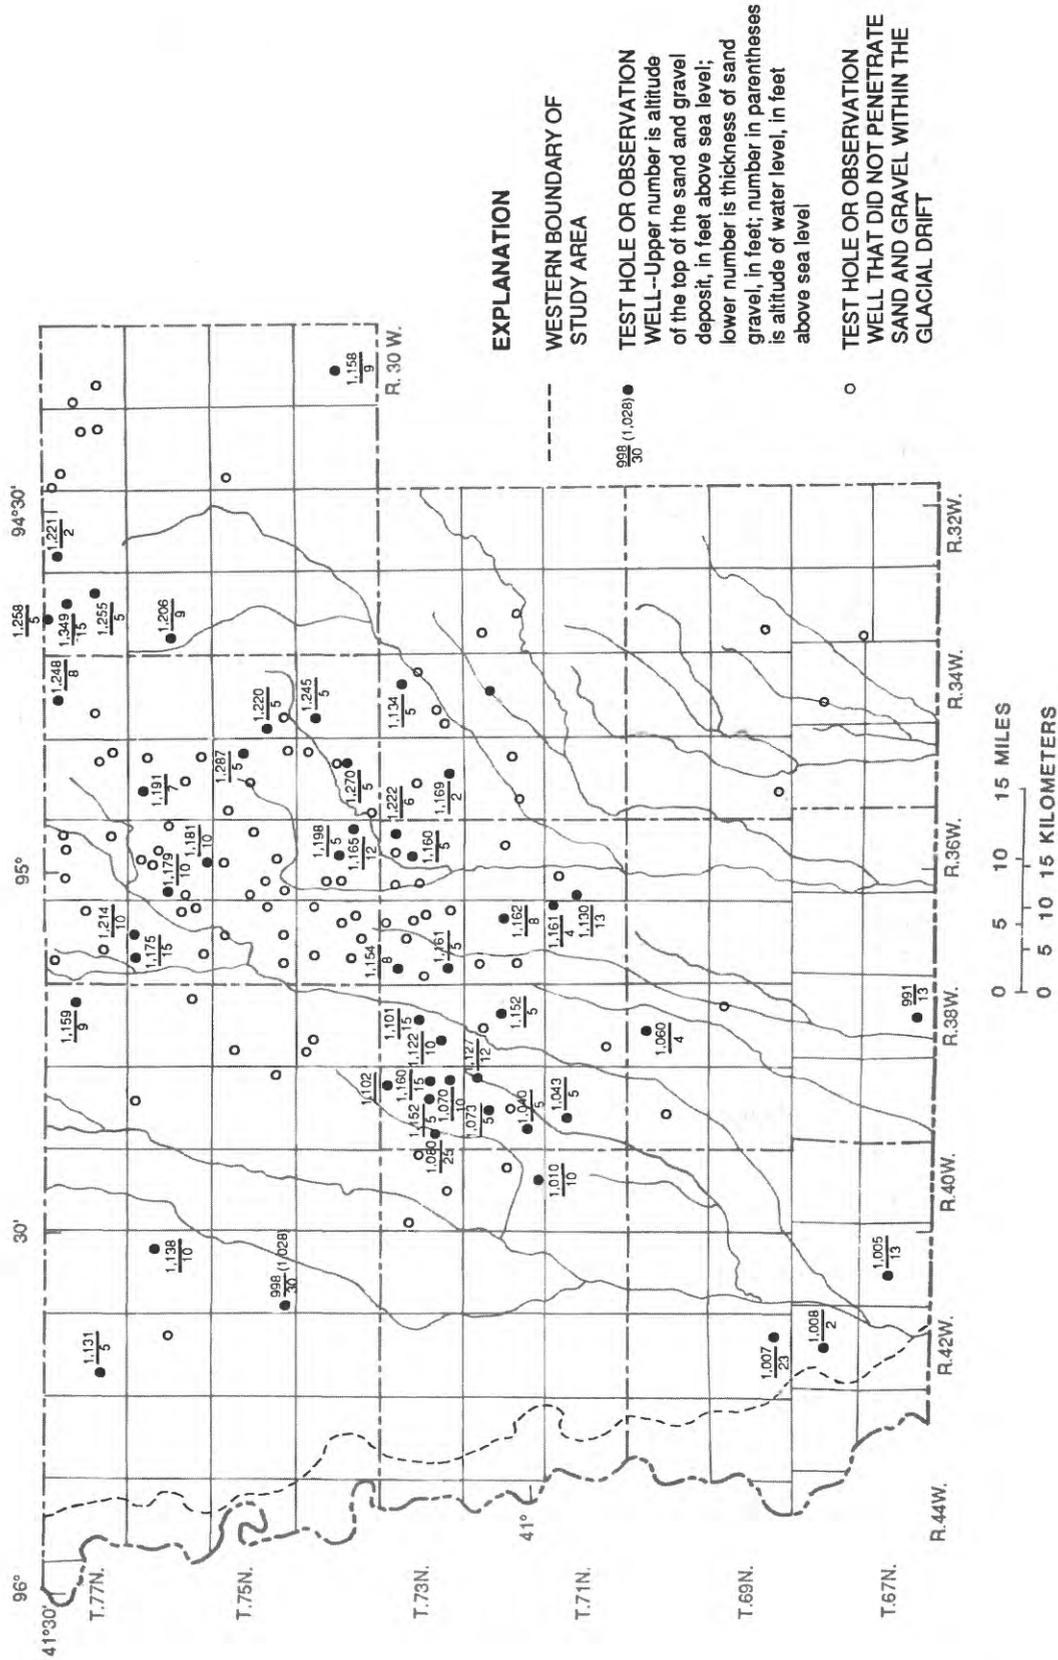


Figure 13. Attitude and thickness of inter-till sand and gravel deposits.

Pliocene strata in Nebraska. For purposes of this report, distinctions between these two units will not be considered because the distribution, physical geometry, and stratigraphic position of the "salt and pepper" sand are only now (1991) being evaluated and older well-log information has not been reevaluated.

The basal sand and gravel aquifers are important sources of water for rural-domestic and livestock supplies and for some municipal supplies. Emerson and Underwood (fig. 14) obtain their water supply from basal sand and gravel deposits. Several other towns have wells completed in these aquifers, but the wells are for standby or occasional use only and are not the main source of supply. Most rural wells in this type of aquifer are reported to yield 10 gal/min or less, but yields as large as 35 gal/min have been reported. About 98,000 gal/d are pumped from these deposits for municipal use. No attempt was made to calculate the potential yield of these aquifers because of the discontinuous nature of the materials and the small quantity of available information. Historical water levels range in altitude from more than 1,200 ft in the northeast to less than 1,000 ft in the west and southwest parts of the study area. Recharge to the aquifers is from leakage through the overlying glacial drift, and locally, some recharge may occur from the underlying Dakota aquifer where present.

Buried-Channel Aquifers

The bedrock surface in southwest Iowa (fig. 15) has been eroded to form uplands and valleys. In places the valleys of present-day streams are superimposed on the bedrock valleys, and exposures of the bedrock surface are present along the valley walls. In other areas, deposits of glacial drift have buried the bedrock valleys. Buried bedrock valleys that contain sand and gravel deposited by streams that flowed before, during, or between glacial advances are productive aquifers in many areas of Iowa and are called buried-channel aquifers.

Two bedrock valleys in southwest Iowa are known to contain sand and gravel deposits that form buried-channel aquifers. Data available for other parts of the study area where bedrock valleys are present indicate that some of these bedrock valleys are filled with fine-grained glacial drift and do not contain buried-channel

aquifers. Several bedrock valleys are the upper part of bedrock valleys that contain sand and gravel deposits farther south in Missouri.

The quantity of aquifer material penetrated by test holes and observation wells in buried-channel areas is variable (fig. 16). The extent and thickness of the aquifer material cannot be predicted based on the limited information available in these areas. Additional exploration is needed to fully define the occurrence and hydraulic properties of these aquifers in southwest Iowa.

The Fremont channel (fig. 16) is the largest and best-known buried channel in southwest Iowa and crosses Pottawattamie, Mills, and Fremont Counties from north to south. It is part of a buried channel beginning in Minnesota north of northwest Iowa and continuing to the southeast through Fremont County into Missouri. The bedrock-contour map (fig. 15) also shows several large tributaries to the Fremont channel and several smaller channels paralleling the main channel.

The main Fremont channel is eroded into the bedrock nearly 200 ft below the altitude of the adjacent bedrock uplands (fig. 15). Logs of wells drilled into the channel indicate that sand and gravel deposits in the channel range from 10 to about 300 ft thick (fig. 16). The deposits generally are thickest in the deepest part of the channel. It is not known if all of the tributary bedrock channels contain sand and gravel deposits.

The potentiometric surface of the Fremont buried-channel aquifer ranges in altitude from 965 ft northwest of Randolph in Fremont County to 1,164 ft south of Hancock in Pottawattamie County. Average altitudes of water levels measured during this study in observation wells SW32, SW37, SW39U, and SW39L indicate that ground water is moving in the aquifer from north to south (table 7).

The sources of recharge to the Fremont buried-channel aquifer are inflow from the north and downward leakage through overlying glacial drift in areas where overlying materials have higher water levels. Some recharge-discharge relations may occur between the basal sand and gravel aquifers and the Fremont buried-channel aquifer. More observation wells would be needed

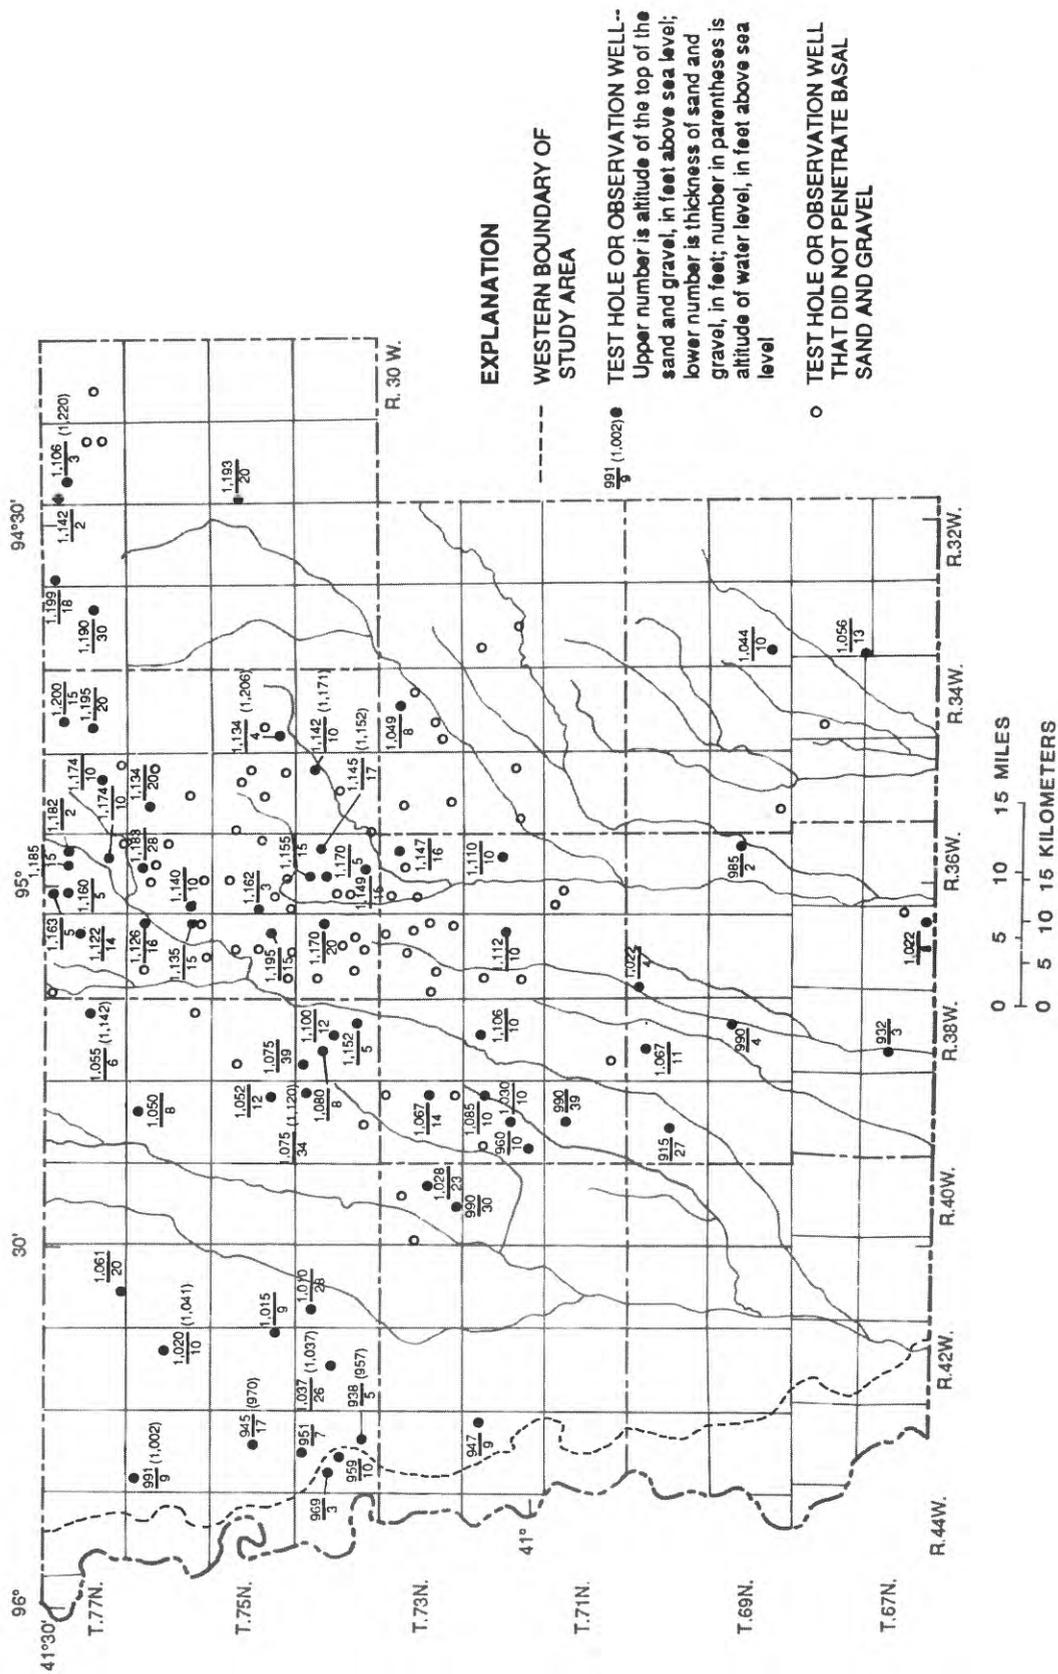


Figure 14. Altitude and thickness of basal sand and gravel deposits.

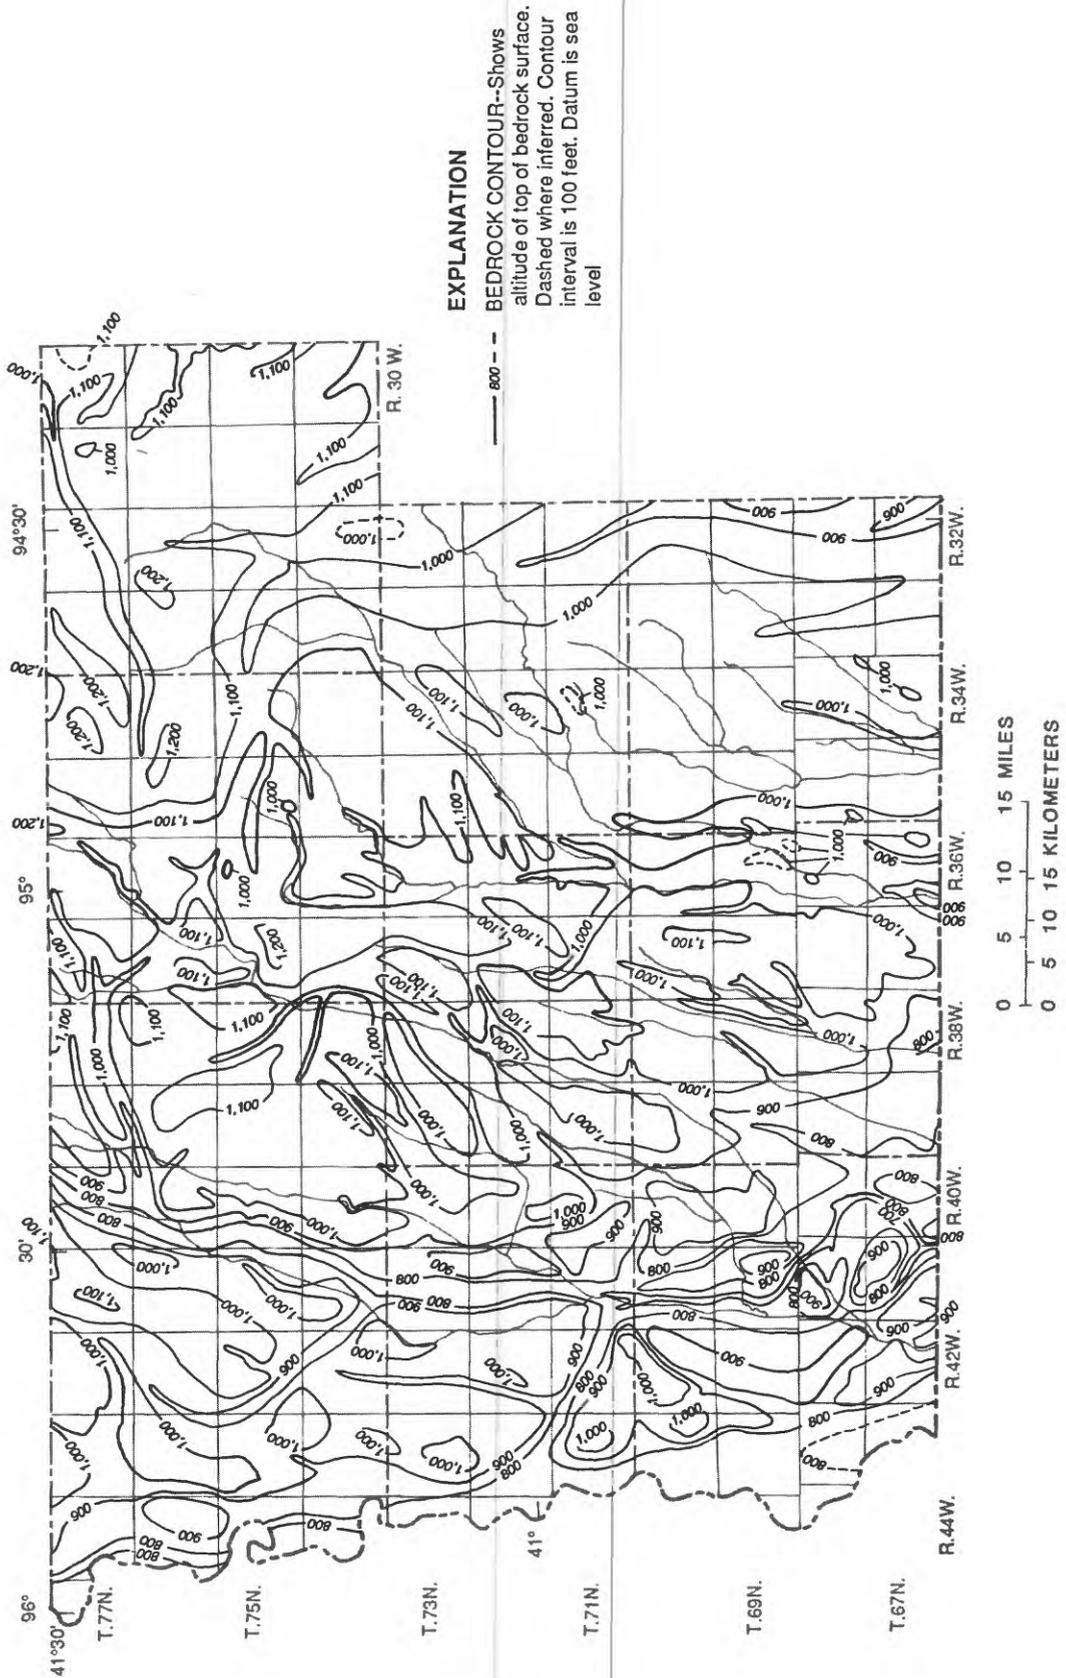


Figure 15. Bedrock topography (modified from Hansen, in press).

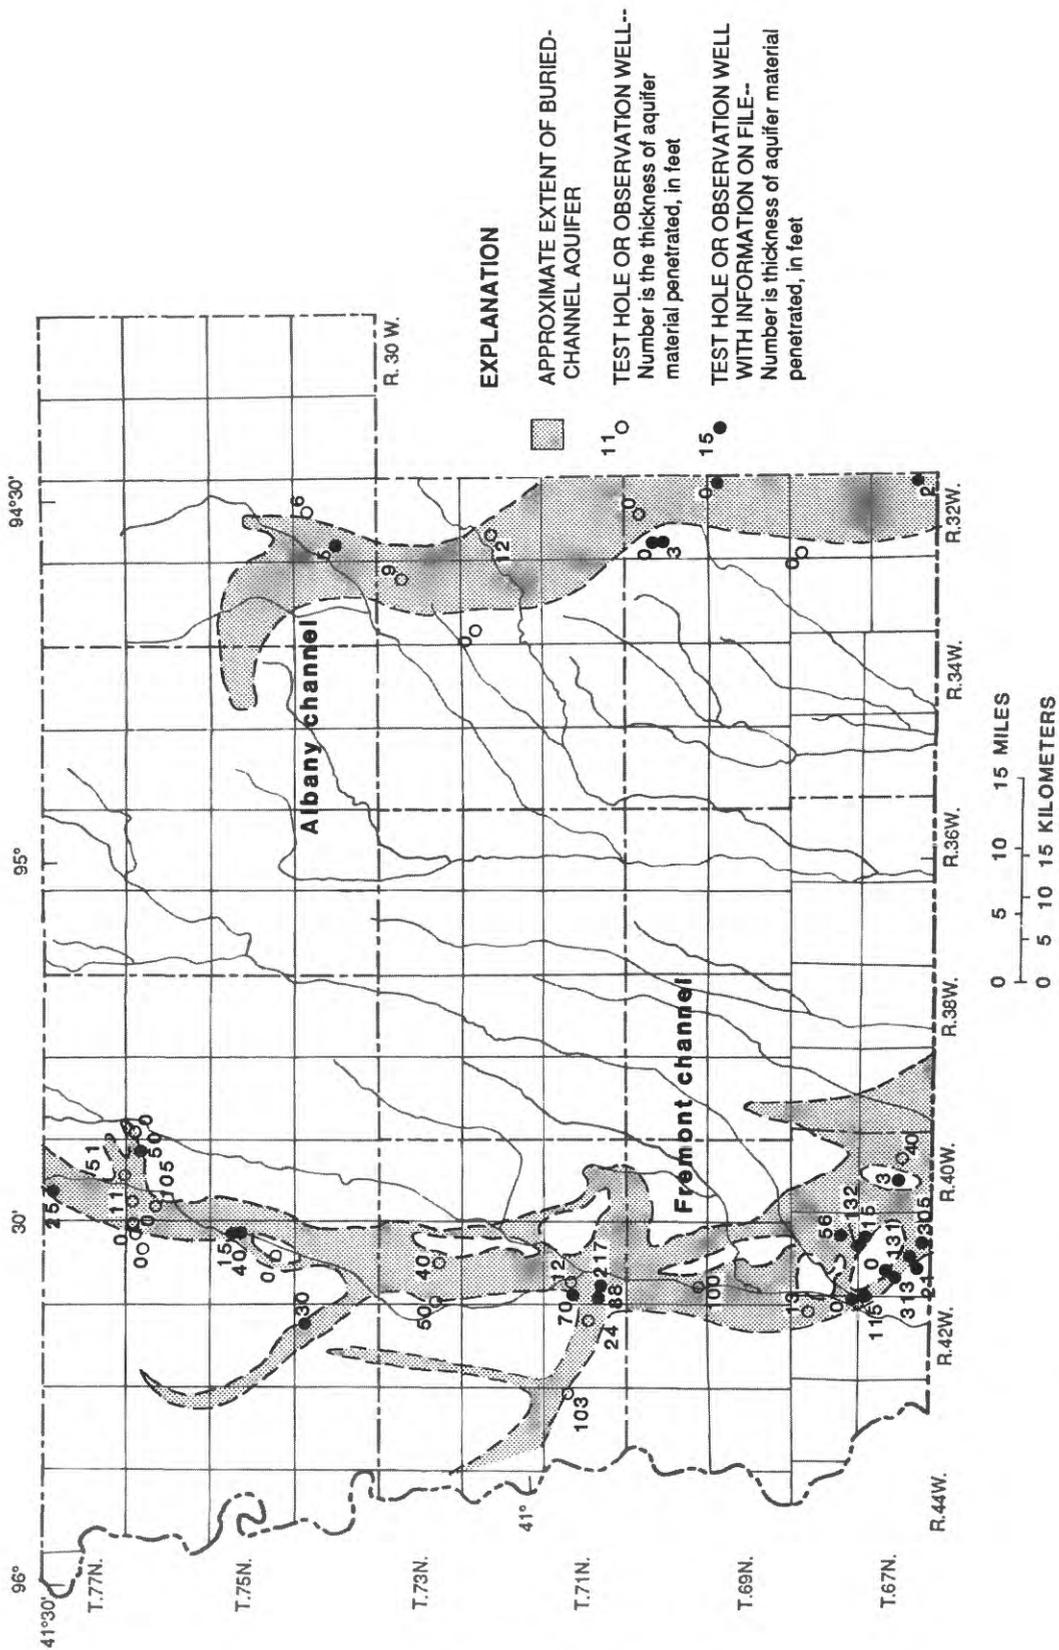


Figure 16. Extent and thickness of the Fremont and Albany buried-channel aquifers.

to determine the movement of water between these aquifers. Because of the discontinuous occurrence of the basal sand and gravel deposits, any exchange of water probably would have only local significance.

Most wells in the Fremont buried-channel aquifer are for rural use; however, the town of Treynor has wells that may be completed in the channel. Wells at Treynor, which range from 220 to 250 ft deep, are pumped at rates between 80 and 150 gal/min. On the basis of information from west-central Iowa (Runkle, 1987), the aquifer has an estimated transmissivity of 520 ft²/d and possible yields of 800 gal/min. Although large yields are possible, testing usually is required to determine an appropriate yield for a particular area.

The Albany channel (fig. 16) is the upper part of a bedrock valley that contains sand and gravel deposits and extends farther south in Missouri. This valley trends northward from the southeast corner of Taylor County through Adams and into Adair and Cass Counties. Limited data are available for the Albany channel. According to local well drillers, the buried-channel aquifer underlies an area from southern Adair County southward through Taylor County. The existence of extensive sand and gravel deposits in the Albany channel is not indicated by available geologic logs and test-hole data. Previous work in south-central Iowa (Cagle and Heinritz, 1978) supports this conclusion. Sand and gravel deposits from 1 to 15 ft thick have been recorded.

Water levels in the Albany buried-channel aquifer were measured in observation well SW78 (fig. 1; table 7). The altitude of the potentiometric surface in an inter-till aquifer at the same location, well SW83, was 5.35 ft higher than the water level in the Albany buried-channel aquifer on August 8, 1988. This indicates a downward gradient at this location. As in the Fremont buried-channel aquifer, there probably is movement of ground water to the south and out of the area.

The town of Blockton in Taylor County obtains water from a well completed in the Albany buried-channel aquifer. Present pumpage for municipal use is about 15,000 gal/d. The town of Fontanelle in Adair County has a stand-by well completed in the Albany

buried-channel aquifer with a reported potential withdrawal rate of 40 gal/min.

Water Quality

Analyses of water samples from the various glacial-drift aquifers (table 11) indicate that water from these aquifers generally is hard. Water from the inter-till and basal sand and gravel aquifers is usually of acceptable quality for most uses. Dissolved-solids concentrations ranged from 176 to 600 mg/L, and sulfate concentrations ranged from 6.0 to 97 mg/L. The water is generally a calcium bicarbonate type. However, water from observation well SW83 (table 8) is an exception. Water from this well is a sodium sulfate type, with a dissolved-solids concentration of 1,900 mg/L and sulfate concentration of 910 mg/L. Iron concentrations have exceeded the secondary drinking-water regulations (table 4) and ranged from less than 10 to 8,000 µg/L. Nitrate concentrations ranged from less than 0.10 to 120 mg/L.

Water in the Fremont buried-channel aquifer ranged from a calcium bicarbonate type to a sodium sulfate type. Dissolved-solids concentrations in samples from the observation wells and the town of Treynor ranged from 312 to 1,410 mg/L, and sulfate concentrations ranged from 20 to 620 mg/L (table 8). Iron concentrations were large and exceeded the secondary drinking-water regulation. Nitrate concentrations generally were small, usually less than 1.0 mg/L. Water in the Albany buried-channel aquifer is very hard with dissolved-solids concentrations ranging from 1,040 to 3,200 mg/L and sulfate concentrations from 240 to 1,900 mg/L (table 11). Iron concentrations generally exceeded the secondary drinking-water regulation. Nitrate concentrations were small, generally less than 0.50 mg/L.

None of the common pesticides were detected in samples from any inter-till, basal sand and gravel, or buried-channel aquifer wells during this study (table 10). There are seven other analyses available for untreated municipal water and six from treated municipal water from these aquifers (M.L. Clark, U.S. Geological Survey, oral commun., 1989). A well at Emerson, completed in the basal sand and gravel aquifer, had a detection of chlordane at 0.10 µg/L during June 1986 from an untreated water sample.

Dakota Aquifer

The Dakota aquifer consists of sandstone units within the Dakota Formation (table 6). In northwestern and west-central Iowa, the Dakota Formation consists of two members--the upper Woodbury Member, comprised of shale and sandstone, and the lower Nishnabotna Member, comprised of sandstone, gravel, and conglomerate. The Nishnabotna Member is the principal unit of the Dakota aquifer in these areas (Munter and others, 1983; Runkle, 1987). In southwest Iowa, the Dakota Formation generally consists of poorly cemented sandstone and gravel (Hershey and others, 1960) of the Nishnabotna Member (Witzke and Ludvigson, 1982).

Occurrence

The Dakota aquifer occurs primarily in Cass and Montgomery Counties (fig. 17). Outliers occur in Adair, Adams, Mills, and Pottawattamie Counties. Generally, identifiable Dakota Formation strata occur on bedrock uplands. In Cass and Montgomery Counties, it appears that the bedrock channels represent areas where the Dakota Formation was eroded. Thus, the Dakota Formation occurs as a group of isolated strata separated by bedrock channels.

The extent of the Dakota aquifer, as shown in figure 17, is different than previously published maps of the Cretaceous rocks in southwest Iowa (Hershey and others, 1960; Hershey, 1969; Witzke and Ludvigson, 1982). Presently (1991) available information indicates that the Dakota aquifer is more dissected and restricted than previously mapped. Interpretation of its extent is difficult because there are many drillers' logs that do not distinguish sand from sandstone. Also, some test holes may have stopped short of penetrating the Dakota aquifer beneath Dakota Formation shale.

The Dakota aquifer varies in thickness from a few feet to 140 ft, although the average thickness in most areas varies between 20 and 60 ft (fig. 17). The maximum probable thickness of the Dakota Formation in southwest Iowa is less than 150 ft because the formation is at the eastern edge of its geographic limit. Also, in several counties north of the study area, the maximum

measured thickness is reported to be 150 ft (Runkle, 1987).

The top of the Dakota aquifer is generally at higher altitudes, 1,150 ft to more than 1,200 ft in the north and northeast and at slightly lower altitudes, 1,100 ft to less than 1,050 ft, toward the south and west. The Dakota Formation crops out along some streams in Cass and Montgomery Counties.

The potentiometric surface generally declines from the northeast to the southwest and also toward all major rivers (fig. 18). In northern Montgomery County, anomalously high water levels occur in an area between the East Nishnabotna and Tarkio Rivers. The water level in one well exceeded 1,250 ft, about 150 ft to 200 ft higher than other water levels in this area and adjacent areas of the Dakota aquifer. Yields to wells completed in the Dakota aquifer have been reported as large as 150 gal/min, but more typical values are about 20 gal/min. The hydraulic characteristics of parts of the Dakota aquifer in southwest Iowa are listed in table 15 at the back of this report.

Water Quality

Water from the Dakota aquifer is a calcium bicarbonate type (fig. 19), with magnesium a significant secondary cation and sulfate a significant secondary anion. In samples from municipal wells at Anita, sodium and magnesium are more common secondary cations than in the other samples. Water-quality data from nine municipalities in southwest Iowa using the Dakota aquifer are summarized in table 16 at the back of this report.

Water from the Dakota aquifer is hard to very hard, with total hardness ranging from 112 to 640 mg/L as calcium carbonate (table 16). Sulfate concentrations, although generally less than 50 mg/L, were as large as 430 mg/L in some areas. Only one sample exceeded the secondary drinking-water regulation of 250 mg/L for sulfate (table 3). Dissolved-solids concentrations rarely exceeded the secondary drinking-water regulation of 500 mg/L (table 3), and averaged about 325 mg/L throughout the area. Water from the Dakota aquifer in the Anita area contained larger dissolved-solids concentrations than any other area in southwest Iowa; specific conductance averaged 877 μ S/cm (microsiemens

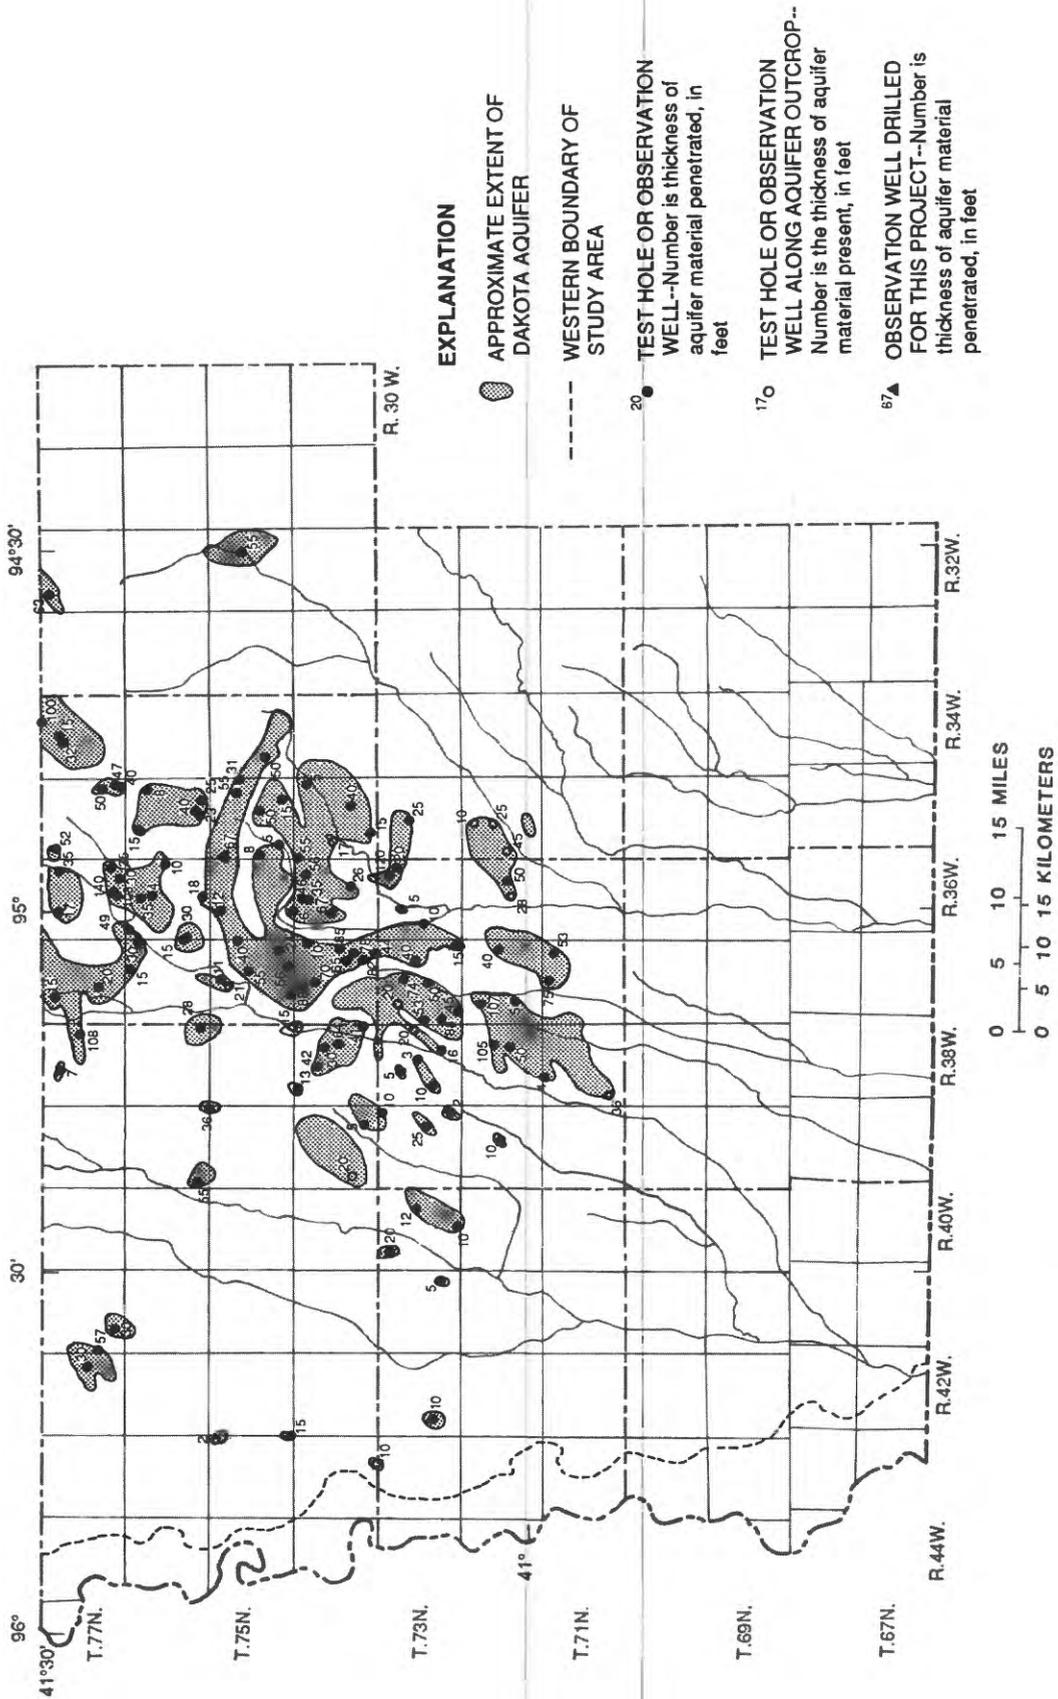


Figure 17. Extent and thickness of the Dakota aquifer.


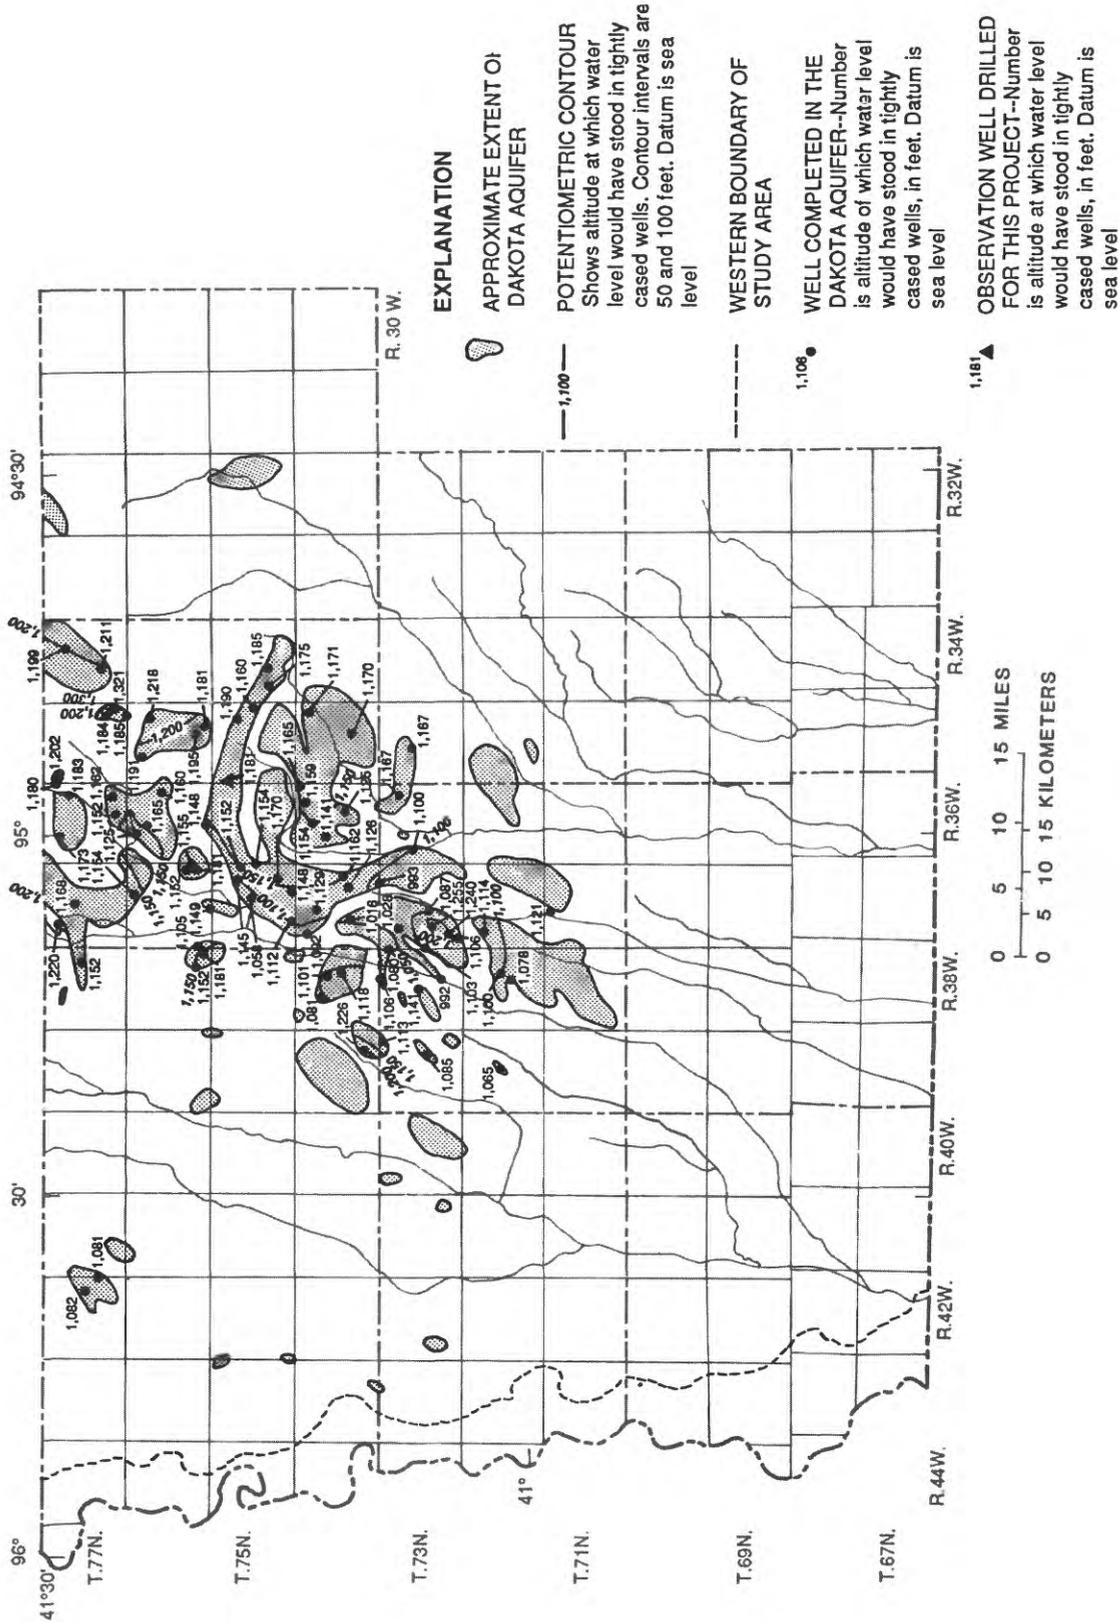


Figure 18. Potentiometric surface of the Dakota aquifer, 1986-88.

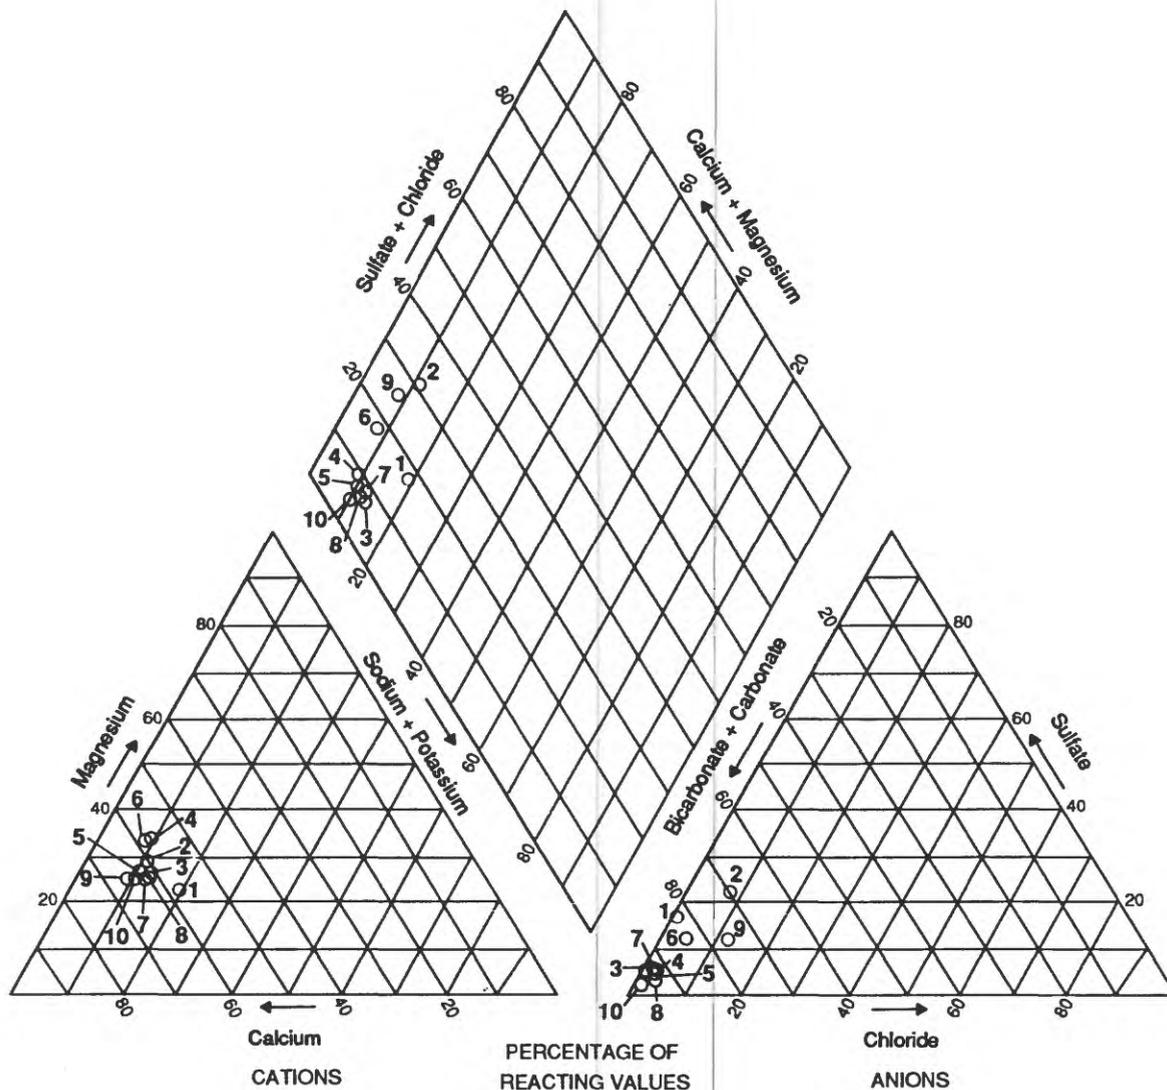

EXPLANATION

NUMBER	DAKOTA AQUIFER WELL
1	Anita, 6 samples
2	Atlantic, 52 samples
3	Cumberland, 9 samples
4	Griswold, 11 samples
5	Elliott, 5 samples
6	Neola, 8 samples
7	Red Oak, 20 samples
8	Stanton, 12 samples
9	Wiota, 7 samples
10	Observation well SW17, 1 sample

Figure 19. Historical water quality of the Dakota aquifer, 1950-86.

per centimeter at 25 degrees Celsius), sulfate averaged 162 mg/L, and dissolved-solids concentrations averaged 619 mg/L. Iron exceeded the secondary drinking-water regulations (table 3) in water from wells in four municipalities and ranged from less than 10 to 16,000 µg/L. Nitrate concentrations were about 3 mg/L throughout the area; 7 of 127 reported analyses exceeded the primary drinking-water regulation of 10 mg/L. The largest nitrate concentration reported was 13 mg/L. Atrazine, the only pesticide detected in Dakota aquifer water samples, was detected in a water sample from Atlantic at a concentration of 0.39 µg/L in January 1987. There were no other pesticide detections in 10 raw-water samples.

Barium, copper, and zinc were the most common trace elements detected in water from the Dakota aquifer; concentrations ranged from less than 10 to 800 µg/L, less than 10 to 170 µg/L, and less than 10 to 940 µg/L, respectively (table 16 at the back of this report). Concentrations of other trace elements detected included: selenium, 2 samples at the MCL of 10 µg/L; arsenic, 3 samples at 10 µg/L; cadmium, 1 sample at 4 µg/L; and lead, 1 sample at 20 µg/L. The detection level for some of the metals analyzed also is the MCL for drinking water. Radium-226 has been detected, with concentrations ranging from 0.6 to 4.0 pCi/L (picocuries per liter), and radium-228 has been detected, with concentrations ranging from 1.3 to 1.8 pCi/L (table 16).

WATER USE

The major categories of water use in southwest Iowa are municipal, rural domestic, livestock, irrigation, and industrial/commercial (referred to as industrial in this report). Municipal water-use information, which includes rural-water systems, was collected by U.S. Geological Survey personnel from individual water-plant operators where possible or compiled from the files of the Iowa Department of Natural Resources. Estimates of the other water-use quantities were based on the permitted-use quantity or on use rates applied to population estimates. Estimates of the quantity of use for each category are listed in table 17 at the back of this report. Although the date of the annual water-use estimate varies slightly from one category to another, changes in use do not vary

substantially from one year to the next, and the data are considered adequate for comparison between the categories for the purposes of this report.

Municipal Use, 1984

Municipal water use is the third largest use of water in southwest Iowa (table 17). The largest municipal use in 1984, about 9.3 Mgal/d, occurred in Pottawattamie County. The smallest use of less than 0.3 Mgal/d in 1984 was in Adams County. Ground-water resources supplied more than 60 percent of the water used for municipal purposes. The location, source, and relative quantity of withdrawal are shown in figure 20. Several municipalities and rural-water systems derive their water from or are located outside the study area. Additional information on the sources of water, population served, average use, and maximum use for each municipality and rural-water system is provided in table 18 at the back of this report.

Total maximum daily water use by municipal and rural-water systems, about 35 Mgal/d, is slightly more than double the average daily water use (table 17). For several communities, maximum water use is reported as four to seven times higher than average use (table 18). Water authorized for municipal use is generally restricted to a maximum of 2,000 gal/d per capita [State of Iowa Administrative Code (567), Ch. 52.2(3)].

Rural Domestic Use, 1984

Rural domestic water use is the quantity of water used by households not served by municipal or rural-water systems. Rural domestic water use (table 17) is estimated at 100 gal/d per capita. Rural domestic water supplies generally are dependent on shallow ground-water sources. In 1984, the largest rural domestic water use, about 1.8 Mgal/d, occurred in Pottawattamie County. This use is larger than the 1984 average municipal water use for seven of the nine counties in the study area.

Livestock Use, 1986

Livestock data are from Iowa Department of Agriculture and Land Stewardship (1987), and livestock water requirements are from Herrick

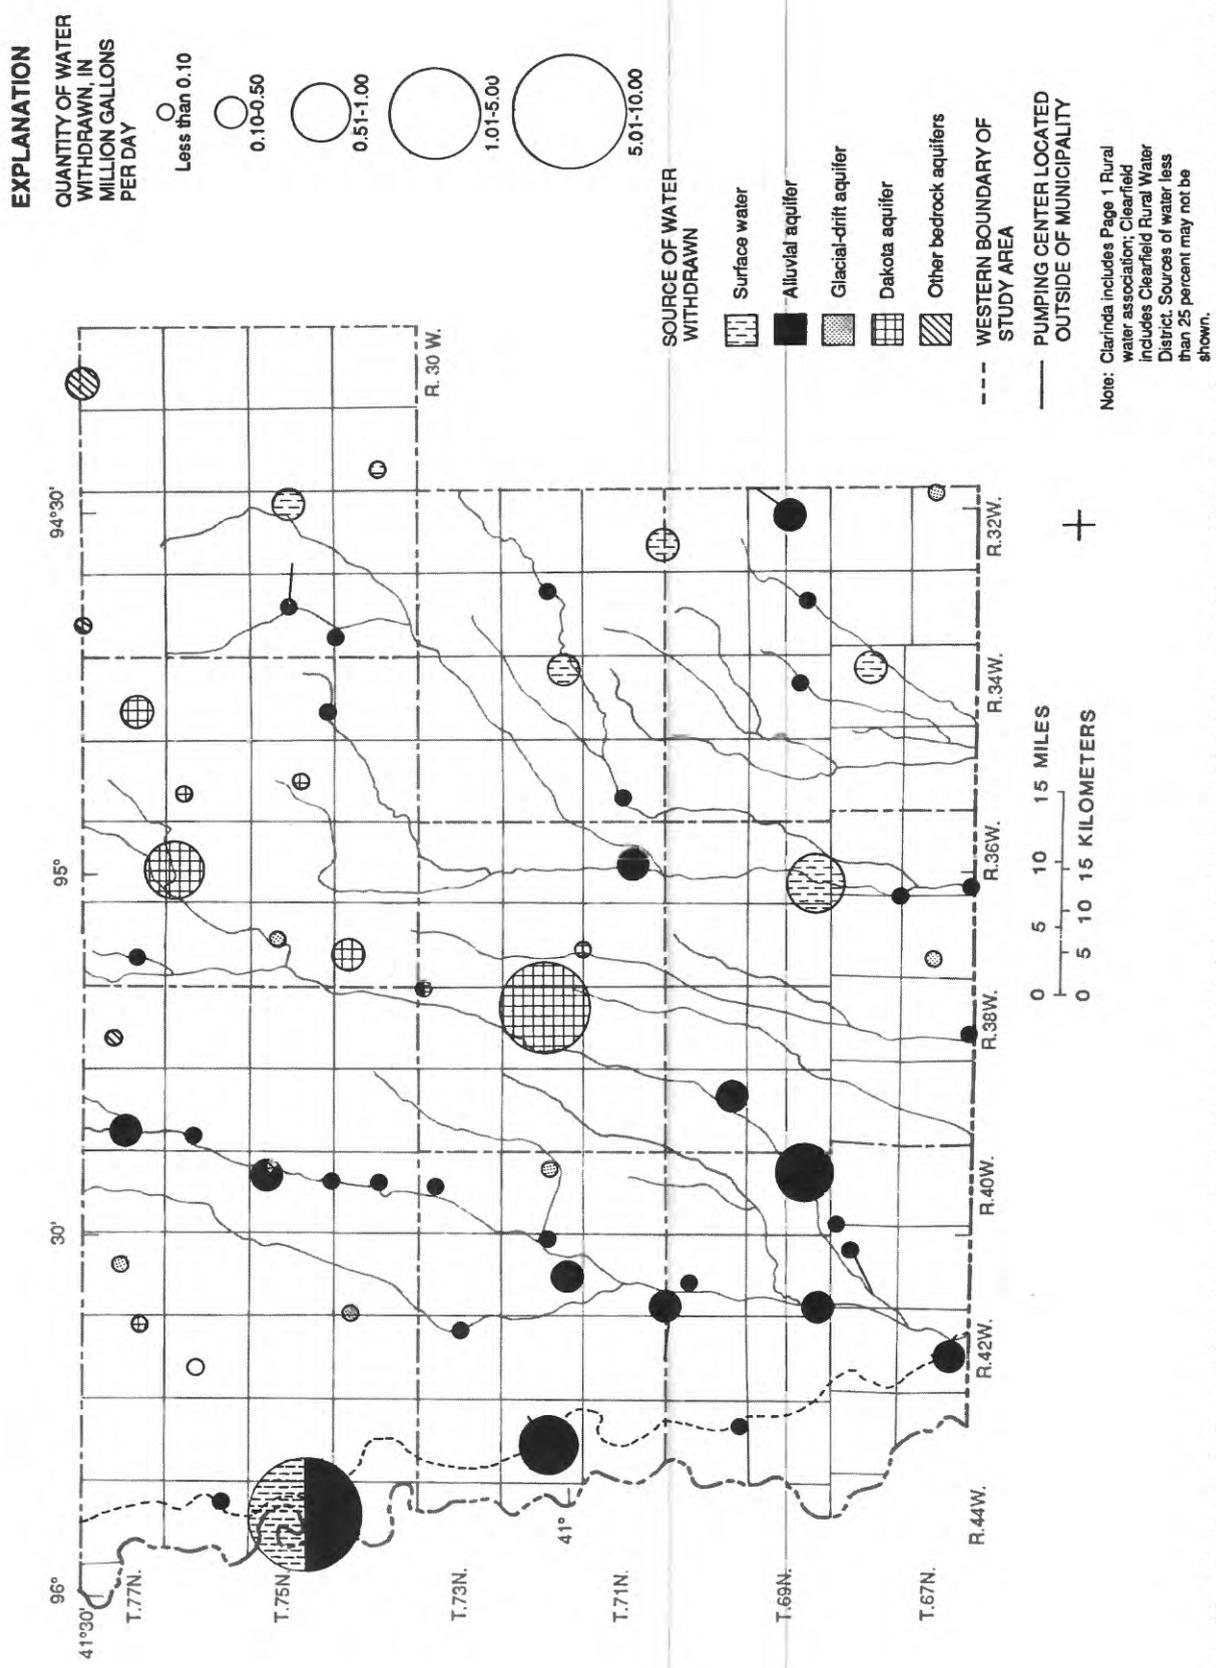


Figure 20. Average daily municipal water use and source of water withdrawn, 1984 (computed from U.S. Geological Survey, Iowa Department of Natural Resources, and various municipal water-supply files).

(1978). Livestock water use (table 17) will vary depending on current farm inventories. During the past few years there has been a decline in farm inventories in Iowa (Iowa Department of Agriculture and Land Stewardship, 1987). Although farm ponds are sources of surface water for some of the livestock population, no attempt was made to categorize these sources. Generally, water for livestock use in southwest Iowa is from shallow ground-water sources.

Permitted Water Use, 1987

Existing water-withdrawal permits for irrigation, industrial (including electric-generation cooling water), commercial feedlots, and miscellaneous uses are listed in table 17. Permits for municipal water supplies are not included. Permitted water use is the maximum quantity of water allowed to be withdrawn. Because actual water-use withdrawals vary yearly for certain categories, permitted water-use data are discussed in the following sections.

Irrigation

Irrigation permits are issued for seasonal withdrawals for general farm crops, such as row crops, small grain, and hay from April 1 to September 30, and specialty crops, such as vegetables, fruits, and sod from April 1 to October 31 [State of Iowa Administrative Code (567), Ch. 52.2(1)a]. General farm crops may be authorized 1 acre-ft, and specialty crops may be authorized 2 acre-ft [State of Iowa Administrative Code (567), Ch. 52.2(1)b].

In southwest Iowa, 75 percent or 20.3 Mgal/d of water permitted for irrigation use comes from ground water. Approximately 97 percent of the ground water used for irrigation, 19.6 Mgal/d, is derived from alluvial aquifers along the principal rivers, primarily the Missouri River. This quantity is nearly double the quantity of water used by municipal systems and industrial permits from alluvial aquifers (table 17).

Industrial

The permitted industrial use of water is predominantly from surface-water resources (83 percent of the total industrial use). Use of surface water for industrial purposes occurs mainly in Adair, Adams, Cass, Page, and

Pottawattamie Counties. Ground water for industrial purposes is used mainly in Pottawattamie County.

Commercial Feedlots

Feedlots are permitted commercial water users. Water used by feedlots was subtracted from the total permitted water use in calculating total water use to prevent counting water used by livestock twice. Commercial feedlots account for about 8 percent of total livestock water use in the study area (table 17).


Miscellaneous

The principal miscellaneous permitted water user in the nine-county area is the Iowa Department of Natural Resources, which has a permitted use for recreational purposes of 9.13 Mgal/d or 87 percent of this category. The quantity of water authorized for recreational and also other purposes is determined on the basis of the proposed use [State of Iowa Administrative code (567), Ch. 52.2(4)].

Total Water Use

Total water use in southwest Iowa is about 91.8 Mgal/d (table 17). The largest use is for irrigation, 26.9 Mgal/d. Pottawattamie County uses 35 percent of the total water in southwest Iowa and more than twice as much water as the next largest water user, Fremont County. The proportion of total water use in southwest Iowa for each category of use is shown in figure 21. The proportion of total water use in each county for each category of use is shown in figure 22.

Domestic use, including municipal- and rural-water systems and rural domestic use, accounts for about 22.0 Mgal/d or 24 percent of total water use in southwest Iowa. Livestock use accounts for 10.3 Mgal/d or 11.2 percent of total water use; 26.9 Mgal/d or 29.4 percent of the total water use is for irrigation; 22.1 Mgal/d or 24 percent of the total use is for industrial use; and about 10.5 Mgal/d or 11.4 percent of the total use is for miscellaneous permitted water uses, primarily recreation. More than 55 percent or 51.2 Mgal/d of the total water use in southwest Iowa is from ground-water sources if livestock are assumed to be totally dependent on ground-water sources.

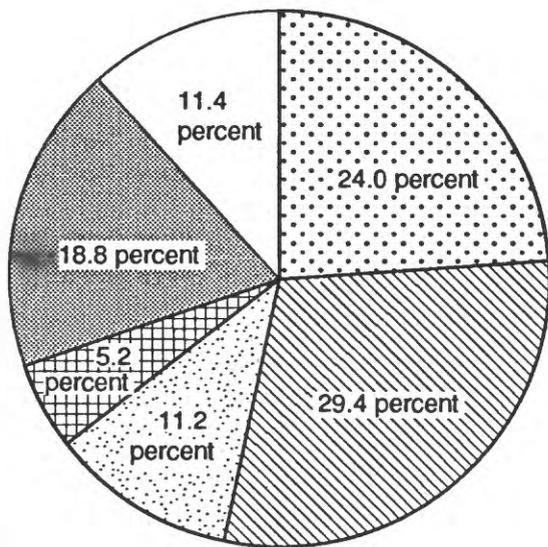

EXPLANATION

WATER USE

-  Industrial, excluding thermoelectric-power generation from the Missouri River
-  Irrigation
-  Livestock
-  Rural domestic
-  Municipal- and rural-water systems
-  Miscellaneous permitted, includes recreation

Figure 21. Total water use (compiled from U.S. Geological Survey, Iowa Department of Natural Resources, and various municipal water-supply files).

Surface Water

Surface-water use within the study area accounts for 34.4 Mgal/d or 44.3 percent of total water use. These uses are irrigation, 6.6 Mgal/d or 7.2 percent of the total use; industrial, 18.3 Mgal/d or 19.9 percent of the total use; miscellaneous, 9.3 Mgal/d or 10.1 percent; and commercial feedlots, 0.2 Mgal/d or less than 1 percent of the total use. Additionally, municipal- and rural-water systems using surface water account for 6.3 Mgal/d or 6.9 percent of all water used in the study area. Rural domestic and livestock are not substantially dependent on surface-water sources, although livestock use of farm ponds does occur.

Ground Water

Municipal- and rural-water systems using ground water account for 10.9 Mgal/d or 11.9 percent of total water use in the study area, and permitted irrigation, industrial, and miscellaneous ground-water use accounts for 25.2 Mgal/d or 27.5 percent of total water use. It is

assumed that rural domestic, which accounts for 4.8 Mgal/d, and livestock, which accounts for 10.3 Mgal/d (5.2 and 11.2 percent of the total water use), are substantially dependent on ground-water sources.

Alluvial aquifers are the most important source of ground water in the study area. Alluvial sources supply approximately 97 percent or 19.6 Mgal/d of permitted ground water used for irrigation; 100 percent or 3.8 Mgal/d of the permitted ground water for industrial use; about 34 percent or 0.23 Mgal/d of permitted ground water for commercial feedlots; and about 98.6 percent or 1.15 Mgal/d of permitted ground water for miscellaneous uses. About 44 percent, 7.6 Mgal/d, of the municipal- and rural-water system use of ground water is derived from alluvial aquifers.

The Dakota aquifer is mainly used for domestic and municipal water supplies. Although nine municipalities rely on the Dakota aquifer, in part, for their water supplies (table 18), Red Oak and Atlantic are the principal users

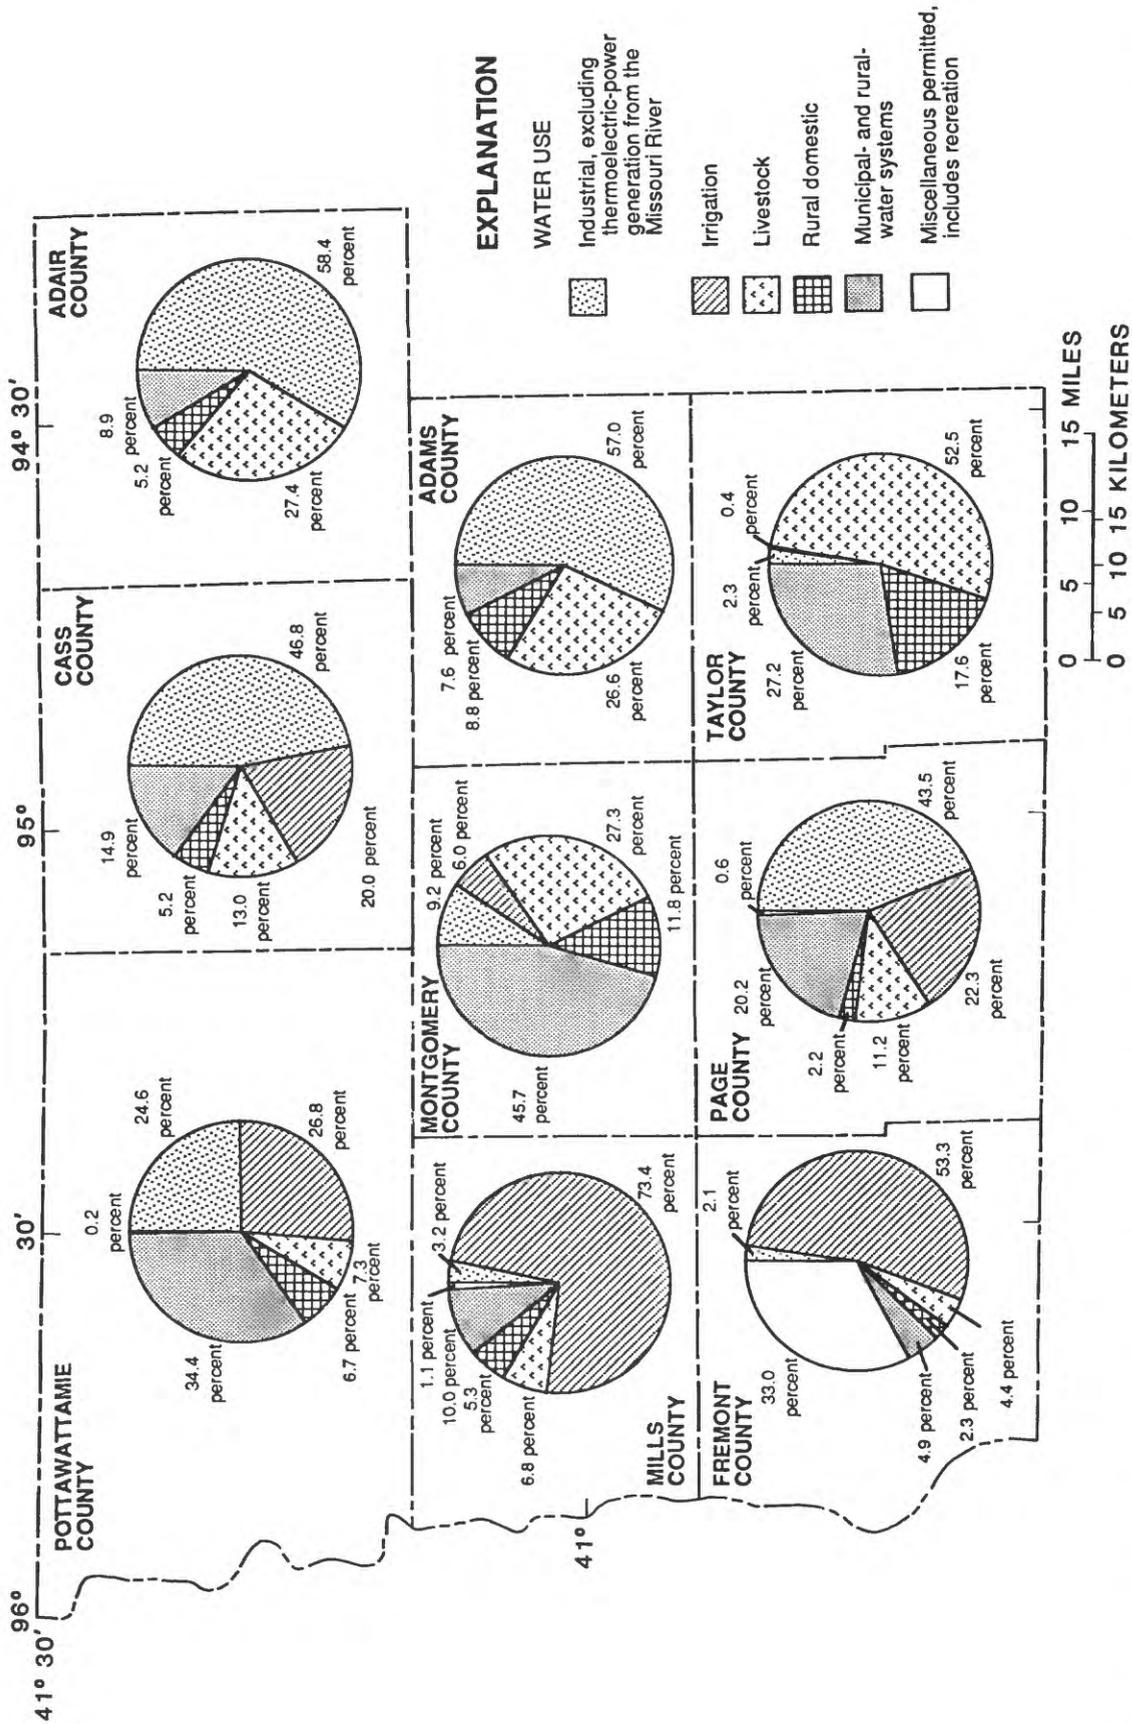


Figure 22. Total water use by county (compiled from U.S. Geological Survey, Iowa Department of Natural Resources, and various municipal water-supply files).

of the Dakota aquifer with withdrawals of about 1 Mgal/d each. Total municipal water use from the Dakota aquifer is 2.63 Mgal/d, which is about 3 percent of total water use.

Future Water Demands

Future demands for water in the study area probably will be met by increased use of surface-water sources and alluvial aquifers, particularly the Missouri River alluvial aquifer. The users that are already dependent on the Dakota aquifer will continue to rely on it. There may be some slight shift for the rural domestic and livestock users to use buried-channel deposits if these sources become better known, can provide adequate yields, and have acceptable water quality.

SUMMARY

Residents in southwest Iowa rely on shallow ground-water sources because of unacceptable water quality in deeper aquifers. These shallow aquifers are of limited extent, the water levels and thus the quantity of water in storage, are affected by climatic variations, and the aquifers are susceptible to contamination. Analyses of samples from private water wells from 1981 to 1986 indicate that wells in southwest Iowa have larger nitrate concentrations than wells in other parts of the State. An appraisal of the ground-water resources of a nine-county area in southwest Iowa was done to provide information needed to plan the development of the shallow water resources. Five types of unconsolidated aquifers and one bedrock aquifer were investigated.

Alluvial aquifers, comprised of sand and gravel, are present in the major river valleys. Four alluvial aquifers were investigated--the Nishnabotna, Nodaway, Tarkio, and One Hundred and Two. Alluvial deposits in southwest Iowa usually consist of a series of fine-grained deposits overlying sand and gravel.

The Nishnabotna alluvial aquifer is the most used source for municipal and domestic water. The alluvial deposits are variable; the average thickness of the fine-grained materials is 21 ft, overlying an average thickness of 17 ft of sand and gravel. Transmissivities range from 1,000 to

8,000 ft²/d, and most wells are capable of yielding as much as 100 gal/min of water.

Water in the Nishnabotna alluvial aquifer is a calcium bicarbonate type. Nitrate concentrations are variable and have exceeded the MCL in samples from several municipal wells. Iron concentrations greater than the secondary drinking-water regulation of 300 µg/L are common. Pesticides were detected in water from nine municipal wells; none were detected in water from observation wells. Five pesticides were detected; concentrations for all pesticides except alachlor were less than proposed regulations.

The Nodaway alluvial aquifer also is an important source of water, although less used than the Nishnabotna alluvial aquifer. The average thickness of the fine-grained alluvial sediments is about 20 ft, overlying an average thickness of about 10 ft of sand and gravel. Transmissivities range from 90 to 570 ft²/d, and yields range from 12 to 100 gal/min.

Water in the Nodaway alluvial aquifer is a calcium bicarbonate type. Nitrate concentrations generally are less than in the Nishnabotna alluvial aquifer. Iron concentrations commonly exceeded the secondary drinking-water regulation. One municipal well had detectable concentrations of two pesticides.

The other two alluvial aquifers, the Tarkio and the One Hundred and Two, are used less. Their limited areal extent and thin sand and gravel deposits limit their productivity to yields generally less than 50 gal/min. Both aquifers contain calcium bicarbonate type water. Nitrate concentrations are small, generally less than 1.0 mg/L. Pesticides have been detected in samples from municipal wells completed in each aquifer.

There are four types of glacial-drift aquifers in southwest Iowa--loess, inter-till sand and gravel, basal sand and gravel, and buried-channel sand and gravel. Except for buried channels, these aquifers are discontinuous and distributed locally. Wells completed in loess and inter-till sand and gravel are used by rural residents, who commonly use large-diameter seepage wells to obtain water from these low-yield sources. The inter-till and basal sand and gravel aquifers are used by a few municipalities. Yields to wells screened in these aquifers are variable. Loess

wells typically yield less than 10 gal/min, and inter-till and basal sand and gravel aquifers yield from 10 to 120 gal/min.

There are two buried-channel aquifers in the study area--the Fremont and Albany. The Fremont buried-channel aquifer is the most extensive and contains sand and gravel deposits about 300 ft thick. The Albany buried-channel aquifer is less extensive, with thinner sand and gravel deposits. Only one municipality relies on water from a buried-channel aquifer; the town of Blockton in Taylor County has a well in the Albany buried-channel aquifer. Well yields from these buried-channel aquifers range from 40 to 150 gal/min.

Water from the loess and inter-till and basal sand and gravel aquifers is normally a calcium bicarbonate type. Nitrate concentrations in some samples exceeded the MCL. Iron concentrations have exceeded the secondary drinking-water regulation. No agricultural pesticides were detected; however, chlordane was detected in water from one municipal well completed in the basal sand and gravel aquifer.

Water in the buried-channel aquifers ranged from a calcium bicarbonate type to a sodium sulfate type. Sulfate, dissolved-solids, and iron concentrations in some samples exceeded the secondary drinking-water regulations. Nitrate concentrations were small, usually less than 1.0 mg/L, and no pesticides were detected in samples collected during this study.

The Dakota aquifer was the only bedrock aquifer investigated. In southwest Iowa, the Dakota aquifer exists as isolated outliers, primarily in Montgomery and Cass Counties. The thickness of the aquifer is variable, averaging between 20 and 60 ft. Yields to Dakota aquifer wells are quite variable. Water from the aquifer is a calcium bicarbonate type. Sulfate and dissolved-solids concentrations rarely exceeded the secondary drinking-water regulations, whereas iron concentrations often exceeded the secondary drinking-water regulation. Nitrate concentrations were small, usually about 3.0 mg/L, and pesticides were detected at only one municipal well.

Water-use statistics were tabulated for each county in southwest Iowa. Municipal- and rural-water systems rely primarily on surface

water (37 percent), alluvial aquifers (44 percent), and the Dakota aquifer (15 percent). Rural residents rely on the alluvial and glacial-drift aquifers, although actual use data are not available.

SELECTED REFERENCES

- Bettis, E.A., III, and Littke, J.P., 1987, Holocene alluvial stratigraphy and landscape development in Soap Creek watershed, Appanoose, Davis, Monroe, and Wapello Counties, Iowa: Iowa City, Iowa Department of Natural Resources, Geological Survey Bureau Open-File Report 87-2, 170 p.
- Bruner, D.R., and Hallberg, G.R., 1987, An overview of water quality in the Skunk River basin: Iowa City, Iowa Department of Natural Resources, Geological Survey Bureau Open-File Report 87-3, 36 p.
- Cagle, J.W., and Heinitz, A.J., 1978, Water resources of south-central Iowa: Iowa City, Iowa Geological Survey Water Atlas 5, 97 p.
- Dorsch, M.M., Scragg, R.K., McMichael, A.J., Baghurst, P.A., and Dyer, K.F., 1984, Congenital malformations and maternal drinking water supply in rural South Australia--A case control study: *American Journal of Epidemiology*, v. 119, p. 473-486.
- Forman, D., Al-Dabbagh, S., and Doll, R., 1985, Nitrates, nitrites, and gastric cancer in Great Britain: *Nature*, v. 313, p. 620-625.
- Fraser, P., and Chilvers, C., 1981, Health aspects of nitrate in drinking water: *Science of the Total Environment*, v. 18, p. 103-116.
- Freeze, R.A., and Cherry, J.A., 1979, *Groundwater*: Englewood Cliffs, New Jersey, Prentice-Hall, 604 p.
- Hallberg, G.R., and Hoyer, B.E., 1982, Sinkholes, hydrogeology and groundwater quality in northeast Iowa: Iowa City, Iowa Geological Survey Open-File Report 82-3, 120 p.

- Hallberg, G.R., Hoyer, B.E., Bettis, E.A., III, and Libra, R.D., 1983, Hydrogeology, water quality, and land management in the Big Spring basin, Clayton County, Iowa: Iowa City, Iowa Geological Survey Open-File Report 83-3, 280 p.
- Hansen, R.E., in press, Bedrock topography of southwest Iowa: U.S. Geological Survey Miscellaneous Map Series Report I-1222, 1 sheet.
- Herrick, J.B., 1978, Water quality for livestock: Ames Cooperative Extension Service, Iowa State University, Animal Health Fact Sheet no. 8, 1 p.
- Hershey, H.G., 1969, Geologic map of Iowa: Iowa City, Iowa Geological Survey, scale 1:500,000, 1 sheet.
- Hershey, H.G., Brown, C.N., Van Eck, O., and Northrup, R.C., 1960, Highway construction materials from the consolidated rocks of southwestern Iowa: Ames, Iowa Highway Research Board Bulletin 15, 151 p.
- Iowa Department of Agriculture and Land Stewardship, 1987, Iowa agricultural statistics: Des Moines, 111 p.
- Knochenmus, D.D., 1962, Alluvial history of the Nishnabotna valley, southwestern Iowa: Ames, Iowa State University, unpublished M.S. thesis, 76 p.
- Libra, R.D., Hallberg, G.R., and Hoyer, B.E., 1984, Groundwater quality and hydrogeology of Devonian carbonate aquifers in Floyd and Mitchell Counties, Iowa: Iowa City, Iowa Geological Survey Open-File Report 84-2, 106 p.
- Munter, J.A., Ludvigson, G.A., and Bunker, B.J., 1983, Hydrogeology and stratigraphy of the Dakota Formation in northwest Iowa: Iowa City, Iowa Geological Survey Water Supply Bulletin 13, 55 p.
- National Oceanic and Atmospheric Administration, 1987, Monthly reports for Iowa, 1986-87: Asheville, N.C., Environmental Data Service, 27 p.
- Prior, J.C., 1976, A regional guide to Iowa landforms: Iowa City, Iowa Geological Survey Educational Series 3, 72 p.
- Ruhe, R.V., 1969, Quaternary landscapes in Iowa: Ames, Iowa State University Press, 255 p.
- Runkle, D.L., 1987, Hydrology of the alluvial, buried channel, basal Pleistocene and Dakota aquifers in west-central Iowa: U.S. Geological Survey Water-Resources Investigations Report 85-4239, 111 p.
- State of Iowa Administrative Code (567), Chapters 37, 38, 39, 51, 52, 54.
- Stone, R., 1971, Hydrogeology of the Nishnabotna River basin: Ames, Iowa State University, unpublished Ph.D. dissertation, 179 p.
- Thompson, C.A., 1986, Water resources of the Ocheyedon--Little Sioux alluvial aquifer: Iowa City, Iowa Department of Natural Resources, Geological Survey Bureau Open-File Report 86-3, 90 p.
- _____, 1987, Water resources of the Rock River alluvial aquifer: Iowa City, Iowa Department of Natural Resources, Geological Survey Bureau Open-File Report 87-1, 109 p.
- Thompson, C.A., and VanDorpe, P.E., 1988, Water quality monitoring of the Nishnabotna River alluvial system: Iowa City, Iowa Department of Natural Resources, Geological Survey Bureau Open-File Report 88-1, 61 p.
- U.S. Environmental Protection Agency, 1987, Agricultural chemicals in ground water--Proposed pesticide strategy: Office of Pesticides and Toxic Substances, 149 p.
- _____, 1988a, Maximum contaminant levels (subpart B of part 141, National interim primary drinking-water regulations): U.S. Code of Federal Regulations, Title 40, Parts 100 to 149, revised as of July 1, 1988, p. 530-533.

- ____1988b, National revised primary drinking-water regulations--Maximum contaminant levels (subpart G of part 141, National interim primary drinking-water regulations): U.S. Code of Federal Regulations, Title 40, Parts 100 to 149, revised as of July 1, 1988, p. 586-587.
- ____1988c, Secondary maximum contaminant levels (section 143.3 of part 143, National secondary drinking-water regulations): U.S. Code of Federal Regulations, Title 40, Parts 100 to 149, revised as of July 1, 1988, p. 608.
- ____1988d, Proposed rule, drinking-water regulations--Maximum contaminant level goals and national primary drinking-water regulations for lead and copper (subpart I of part 141): U.S. Federal Register, v. 53, no. 160, August 18, 1988, p. 31,516 - 31,578.
- ____1989, Proposed rule, National primary and secondary drinking-water regulations (sections 141.50, 141.51, 141.61, and 141.62 of part 141 and 143.3 of part 143): U.S. Federal Register, v. 54, no. 97, May 22, 1989, p. 22,062-22,160.
- Walton, W.C., 1960, Selected analytical methods for well and aquifer evaluation: Champaign, Illinois State Water Survey Bulletin 49, 81 p.
- Wehmeyer, L.K., 1988, Denitrification and nitrate movement in the shallow alluvial aquifer of the West Des Moines River, Palo Alto County, Iowa: Iowa City, University of Iowa, unpublished M.S. thesis, 110 p.
- Witzke, B.J., and Ludvigson, G.A., 1982, Cretaceous stratigraphy and depositional systems in Guthrie County, Iowa: Geological Society of Iowa Guidebook 38, 46 p.
- ____ 1988, Tertiary strata in Iowa, in Program abstracts, 100th session: Journal of the Iowa Academy of Science, v. 95, no.1, abstract 176.

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87

[Stratigraphic names and descriptions are those of the Iowa Department of Natural Resources; DDMSS, degrees minutes seconds; U, shallow well at site; L, deep well at site; all well casing is 2-inch-diameter polyvinyl-chloride pipe]

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW1	W-27553	67-41-17ADCC	403709-0953406	1,085	Fremont
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 3	No sample		
	3	to 7	Silt, orange-brown, very argillaceous		
	7	to 15	Silt, pale yellow, slightly argillaceous		
	15	to 20	Silt, orange, very argillaceous		
	20	to 30	Silt, maroon-orange		
Pleistocene deposits	30	to 33	Till, orange, oxidized, leached		
	33	to 33	Till, orange, oxidized, leached		
	33	to 43	Till, orange-yellow, oxidized, leached		
	43	to 45	Sand, colorless and varicolored, coarse to fine		
	45	to 65	Till, yellow, oxidized, unleached		
	65	to 73	Till, orange-brown, oxidized, unleached		
	73	to 80	Till, light olive-gray, unoxidized, unleached		
	80	to 94	Sand, colorless and varicolored, coarse to fine, subrounded, quartz; gravel, quartz, and metamorphic rock		
SW2	W-27554	67-41-20CDDD	403600-0953427	1,135	Fremont
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 10	Silt, yellow, argillaceous		
	10	to 15	Silt, very light yellow, argillaceous		
	15	to 20	Silt, yellow-orange, argillaceous		
	20	to 26	Silt, gray-yellow, argillaceous		
	26	to 30	Silt, pale maroon, argillaceous		
	30	to 50	Silt, orange, argillaceous		
	50	to 70	Silt, light orange-gray, very argillaceous		
Pleistocene deposits	70	to 74	Till, orange, oxidized, leached		
	74	to 108	Sand, colorless, varicolored, medium to fine and coarse, subrounded to subangular		
	108	to 110	Till, dark green-gray, unoxidized, unleached		
	110	to 122	Till, light olive-gray, unoxidized, unleached		
	122	to 125	Till, light yellow, oxidized, leached		
	125	to 131	Silt, very light yellow-orange, calcareous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description	
SW2--Continued					
Pleistocene deposits-- Continued	131	to	132	Silt, very light yellow-orange, calcareous; limestone, very light gray	
	132	to	140	Silt, very light yellow-orange, calcareous, argillaceous	
	140	to	155	Silt, very light yellow-orange, calcareous, argillaceous, trace sand	
	155	to	164	Till, light gray, unoxidized, unleached	
	164	to	169	Sand, colorless, varicolored, trace dark grains	
	Pennsylvanian rocks, undifferentiated	169	to	174	Dolostone, very light yellow-gray to gray, silty, sandy, calcareous, micaceous
174		to	176	Shale, green-gray, lumpy, soft, micaceous, calcareous	
176		to	180	Siltstone, green-gray, argillaceous	
180		to	190	Shale, gray, silty, calcareous, with micaceous partings	
190		to	191	Limestone, gray, silt-grade, argillaceous	
191		to	192	Shale, gray, with limestone nodules	
192		to	193	Shale, very dark gray, blocky, carbonaceous	
193		to	197	Shale, green, blocky, silty	
197		to	199	Shale, gray, very light gray, lumpy	
199		to	201	Shale, very light gray, very dark gray, lumpy, silty, calcareous	
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW3	W-27555	67-41-30ABBB	403558-0953533	1,040	Fremont
Stratigraphic unit	Depth interval (feet)			Description	
Quaternary deposits	0	to	5	No sample	
	5	to	15	Silt, argillaceous, calcareous	
	15	to	20	Silt, light yellow, argillaceous	
	20	to	60	Silt, orange, argillaceous	
	60	to	67	Silt, pale maroon, argillaceous	
Cretaceous rocks Dakota Formation	67	to	75	Sand, colorless, orange, medium to fine and coarse, subrounded to angular	
	75	to	78	Silt, orange-gray, argillaceous	
Pennsylvanian rocks, undifferentiated	78	to	80	Shale, gray, slightly silty	
	80	to	90	Shale, gray, lumpy	
	90	to	99	Shale, gray, lumpy, slightly calcareous	
	99	to	101	Shale, gray, lumpy, slightly calcareous, with limestone nodules	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description
SW3--Continued			
Pennsylvanian rocks, undifferentiated-- Continued	101	to 104	Siltstone, very light green, argillaceous, calcareous
	104	to 112	Siltstone, very light green, very argillaceous, calcareous
	112	to 120	Shale, green-gray, very silty, calcareous
	120	to 121.5	Limestone, green-gray, silty, very argillaceous
	121.5	to 122.5	Shale, dark, blocky
	122.5	to 128	Shale, very light green, lumpy, silty
	128	to 133	Shale, very light green, lumpy, silty, slightly calcareous
	133	to 140	Shale, very light green, lumpy, silty, calcareous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW4	W-27556	67-41-20CDDD	403600-0953427	1,138	Fremont

Note: This is a rock core repositated at the Iowa Department of Natural Resources, Geological Survey Bureau.

Stratigraphic unit	Depth interval (feet)		Description
Pleistocene deposits	0	to 55	Peorian loess
	55	to 75	Loveland loess
	75	to 80	Till, oxidized, leached
	80	to 109	Sand and gravel
	109	to 111	Till, oxidized, unleached
	111	to 128	Till, unoxidized, unleached
Tertiary deposits	128	to 135.5	Clay, medium brown-gray, light medium brown-gray, very silty, slightly sandy; sandstone, very fine; siltstone
	135.5	to 151.5	Clay, silty
	151.5	to 155	Siltstone, clay
	155	to 166	Silt
	166	to 170	Silt
170	to 174	Sand	
Pennsylvanian rocks	174	to 1,116	Description available from: Iowa Department of Natural Resources, Geological Survey Bureau 123 N. Capitol St. Iowa City, IA 52242

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW5	W-27704	67-40-14A DDD	403712-0952305	1,080	Fremont
Stratigraphic unit	Depth interval (feet)			Description	
Quaternary deposits	0	to	5	Fill and topsoil (driller's log)	
	5	to	8	Clay, medium dark gray, silty	
	8	to	10	Clay, brown-gray, silty	
	10	to	20	Clay, gray, silty	
	20	to	25	Silt, light gray, very argillaceous	
	25	to	30	Silt, light gray, very argillaceous, with trace sand	
Pleistocene deposits	30	to	34	Till, brown, oxidized, leached	
	34	to	40	Silt, medium light gray, argillaceous, calcareous; till, gray, unoxidized, unleached, sandy	
	40	to	43	Silt, gray, sandy, calcareous	
	43	to	60	Till, gray, unoxidized, unleached	
	60	to	65	Till, blue-gray (driller's log)	
	65	to	80	Till, gray, unoxidized, unleached	
	80	to	90	Till, blue-gray, softer, sandy	
	90	to	110	Till, gray, unoxidized, unleached, subrounded, coarse to fine; shale, gray and green-gray, silty, sandy; limestone, gray, silt-grade	
	110	to	120	Till, light olive-gray, unoxidized, unleached	
	120	to	130	Till, medium dark gray, unoxidized, unleached	
	130	to	150	Till, gray, unoxidized, unleached	
	150	to	180	Till, light olive-gray, unoxidized, unleached	
	180	to	200	Till, light olive-gray, unoxidized, unleached, sandy, gravelly	
	200	to	250	Till, gray, unoxidized, unleached	
	250	to	254	Till, light olive-green, unoxidized, unleached	
254	to	277	Till, gray, unoxidized, unleached		
277	to	300	Sand, colorless, orange, pink, yellow, dark, coarse to fine, subrounded, slightly silty, quartz		
300	to	317	Sand, colorless, orange, pink, yellow, dark, coarse to fine, subrounded, slightly silty, partly argillaceous, quartz		
Pennsylvanian rocks, undifferentiated	317	to	320	Shale, gray, silty, sandy, calcareous	
	320	to	323	Sandstone, colorless, trace pink and dark, subrounded, coarse to fine; shale, light gray, silty, sandy; gravel, very calcareous	
	323	to	330	Sandstone, colorless, trace pink and dark, subrounded, coarse to fine; shale, gray and green-gray, silty, sandy	
	330	to	331	Sandstone, colorless, trace pink and dark	
	331	to	332	Shale, gray, silty, blocky, calcareous; trace limestone	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>			<u>Description</u>
SW5--Continued				
Pennsylvanian rocks, undifferentiated-- Continued	332	to	335	Shale, gray, silty, sandy, blocky, calcareous
	335	to	337	Shale, medium dark gray, silty, sandy, calcareous
	337	to	339	Shale, medium dark gray, silty, sandy, calcareous; limestone, gray, dolomitic
	339	to	340	Limestone, gray; shale, gray, lumpy
	340	to	342	Limestone, gray; shale, dark, micaceous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW6	W-27705	67-40-30CBBB	403524-0952914	1,040	Fremont

<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>			<u>Description</u>
Quaternary deposits	0	to	5	Topsoil and clay, brown, silty (driller's log)
	5	to	13	Silt, dark orange, argillaceous
	13	to	15	Sand, dark orange, oxidized, leached, argillaceous, silty
	15	to	20	Sand, yellow, argillaceous, silty
Pleistocene deposits	20	to	22	Sand, medium to fine and coarse
	22	to	25	Till, orange, oxidized, unleached, with quartz and 5 percent heavy grains
	25	to	27.5	Sand, clear, orange, pink, and dark, medium to fine
	27.5	to	34	Till, yellow, oxidized, unleached
	34	to	60	Till, gray, unoxidized, unleached
	60	to	65	Till, gray, unoxidized, unleached, sandy
	65	to	75	Sand, colorless and varicolored, fine, silty, quartz; gravel; metamorphic rocks; limestone
	75	to	80	Till (driller's log)

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW7	W-27706	67-41-25AAAA	403551-0952918	1,075	Fremont
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 7	Roadbed (driller's log)		
Quaternary deposits	7	to 20	Silt, dark orange, argillaceous		
	20	to 24	Silt, orange, argillaceous		
	24	to 40	Silt, light orange, argillaceous		
	40	to 49	Silt, light orange, argillaceous, with trace sand		
Pleistocene deposits	49	to 52	Till, dark orange, oxidized, unleached		
	52	to 60	Till, gray, unoxidized, unleached, with trace till, orange, oxidized		
	60	to 131	Till, light olive-gray, unoxidized, unleached		
	131	to 133	Gravel, colorless; sand, coarse, subrounded		
	133	to 150	Till, gray, unoxidized, unleached		
	160	to 170	Till, light olive-gray, unoxidized, unleached		
	170	to 190	Till, medium light gray, unoxidized, unleached		
	190	to 200	Till, medium light gray, unoxidized, unleached, with trace till, orange, oxidized, unleached		
	200	to 211	Sand, colorless, trace orange, medium to fine and coarse		
	211	to 220	Till, medium light gray, unoxidized, unleached, with trace mollusk shells		
220	to 240	Till, gray, unoxidized, unleached, blocky			
Pennsylvanian rocks, undifferentiated-- Continued	240	to 242	Limestone, dark gray, argillaceous		
	242	to 246	Shale, gray, very calcareous; limestone, dark gray, argillaceous		
	246	to 255	Shale, gray, very calcareous; limestone, very light gray, silt-grade		
	255	to 258	Siltstone, gray, calcareous, argillaceous		
	258	to 261	Siltstone, gray, calcareous, very argillaceous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW8	W-27707	67-40-21CCAC	403602-0952659	1,065	Fremont
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	7	Roadbed (driller's log)	
Quaternary deposits	7	to	9	Clay, medium dark gray, slightly silty, hard	
	9	to	14	Clay, brown, with trace sand	
	14	to	17	Clay, medium light gray, slightly silty	
	17	to	20	Clay, gray, silty	
	20	to	35	Clay, gray, slightly silty	
	35	to	37	Clay, brown-gray	
	37	to	40	Clay, yellow-gray clay	
	40	to	50	Clay, medium light gray, slightly silty	
	50	to	57	Clay, yellow-gray	
	57	to	60	Clay, brown, silty	
	60	to	63	Sand, colorless and varicolored; gravel, varicolored	
Pleistocene deposits	63	to	65	Till, gray, unoxidized, unleached	
	65	to	71	Till, light olive-gray, unoxidized, unleached	
	71	to	75	Till, gray, unoxidized, unleached	
	75	to	130	Till, light olive-gray, unoxidized, unleached, sandy	
	130	to	140	Gravel, varicolored; sand, very dirty, subrounded	
	140	to	160	Till, light olive-gray, unoxidized, unleached, sandy; with till, yellow, oxidized, leached	
	160	to	180	Till, brown-gray, unoxidized, unleached	
	180	to	240	Till, light olive-gray, unoxidized, unleached	
	240	to	246	Till, light olive-gray, unoxidized, unleached; gravel	
	246	to	255	Gravel, varicolored; sand, medium; with till matrix, light olive-gray, unoxidized, unleached	
	255	to	260	Till, brown-gray, unoxidized, unleached	
	260	to	288	Till, light gray, unoxidized, unleached	
	288	to	300	Till, light olive-gray, unoxidized, unleached	
	300	to	316	Till, light brown-gray, unoxidized, unleached	
316	to	318	Till, light brown-gray, unoxidized, unleached, very sandy		
	318	to	344	Till, light olive-gray, unoxidized, unleached	
	344	to	350	Till, light olive-gray, unoxidized, unleached; limestone, very light gray, silt-grade	
Pennsylvanian rocks, undifferentiated	350				

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW9	W-27708	68-41-11CDCC	404256-0953104	945	Fremont
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	3	Roadbed (driller's log)	
Quaternary deposits	3	to	5	Clay, yellow-brown, silty (driller's log)	
	5	to	20	Silt, medium dark orange-brown, argillaceous	
	20	to	23	Sand, orange, medium to fine, subrounded, silty	
	23	to	25	Silt, dark orange, argillaceous	
	25	to	28	Clay, gray and orange, silty, sandy	
	28	to	35	Sand, colorless and orange, coarse to fine, subrounded, very argillaceous	
	35	to	40	Gravel, colorless and orange; sand, colorless, coarse, subrounded, very argillaceous sand	
	40	to	51	Gravel, varicolored; sand, colorless and yellow, fine	
	51	to	60	Gravel, varicolored; sand, colorless and yellow, argillaceous, fine	
Pleistocene deposits	60	to	80	Till, light olive-gray, unoxidized, unleached	
	80	to	115	Till, olive-gray, unoxidized, unleached; sand; gravel, varicolored and colorless	
	115	to	138	Till, light olive-gray, unoxidized, unleached; gravel, varicolored, subrounded to angular	
	138	to	160	Sand, colorless, varicolored, coarse to fine, subangular to subrounded	
	160	to	170	Till, light olive-gray, unoxidized, unleached	
	170	to	180	Till, gray, unoxidized, unleached	
	180	to	202	Till, medium light gray, unoxidized, unleached, very gravelly	
Pennsylvanian rocks, undifferentiated	202	to	208	Dolostone, gray, silt-grade; shale, gray	
	208	to	211	Dolostone, gray, silt-grade, argillaceous	
	211	to	211.5	Dolostone, gray, silt-grade, argillaceous; shale, gray	
	211.5	to	214	Shale, very dark gray, blocky, silty, calcareous	
	214	to	215	Dolostone, gray, silt-grade, argillaceous, very calcareous; sandstone, colorless, coarse to medium, subrounded	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW10	W-27709	68-42-12ADAC	404924-0953554	935	Fremont
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 12	Silt, yellow-orange, very argillaceous		
	12	to 20	Clay, orange, silty		
	20	to 27	Clay, very light yellow-orange, silty, calcareous		
	27	to 35	Clay, gray, silty, calcareous		
	35	to 36	Clay, medium dark brown, sandy		
	36	to 37	Clay, gray, silty, calcareous		
	37	to 42	Sand, colorless to varicolored, coarse to fine; gravel, subrounded		
Pleistocene deposits	42	to 43	Till, gray, unoxidized, unleached, weakly calcareous		
	43	to 47	Till, gray, unoxidized, unleached		
	47	to 60	Till, gray, unoxidized, unleached, silty		
	60	to 88	Till, light olive-gray, unoxidized, unleached		
	88	to 90	Sand, colorless and varicolored, coarse to fine; gravel, subrounded, calcareous, argillaceous, silty		
	90	to 151	Till, gray, unoxidized, unleached		
	151	to 164	Sand, colorless, orange, pink, coarse to fine, subrounded, quartz; gravel, very clean; quartz; igneous, metamorphic, and carbonate rocks		
Pennsylvanian rocks, undifferentiated	164	to 171	Shale, green, lumpy, calcareous, with calcareous nodules		
	171	to 171.5	Dolostone, very light gray, silt-grade, crystalline; shale, green, lumpy, calcareous, sandy		
	171.5	to 174	Shale, gray, silty, calcareous; dolostone, very light gray, silt-grade, crystalline dolostone		
	174	to 176	Shale, gray; dolostone, gray, silt-grade, calcareous, very argillaceous		
	176	to 180	Shale, green-gray, calcareous, with limestone nodules		
	180	to 182	Shale, green-gray, silty, calcareous		
	182	to 184	Shale, gray, silty, calcareous		
	184	to 186	Shale, green-gray, silty, calcareous		
186	to 189	Shale, green-gray, silty, calcareous; limestone, dark green, silt-grade, argillaceous			
	189	to 191	Shale, gray, silty, calcareous		

Note: Well flows at the land surface from 300 to 500 gallons per minute from 150 to 164 feet below land surface after hole was completed.

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW11	W-27710	70-41-32ABBB	404906-0953504	948	Fremont
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 8	Roadbed and topsoil (driller's log)		
	8	to 10	Clay, dark gray, silty		
	10	to 15	Silt, yellow and gray, very argillaceous		
	15	to 17	Silt, orange, very argillaceous		
	17	to 20	Silt, yellow-orange; sand, varicolored, subangular to subrounded		
	20	to 50	Sand, quartz; gravel, colorless and varicolored, subrounded, coarse, igneous and metamorphic rocks		
Pleistocene deposits	50	to 110	Till, light olive-gray, unoxidized, unleached		
	110	to 140	Sand, colorless and varicolored, coarse to fine, quartz, with 5 percent dark, heavy grains; gravel, metamorphic and granite rocks		
	140	to 160	Sand, very clear, colorless, yellow, pink, and dark grains, medium to coarse and fine		
	160	to 180	Sand, very clear, colorless, yellow, pink, and dark grains, medium to coarse and fine; gravel, varicolored, very clean		
	180	to 200	Sand, very clear, colorless, yellow, pink, and dark grains, medium to coarse and fine, slightly silty; gravel, varicolored, very clean		
	200	to 210	Gravel, varicolored, subrounded to angular igneous and metamorphic rocks		
Pennsylvanian rocks, undifferentiated	210	to 215	Dolostone, gray, calcareous, argillaceous; grading to dolostone, very light gray, non-argillaceous, silt-grade		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW12	W-27711	71-41-09DDDD	405736-0953323	976	Fremont
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
	0	to 8	Roadbed and fill (driller's log)		
Quaternary deposits	8	to 15	Clay, brown, silty		
	15	to 18	Clay, brown-gray, silty		
	18	to 25	Clay, gray, sandy; sand, varicolored, coarse to fine; gravel		
	25	to 34	Sand, colorless and varicolored, coarse to fine; gravel, varicolored, subrounded, silty		
Pleistocene deposits	34	to 180	Till, light olive-gray, unoxidized, unleached		
	180	to 211	Till, gray, unoxidized, unleached		
	211	to 223	Gravel, varicolored, subrounded to angular; igneous, metamorphic rocks, and dolostone; sand, coarse, quartz, with gray, till-like matrix		
Pennsylvanian rocks, undifferentiated	223	to 227	Limestone, very light gray, silty, silt-grade, argillaceous		
	227	to 231	Limestone, very light gray, silty, silt-grade, argillaceous; shale, gray; sand		
	231	to 244	Limestone, very light gray, silty, silt-grade, argillaceous; shale, gray		
	244	to 249	Shale, very dark gray, blocky; limestone, very light gray, silty, silt-grade, argillaceous		
	249	to 251	Shale, green-gray, calcareous		
	251	to 256	Shale, dark gray, green-gray, calcareous		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW13	W-27712	73-41-19ACAA	410645-0953556	1,115	Mills
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 10	Silt, yellow-brown, argillaceous		
	10	to 20	Silt, gray-orange, argillaceous		
	20	to 30	Silt, yellow, argillaceous		
Pleistocene deposits	30	to 34	Till, oxidized, leached, with sparse sand		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description	
SW13--Continued					
Pleistocene deposits-- Continued	34	to	40	Till, yellow-orange, oxidized, unleached, weakly calcareous	
	40	to	57	Till, yellow-orange, oxidized, unleached	
	57	to	60	Till, dark orange and gray, partly unoxidized, unleached	
	60	to	120	Till, light olive-gray, unoxidized, unleached	
	120	to	160	Till, light olive-gray, unoxidized, unleached, gravelly	
	160	to	170	Till, brown-gray, unoxidized, unleached	
	176	to	180	Till, medium light gray, unoxidized, unleached	
	180	to	181	Till, medium light gray, unoxidized, unleached, very sandy	
	Pennsylvanian rocks, undifferentiated	181	to	187	Limestone, very light gray; shale, gray; sand, colorless, coarse to fine
		187	to	189	Limestone, gray to very light gray, silt-grade, partly argillaceous
189		to	197	Shale, green, lumpy, silty, sandy	
197		to	199	Limestone, very light gray to gray, silt-grade, partly argillaceous; limestone, very light gray, fine to medium	
199		to	202	Limestone, very light gray, fine to medium, partly argillaceous	
202		to	205	Limestone, very light gray, slightly argillaceous	
205		to	205.5	Limestone, very light gray, slightly argillaceous; shale, dark gray, carbonaceous	
205.5		to	206	Shale, gray, micaceous	
206		to	208.5	Shale, very dark gray, carbonaceous	
208.5		to	210	Limestone, light gray, silt-grade, argillaceous	
210	to	213	Limestone, gray, silt-grade, argillaceous, fragmented		
213	to	215	Limestone, silt-grade to fine; shale, gray		
215	to	216	Shale, gray; limestone, silt-grade to coarse, fragmented		
216	to	218	Shale, gray; limestone, silt-grade to coarse		
218	to	219	Limestone, silt-grade to medium, dolomitic		

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW14	W-27713	73-42-15BAAB	410751-0953947	1,142	Mills

Stratigraphic unit	Depth interval (feet)			Description
	0	to	3	Roadbed (driller's log)
Quaternary deposits	3	to	5	Clay, dark gray-brown, silty (driller's log)

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description
SW14--Continued			
Quaternary deposits-- Continued	5	to 11	Silt, dark orange, argillaceous, calcareous
	11	to 19	Silt, very pale yellow, argillaceous, calcareous
Pleistocene deposits	19	to 30	Till, yellow, oxidized, unleached
	30	to 42	Till, very pale yellow, oxidized, unleached
	42	to 43	Till, very pale yellow, oxidized, unleached, sandy
	43	to 50	Till, yellow-orange, oxidized, unleached
	50	to 65	Till, orange-yellow, oxidized, unleached
	65	to 70	Till, orange-brown, oxidized, unleached
	70	to 75	Till, light olive-gray, unoxidized, unleached
	75	to 80	Till, light olive-gray, unoxidized, unleached; till, orange, oxidized, unleached
	80	to 113	Till, gray, unoxidized, unleached
	113	to 116	Till, medium light gray, unoxidized, unleached
	116	to 118	Till, gray-brown, unoxidized, unleached
	118	to 119	Silt, brown, argillaceous, calcareous
	119	to 124	Till, gray to very light gray, partly oxidized, unleached
	124	to 133	Till, very light yellow gray, oxidized, partly unleached, partly leached
Tertiary deposits	136	to 140	Sand, colorless and varicolored, fine to coarse, subrounded, partly polished; gravel, quartz, granite, limestone
	140	to 150	Sand, colorless and varicolored, medium to coarse and fine, slightly silty, quartz, with trace dark heavy minerals
	150	to 160	Sand, colorless and varicolored, coarse to fine; gravel, quartz and dark minerals
	160	to 164	Gravel, igneous and metamorphic rocks; sand, varicolored, coarse, subrounded, dirty, quartz
Pennsylvanian rocks, undifferentiated	64	to 165	Siderite, brown, massive; chert, gray; gravel, igneous and metamorphic rocks
	165	to 168	Siderite, brown, massive, crystalline, and nodular
	168	to 168.5	Siderite, brown, massive, crystalline, and nodular; sand, varicolored, argillaceous
	168.5	to 169	Siderite, massive
	169	to 170	Shale, brown, very dark gray, gray; siderite
	170	to 171	Shale, very dark gray, lumpy
	171	to 171.5	Shale, gray, sandy, calcareous, till-like
	171.5	to 172	Shale, very dark gray, micaceous, blocky
	172	to 173	Limestone, medium light gray, silt-grade to fine
	173	to 174	Shale, gray and very dark gray, lumpy, calcareous
	174	to 175	Shale, gray
	175	to 177	Shale, very dark gray, silty, blocky
	177	to 178	Limestone, mottled gray to brown

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW15	W-27714	73-43-26CBAB	410541-0954546	1,285	Mills
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 15	Silt, yellow-orange		
	15	to 20	Silt, orange		
	20	to 30	Silt, yellow-orange		
	30	to 50	Silt, pale orange, slightly argillaceous		
	50	to 60	Silt, orange, argillaceous		
	60	to 67	Silt, orange and gray		
	67	to 80	Silt, orange, argillaceous		
	80	to 90	Silt, orange-yellow		
	90	to 100	Silt, yellow-orange		
	100	to 110	Silt, very pale red-orange, argillaceous		
	110	to 120	Silt, brown-orange, argillaceous		
	120	to 130	Silt, pale orange		
	130	to 150	Silt, very pale orange		
150	to 160	Silt, very light gray			
160	to 169	Silt, gray, very argillaceous			
Pleistocene deposits	169	to 176	Till, light orange, oxidized, unleached		
	176	to 190	Till, light gray to orange, partly oxidized, unleached		
	190	to 205	Till, pale orange, oxidized, unleached		
	205	to 216	Till, olive-gray, unoxidized, unleached, with trace till, orange, oxidized, unleached		
	216	to 236	Gravel, varicolored, with argillaceous, silty, calcareous matrix		
	236	to 270	Till, olive-gray, unoxidized, unleached		
	270	to 280	Till, olive-gray, unoxidized, unleached; trace till, yellow, oxidized, unleached		
	280	to 300	Till, olive-gray, unoxidized, unleached; gravel		
300	to 317	Till, olive-gray, unoxidized, unleached			
Pennsylvanian rocks, undifferentiated	317	to 340	No samples		
	317	to 323	Limestone; shale, gray-green, silty (driller's log)		
	323	to 328	Siltstone, gray-green (driller's log)		
	328	to 332	Limestone, gray-green and tan, shaly (driller's log)		
	332	to 333	Shale, gray (driller's log)		
	333	to 335	Limestone; shale, gray, gray-green (driller's log)		
	335	to 338	Shale, gray-green and gray (driller's log)		
	338	to 339	Limestone, blue-gray, shaly (driller's log)		
339	to 340	Shale, gray-green; limestone (driller's log)			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW16	W-27715	74-37-30BBBB	411117-0950919	1,090	Cass
SW16U casing	0 to 37 37 to 42				Slotted
SW16L casing	0 to 59 59 to 70				Slotted
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0 to 5		Topsoil and clay, dark brown, silty (driller's log)		
	5 to 9		Clay, orange-brown, mottled, silty		
	9 to 17		Silt, yellow, argillaceous		
	17 to 23		Silt, yellow, mottled orange, argillaceous		
	23 to 29		Clay, yellow, silty		
	29 to 43		Sand, colorless, varicolored, medium to coarse to fine, subrounded; gravel		
Pleistocene deposits	43 to 53		Sand, colorless, orange, pink, fine to medium, subangular, quartz		
	53 to 54		Sand, colorless, varicolored, coarse to fine; gravel		
	54 to 56		Silt, yellow argillaceous; gravel		
	56 to 59		Clay, yellow and gray, silty, sandy		
	59 to 67		Gravel, varicolored; sand, colorless, yellow, orange, fine to medium, subrounded		
	67 to 70 70 to 72		Gravel, varicolored; sand, silty, argillaceous Clay, orange, silty, sandy		
Pennsylvanian rocks, undifferentiated	72 to 75		Shale, gray, silty, sandy, unoxidized, leached		
	75 to 96		Shale, gray, silty		
	96 to 98		Shale, gray, silty, with siderite		
	98 to 104		Shale, gray, silty; sandstone, colorless, orange, fine to coarse		
	104 to 105		Siderite, brown, crystalline, medium to fine		
	105 to 113		Shale, gray, very sandy		
	113 to 130		Shale, gray, sandy, silty		
	130 to 145		Shale, gray, lumpy, silty		
	145 to 146		Chert, very light gray; shale, gray, lumpy, silty		
	146 to 147		Chert, very light gray; siderite, crystalline		
	147 to 148		Siderite, argillaceous		
	148 to 150		Shale, gray, silty, calcareous		
	150 to 152		Shale, gray, silty, calcareous; limestone, dark gray silt-grade		
152 to 154		Limestone, medium light gray, silt-grade partly argillaceous			
154 to 156		Shale, green, calcareous			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW17	W-27747	75-35-07BBBA	411900-0945530	1,295	Cass
SW17 casing	0 to 189	189 to 209	Slotted		
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 10	Silt, yellow, argillaceous		
	10	to 14	Silt, orange-yellow, argillaceous		
Pleistocene deposits	14	to 17	Till, orange, oxidized, leached		
	17	to 20	Till, orange, oxidized, unleached		
	20	to 26	Till, orange, oxidized, unleached, weakly calcareous		
	26	to 28	Silt, very light gray, argillaceous		
	28	to 55	Clay, light gray, silty		
	55	to 60	Till, yellow, oxidized, unleached		
	60	to 75	Till, pale orange, oxidized, unleached		
	75	to 77	Till, orange, oxidized, unleached		
	77	to 83	Till, light gray, oxidized, unleached		
	83	to 105	Till, yellow, oxidized, unleached		
Cretaceous rocks, undifferentiated	105	to 131	Till, very light yellow, oxidized, unleached		
	131	to 138	Till, very light gray, oxidized, unleached		
	138	to 140	Clay, gray, silty		
	140	to 145	Clay, gray, silty, very sandy		
	145	to 152	Sandstone, colorless, medium to coarse and fine, angular, very silty, quartz		
	152	to 160	Sandstone, colorless, orange, yellow, coarse to fine, angular, clean, quartz		
	160	to 170	Sandstone, orange, coarse to fine, angular, clean, quartz		
Pennsylvanian rocks, undifferentiated	170	to 205	Sandstone, orange, medium to coarse and fine, angular, clean, quartz		
	205	to 210	Gravel, varicolored; sand, coarse, quartz; chert		
	210	to 212	Gravel, varicolored; sand, coarse, quartz; chert; shale, gray, lumpy, silty		
	212	to 218	Shale, green and yellow, sandy		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW18	W-27745	77-37-13BBBB	412832-0950334	1,298	Cass
SW18 casing	0 to 196 196 to 201	to 196 to 201	Slotted		
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 1	Topsoil (driller's log)		
	1	to 5	Loess, light yellow, argillaceous		
	5	to 8	Loess, pale yellow, argillaceous		
	8	to 23	Clay, light gray		
	23	to 30	Clay, light gray; till, silty, sandy, highly oxidized, leached		
	30	to 32	Till, very light gray and orange, oxidized, leached		
	32	to 40	Till, very light gray and orange, oxidized, unleached		
	40	to 59	Till, yellow, oxidized, unleached		
	59	to 63	Till, gray, oxidized, unleached		
	63	to 70	Till, yellow, oxidized, unleached		
	70	to 80	Till, orange, oxidized, unleached		
	80	to 103	Till, pale yellow, oxidized, unleached		
	103	to 107	Till, pale yellow, unoxidized, unleached		
	107	to 120	Till, gray, unoxidized, unleached		
	120	to 145	Till, gray, unoxidized, unleached; till, yellow oxidized, unleached		
	145	to 151	Till, gray, oxidized, unleached		
151	to 157	Till, yellow and orange, oxidized, partly leached			
157	to 176	Till, medium light gray and yellow, partly oxidized, unleached			
176	to 180	Till, medium dark gray and yellow, partly oxidized, unleached			
180	to 196	Sand, colorless and orange, medium to coarse and fine, quartz; clay, brown, sandy, calcareous			
Pennsylvanian rocks, undifferentiated	196	to 201	Limestone, very light gray and dark gray, silt-grade to coarse		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW19	W-27748	72-39-12CBBB	410308-0950337	1,285	Montgomery
Stratigraphic unit	Depth interval (feet)			Description	
Quaternary deposits	0	to	2	Topsoil and clay, brown (driller's log)	
	2	to	14	Silt, orange, argillaceous	
	14	to	18	Silt, pale yellow, argillaceous	
	18	to	20	Clay, gray and orange, silty	
	20	to	30	Silt, very light yellow, very argillaceous	
	30	to	40	Silt, very light gray	
	40	to	50	Silt, very light gray, very argillaceous	
	50	to	57	Shale, gray, silty	
	57	to	60	Shale, gray, silty, calcareous	
	60	to	75	Silt, yellow, calcareous	
Pleistocene deposits	75	to	112	Till, yellow, oxidized, unleached	
	112	to	115	Till, gray, medium light gray, oxidized, unleached	
	115	to	118	Till, light gray and pale orange, oxidized, unleached	
	118	to	120	Till, gray, unoxidized, leached; till, gray and pale orange, oxidized, unleached	
	120	to	128	Till, orange, oxidized, unleached	
	128	to	140	Clay, yellow, silty, slightly calcareous	
	140	to	150	Silt, yellow, argillaceous, calcareous	
	150	to	158	Silt, light gray, argillaceous, calcareous	
	158	to	160	Till, yellow, oxidized, unleached	
	160	to	170	Sand, colorless and varicolored, very silty, very argillaceous, medium to fine, poorly sorted, quartz, with till-like matrix	
	170	to	190	Silt, pale, calcareous, sandy, argillaceous	
	190	to	195	Till, very light gray, oxidized, unleached	
	195	to	200	Till, light orange, oxidized, unleached	
200	to	210	Sand, colorless, varicolored, medium to fine, quartz; gravel, silty, argillaceous, calcareous; igneous and metamorphic rocks		
Pennsylvanian rocks, undifferentiated	210	to	220	Shale, gray, lumpy, silty, soft	
	220	to	252	Shale, olive-gray, silty, slightly calcareous, till-like	
	252	to	260	Sandstone, colorless, varicolored, coarse to fine; shale, olive-gray, silty, slightly calcareous, till-like	
	260	to	261	Shale, yellow, silty, slightly calcareous, till-like	
	261	to	262	Dolostone, very light gray, silt-grade, very calcareous	
	262	to	263	Shale, gray-green, lumpy	
	263	to	267	Shale, green, maroon, tan	
267	to	270	Shale, green; trace limestone		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW20	W-27749	72-36-04DCDC	410333-0945927	1,082	Montgomery
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Fill (driller's log)		
	5	to 10	Clay, brown, silty		
	10	to 20	Silt, brown, very argillaceous		
	20	to 23	Silt, brown, very sandy		
	23	to 26	Gravel; sand, varicolored, fine, very argillaceous, silty		
	26	to 35	Gravel; sand, varicolored, fine, clean		
	35	to 36	Gravel; sand, varicolored, fine, clean; clay, yellow-gray, silty		
Pennsylvanian rocks, undifferentiated	36	to 38	Shale, gray, silty, sandy		
	38	to 38.5	Siderite, brown, silt-grade; shale, gray		
	38.5	to 40	Shale, green		
	40	to 45	Shale, maroon-gray, lumpy, silty, sandy		
	45	to 65	Shale, gray		
	65	to 65.5	Siderite, brown, silt-grade; shale, gray		
	65.5	to 80	Shale, gray		
	80	to 95	Shale, gray, very silty		
	95	to 115	Shale, gray, lumpy, silty		
	115	to 120	Shale, gray-green, lumpy, silty		
	120	to 130	Shale, gray		
	130	to 131	Dolostone, gray, argillaceous; shale		
	131	to 132	Dolostone, gray, argillaceous; shale, dark gray		
	132	to 134	Shale, dark gray, carbonaceous		
	134	to 136	Limestone, gray, silt-grade, argillaceous; shale		
	136	to 138	Limestone, gray, argillaceous		
	138	to 140	Limestone, gray, argillaceous; shale		
	140	to 142	Shale, very dark gray, blocky		
	142	to 144	Limestone, very light gray, argillaceous; shale, dark gray, silty		
	144	to 145	Limestone; shale, gray		
145	to 147	Shale, green, silty; limestone			
147	to 149	Limestone, very light gray to gray, partly fragmented; shale, green			
149	to 150	Limestone, very light gray to gray, partly fragmented			
150	to 151	Limestone, very light gray to gray, partly fragmented; shale, green, lumpy			
151	to 152	Shale, gray-green; some limestone (driller's log)			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW21	W-27746	74-39-01CCCC	411351-0951719	1,245	Pottawattamie
SW21 casing	0 to 189	189 to 206	Slotted		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0 to 2		Clay, yellow-brown, silty (driller's log)		
	2 to 8		Clay, orange-brown, silty		
Pleistocene deposits	8 to 40		Till, yellow, oxidized, unleached		
	40 to 44		Till, pale yellow, oxidized, unleached		
	44 to 50		Till, medium light gray, unoxidized, unleached		
	50 to 65		Till, medium light gray, unoxidized, unleached; trace till, oxidized, unleached		
	65 to 70		Till, dark gray, unoxidized, unleached; till, yellow, oxidized, unleached		
	70 to 72		Till, yellow-orange, oxidized, unleached		
	72 to 77		Gravel, varicolored; sand, coarse, silty		
	77 to 79		Till, yellow, oxidized, unleached		
	79 to 80		Gravel, varicolored, subrounded; sand, coarse, silty		
	80 to 87		Till, yellow and trace orange, oxidized, unleached		
	87 to 89		Till, very light yellow, gray to orange, oxidized, unleached		
	89 to 93		Gravel, varicolored; sand, coarse, subrounded		
	93 to 95		Till, orange to dark orange, oxidized, unleached		
	95 to 105		Till, orange-brown, oxidized, unleached		
	105 to 140		Till, gray, unoxidized, unleached		
140 to 143		Till, brown-orange, orange, partly oxidized, unleached, very sandy			
143 to 155		Sand, colorless, yellow, pink, dark, medium to fine and coarse, clean, quartz, with dark grains			
155 to 170		Till, medium dark gray and orange, partly oxidized, unleached			
170 to 172		Till, medium dark gray and orange, partly oxidized, unleached; quartz			
172 to 191		Sand, colorless, varicolored, dark, medium to fine and coarse, subrounded, frosted, quartz; gravel, quartz, and metamorphic rocks			
191 to 195		Sand, colorless, varicolored, dark, coarse to fine, subrounded, frosted, quartz			
195 to 200		Sand, colorless, varicolored, dark, fine, subrounded, frosted, quartz			
200 to 207		Sand, colorless, varicolored, dark, fine to medium, subrounded to subangular, quartz			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
SW21--Continued					
Pennsylvanian rocks, undifferentiated	207	to 209	Shale, yellow and gray, partly oxidized, unleached, till-like		
	209	to 216	Shale, maroon and gray, calcareous, sandy; gravel		
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW22	W-27750	75-38-07AAAA	411904-0951507	1,298	Pottawattamie
<hr/>					
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 2	Topsoil (driller's log)		
	2	to 5	Silt, yellow, slightly argillaceous		
	5	to 12	Silt, yellow, argillaceous		
	12	to 22	Clay, yellow-tan		
	22	to 35	Clay, very light gray		
	35	to 37	Clay, very light gray, sandy		
Pleistocene deposits	37	to 40	Till, orange, oxidized, unleached		
	40	to 50	Till, yellow, oxidized, unleached		
	50	to 60	Till, dark yellow-orange, oxidized, unleached		
	60	to 70	Till, yellow, oxidized, unleached		
	70	to 80	Till, dark yellow-orange, oxidized, unleached		
	80	to 87	Till, orange, oxidized, unleached		
	87	to 90	Till, medium dark gray, unoxidized, unleached		
	90	to 96	Till, gray, unoxidized, leached		
	96	to 110	Till, medium dark orange, oxidized, unleached		
	110	to 120	Till, medium dark orange, oxidized, unleached, sandy		
	120	to 128	Till, orange and gray, partly unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	128	to 158	Till, light olive-gray, unoxidized, unleached		
	158	to 159	Till, gray, orange, maroon, partly oxidized, unleached		
	159	to 160	Till, gray and orange, partly oxidized, unleached		
	160	to 164	Clay, very light gray to orange, silty, sandy, calcareous		
Pennsylvanian rocks, undifferentiated	164	to 168	Clay, maroon and gray, silty, sandy, calcareous		
	168	to 171	Sand, colorless and pink, quartz; clay, maroon and gray, silty, sandy, calcareous		
	171	to 175	Clay, orange and trace maroon, very sandy, calcareous		
	175	to 177	Clay, yellow, maroon, green, sandy		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description		
SW22--Continued					
Pennsylvanian rocks undifferentiated--Continued	177	to 180	Clay, maroon, sandy, silty		
	180	to 187	Clay, yellow, sandy, silty, slightly calcareous		
	187	to 189	Clay, yellow, very sandy, silty, slightly calcareous		
	189	to 191	Clay, green, very sandy, silty, slightly calcareous		
	191	to 195	Clay, yellow, very sandy, silty, slightly calcareous		
	195	to 200	Clay, yellow-gray, maroon		
	200	to 205	Clay, yellow, gray, brown, sandy, calcareous		
	205	to 208	Clay, yellow, gray, maroon, sandy, calcareous		
	208	to 215	Shale, gray and yellow-gray, maroon, sandy, partly silty, calcareous, with trace gypsum		
	215	to 218	Shale, yellow-green to yellow, sandy, slightly calcareous		
	218	to 221	Shale, gray, orange, maroon, sandy, slightly calcareous		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW23	W-27751	75-41-26ACBB	411615-0953137	1,102	Pottawattamie
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 10	Silt, brown, very argillaceous		
	10	to 18	Silt, slightly lighter brown, very argillaceous		
	18	to 20	Clay, brown, silty		
	20	to 24	Silt, brown-gray, argillaceous		
	24	to 30	Clay, very pale yellow and medium dark gray, silty		
	30	to 38	Clay, yellow, silty		
	38	to 41	Sand, colorless, varicolored, coarse to fine; gravel, varicolored, dirty		
	41	to 44	Silt, brown, argillaceous		
	44	to 45	Silt, brown, argillaceous; gravel		
Pleistocene deposits	45	to 80	Till, gray, unoxidized, unleached		
	80	to 100	Till, gray, unoxidized, unleached, gravelly		
	100	to 150	Till, gray, unoxidized, unleached, sandy		
	150	to 157	Till, very light gray, unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	157	to 158	Limestone, brown, silt-grade to fine		
	158	to 166	Shale, yellow-green, sandy, calcareous		
	166	to 168	Limestone, very yellow, silt-grade		
	168	to 173	Limestone, very light pink, silt-grade		
	173	to 179	Shale, gray, silty, calcareous		
	179	to 181	Limestone, very light gray, silt-grade; shale, gray, silty, calcareous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW24	W-27752	76-41-29DDDD	412051-0953431	1,215	Pottawattamie
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller log)		
	5	to 10	Clay, medium dark brown-gray, silty		
	10	to 12	Clay, brown, silty		
	12	to 20	Silt, brown, very argillaceous		
	20	to 24	Silt, brown, very argillaceous, calcareous		
	24	to 31	Silt, medium light brown-gray, very argillaceous		
	31	to 34	Clay, light gray, silty		
	34	to 39	Silt, very light yellow		
	39	to 42	Silt, pale orange and gray, very argillaceous, calcareous		
	42	to 51	Clay, brown-gray, silty, slightly calcareous		
Pleistocene deposits	51	to 78	Till, orange, oxidized, unleached		
	78	to 80	Till, orange-brown, partly oxidized, unleached		
	80	to 100	Till, brown-gray, unoxidized, unleached; trace till, orange, oxidized, unleached		
	100	to 110	Till, light olive-gray, unoxidized, unleached		
	110	to 140	Till, light olive-gray, unoxidized, unleached		
	140	to 145	Till, brown-gray, unoxidized, unleached		
	145	to 150	Till, light olive-gray, unoxidized, unleached		
	150	to 164	Till or clay, gray to light gray, calcareous, very silty, slightly sandy		
	164	to 169	Silt, very light gray, argillaceous, very slightly calcareous, with trace sand		
	169	to 169.5	Chert, gray to brown-gray, smooth; sand, colorless, varicolored		
Pennsylvanian rocks, undifferentiated	169.5	to 174	Shale, orange, silty, lumpy; shale, gray, lumpy; chert, gray to brown-gray, smooth		
	174	to 176	Shale, green and orange, lumpy		
	176	to 178	Shale, green and orange, lumpy;		
	178	to 180	Limestone, very light gray, silt-grade to fine, dolomitic		
	180	to 182	Limestone, pale yellow, silt-grade to fine, dolomitic		
	182	to 184	Shale, gray, lumpy, silty		
	184	to 186	Limestone, very light gray, silt-grade to fine, dolomitic		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW25	W-27775	77-41-33CDCC	412510-0953408	1,156	Pottawattamie
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 6	Roadbed and topsoil (driller's log)		
	6	to 13	Clay, gray, silty		
	13	to 20	Clay, slightly lighter gray, silty		
	20	to 26	Clay, gray, silty		
	26	to 30	Silt, very light gray to yellow-gray, slightly silty, slightly calcareous, with trace sand		
	30	to 35	Clay, orange, silty, sandy, gravelly		
	35	to 40	Silt, pale orange, very argillaceous, calcareous		
	40	to 46	Silt, pale yellow, argillaceous		
	46	to 54	Clay, dark orange, silty, calcareous, with wood		
	54	to 56	Gravel to sand, varicolored, coarse, subrounded to subangular, dirty		
	56	to 69	Clay, gray, silty, calcareous, with much wood		
	Pleistocene deposits	69	to 86	Till, light olive-gray, unoxidized, unleached	
86		to 89	Till, gray-orange, partly oxidized, unleached		
89		to 90	Till, orange, oxidized, leached		
90		to 95	Till, medium light gray, unoxidized, unleached, very sandy		
95		to 100	Sand, colorless, varicolored, fine to medium, quartz, with trace dark grains		
100		to 110	Sand, colorless, varicolored, coarse, quartz, with trace dark grains		
110		to 114	Sand, colorless, varicolored, coarse, quartz, with trace dark grains; gravel		
Pennsylvanian rocks, undifferentiated	114	to 118	Clay, orange, slightly silty; gravel		
	118	to 120	Clay, brown and orange, slightly calcareous		
	120	to 122	Clay, maroon, green, orange, slightly silty, calcareous		
	122	to 123	Limestone, very light green-gray, silt-grade, argillaceous; shale, green		
	123	to 125	Limestone, very light green-gray, silt-grade, argillaceous		
	125	to 127	Limestone, very light green-gray, silt-grade, argillaceous; shale, green		
	127	to 128	Limestone, pale maroon, very argillaceous		
	128	to 129	Shale, green, maroon, calcareous		
	129	to 133	Limestone, very light gray, silt-grade		
	133	to 137	Limestone, very light gray, silt-grade; shale, gray, lumpy		
	137	to 138	Limestone, very light gray, silt-grade; shale, green		
138	to 140	Limestone, very light gray, silt-grade			
140	to 141	Limestone, very light gray, silt-grade; shale, gray			
141	to 145	Shale, gray, very calcareous			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description
SW25--Continued			
Pennsylvanian rocks, undifferentiated--Continued	145	to 146	Shale, green and orange
	146	to 148	Limestone, medium light gray, silt-grade
	148	to 150	Chert, dark gray; limestone, medium light gray, silt-grade
	150	to 151	Limestone, gray and very light gray, mottled, silt-grade

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW26	W-27776	76-41-12BBCC	412407-0953058	1,248	Pottawattamie

Stratigraphic unit	Depth interval (feet)		Description
	0	to 7	Roadbed and fill (driller's log)
Quaternary deposits	7	to 14	Clay, medium dark gray to brown, silty
	14	to 16	Clay, gray, yellow-orange, silty
	16	to 30	Clay, gray, silty
	30	to 33	Silt, orange-yellow, gray, argillaceous
	33	to 36	Silt, orange, very light gray
	36	to 45	Silt, gray, calcareous
Pleistocene deposits	45	to 50	Till, medium light gray, unoxidized, unleached
	50	to 63	Till, orange, unoxidized, unleached
	63	to 80	Till, yellow, oxidized, unleached
	80	to 83	Till, yellow, oxidized, unleached, very sandy
	83	to 88	Gravel; sand, varicolored, coarse, subrounded, dirty
	88	to 94	Till, gray, unoxidized, unleached, sandy, gravelly
	94	to 99	Sand, colorless, varicolored, coarse to fine, subrounded; gravel, varicolored, dirty
	99	to 110	Till, gray, unoxidized, unleached, sandy, very gravelly
	110	to 120	Gravel, varicolored, subrounded to angular; sand, colorless, coarse, subrounded, very dirty
	120	to 163	Till, gray, unoxidized, unleached, gravelly
163	to 210	Till, light olive-gray, unoxidized, unleached	
210	to 225	Till, medium light gray, unoxidized, unleached	
225	to 227	Till, medium light gray, unoxidized, unleached; gravel, varicolored; sand, coarse	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description		
SW26--Continued					
Pennsylvanian rocks, undifferentiated	227	to 229	Limestone, orange and very light gray		
	229	to 233	Limestone, green, argillaceous		
	233	to 235	Limestone, very light gray, yellow, silt-grade		
	235	to 237	Limestone, very light gray, yellow, coarse		
	237	to 239	Dolostone, gray, silt-grade		
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW27	W-27777	76-40-06CABB	412431-0952950	1,220	Pottawattamie
<hr/>					
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 10	Silt, brown, sandy, very argillaceous		
	10	to 30	Silt, orange, very argillaceous		
	30	to 55	Silt, gray, argillaceous, slightly calcareous		
	55	to 59	Gravel, varicolored; sand, coarse; till, gray, unoxidized, unleached		
Pleistocene deposits	59	to 67	Till, yellow, oxidized, unleached		
	67	to 82	Till, gray, unoxidized, unleached		
	82	to 87	Gravel, varicolored; sand; till, orange, oxidized, unleached		
	87	to 100	Till, gray, unoxidized, unleached		
	100	to 130	Till, light olive-gray, unoxidized, unleached		
	130	to 220	Till, light olive-gray, unoxidized, unleached, very sandy		
	220	to 240	Till, light olive-gray, unoxidized, unleached, sandy		
	240	to 257	Till, gray, unoxidized, unleached		
	257	to 260	Till, gray, unoxidized, unleached, with little sand		
	260	to 300	Till, gray, unoxidized, unleached, gravelly, with little sand		
Pennsylvanian rocks, undifferentiated	300	to 307	Chert, blue-gray, smooth; limestone, very light gray, silt-grade to fine, fragmented, dolomitic		
	307	to 313	Chert, blue-gray, smooth; limestone, gray, silt-grade to fine, fragmented, dolomitic; shale, very dark gray		
	313	to 315	Limestone, gray, silt-grade to fine, fragmented, dolomitic		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County	
SW28	W-27778	76-40-05BCCB	412447-0952846	1,222	Pottawattamie	
Stratigraphic unit	Depth interval (feet)		Description			
Quaternary deposits	0	to 5	Roadbed and topsoil			
	5	to 15	Clay, medium dark gray, slightly silty			
	15	to 20	Clay, medium light gray, very silty			
	20	to 25	Silt, medium light gray, very argillaceous			
	25	to 29	Silt, yellow, gray, argillaceous			
	29	to 38	Silt, yellow, gray, orange, argillaceous			
Pleistocene deposits	38	to 40	Clay, gray, argillaceous			
	40	to 43	Till, orange, oxidized, unleached			
	43	to 47	Till, gray, orange, partly oxidized, unleached			
	47	to 50	Till, light olive-gray, unoxidized, unleached			
	50	to 53	Till, medium dark gray, unoxidized, leached			
	53	to 55	Till, gray, orange, partly oxidized, leached			
	55	to 57	Gravel, varicolored, with orange, argillaceous matrix			
		57	to 60	Till, pale yellow, oxidized, unleached		
		60	to 70	Till, pale yellow, oxidized, unleached, very gravelly, sandy		
		70	to 73	Till, orange, oxidized, unleached		
		73	to 84	Till, gray, unoxidized, unleached		
		84	to 88	Gravel, varicolored; sand, coarse, subrounded		
		88	to 100	Gravel, colorless, varicolored; sand, coarse, subrounded; till, unoxidized, unleached		
		100	to 120	Till, gray, unoxidized, unleached; sand, coarse, subrounded; gravel, colorless, varicolored		
		120	to 160	Till, gray, unoxidized, unleached		
		160	to 180	Till, gray, unoxidized, unleached, sandy, gravelly		
		180	to 209	Till, light olive-gray, unoxidized, unleached		
	209	to 216	Till, light olive-gray, unoxidized, unleached; gravel, varicolored, coarse			
	216	to 218	Till, gray, unoxidized, unleached; limestone, very light gray, abundant			
	218	to 228	Till, gray, unoxidized, unleached			
	228	to 240	Till, gray, unoxidized, unleached, with abundant sand and gravel			
	240	to 250	Till, gray, unoxidized, unleached			
	250	to 260	Till, gray, unoxidized, unleached; till, yellow, oxidized, unleached			
	260	to 268	Till, gray, light gray, unoxidized, unleached; till, yellow, oxidized, unleached			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description		
SW28--Continued					
Pennsylvanian rocks, undifferentiated	268	to 272	Limestone, very light gray, silt-grade to fine		
	272	to 273	Shale, green, gray, lumpy		
	273	to 275	Shale, very dark gray, blocky		
	275	to 278	Shale, gray, lumpy, calcareous		
	278	to 281	Shale, green-gray, lumpy, calcareous		
	281	to 287	Chert, very light gray		
	287	to 289	Limestone, very light gray, silt-grade to medium, fragmented		
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW29	W-27779	76-40-09BAAB	412415-0952710	1,165	Pottawattamie
<hr/>					
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 9	Clay, dark gray, silty		
	9	to 18	Clay, medium light gray, silty		
	18	to 30	Silt, light gray, argillaceous		
	30	to 34	Silt, light gray, argillaceous, calcareous		
	34	to 38	Silt, medium light gray, argillaceous, calcareous		
Pleistocene deposits	38	to 40	Silt, medium light gray, argillaceous, calcareous, sandy, gravelly, unoxidized, unleached		
	40	to 80	Till, gray, unoxidized, unleached		
	80	to 120	Till, medium light gray, unoxidized, unleached		
	120	to 140	Till, gray		
	140	to 160	Till, medium light gray		
	160	to 180	Till, blue-gray (driller's log)		
	180	to 230	Till, light olive-gray, unoxidized, unleached		
	230	to 240	Till, blue-gray, very sandy (driller's log)		
	240	to 245	Gravel, varicolored; sand, coarse; till, light olive-gray, unoxidized, unleached		
	245	to 260	Till, light olive-gray, unoxidized, unleached		
	260	to 280	Sand, colorless, dark, varicolored, medium to coarse and fine, very argillaceous, quartz		
	280	to 300	Sand, colorless, dark, varicolored, medium to coarse and fine, clean, quartz		
300	to 320	Sand, gray-tan, fine to coarse, with clay at the base (driller's log)			
320	to 330	Sand, colorless, dark, varicolored, medium to coarse and fine, quartz			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW29--Continued				
Pleistocene deposits-- Continued	330	to	340	Sand, colorless, dark, varicolored, medium to coarse and fine, quartz; gravel, dirty, igneous, metamorphic, limestone rocks
	340	to	350	Sand, colorless, dark, varicolored, coarse to fine, silty, argillaceous, quartz; gravel, dirty; igneous, metamorphic, limestone rocks
	350	to	360	Sand, fine to medium fine; cemented gravel (driller's log)
	360	to	365	Gravel, varicolored, quartz; metamorphic, limestone rocks, with argillaceous, calcareous cement
Pennsylvanian rocks, undifferentiated	365	to	370	Limestone, very light gray, partly sandy; shale, dark gray, blocky
	370	to	372	Limestone, very light gray, silt-grade; shale
	372	to	374	Shale, gray
	374	to	375	Shale, very dark gray, blocky
	375	to	377	Sandstone, gray, calcareous, fine; shale, gray

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW30	W-27780	77-40-35CDDD	412508-0952446	1,235	Pottawattamie

Stratigraphic unit	Depth interval (feet)			Description
	0	to	8	Roadbed and fill (driller's log)
Quaternary deposits	8	to	12	Silt, brown-gray, argillaceous
	12	to	24	Silt, gray, argillaceous, slightly calcareous
	24	to	32	Silt, pale yellow, argillaceous
	32	to	37	Silt, lighter pale yellow, argillaceous
	37	to	43	Silt, brown-gray, argillaceous
	43	to	47	Gravel, varicolored, colorless, subrounded; sand, colorless, medium
Pleistocene deposits	47	to	66	Till, yellow, oxidized, unleached
	66	to	70	Till, light gray, oxidized, unleached
	70	to	155	Till, light olive-gray, unoxidized, unleached
	155	to	200	Till, light olive-gray, unoxidized, unleached, sandy
	200	to	300	Till, light olive-gray, unoxidized, unleached
	300	to	340	Till, light olive-gray, unoxidized, unleached, sandy
	340	to	348	Till, gray, unoxidized, unleached
	348	to	380	Sand, quartz; gravel, colorless, varicolored, coarse to fine, quartz and metamorphic rocks

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description
SW30--Continued			
Pleistocene deposits-- Continued	380	to 396	Sand, quartz; gravel, colorless, varicolored, coarse to fine, clean, quartz and metamorphic rocks
	396	to 399	Gravel, colorless, varicolored, coarse to fine, clean, quartz and metamorphic rocks; limestone, very light gray, silt-grade, dolomitic
Pennsylvanian rocks, undifferentiated	399	to 400	Shale, very light gray
	400	to 405	Shale, gray, lumpy, silty, calcareous
	405	to 408	Dolostone, very light gray, silt-grade
	408	to 411	Limestone, very light gray, silt-grade

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW31	W-27781	76-39-05BCCC	412443-0952155	1,125	Pottawattamie

Stratigraphic unit	Depth interval (feet)		Description
	0	to 5	Roadbed and fill (driller's log)
Quaternary deposits	5	to 20	Silt, yellow-orange, argillaceous
	20	to 31	Silt, light gray, trace orange, argillaceous
	31	to 39	Gravel, orange, varicolored; sand, medium
Pleistocene deposits	39	to 60	Till, gray, unoxidized, unleached
	60	to 109	Till, light olive-gray, unoxidized, unleached, sandy
Pennsylvanian rocks, undifferentiated	109	to 111	Limestone, very light gray, silt-grade, argillaceous; shale, light gray, lumpy
	111	to 113	Dolostone, very light gray, silt-grade; limestone, orange
	113	to 118	Limestone, very light gray, silt-grade; shale, very calcareous
	118	to 120	Limestone, very light gray, silt-grade
	120	to 121	Limestone, very light gray, silt-grade; shale, green-gray
	121	to 123	Shale, green-gray
	123	to 125	Shale, very dark gray, silty, blocky
	125	to 126	Shale, gray, lumpy
	126	to 129	Shale, gray, sandy, calcareous, lumpy
129	to 130	Limestone, gray, oolitic	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW32	W-27838	76-40-04AAAA	412505-0952629	1,177	Pottawattamie
SW32 casing	0 to 335	335 to 340			Well screen
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 6	Fill and topsoil (driller's log)		
	6	to 9	Clay, brown, silty		
	9	to 16	Silt, gray, very argillaceous		
	16	to 40	Silt, medium light yellow-gray, argillaceous		
	40	to 44	Clay, yellow-gray, silty, very sandy; gravel, till-like		
	44	to 50	Gravel, varicolored; sand, colorless, medium		
Pleistocene deposits	50	to 80	Till, olive-gray, unoxidized, unleached		
	80	to 180	Till, light olive-gray, unoxidized, unleached		
	180	to 220	Till, light olive-gray, unoxidized, unleached; gravel, varicolored, dirty		
	220	to 240	Till, light olive-gray, unoxidized, unleached, sandy, gravelly		
	240	to 260	Till, light olive-gray, unoxidized, unleached, sandy, gravelly; gravel		
	260	to 300	Till, light olive-gray, unoxidized, unleached, gravelly		
	300	to 340	Till, gray, unoxidized, unleached, gravelly		
	340	to 360	Till, gray, unoxidized, unleached, very sandy		
	360	to 372	Till, gray, unoxidized, unleached, very sandy; sand, colorless, coarse to fine; gravel, varicolored; quartz, metamorphic, and limestone rocks		
	372	to 375	Gravel, varicolored, subrounded; igneous or metamorphic and limestone rocks		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW33	W-27753	76-37-23DABB	412204-0950351	1,142	Cass
SW33U casing	0 to 40	40 to 45	Well screen		
SW33L casing	0 to 60	60 to 65	Well screen		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 2	Topsoil (driller's log)		
	2	to 12	Silt, yellow, argillaceous		
	12	to 15	Silt, very light gray and orange, very argillaceous		
	15	to 20	Sand, colorless, orange, dark coarse to fine, partly with argillaceous cement		
	20	to 22	Silt, gray and yellow, very argillaceous		
	22	to 35	Silt, gray, with trace hard sand		
	35	to 42	Gravel, colorless, varicolored; sand, fine		
Pleistocene deposits	42	to 52	Silt, gray, argillaceous, calcareous		
	52	to 54	Silt, medium dark gray, argillaceous		
Pleistocene deposits	54	to 59	Till, gray, unoxidized, unleached		
	59	to 66	Sand, colorless, yellow, coarse to medium; gravel, quartz, trace igneous, granite; gravel, light gray, silt-grade, limestone rocks		
Pennsylvanian rocks, undifferentiated	66	to 68	Limestone, light gray, silt-grade, Kansas City Group		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW34	W-27834	74-38-36BAAA	411025-0950956	1,073	Pottawattamie
SW34U casing	0 to 20	20 to 25	Well screen		
SW34L casing	0 to 34	34 to 39	Well screen		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW34--Continued				
Quaternary deposits	0	to	3	Fill and topsoil (driller's log)
	3	to	5	Clay, dark gray (driller's log)
	5	to	9	Clay, gray, yellow-gray, silty
	9	to	11	Silt, orange, argillaceous
	11	to	15	Silt, gray, yellow-gray, argillaceous
	15	to	18	Sand, colorless, yellow, orange, dark, medium to fine and coarse, quartz
	18	to	24	Sand, colorless, yellow, orange, dark, medium to fine and coarse, quartz; gravel, partly argillaceous
	24	to	31	Gravel; sand, colorless, yellow, orange, dark, medium to fine and coarse, quartz
	31	to	40	Sand, colorless, yellow, orange, dark, medium to fine and coarse, quartz; gravel
	40	to	55	Sandstone; gravel; dolostone; very light gray, silt-grade
55	to	60	Gravel, igneous and dolostone rocks; sand	
Cretaceous rocks	60	to	100	Sandstone, colorless, orange, medium to coarse and fine, quartz
Dakota Formation	100	to	101	Sandstone, yellow-brown and tan, fine to medium (driller's log)

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW35	W-27835	72-38-20ACAA	410130-0951417	1,038	Montgomery

SW35U casing	0	to	14	Slotted
	14	to	17	
SW35L casing	0	to	22	Slotted
	22	to	27	

Stratigraphic unit	Depth interval (feet)			Description
Quaternary deposits	0	to	5	Topsoil and clay, gray (driller's log)
	5	to	12	Silt, orange-gray, very argillaceous
	12	to	15	Silt, orange-gray, very argillaceous; sand, coarse; gravel, varicolored
	15	to	17	Sand, colorless and orange, coarse to fine, clean
	17	to	20	Sand, colorless, yellow, orange, dark, coarse to medium
	20	to	30	Sand, colorless, yellow, orange, dark, coarse to medium; gravel

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description	
SW35--Continued					
Pennsylvanian rocks, undifferentiated Virgil Series	30	to	33	Limestone, brown to yellow, with iron oxide	
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW36	W-27836	71-41-04AAAA	405911-0953324	977	Mills
SW36U casing	0	to	40	Slotted	
	40	to	44		
SW36L casing	0	to	57	Well screen	
	57	to	62		
<hr/>					
Stratigraphic unit	Depth interval (feet)			Description	
Quaternary deposits	0	to	3	Topsoil (driller's log)	
	3	to	5	Clay, yellow-gray, silty (driller's log)	
	5	to	8	Silt, pale yellow, very argillaceous	
	8	to	16	Silt, orange, very argillaceous	
	16	to	20	Silt, orange, very argillaceous, calcareous	
	20	to	27	Silt, very pale yellow, very argillaceous, calcareous	
	27	to	29	Silt, brown-gray, argillaceous	
	29	to	30	Sand, colorless and dark coarse to fine; gravel	
	30	to	32	Silt, gray, very argillaceous, slightly sandy	
	32	to	40	Clay, gray, silty	
	40	to	50	Sand, colorless and very light gray, coarse to fine, subrounded to angular	
	50	to	68	Gravel, varicolored; sand, colorless and very light gray, coarse to fine, subrounded to angular	
	68	to	69	Clay, dark orange and brown, gravelly, sandy	
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW37	W-27837	73-41-23BCCC	410636-0953215	1,068	Mills
SW37 casing	0	to	255	Well screen	
	255	to	260		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW37--Continued				
Quaternary deposits	0	to	2	Topsoil (driller's log)
	2	to	8	Clay, gray, silty
	8	to	12	Silt, orange, argillaceous
Pleistocene deposits	12	to	20	Till, yellow, oxidized, unleached
	20	to	24	Till, light gray, unoxidized, unleached
	24	to	32	Till, pale yellow, oxidized, unleached
	32	to	36	Till, medium light gray, unoxidized, unleached
	36	to	40	Till, medium light gray, unoxidized, unleached, with sparse sand
	40	to	50	Till, light olive-gray, unoxidized, unleached
	50	to	60	Sand, varicolored, colorless, coarse to fine; gravel, subrounded, partly very argillaceous
	60	to	80	Till, light olive-gray, unoxidized, unleached, very sandy
	80	to	100	Till, light olive-gray, unoxidized, unleached
	100	to	134	Till, light olive-gray, unoxidized, unleached, very gravelly
	134	to	170	Gravel, varicolored, subrounded; quartz; metamorphic and limestone rocks; till, light olive-gray, unoxidized, unleached, very gravelly
	170	to	175	Gravel, varicolored, subrounded, quartz; metamorphic and limestone rocks
	175	to	239	Till, light olive-gray, unoxidized, unleached; gravel, varicolored, subrounded; quartz, metamorphic, and limestone rocks
	239	to	279	Sand, colorless, varicolored, coarse to fine, quartz, with 10 percent dark grains; gravel, subrounded to subangular
Pennsylvanian rocks, undifferentiated	279	to	285	Shale, gray-green (driller's log)

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW38	W-27839	70-41-32AABB	404906-0953446	960	Fremont
SW38U casing	0	to	35		
	35	to	38		Slotted
SW38L casing	0	to	50		
	50	to	55		Well screen

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description	
SW38--Continued					
Quaternary deposits	0	to	2	Topsoil (driller's log)	
	2	to	5	Clay, yellow-brown, silty (driller's log)	
		5	to	17	Silt, yellow, argillaceous
	17	to	20	Silt, yellow, argillaceous, calcareous	
	20	to	26	Silt, orange, very light gray, argillaceous, calcareous	
	26	to	30	Clay, very light gray, calcareous, silty	
	30	to	32	Clay, very light gray, calcareous, silty; silt, argillaceous	
	32	to	34	Clay, very light gray, calcareous, silty; silt, orange, argillaceous; sand, colorless, coarse to fine	
	34	to	40	Sand, colorless, varicolored, coarse to fine; gravel	
	40	to	56	Sand, colorless, varicolored, coarse to fine; gravel, subrounded to subangular	
Pleistocene deposits	56	to	58	Gravel, gray; till, gray unoxidized, leached	

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW39	W-27840	70-41-32AABB	404906-0953446	960	Fremont
SW39U casing	0	to	130		
	130	to	135		2-inch diameter polyvinyl-chloride well screen
SW39L casing	0	to	216		
	216	to	221		2-inch diameter polyvinyl-chloride well screen
Stratigraphic unit	Depth interval (feet)			Description	
Quaternary deposits	0	to	56	No samples (see log for SW38)	
Pleistocene deposits	56	to	60	Till, olive-gray, unoxidized, unleached, weakly calcareous	
	60	to	100	Till, olive-gray, unoxidized, unleached	
	100	to	119	Till, gray, unoxidized, unleached	
	119	to	121	Till, gray, unoxidized, unleached, gravelly	
	121	to	125	Till, light olive-gray, unoxidized, unleached	
Tertiary deposits					
Pliocene deposits	125	to	140	Sand, colorless, yellow, orange, dark medium to fine and coarse, subrounded, quartz, with 5 percent heavy, igneous or metamorphic grains	
	140	to	160	Sand, colorless, yellow, orange, dark coarse to fine, quartz, with trace heavy minerals	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description		
SW39--Continued					
Pliocene deposits-- Continued	160	to 180	Sand, colorless, yellow, orange, dark coarse to fine, quartz, with trace heavy minerals; gravel, quartz and igneous granite		
	180	to 200	Sand, colorless, yellow, orange, dark coarse to fine, quartz, with trace heavy minerals		
	200	to 223	Sand, colorless, yellow, orange, dark medium to coarse and fine, quartz, with trace heavy minerals		
Pennsylvanian rocks, undifferentiated	223	to 225	Limestone (driller's log)		
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW40	W-27841	71-42-07BBCD	415812-0954328	1,122	Mills
SW40 casing	0	to 332			
	332	to 342	Slotted		
<hr/>					
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Clay, gray-brown, silty (driller's log)		
	5	to 15	Silt, brown-gray, argillaceous		
	15	to 30	Silt, medium dark gray, argillaceous		
	30	to 40	Silt, very light gray, calcareous		
	40	to 44	Silt, medium light gray, gray, calcareous		
	44	to 50	Silt, light gray, calcareous		
	50	to 55	Silt, gray and orange, mottled, very calcareous		
	55	to 63	Silt, gray and orange, mottled, very calcareous, with trace sand		
Pleistocene deposits	63	to 65	Till, oxidized, leached		
	65	to 69	Till, oxidized, leached, with sparse sand and gravel		
	69	to 70	Till, orange, mottled, oxidized, leached		
	70	to 73	Till, orange, mottled, oxidized, unleached		
	73	to 80	Till, olive-gray, unoxidized, unleached		
	80	to 82	Gravel, varicolored; sand, coarse		
	82	to 86	Gravel, varicolored; sand, medium, dirty		
	86	to 130	Till, light olive-gray, unoxidized, unleached		
	130	to 137	Sand, colorless, orange, pink, yellow, dark, medium to fine and coarse		
	137	to 240	Till, light olive-gray, unoxidized, unleached		
240	to 245	Till, light gray, unoxidized, unleached			
250	to 270	Sand, colorless, yellow, pink, dark, heavy, medium			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description		
SW40--Continued					
Pleistocene deposits-- Continued	270	to 310	to fine and coarse, subrounded to subangular, quartz, with trace heavy mineral grains		
	310	to 348	Sand, colorless, yellow, pink, dark, heavy, coarse to fine, subrounded to subangular, quartz, with trace heavy mineral grains; gravel		
Pennsylvanian rocks, undifferentiated	348	to 351	Sand, colorless, yellow, pink, dark, heavy, coarse to fine, subrounded to subangular, silty, quartz, with trace heavy mineral grains; gravel		
Limestone, very light gray, silt-grade					
<hr/>					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW41	W-27842	71-42-24AAAA	405640-0953651	1,102	Mills
<hr/>					
Stratigraphic unit	Depth interval (feet)		Description		
SW41 casing	0	to 240	Slotted		
	240	to 250			
Quaternary deposits	0	to 2	Topsoil (driller's log)		
	2	to 5	Clay, yellow-brown and brown, silty (driller's log)		
	5	to 10	Silt, yellow, argillaceous		
	10	to 20	Silt, yellow, very argillaceous		
Pleistocene deposits	20	to 30	Till, light yellow, oxidized, leached		
	30	to 60	Till, light yellow, oxidized, unleached		
	60	to 80	Till, gray and orange, mottled, partly oxidized, unleached		
	80	to 100	Till, light olive-gray, unoxidized, unleached		
	100	to 105	Gravel, varicolored; sand, coarse, subrounded, very dirty		
	105	to 120	Till, light olive to gray, unoxidized, unleached		
	120	to 140	Till, light olive-gray, unoxidized, unleached, gravelly		
	140	to 156	Till, light olive-gray, unoxidized, unleached		
	156	to 180	Till, medium light gray, unoxidized, unleached		
	180	to 226	Till, medium light gray, unoxidized, unleached, very gravelly		
	226	to 240	Sand, colorless, yellow, pink, dark medium to fine and coarse, quartz, with trace heavy grains; partly with calcareous cement		
	240	to 250	Sand, colorless, yellow, pink, dark coarse to fine, quartz, with trace heavy grains		
Pennsylvanian rocks, undifferentiated	250	to 255	Limestone, very light gray, silt-grade		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW42	W-28041	71-36-32DDDD	405403-0950017	1,031	Montgomery
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 2	Topsoil (driller's log)		
	2	to 4	Clay, dark gray (driller's log)		
	4	to 6	Clay, medium dark gray, silty		
	6	to 9	Clay, medium light gray, silty		
	9	to 14	Clay, light yellow, silty		
	14	to 16	Silt, light yellow, orange		
	16	to 21	Sand, colorless, trace varicolored, trace dark, clean, fine, with partly argillaceous cement		
	21	to 27	Clay, gray, silty, trace sandy		
	27	to 34	Silt, light brown, argillaceous, sandy		
	34	to 37	Sand, colorless, varicolored, medium to fine and coarse, subrounded		
Pennsylvanian rocks, undifferentiated	37	to 40	Gravel, varicolored; sand, with silty cement		
	40	to 47	Sand, colorless, yellow, pink, coarse to fine		
	47	to 53	Shale, light green, slightly silty		
	53	to 55	Dolostone, light gray, silt-grade		
	55	to 56.5	Shale, gray, calcareous to dolomitic; shale, very dark gray		
	56.5	to 58	Shale, medium dark gray, blocky		
	58	to 59	Shale, medium light gray to medium dark gray		
	59	to 60.5	Shale, very dark gray; coal		
60.5	to 61	Shale, medium light gray, calcareous, lumpy			

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW43	W-28042	72-33-28ADAA	410040-0943832	1,140	Adams
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 2	Topsoil (driller's log)		
	2	to 8	Clay, gray, silty		
	8	to 12	Silt, very light gray and orange, very argillaceous		
	12	to 14	Clay, very light orange, very silty		
	14	to 18	Clay, light gray and light orange, very silty		
	18	to 30	Sand, orange, colorless, dark, coarse to fine; gravel		
30	to 34	Gravel; sand, coarse			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW43--Continued				
Pleistocene deposits	34	to	60	Till, light olive-gray, unoxidized, unleached
	60	to	72	Till, medium light gray, unoxidized, unleached, very sandy, gravelly
	72	to	77	Till, light yellow, with gray, partly oxidized, unleached
	77	to	100	Till, light yellow, oxidized, unleached
	100	to	120	Till, light yellow, oxidized, unleached; with till, orange, oxidized, unleached
	120	to	135	Till, light yellow, pale orange, oxidized, unleached
	135	to	140	Till, medium dark gray, unoxidized, unleached; till, orange, mottled, oxidized, unleached
Pennsylvanian rocks, undifferentiated	140	to	148	Till, dark gray, unoxidized, unleached
	148	to	149	Limestone, light gray, maroon; much sand
	149	to	150	Shale, light green
	150	to	151	Shale, maroon, calcareous
	151	to	155	Shale, green, lumpy
155	to	161	Shale, medium light green-gray, slightly calcareous	

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW44	W-28043	73-33-28BCCC	410537-0943938	1,190	Adams

Stratigraphic unit	Depth interval (feet)			Description
Quaternary deposits	0	to	13	Clay, gray, slightly silty
	13	to	16	Clay, medium light gray-brown, silty
	16	to	20	Clay, light gray-yellow, silty
	20	to	28	Clay, light gray, silty
	28	to	30	Silt, yellow, sandy; gravel
	30	to	38	Gravel, varicolored, subrounded; sand, coarse, argillaceous
	38	to	44	Gravel, varicolored, subrounded; sand, coarse, argillaceous, with calcareous matrix

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW44--Continued				
Pleistocene deposits	44	to	50	Till, olive-gray, unoxidized, unleached
	50	to	80	Till, light olive-gray, unoxidized, unleached
	80	to	90	Till, light olive-gray, unoxidized, unleached, with trace till, orange, oxidized, unleached
	90	to	130	Till, light olive-gray, unoxidized, unleached
	130	to	140	Till, medium light gray, unoxidized, unleached
	140	to	151	Till, light olive-gray, unoxidized, unleached
	151	to	155	Till, medium light gray, unoxidized, unleached, gravelly
	155	to	178	Till, light gray, unoxidized, unleached
	178	to	180	Till, medium light brown-gray, unoxidized, unleached
	180	to	187	Silt, brown-gray, sandy, slightly calcareous
187	to	197	Reworked shale and limestone fragments (driller's log)	
Pennsylvanian rocks, undifferentiated	197	to	199	Dolostone, light gray, silt-grade to coarse, fragmented
	199	to	205	Shale, gray, silty, micaceous, calcareous
	205	to	207	Shale, dark gray, blocky, silty
	207	to	208	Dolostone, medium light gray, silt-grade, calcareous, argillaceous
	208	to	212	Dolostone, medium light gray, silt-grade, calcareous; shale, medium light gray, lumpy, silty, calcareous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW45	W-28044	74-33-31DDDD	410930-0944034	1,134	Adair

Stratigraphic unit	Depth interval (feet)			Description
Quaternary deposits	0	to	5	Fill (driller's log)
	5	to	8	Clay, medium light gray, slightly silty
	8	to	10	Clay, medium light gray, orange, slightly silty
	10	to	15	Silt, very light orange-gray with orange mottling, argillaceous
	15	to	18	Silt, very light orange-gray with light gray mottling, argillaceous
	18	to	20	Sand, colorless, varicolored, coarse to fine, subrounded

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW45--Continued				
Quaternary deposits-- Continued	20	to	25	Sand, colorless, varicolored, coarse to fine, subrounded; gravel, fine, subrounded, with argillaceous matrix
	25	to	29	Sand, colorless, varicolored, coarse to fine, subrounded; gravel, fine, subrounded, with slightly argillaceous matrix
Pleistocene deposits	29	to	40	Till, blue-gray (driller's log)
	40	to	48	Till, medium light gray, unoxidized, unleached
	48	to	50	Gravel, varicolored, subrounded; sand, coarse
Pennsylvanian rocks, undifferentiated	50	to	54	Shale, light green and yellow, lumpy, soft, calcareous
	54	to	55	Shale, gray, lumpy, hard, calcareous
	55	to	57	Dolostone, light gray, silt-grade, calcareous
	57	to	59	Shale, light green, lumpy, calcareous
	59	to	60	Siltstone, yellow, calcareous; shale, green, lumpy, calcareous
	60	to	61	Limestone, very light yellow, silt-grade; shale, light green
	61	to	63	Shale, green, calcareous, lumpy
	63	to	65	Limestone, very light gray, silt-grade to fine, dense
	65	to	68	Shale, very light green-gray, silty, calcareous
	68	to	69	Shale, very light green-gray, silty, calcareous; limestone
	69	to	70	Shale; limestone; shale, dark gray, subflaky
	70	to	72.5	Shale, dark gray, silty, calcareous
	72.5	to	75	Shale, light green, silty, calcareous
	75	to	76	Dolostone, very light gray, silt-grade, argillaceous; shale, light green, silty, calcareous
	76	to	78	Limestone, very light gray, argillaceous; shale, light green, silty, calcareous
	78	to	79	Limestone, very light gray, silt-grade; shale, dark gray
	79	to	80	Limestone, very light gray, fine to silt-grade, crystalline
80	to	81	Limestone, very light gray, fine to silt-grade, crystalline, dolomitic	
81	to	83	Limestone, very light gray, silt-grade	
83	to	85	Dolostone, medium light gray, argillaceous	
85	to	87	Limestone, medium light gray, silt-grade, argillaceous	
87	to	95	Shale, medium dark gray, silty, calcareous	

Table 1. *Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued*

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land surface altitude (feet above sea level)	County
SW46	W-28045	76-33-20CCCC	412136-0944049	1,227	Adair
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	5	Roadbed and fill (driller's log)	
Quaternary deposits	5	to	13	Clay, medium light brown, silty	
	13	to	14	Clay, orange-brown, silty	
	14	to	19	Clay, gray with orange mottling, hard	
	19	to	21	Clay, gray, orange to yellow, silty, sandy	
	21	to	30	Gravel; sand, varicolored, subrounded, coarse, partly with argillaceous and silty cement	
	30	to	33	Clay, dark yellow, very silty, sandy	
	33	to	35	Gravel, varicolored; sand, coarse, subrounded	
Pleistocene deposits	35	to	43	Till, medium light yellow, oxidized, unleached	
	43	to	56	Till, orange-yellow, oxidized, unleached	
	56	to	63	Till, yellow-orange, oxidized, leached	
Pennsylvanian rocks, undifferentiated	63	to	64	Dolostone, very light gray, silt-grade, calcareous	
	64	to	67	Dolostone, very light gray, silt-grade, calcareous; limestone	
	67	to	68	Dolostone, yellow-orange, silt-grade, calcareous	
	68	to	69	Dolostone, yellow-orange, silt-grade, calcareous; chert, brown	
	69	to	70	Limestone, orange, silt-grade	
	70	to	71	Limestone, very light orange-gray, silt-grade	
	71	to	72	Limestone, very light orange-gray, silt-grade, fragmented	
	72	to	73	Limestone, light brown, silt-grade	
	73	to	74	Limestone, very light yellow, silt-grade	
	74	to	76	Limestone, light brown, silt-grade	
	76	to	77	Limestone, light brown, silt-grade, dense	
77	to	79	Limestone, very light gray, light orange, silt-grade		
79	to	81	Limestone, very light gray, orange, silt-grade to medium		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW47	W-28046	70-33-21AABB	405122-0943851	1,168	Taylor
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	15	Roadbed and fill (driller's log)	
Quaternary deposits	15	to	20	Clay, gray, silty	
	20	to	25	Clay, gray, very silty	
	25	to	27	Silt, orange, gray, very argillaceous	
	27	to	29	Silt, orange, sandy, argillaceous	
	29	to	31	Silt, very light gray and orange, argillaceous	
	31	to	33	Silt, argillaceous, sandy	
	33	to	36	Silt, gray-brown, argillaceous	
	36	to	42	Silt, brown, argillaceous	
	42	to	45	Sand, colorless, varicolored, coarse to fine; gravel, subrounded, with silty, argillaceous matrix	
Pleistocene deposits	45	to	48	Till, yellow, oxidized, unleached	
	48	to	52	Till, light yellow, oxidized, unleached	
	52	to	60	Till, gray and orange, partly oxidized, unleached	
	60	to	78	Till, light olive-gray, unoxidized, unleached	
	78	to	80	Till, medium light brown, unoxidized, unleached	
	80	to	90	Till, gray, unoxidized, unleached	
	90	to	131	Till, light olive-gray, unoxidized, unleached	
	131	to	133	Clay, light gray, silty, calcareous, with limestone clasts	
	133	to	137	Clay, medium light gray, with gravel, calcareous	
	137	to	140	Till, medium light gray, light yellow, partly oxidized, unleached	
	140	to	143	Clay, medium light gray to orange	
Pennsylvanian rocks, undifferentiated	143	to	152	Shale, green, lumpy, calcareous	
	152	to	153	Dolostone, very light gray to orange, silt-grade to fine, with ostracodes and fusulinids	
	153	to	154	Limestone, very light gray-brown, light orange	
	154	to	155	Limestone, very light gray-brown, light orange, green-gray	
	155	to	156	Limestone, very light gray-brown, light orange, green-gray, fragmented	
	156	to	157	Shale, very dark gray, gray, micaceous, subflaky	
	157	to	159	Shale, gray, blocky, calcareous	
	159	to	160	Limestone, very light gray, orange, silt-grade	
	160	to	161	Limestone, medium light gray	
	161	to	165	Shale, medium dark gray, blocky, silty, slightly calcareous	
	165	to	167	Shale, very dark gray, calcareous	
	167	to	170	Shale, very dark gray, calcareous; shale, medium light gray, lumpy	
	170	to	172	Shale, light gray, lumpy; limestone, very light gray	
	172	to	174	Shale, gray, very calcareous, blocky	
174	to	176	Shale, green, medium light gray, lumpy calcareous		
	176	to	177	Limestone, very light gray, brown, silt-grade	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW48	W-28047	68-33-08AAAB	404245-0943945	1,122	Taylor
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 5	Roadbed (driller's log)		
Quaternary deposits	5	to 16	Clay, light brown-gray, slightly silty		
	16	to 20	Clay, light gray, mottled orange, silty		
	20	to 29	Clay, light gray, mottled orange, very silty		
	29	to 38	Silt, orange-brown, argillaceous		
	38	to 41	Gravel, varicolored, subrounded; sand, coarse		
Pleistocene deposits	41	to 60	Till, light olive-gray, unoxidized, unleached		
	60	to 70	Till, medium light gray, unoxidized, unleached		
	70	to 80	Till, medium light gray, unoxidized, unleached; sand, colorless, varicolored, coarse to medium; gravel, subrounded		
	80	to 89	Till, medium light gray, unoxidized, unleached		
	89	to 92	Till, medium light gray, unoxidized, unleached, gravelly		
	92	to 97	Till, medium light gray, unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	97	to 98	Till, medium light gray, unoxidized, unleached; gravel, varicolored		
	98	to 102	Limestone, very light gray, silt-grade; shale, very pale green, calcareous		
	102	to 103	Limestone, very light gray, silt-grade		
	103	to 104	Limestone, very light gray with dark gray mottling		
	104	to 107	Shale, brown, blocky; shale, very dark gray		
	107	to 109	Shale, dark gray		
	109	to 110	Shale, gray, calcareous		
	110	to 111	Limestone, gray, silt-grade, calcareous		
	111	to 112	Shale, gray		
	112	to 114	Dolostone, gray, argillaceous, silt-grade; shale		
	114	to 115	Dolostone, very light gray, silt-grade		
	115	to 117	Dolostone, light gray, silt-grade, calcareous		
117	to 120	Dolostone, very light gray, silt-grade			
120	to 121	Dolostone, very light gray, light gray, silt-grade			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW49	W-28048	68-36-31BCCA	403938-0950138	960	Page
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 12	Clay, brown, silty		
	12	to 14	Clay, gray and dark brown, silty		
	14	to 20	Clay, medium light gray, silty		
	20	to 27	Gravel; sand, medium, subrounded to subangular; trace silty, argillaceous matrix		
Pennsylvanian rocks, undifferentiated	27	to 28	Shale, gray, yellow, lumpy, calcareous		
	28	to 30	Shale, gray, lumpy, calcareous		
	30	to 31	Shale, light gray, flaky, silty, calcareous		
	31	to 33	Limestone, light gray, argillaceous		
	33	to 34	Limestone, light gray, argillaceous; shale		
	34	to 36	Dolostone, very light gray, silt-grade to coarse, crystalline, very calcareous		
	36	to 38	Dolostone, very light gray, silt-grade to coarse, crystalline, very calcareous; limestone, dark gray, mottled, argillaceous		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW50	W-28049	69-36-16CBCB	404634-0950010	992	Taylor
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 5	Roadbed and topsoil (driller's log)		
	5	to 10	Clay, gray, slightly silty		
	10	to 15	Clay, medium light gray, slightly silty		
	15	to 21	Clay, light gray with orange mottling, slightly silty		
	21	to 25	Clay, gray, medium light gray, slightly silty		
	25	to 27	Clay, gray and orange mottled, silty, with plant fossils		
Pleistocene deposits	27	to 30	Till, gray, unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	30	to 32	Shale, gray, lumpy, soft, calcareous, micaceous		
	32	to 35	Shale, green-gray, lumpy, soft, calcareous, micaceous		
	35	to 36	Shale, blue-gray, silty, calcareous, lumpy		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW50--Continued				
Pennsylvanian rocks, undifferentiated--Continued	36	to	37	Shale, blue-gray, silty, very calcareous, lumpy; limestone
	37	to	38	Dolostone, medium light gray, very argillaceous; shale
	38	to	40	Shale, brown and medium dark gray, silty, calcareous, subflaky
	40	to	41	Shale, medium light gray, lumpy, silty, calcareous; shale, dark gray, subflaky, silty, calcareous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW51	W-28050	69-36-13ACCB	404648-0945614	1,015	Page

Stratigraphic unit	Depth interval (feet)			Description
	0	to	4	Roadbed (driller's log)
Quaternary deposits	4	to	13	Clay, gray, silty
	13	to	15	Clay, very light brown, silty
	15	to	17	Clay, very light gray, silty
	17	to	20	Clay, pale orange, pale brown, silty
	20	to	27	Clay, very light gray, silty
	27	to	30	Clay, medium light brown-gray, silty
	30	to	32	Gravel, varicolored; sand, coarse, with argillaceous matrix
Pennsylvanian rocks, undifferentiated	32	to	35	Shale
	35	to	36	Shale, gray-brown, very calcareous
	36	to	38.5	Shale, gray, flaky, silty
	38.5	to	39	Shale, very dark gray, blocky, carbonaceous
	39	to	40	Shale, very light gray, blocky, carbonaceous, calcareous; dolostone, light brown, silt-grade, argillaceous
	40	to	41	Shale, very light gray, blocky, carbonaceous, calcareous; limestone, gray, silt-grade

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW52	W-28051	72-34-16DCAC	410153-0944622	1,135	Adams
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and clay, blue, sandy (driller's log)		
	5	to 11	Clay, gray, slightly silty		
	11	to 15	Clay, medium light gray, light gray, orange, silty		
	15	to 20	Clay, medium light gray, silty		
	20	to 25	Clay, medium light gray, orange, very sandy, silty		
	25	to 31	Clay, dark orange, silty		
	31	to 38	Silt, orange-gray, argillaceous		
	38	to 41	Silt, orange-gray, argillaceous; gravel, abundant; sand, varicolored		
Pennsylvanian rocks, undifferentiated	41	to 43	Shale, green, very calcareous		
	43	to 45	Shale, green, very calcareous; limestone, yellow		
	45	to 47	Shale, yellow-green, very calcareous		
	47	to 48	Shale, yellow-green, very calcareous; limestone; gypsum, crystalline		
	48	to 49	Limestone, very light gray, yellow-green, argillaceous		
	49	to 50	Dolostone, orange		
	50	to 52	Dolostone, orange, very calcareous		
	52	to 53	Dolostone, very light gray, yellow, calcareous		
	53	to 55	Dolostone, very light gray, silt-grade, calcareous		
	55	to 56	Dolostone, very light gray, argillaceous; shale, green-gray		
	56	to 56.5	Dolostone, very light gray, silt-grade, calcareous		
	56.5	to 57	Dolostone, light green, silt-grade; shale, green and gray, very calcareous		
	57	to 58.5	Dolostone, light gray		
	58.5	to 63	Shale, gray, lumpy, calcareous		
63	to 66	Shale, gray, lumpy, silty, calcareous			
66	to 67	Limestone, light gray, yellow, silt-grade; shale, gray, lumpy, silty, calcareous			
67	to 68	Limestone, very light gray, silt-grade to fine			
68	to 69	Limestone, very light gray, yellow, silt-grade to fine			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW53	W-28052	72-35-12BDAA	410318-0944928	1,090	Adams
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 5	Roadbed (driller's log)		
Quaternary deposits	5	to 10	Clay, gray-brown, silty		
	10	to 13	Clay, gray-brown		
	13	to 15	Clay, gray-brown, silty		
	15	to 19	Silt, orange and gray, argillaceous		
	19	to 25	Silt, gray-brown, argillaceous		
	25	to 35	Sand, colorless, varicolored, coarse; gravel, fine, subrounded, partly with argillaceous matrix		
Pennsylvanian rocks, undifferentiated	35	to 40	Shale, medium light gray, slightly silty, slightly calcareous		
	40	to 41	Dolostone, very light gray, calcareous		
	41	to 44	Shale, medium light gray, blocky, silty, calcareous		
	44	to 46	Shale, medium light green, calcareous, blocky		
	46	to 47	Dolostone, very light gray, silt-grade, calcareous		
	47	to 48	Dolostone, very light gray, silt-grade, calcareous, partly argillaceous		
	48	to 50	Dolostone, very light gray, silt-grade		
	50	to 52	Shale, medium light gray, silty, calcareous; dolostone		
	52	to 53	Limestone, very light gray, silt-grade; shale		
	53	to 54	Limestone, very light gray, silt-grade; shale, medium light gray		
	54	to 55	Limestone, very light gray, gray mottled		
	55	to 56	Dolostone, gray, calcareous, argillaceous		
	56	to 58	Shale, gray, micaceous, blocky		
58	to 59	Shale, gray, subflaky, slightly calcareous			
59	to 61	Shale, gray, subflaky, slightly calcareous, lumpy			

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW54	W-28053	74-35-31CBBC	410951-0945537	1,130	Cass
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	5	Roadbed (driller's log)	
Quaternary deposits	5	to	8	Clay, brown, silty	
	8	to	13	Clay, medium dark gray, silty	
	13	to	18	Clay, gray with orange mottling, silty	
	18	to	20	Clay, darker gray with orange mottling, silty	
	20	to	31	Silt, light yellow-gray	
	31	to	36	Sand, colorless, varicolored, coarse to fine; gravel, subrounded	
	36	to	40	Sand, colorless, varicolored, coarse to fine, trace medium to fine; gravel, subrounded	
Pennsylvanian rocks, undifferentiated	40	to	43.5	Sand, colorless, varicolored, coarse to fine; gravel, subrounded; partly with argillaceous matrix	
	43.5	to	44	Shale, gray, blocky, hard	
	44	to	45	Shale, gray, lumpy, calcareous; trace dolostone	
	45	to	46	Shale, gray, lumpy, calcareous, with calcareous fossils	
	46	to	47	Shale, gray, lumpy, calcareous, with fusulinids	
	47	to	48	Shale, light green-gray and gray, calcareous	
	48	to	50	Dolostone, very light gray, silt-grade, calcareous	
	50	to	51	Shale, very dark gray, flaky	
	51	to	53	Shale, medium dark gray, calcareous, silty, lumpy	
	53	to	54	Dolostone, orange, calcareous; shale, green, calcareous	
	54	to	55	Dolostone, very light gray, calcareous	
	55	to	58	Limestone, very light gray, yellow, silt-grade	
	58	to	60	Limestone, very light gray, light yellow, silt-grade	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW55	W-28054	70-37-06AADD	405351-0950814	1,080	Page
SW55 casing	0 to 58	58 to 62	Slotted		
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0 to 3	3 to 5	Topsoil (driller's log)		
	3 to 5	5 to 14	Clay, blue-gray (driller's log)		
	5 to 14	14 to 18	Clay, gray, silty, blocky		
	14 to 18	18 to 26	Clay, light gray, silty, blocky		
	18 to 26	26 to 30	Clay, light gray, slightly silty, blocky		
	26 to 30	30 to 36	Silt, very light gray, very argillaceous		
	30 to 36	36 to 50	Clay, very light gray, very silty		
	36 to 50	50 to 58	Clay, light gray, silty		
	50 to 58	58 to 60	Silt, medium light gray, argillaceous		
	58 to 60	60 to 62	Sand, colorless, varicolored, coarse; gravel, medium, dirty		
	60 to 62		Sand, colorless, varicolored, coarse; gravel, medium, dirty; with argillaceous and silty matrix		
Pennsylvanian rocks, undifferentiated	62 to 65		Dolostone, medium light gray, very argillaceous		

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW56	W-28117	69-38-11ABAB	404801-0951053	1,040	Page
SW56 casing	0 to 50	50 to 54	Slotted		
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0 to 5	5 to 12	Topsoil and fill (driller's log)		
	5 to 12	12 to 19	Clay, gray, silty		
	12 to 19	19 to 28	Clay, medium light gray, silty		
	19 to 28	28 to 31	Silt, light yellow, argillaceous		
	28 to 31	31 to 40	Clay, brown-gray, silty		
	31 to 40		Silt, light yellow, argillaceous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW56--Continued				
Quaternary deposits-- Continued	40	to	50	Silt, light brown, argillaceous
	50	to	54	Gravel, varicolored, subrounded; sand, coarse, clean
Pennsylvanian rocks, undifferentiated	54	to	57	Shale, gray, blocky, lumpy
	57	to	58	Dolostone, very light gray, silt-grade, calcareous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW57	W-28118	67-38-08DADD	403743-0951317	980	Page
SW57 casing	0	to	45	Slotted	
	45	to	51		

Stratigraphic unit	Depth interval (feet)			Description
	0	to	10	Roadbed and fill (driller's log)
Quaternary deposits	10	to	14	Clay, gray, silty
	14	to	25	Clay, medium light gray, silty
	25	to	30	Clay, pale yellow, gray
	30	to	35	Clay, gray and orange, silty
	35	to	40	Silt, gray and orange, argillaceous
	40	to	46	Gravel, varicolored; sand, medium, subrounded; with calcareous, argillaceous matrix
	46	to	48	Clay, yellow-gray, silty, sandy; gravel
	48	to	51	Gravel, varicolored; sand, coarse, subrounded
Pleistocene deposits	51	to	58	Till, gray, unoxidized, unleached

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW58	W-28119	72-33-08DDDC	410237-0943943	1,175	Adams

Stratigraphic unit	Depth interval (feet)			Description
Quaternary deposits	0	to	5	Roadbed and topsoil (driller's log)
	5	to	11	Clay, gray, silty
	11	to	15	Clay, gray with trace orange mottling, silty
	15	to	25	Clay, light gray, silty

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW58--Continued				
Quaternary deposits-- Continued	25	to	33	Clay, medium light gray, silty
Pleistocene deposits	33	to	80	Till, light olive-gray, unoxidized, unleached
	80	to	96	Till, olive-gray, unoxidized, unleached
	96	to	123	Till, light yellow, oxidized, unleached
	123	to	128	Clay, light gray
	128	to	131	Clay, light gray, with trace sand, light orange
Pennsylvanian rocks, undifferentiated	131	to	133	Shale, light green, yellow, gray
	133	to	135	Dolostone, very light gray, light yellow, silt-grade, calcareous
	135	to	137	Shale, yellow, very calcareous
	137	to	138	Dolostone, yellow, silt-grade; shale, gray, blocky, hard, slightly dolomitic
	138	to	139	Dolostone, yellow, silt-grade; shale, gray, blocky, hard, dolomitic
	139	to	141	Shale, gray, lumpy, silty, calcareous

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW59	W-28120	72-32-09BCCB	410308-0943247	1,168	Adams

Stratigraphic unit	Depth interval (feet)			Description
	0	to	6	Roadbed and fill (driller's log)
Quaternary deposits	6	to	11	Clay, medium light gray, silty
	11	to	20	Silt, very light gray, orange, argillaceous
	20	to	26	Clay, light gray, very silty
	26	to	32	Silt, very light gray, argillaceous
	32	to	35	Gravel, varicolored, subrounded; sand, coarse; with argillaceous matrix
	35	to	40	Sand, varicolored, coarse; gravel, medium, subrounded, clean
Pleistocene deposits	40	to	46	Till, light gray, oxidized, unleached, very weakly calcareous
	46	to	54	Till, light gray, unoxidized, unleached
	54	to	60	Till, very light gray, oxidized, unleached
	60	to	64	Till, light olive-gray, unoxidized, unleached, weakly calcareous
	64	to	65	Till, gray, unoxidized, unleached, weakly calcareous
	65	to	73	Till, very pale green, oxidized, unleached
	73	to	80	Till, gray, unoxidized, unleached, very weakly calcareous
	80	to	82	Till, gray (driller's log)

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)	Description			
SW59--Continued					
	82	Sand and gravel (driller's log)			
Note: Well flows at the land surface from 300 to 400 gallons per minute from 82 feet below land surface.					
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW60	W-28121	75-32-28CDDD	411532-0943212	1,205	Adair
Stratigraphic unit	Depth interval (feet)	Description			
Quaternary deposits	0 to 5	Clay, medium light gray, silty			
	5 to 8	Silt, light yellow, light orange mottled			
	8 to 13	Silt, light yellow, light orange mottled, very argillaceous			
	13 to 28	Silt, very light yellow, argillaceous			
	28 to 31	Silt, gray-brown, argillaceous, sandy			
	31 to 36	Gravel, varicolored, subrounded; sand, colorless, subrounded			
	Pleistocene deposits	36 to 38	Till, light yellow, oxidized, unleached		
		38 to 39	Till, green-yellow, oxidized, unleached		
		39 to 40	Till, medium light gray, unoxidized, unleached; till, orange, oxidized, unleached		
		40 to 60	Till, medium light green-gray, unoxidized, unleached		
60 to 70		Till, medium light gray, unoxidized, unleached			
70 to 110		Till, light olive-gray, unoxidized, unleached			
110 to 115		Till, medium light olive-gray, unoxidized, unleached			
115 to 120		Till, medium light gray, unoxidized, unleached			
120 to 129		Till, light yellow, oxidized, unleached			
129 to 134		Till, light yellow, oxidized, unleached; clay, gray, slightly silty			
Pennsylvanian rocks, undifferentiated	134 to 140	Clay, gray, slightly silty, with till-like areas, yellow, mottled, calcareous			
	140 to 145	Silt, medium light gray, very sandy, argillaceous			
	145 to 146	Sand, colorless, varicolored, medium to coarse and fine, subangular to subrounded; gravel, varicolored, subrounded			
	146 to 148	Limestone, very light gray and orange, silt-grade to medium			
	148 to 150	Limestone, very light gray and orange, silt-grade to medium; shale, green			
	150 to 152	Shale, maroon and green, lumpy			
	152 to 154	Dolostone, orange and very light gray, silt-grade; maroon and green, lumpy			
154 to 156	Shale, yellow, lumpy				

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW60--Continued				
Pennsylvanian rocks, undifferentiated--Continued	156	to	157	Limestone, medium light gray, silt-grade, fragmented, argillaceous
	157	to	159	Limestone, medium light gray, silt-grade, partly argillaceous
	159	to	161	Limestone, medium light gray, silt-grade; shale, brown
	161	to	163	Shale, gray, lumpy, calcareous
	163	to	165	Dolostone, very light gray, silt-grade, very cherty, very calcareous
	165	to	167	Limestone, very light gray, silt-grade, very calcareous
	167	to	169	Limestone, very light gray, silt-grade to coarse
	169	to	171	Limestone, very light gray, silt-grade to fine
	171	to	172	Limestone, very light gray, silt-grade to fine, fragmented
	172	to	173	Chert, very light gray, smooth; limestone, very light gray, silt-grade to coarse, fragmented

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW61	W-28122	70-32-03BBBB	405357-0943138	1,200	Taylor

Stratigraphic unit	Depth interval (feet)			Description
	0	to	10	Fill (driller's log)
Quaternary deposits	10	to	15	Clay, gray, silty
	15	to	19	Clay, gray, orange mottled, silty
	19	to	20	Clay, light gray and yellow orange, silty, sandy
Pleistocene deposits	20	to	24	Till, yellow, oxidized, unleached
	24	to	35	Till, yellow to orange, oxidized, unleached
	35	to	40	Till, yellow, oxidized, unleached
	40	to	46	Till, very light yellow-gray, oxidized, unleached
	46	to	60	Till, yellow-orange, oxidized, unleached
	60	to	85	Till, yellow, oxidized, unleached
	85	to	100	Till, light olive-gray; till, trace yellow, oxidized, unleached
	100	to	130	Till, light olive-gray, unoxidized, unleached
	130	to	140	Till, olive-gray, unoxidized, unleached
	140	to	200	Till, light olive-gray, unoxidized, unleached
	200	to	220	Till, medium light olive-gray, unoxidized, unleached
220	to	240	Till, light olive-gray, unoxidized, unleached	
240	to	246	Till, light olive-gray, unoxidized, unleached, very sandy, gravelly	
246	to	250	Till, gray, unoxidized, unleached, very sandy, gravelly; till, yellow, oxidized, unleached	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)		Description
SW61--Continued			
Pleistocene deposits-- Continued	250	to 255	Till, yellow, medium light gray, oxidized, unleached, very sandy, gravelly
Pennsylvanian rocks, undifferentiated	255	to 257	Dolostone, light tan, silt-grade, calcareous
	257	to 258	Dolostone, light tan, very light gray, silt-grade
	258	to 260	Dolostone, very light gray, light tan, silt-grade, slightly calcareous
	260	to 265	Dolostone, very light gray, light tan, silt-grade, calcareous
	265	to 266	Dolostone, very light gray, light tan, silt-grade, calcareous; limestone
	266	to 268	Limestone; shale
	268	to 270	Shale, light green-gray, calcareous, lumpy

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW62	W-28123	68-35-15BCDD	404200-0945109	1,070	Taylor
SW62 casing	0	to 29			
	29	to 37	Slotted		

Stratigraphic unit	Depth interval (feet)		Description
	0	to 12	Fill (driller's log)
Quaternary deposits	12	to 14	Silt, yellow-orange, sandy, argillaceous
	14	to 16	Silt, brown-gray, sandy, very argillaceous
	16	to 22	Clay, gray, silty
	22	to 24	Sand, colorless, coarse to medium; gravel, subrounded, dirty
	24	to 33	Gravel, varicolored; sand, medium, subrounded to subangular; partly with argillaceous cement
Pleistocene deposits	33	to 35	Till, light gray, oxidized, leached
	35	to 37	Till, light gray, oxidized, unleached, very gravelly
	37	to 38	Till, yellow, oxidized, unleached, gravelly
	38	to 39	Till, yellow, gray, gravelly, partly oxidized, unleached
Pennsylvanian rocks, undifferentiated	39	to 40	Shale, medium light gray, silty, calcareous, micaceous, blocky

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW63	W-28124	67-36-02AAAA	403859-0945602	1,020	Page
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>			<u>Description</u>	
	0	to	7	Roadbed and fill (driller's log)	
Quaternary deposits	7	to	10	Clay, medium dark gray, silty	
	10	to	16	Clay, medium light gray	
	16	to	20	Silt, yellow, argillaceous	
	20	to	26	Silt, yellow, very argillaceous	
	26	to	27	Silt, gray and orange, very argillaceous	
	27	to	35	Silt, gray, argillaceous; sand, coarse; gravel	
Pennsylvanian rocks, undifferentiated	35	to	38	Shale, medium light gray, flaky	
	38	to	40	Shale, medium light gray, flaky; shale, very dark gray, carbonaceous	
	40	to	42	Shale, medium light gray, flaky	
	42	to	43	Shale, very dark gray, flaky, carbonaceous	
	43	to	45	Shale, light green-gray, micaceous, subflaky, slightly calcareous	
	45	to	50	Shale, light green-gray, micaceous, subflaky, calcareous	
	50	to	53	Shale, gray, soft, lumpy, subflaky, silty	
	53	to	56	Shale, gray, subflaky, micaceous, calcareous	
	56	to	60	Shale, gray, subflaky, micaceous, calcareous; limestone, gray	
	60	to	61	Shale, light green-gray, subflaky, micaceous, calcareous; limestone, gray	
	61	to	63	Shale, light green-gray, subflaky, micaceous, calcareous; dolostone	
	63	to	64	Dolostone, gray, argillaceous	
	64	to	66	Shale, very dark gray, gray, blocky	
	66	to	67	Dolostone, gray, argillaceous, silt-grade to coarse	
	67	to	69	Dolostone, gray, calcareous, argillaceous	
	69	to	70	Dolostone, light green, silt-grade, argillaceous	
70	to	71	Shale, gray, lumpy, dolomitic		
71	to	74	Shale, gray, lumpy, dolomitic; dolostone		
74	to	75	Limestone, light brown-gray, silt-grade to coarse		
75	to	77	Shale, pale green, lumpy, calcareous		
77	to	78	Dolostone, very light gray, silt-grade, argillaceous		
78	to	80	Dolostone, very light gray, silt-grade, calcareous, argillaceous		
80	to	81	Shale, medium light green-gray, very calcareous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW64	W-28125	67-36-30DCCD	403446-0950107	948	Page
SW64 casing	0 to 16	to 16	Slotted		
	16 to 20	to 20			
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 1	Topsoil (driller's log)		
	1	to 9	Clay, gray and light orange, silty		
	9	to 15	Silt, light yellow, argillaceous		
	15	to 20	Gravel, varicolored; sand, medium, subrounded		
Pennsylvanian rocks, undifferentiated	20	to 23	Limestone, very light gray, silt-grade, argillaceous; shale		
	23	to 26	Shale, light gray, calcareous		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW65	W-28216	71-36-32DDDD	405403-0950017	1,021	Montgomery
SW65 casing	0 to 37	to 37	Slotted		
	37 to 42	to 42			

Same location as SW42, see log for SW42 for description.

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW66	W-28206	72-36-04CDDD	410333-0945942	1,076	Montgomery
SW66 casing	0 to 29	to 29 to 34	Slotted		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 1	Topsoil (driller's log)		
	1	to 5	Clay, gray (driller's log)		
	5	to 11	Silt, light gray, very argillaceous		
	11	to 13	Sand, colorless, varicolored, medium to fine, very silty		
	13	to 15	Clay, gray, very silty		
	15	to 25	Sand, colorless, varicolored, coarse to fine; gravel, subrounded to angular, silty, argillaceous		
	25	to 35	Gravel, varicolored; sand, medium, clean, subrounded		
	35	to 37	Gravel, varicolored; sand, coarse, clean, subrounded		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW67	W-28207	72-35-12ACBC	410314-0944926	1,085	Adams
SW67 casing	0 to 13	to 13 to 17	Slotted		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 1	Topsoil (driller's log)		
	1	to 5	Clay, yellow-gray (driller's log)		
	5	to 10	Sand, varicolored, medium to fine, subrounded, with silty and argillaceous matrix		
	10	to 14	Clay, brown, light yellow, silty		
	14	to 17	Sand, varicolored, coarse to fine; gravel; very argillaceous, calcareous matrix		
Pennsylvanian rocks, undifferentiated	17	to 19	Shale, gray, hard, calcareous, silty		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW68	W-28205	74-34-22ABAB	411215-0944419	1,328	Cass
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 15	Roadbed and fill (driller's log)		
Pleistocene deposits	15	to 20	Till, bright yellow-orange, oxidized, leached		
	20	to 40	Till, light yellow, oxidized, unleached		
	40	to 46	Till, yellow, oxidized, unleached		
	46	to 48	Till, gray, orange mottling, oxidized, unleached		
	48	to 52	Till, yellow, very light gray mottling, oxidized, unleached		
	52	to 60	Clay, light gray		
	60	to 64	Till, very light gray, unoxidized, unleached		
	64	to 66	Till, yellow, orange, oxidized, unleached		
	66	to 80	Till, very pale yellow, oxidized, unleached		
	80	to 105	Till, light yellow, oxidized, unleached		
	105	to 110	Till, very light yellow, unoxidized, unleached		
	110	to 114	Till, very light yellow, unoxidized, unleached; clay, light gray		
	114	to 115	Clay, light gray, slightly calcareous		
	115	to 117	Clay, light yellow, slightly calcareous		
	117	to 120	Till, very light yellow-gray, oxidized, unleached		
	120	to 147	Till, light yellow, oxidized, unleached		
147	to 155	Sand, colorless, dark, medium to fine, subrounded, with argillaceous, calcareous cement			
155	to 160	Till, olive-gray and orange, partly oxidized, unleached			
160	to 164	Till, orange and gray, partly oxidized, unleached			
164	to 170	Till, olive-gray and orange, partly oxidized, unleached			
170	to 180	Till, very light gray, unoxidized, unleached			
180	to 195	Till, light gray, sandy, gravelly, slightly calcareous			
195	to 199	Till, very light yellow, oxidized, unleached			
199	to 203	Till, light yellow, very light gray, very argillaceous, oxidized, unleached			
Pennsylvanian rocks, undifferentiated	203	to 208	Limestone, very light yellow, silt-grade		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW69	28203	77-32-28CCCD	412555-0943242	1,315	Adair
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	3	Roadbed (driller's log)	
Quaternary deposits	3	to	6	Clay, black (driller's log)	
	6	to	8	Clay, dark gray to gray (driller's log)	
	8	to	11	Clay, medium light gray, silty	
	11	to	16	Clay, gray, slightly silty	
	16	to	20	Silt, yellow and orange, very argillaceous	
	20	to	24	Silt, light yellow and orange, very argillaceous	
	24	to	28	Gravel; sand, varicolored, medium, subrounded, with silty, argillaceous, calcareous matrix	
Pleistocene deposits	28	to	40	Till, gray, yellow, partly oxidized, unleached	
	40	to	57	Gravel, varicolored; sand, medium, subrounded, partly dolomitic, with till-like matrix	
	57	to	70	Till, gray, unoxidized, unleached; gravel, varicolored; sand, medium subrounded, partly dolomitic, with till-like matrix	
	70	to	80	Till, gray, unoxidized, unleached, very gravelly	
	80	to	100	Till, light yellow-orange, gray, partly oxidized, unleached	
	100	to	110	Till, light yellow-orange, gray, partly oxidized, unleached, gravelly	
	110	to	120	Till, yellow, light gray, oxidized, unleached	
	120	to	135	Till, light yellow, oxidized, unleached	
	135	to	150	Till, light yellow, oxidized, unleached; till, medium light gray, unoxidized, unleached till	
	150	to	160	Till, medium light gray, unoxidized, unleached	
	160	to	174	Till, yellow, mottled, oxidized, unleached	
	174	to	180	Till, yellow, oxidized, unleached	
	180	to	189	Till, yellow, oxidized, unleached, sandy	
	189	to	203	Till, medium light gray, unoxidized, unleached; till, light yellow, oxidized, unleached	
	203	to	220	Sand, colorless, yellow, orange, dark, heavy, fine to medium, subrounded to subangular, clean, quartz, with trace heavy minerals	
220	to	239	Sand, colorless, yellow, orange, dark, heavy, fine to medium, subrounded to subangular, clean, quartz, with trace heavy minerals; gravel, trace metamorphic rocks		
239	to	243	Sandstone; gravel, quartz, metamorphic rocks		
243	to	250	Gravel, subrounded to angular; sand, medium; much till, orange		
250	to	252	Gravel, subrounded to angular; sand, medium; with Inoceramus fragments		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW70	W-28209	75-31-20CCDC	411622-0942657	1,345	Adair
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	4	Roadbed (driller's log)	
Quaternary deposits	4	to	9	Loess, with yellow, argillaceous matrix	
	9	to	11	Clay, brown, orange, yellow, silty, trace sandy	
	11	to	16	Clay, very light yellow, orange, silty	
Pleistocene deposits	16	to	20	Till, light orange, oxidized, leached	
	20	to	54	Till, light orange, oxidized, unleached	
	54	to	60	Till, gray and yellow, partly oxidized, leached, with sparse sand	
	60	to	65	Till, medium light gray, partly oxidized, leached, with sparse sand	
	65	to	68	Till, light gray, partly oxidized, leached	
	68	to	73	Till, light orange, oxidized, unleached	
	73	to	80	Till, light orange, oxidized, unleached, more calcareous	
	80	to	90	Till, orange-yellow, oxidized, unleached	
	90	to	93	Till, light gray, oxidized, unleached	
	93	to	100	Till, gray, unoxidized, unleached	
	100	to	110	Till, light olive-gray, unoxidized, unleached	
	110	to	127	Till, olive-gray, unoxidized, unleached	
	127	to	128	Clay, dark brown, sandy	
	128	to	134	Till, medium light gray, unoxidized, unleached	
	134	to	140	Till, light gray, unoxidized, unleached	
	140	to	170	Till, light yellow, oxidized, unleached	
170	to	190	Till, light yellow, oxidized, unleached; till, light gray, mottled, unoxidized, unleached		
190	to	199	Till, light gray, unoxidized, unleached; till, yellow-orange, oxidized, unleached, mottled		
199	to	220	Till, yellow-orange, oxidized, unleached		
220	to	230	Till, very light yellow, oxidized, unleached, with abundant limestone gravel		
230	to	233	Till, very light gray, very light yellow gray, oxidized, unleached		
Pennsylvanian rocks, undifferentiated	233	to	241	Dolostone, light orange, silt-grade, partly very calcareous; shale, light green, lumpy	
	241	to	242	Dolostone, light orange, silt-grade, partly very calcareous; shale, very pale green, lumpy	
	242	to	245	Shale, yellow and gray, lumpy shale	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW71	W-28204	73-34-27BCBB	410547-0944524	1,108	Adams
SW71 casing	0 to 25	to 25			Well screen
	25 to 30	to 30			
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Topsoil and clay, dark brown (driller's log)		
	5	to 13	Silt, medium light gray-brown, very argillaceous		
	13	to 15	Silt, gray, very argillaceous		
	15	to 18	Clay, gray-brown, partly very sandy, silt		
	18	to 20	Silt, gray, argillaceous		
	20	to 26	Sand, colorless, varicolored, coarse to fine; gravel		
	26	to 30	Sand, colorless, varicolored, medium; gravel, fine		
	30	to 33	Sand, medium to fine and coarse		
Pennsylvanian rocks, undifferentiated	33	to 34	Shale, gray-green (driller's log)		

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW72	W-28208	71-34-07DCCD	415732-0944811	1,094	Adams
SW72 casing	0 to 35	to 35			Well screen
	35 to 40	to 40			
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 5	Roadbed and clay, brown (driller's log)		
	5	to 9	Silt, brown, argillaceous		
	9	to 14	Clay, brown, silty		
	14	to 15	Clay, orange-brown, silty		
	15	to 19	Sand, medium; gravel, varicolored, subrounded, fine; with argillaceous and silty cement		
	19	to 20	Clay, blue-gray, silty and sandy (driller's log)		
	20	to 37	Silt, medium light brown-gray, argillaceous, sandy		
	37	to 40	Silt, medium light brown-gray, argillaceous, sandy, calcareous		
Pennsylvanian rocks, undifferentiated	40	to 41	Dolostone, orange, silt-grade to fine, calcareous		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW73	W-28210	71-36-01BDCD	405848-0945625	1,052	Montgomery
SW73 casing	0 to 27	to 27 to 32	Well screen		
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 5	Topsoil and clay, very dark gray (driller's log)		
	5	to 10	Clay, brown, silty		
	10	to 14	Clay, light gray and orange, very silty, sandy		
	14	to 16	Sand, colorless, subrounded, medium to fine, with argillaceous, silty matrix		
	16	to 20	Sand, colorless, varicolored, dark, subrounded to angular, medium to coarse and fine		
	20	to 25	Sand, colorless, varicolored, coarse to fine; gravel, subrounded to angular, clean		
	25	to 30	Sand, colorless, varicolored, coarse to fine; gravel, subrounded to angular, clean; partly with argillaceous cement		
	30	to 34	Clay, gray, orange, lumpy, calcareous		
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW74	W-28211	75-30-22BBBB	411713-0941753	1,165	Adair
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 5	Roadbed and clay, dark gray (driller's log)		
	5	to 10	Clay, gray-brown, silty		
	10	to 15	Clay, medium dark gray, orange, sandy, silty		
	15	to 17	Sand, colorless, varicolored, medium to fine, silty		
	17	to 19	Sand, colorless, varicolored, coarse to fine; gravel		
	19	to 27	Silt, light yellow, argillaceous		
	27	to 38	Gravel, varicolored; sand, colorless, coarse to medium, subrounded, partly argillaceous		
	38	to 39	Gravel, varicolored		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW74--Continued				
Pleistocene deposits	39	to	5	Till, gray, unoxidized, unleached
	52	to	60	Till, medium light gray, oxidized, leached
	60	to	70	Till, light yellow, oxidized, unleached
Pennsylvanian rocks, undifferentiated	70	to	75	Limestone, very light gray, silt-grade to coarse, partly fragmented; shale, light green
	75	to	75.5	Limestone, very light gray; shale, very light green-gray, with fusulinids
	75.5	to	77	Limestone, very light gray; shale, green, with calcareous fossil debris
	77	to	78	Limestone, very light gray, silt-grade; shale, yellow
	78	to	80	Dolostone, very light gray, silt-grade; shale
	80	to	82	Dolostone, light gray, light yellow gray, silt-grade
	82	to	84	Limestone, very light gray, silt-grade, argillaceous; shale, very light green
	84	to	85	Shale, dark gray, gray, calcareous, micaceous
	85	to	86.5	Limestone, very light gray, silt-grade
	86.5	to	90	Limestone, very light gray, silt-grade; shale, gray
90	to	93	Shale, medium light green, lumpy	
93	to	97	Limestone, maroon, silt-grade, argillaceous	
97	to	100	Shale, maroon, calcareous	

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW75	W-28215	74-30-21CBAA	411134-0941846	1,310	Adair

Stratigraphic unit	Depth interval (feet)			Description
	0	to	2	Roadbed (driller's log)
Quaternary deposits	2	to	10	Silt, yellow, argillaceous, trace sandy
	10	to	15	Silt, very light gray, orange mottled, argillaceous, trace sandy
Pleistocene deposits	15	to	20	Till, very light yellow, oxidized, leached
	20	to	30	Till, orange, oxidized, leached
	30	to	40	Till, very pale yellow, oxidized, unleached
	40	to	41	Gravel, varicolored, subrounded; sand, coarse, dirty
	41	to	50	Till, light yellow, gray, partly oxidized, unleached

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW75--Continued				
Pleistocene deposits-- Continued	50	to	60	Till, gray, unoxidized, unleached
	60	to	70	Till, medium light gray, unoxidized, unleached; till, light yellow, oxidized, unleached
	70	to	80	Till, medium light gray, unoxidized, unleached; till, trace light yellow, oxidized, unleached
	80	to	93	Till, medium light gray, unoxidized, unleached
	93	to	100	Till, medium light brown, unoxidized, unleached
	100	to	106	Till, gray and yellow, oxidized, unleached
	106	to	110	Till, medium light to very light gray, partly oxidized, partly leached, very sandy
	110	to	142	Till, light yellow, oxidized, unleached
	142	to	153	Till, light yellow, very sandy, oxidized, unleached
	153	to	160	Till, light yellow, very sandy, oxidized, unleached; till, gray, unoxidized, unleached
	160	to	170	Till, light olive-gray, unoxidized, unleached; till, trace light yellow, oxidized, unleached
	170	to	190	Till, gray, unoxidized, unleached
	190	to	218	Till, gray, unoxidized, unleached; till, yellow, oxidized, unleached
	Pennsylvanian rocks, undifferentiated	218	to	220
220		to	221	Dolostone, gray, medium light yellow, calcareous; sand, varicolored, coarse to fine, subrounded
221		to	223	Shale, medium dark gray, partly sandy
223		to	225	Shale, green, sandy
225		to	229	Shale, light green, lumpy, calcareous
229		to	232	Dolostone, very light gray, silt-grade; shale, light green, lumpy, calcareous
232		to	235	Dolostone, very light gray, silt-grade, calcareous
235		to	237	Shale, very pale green, soft, calcareous
237		to	238	Dolostone, very light gray, silt-grade to fine, very calcareous
238		to	239	Dolostone, very light gray, silt-grade to fine, very calcareous much cave
239		to	240	Shale, medium light gray, lumpy, calcareous; dolostone, very light gray, silt-grade to fine, very calcareous

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW76	W-28214	73-33-11BDDA	410816-0943650	1,274	Adams
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 5	Roadbed (driller's log)		
Quaternary deposits	5	to 9	Clay, brown, silty		
	9	to 13	Clay, yellow-orange, silty		
	13	to 17	Clay, light gray with orange mottling		
	17	to 19	Clay, light gray with orange mottling, trace sandy		
	19	to 39	Till, light yellow-orange, oxidized, unleached		
	39	to 50	Till, medium light yellow-orange, oxidized, unleached		
	50	to 60	Till, pale light yellow-gray, oxidized, unleached		
	60	to 90	Till, medium light gray, oxidized, unleached		
	90	to 99	Till, medium light gray, unoxidized, unleached		
	99	to 102	Till, light olive-gray, unoxidized, unleached		
	102	to 111	Till, medium light brown, unoxidized, unleached		
	111	to 114	Till, very light brown, unoxidized, unleached		
	114	to 117	Till, pale yellow, oxidized, unleached		
	117	to 120	Till, medium light gray, oxidized, unleached		
	120	to 138	Till, pale yellow-orange, oxidized, unleached		
	138	to 145	Till, pale yellow-orange, oxidized, unleached, sandy		
		145	to 160	Till, medium light gray, unoxidized, unleached	
	160	to 170	Till, medium light gray, unoxidized, unleached; till, trace yellow, oxidized, unleached		
	170	to 260	Till, light olive-gray, unoxidized, unleached		
	260	to 280	Gravel, varicolored, subrounded, quartz, metamorphic, and limestone rocks, with till-like matrix; till, light olive-gray, unoxidized, unleached		
	280	to 300	Gravel, varicolored, subrounded, quartz, metamorphic, and limestone rocks, with till-like matrix; till, light olive-gray, unoxidized, unleached; sand, medium		
	300	to 320	Gravel, varicolored, subrounded, quartz, metamorphic, and limestone rocks, with till-like matrix; till, light olive-gray, unoxidized, unleached; sand, partly subangular		
	320	to 329	Gravel, varicolored, subrounded, quartz, metamorphic, and limestone rocks, with till-like matrix		
Pennsylvanian rocks, undifferentiated	329	to 340	Shale, gray; possible limestone layer at top (driller's log)		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW77	W-28213	72-32-09BBCC	410316-0943247	1,168	Adams
SW77 casing	0 to 35	35 to 40	Well screen		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 6	Clay, dark gray (driller's log)		
	6	to 9	Clay, medium light gray, slightly silty		
	9	to 15	Silt, light orange, very sandy, argillaceous		
	15	to 17	Silt, orange and very light gray		
	17	to 19	Silt, orange and very light gray, sandy		
	19	to 21	Sand, colorless, varicolored; partly with argillaceous, silty cement		
	21	to 28	Silt, light yellow, argillaceous, sandy		
	28	to 31	Sand, varicolored, coarse; gravel, fine, subrounded		
	31	to 37	Silt, light gray, sandy, gravelly, argillaceous		
	37	to 41	Sand, colorless, varicolored, coarse; gravel, fine, subrounded to subangular, partly argillaceous		
41	to 42	Till, gray (driller's log)			
Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW78	W-28212	72-32-09CCBB	410248-0943248	1,220	Adams
SW78 casing	0 to 266	266 to 276	Slotted		
Stratigraphic unit	Depth interval (feet)		Description		
Quaternary deposits	0	to 11	Silt, light yellow, argillaceous		
Pleistocene deposits	11	to 20	Till, light yellow, oxidized, unleached		
	20	to 70	Till, medium light yellow-gray, oxidized, unleached		
	70	to 75	Till, yellow-gray, oxidized, unleached		
	75	to 80	Till, pale yellow, oxidized, unleached		
	80	to 90	Till, pale yellow-gray, oxidized, unleached		
	90	to 102	Till, pale yellow-gray, oxidized, unleached, weakly calcareous		
	102	to 102.5	Clay, gray-brown, brown-gray		
	102.5	to 113	Till, light yellow-gray, oxidized, unleached		
	113	to 120	Clay, medium light gray, silty, slightly calcareous		
	120	to 123	Till, medium light gray, unoxidized, unleached		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW78--Continued				
Pleistocene deposits-- Continued	123	to	132	Gravel, colorless, varicolored, quartz and metamorphic rock; sand, coarse, subrounded, dirty, quartz
	132	to	240	Till, light olive-gray, unoxidized, unleached
	240	to	244	Till, medium light gray, unoxidized, unleached
	244	to	251	Till, medium light gray, unoxidized, unleached, gravelly
	251	to	256	Till, gray, maroon, partly oxidized, unleached, very gravelly
	256 263	to to	263 275	Clay, gray, maroon, calcareous, very sandy Gravel, varicolored, dirty, quartz, limestone, trace chert rocks
Pennsylvanian rocks, undifferentiated	275	to	279	Limestone, very light gray, silt-grade, sublithographic

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW79	W-28652	70-34-22AAAA	405123-0944419	1,158	Taylor

Stratigraphic unit	Depth interval (feet)			Description
Pleistocene deposits	0	to	5	Clay, yellow-gray sandy (driller's log)
	5	to	6	Silt; clay, very light gray
	6	to	7	Sand, varicolored, coarse; gravel; silt and clay matrix
	7	to	16	Till, pale orange, oxidized, unleached
	16	to	18	Till, light yellow-gray, oxidized, unleached
	18	to	27	Till, light yellow-gray, oxidized, unleached; till, gray, unoxidized, unleached
	27	to	32	Till, yellow, oxidized, unleached; till, brown, unoxidized, unleached
	32	to	37	Till, yellow, oxidized, unleached; till, gray, unoxidized, unleached
	37	to	40	Till, gray, yellow and orange mottling, unoxidized, unleached
	40 61	to to	61 70	Till, gray, trace orange, unoxidized, unleached Silt, very light gray, orange, argillaceous, calcareous
Pennsylvanian rocks, undifferentiated	70	to	78	Shale, yellow, silty, blocky, slightly calcareous
	78	to	81	Shale, yellow, silty, blocky, slightly calcareous; limestone, gray

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Stratigraphic unit	Depth interval (feet)			Description
SW79--Continued				
Pennsylvanian rocks, undifferentiated-- Continued	81	to	84	Shale, gray, calcareous
	84	to	87	Shale, gray, calcareous; limestone
	87	to	89	Shale, gray, calcareous; limestone, gray
	89	to	90	Shale, very dark gray, blocky, silty, calcareous
	90	to	90.5	Shale, medium dark gray, lumpy
	90.5	to	92	Limestone, medium light gray, silt-grade, partly argillaceous
	92	to	93	Limestone, brown, silt-grade
	93	to	94	Shale, light green, lumpy, calcareous
	94	to	95	Shale, light green, lumpy, calcareous; dolostone, silt-grade
	95	to	97	Shale, light green, silty, calcareous
	97	to	97.5	Shale, medium dark green, calcareous
	97.5	to	98	Limestone, very light gray, silt-grade, fragmented; shale, very light gray
	98	to	100	Shale, very light gray, lumpy, very calcareous, silty
	100	to	102	Shale, light green, calcareous, silty, lumpy
	102	to	105	Shale, medium light green-gray, calcareous, silty, lumpy
	105	to	106	Shale, green-gray, calcareous, silty, lumpy
	106	to	106.5	Dolostone, very light gray, calcareous; shale, medium light gray
	106.5	to	108	Shale, maroon, blocky; shale, medium light maroon, calcareous
	108	to	109	Shale, gray, very calcareous, with brachiopod debris
	109	to	110	Shale, maroon-gray, calcareous
110	to	112	Shale, maroon-gray, calcareous; limestone, brown	
112	to	112.5	Shale, dark gray	
112.5	to	113.5	Limestone, very light gray, fragmented	
113.5	to	114	Limestone, very light gray, silt-grade to medium	
114	to	115	Shale, medium light green-gray, lumpy, calcareous	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW80	W-28315	68-32-06BCCC	404312-0943506	1,170	Taylor
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	3	Roadbed (driller's log)	
Quaternary deposits	3	to	20	Clay, medium dark gray, silty	
	20	to	22	Silt, gray, very light gray, very argillaceous, sandy	
	22	to	26	Silt, gray, very light gray, very argillaceous, very sandy, gravelly	
	26	to	30	Silt, gray, very light gray, very argillaceous, very sandy, gravelly sand, colorless, coarse; gravel, varicolored	
Pleistocene deposits	30	to	44	Till, light orange, very light gray, oxidized, unleached	
	44	to	47	Till, light orange, very light gray, oxidized, unleached; till, gray unoxidized, unleached	
	47	to	49	Till, light orange, very light gray, partly oxidized, unleached	
	49	to	55	Till, orange, oxidized, unleached	
	55	to	60	Till, medium light gray, unoxidized, unleached	
	60	to	63	Till, medium light gray, unoxidized, unleached; trace orange, oxidized, unleached	
	63	to	65	Till, olive-gray, unoxidized, unleached	
	65	to	80	Till, olive-gray, trace medium light orange, unoxidized, unleached	
	80	to	90	Till, olive-gray, unoxidized, unleached, with abundant gravel, subrounded	
	90	to	120	Till, olive-gray, unoxidized, unleached, with abundant gravel	
	120	to	130	Till, olive-gray, unoxidized, unleached; till, trace orange, partly oxidized, unleached	
	130	to	188	Till, olive-gray, unoxidized, unleached	
	188	to	196	Till, gray, unoxidized, unleached, sandy; gravel	
196	to	203	Till, medium light gray, brown, unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	203	to	205	Dolostone, orange, very calcareous; gravel, varicolored; sand, colorless	
	205	to	208	Limestone, very light gray, fragmented; shale, green, sandy	
	208	to	210	Shale, maroon, gray, calcareous, lumpy	
	210	to	221	Shale, maroon, calcareous, lumpy	

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW81	W-28316	67-32-11AADD	403718-0942926	1,077	Taylor
Stratigraphic unit	Depth interval (feet)		Description		
	0	to 4	Fill (driller's log)		
Quaternary deposits	4	to 6	Clay, gray, silty		
	6	to 8	Clay, medium light brown-gray, silty		
	8	to 15	Clay, light yellow with orange mottling, silty		
	15	to 16	Clay, brown, silty		
	16	to 17	Clay, orange, very silty		
	17	to 18	Silt, medium light gray, with trace orange, very argillaceous		
	18	to 20	Silt, medium light gray, argillaceous		
	20	to 24	Sand, colorless, orange, subrounded to subangular, very argillaceous, silty, medium to fine		
Pleistocene deposits	24	to 30	Gravel, colorless, varicolored; sand, fine		
	30	to 60	Till, light olive-gray, unoxidized, unleached		
	60	to 72	Till, gray, unoxidized, unleached		
	72	to 74	Till, medium dark gray, unoxidized, unleached		
	74	to 80	Till, gray, unoxidized, unleached		
	80	to 110	Till, light olive-gray, unoxidized, unleached		
	110	to 120	Till, medium light gray, unoxidized, unleached		
	120	to 129	Till, light olive-gray, unoxidized, unleached		
	129	to 140	Gravel, varicolored; sand, colorless, medium; till, light olive-gray, unoxidized, unleached		
	140	to 180	Till, olive-gray, unoxidized, unleached		
	180	to 200	Till, light olive-gray, unoxidized, unleached		
200	to 220	Till, medium light olive-gray, unoxidized, unleached			
220	to 225	Till, light olive-gray, unoxidized, unleached			
225	to 240	Sand, colorless, dark trace varicolored, medium to fine and coarse, subrounded			
240	to 252	Till, medium light gray, unoxidized, unleached			
Pennsylvanian rocks, undifferentiated	252	to 260	Shale, medium light green, gray, slightly micaceous		
	260	to 267	Shale, medium light green, gray, slightly micaceous, unoxidized, unleached		

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW82	W-28317	71-34-26CBBC	405514-0944416	1,280	Adams
<u>Stratigraphic unit</u>	<u>Depth interval (feet)</u>		<u>Description</u>		
Quaternary deposits	0	to 2	Fill and topsoil (driller's log)		
Pleistocene deposits	2	to 8	Clay, yellow-brown (driller's log)		
	8	to 10	Clay, gray to yellow-gray (driller's log)		
	10	to 19	Clay, yellow-gray (driller's log)		
	19	to 38	Till, yellow-orange and yellow-gray (driller's log)		
	38	to 55	Clay, gray (driller's log)		
	55	to 62	Grading to till, yellow-brown and yellow-gray (driller's log)		
	62	to 78	Till, yellow-brown (driller's log)		
	78	to 81	Till, grading to till, blue-gray (driller's log)		
	81	to 86	Till, blue-gray (driller's log)		
	86	to 101	Till, blue-gray and yellow-brown (driller's log)		
101	to 104	Till (driller's log)			
104	to 150	Till, yellow-brown (driller's log)			
150	to 165	Till, blue-gray (driller's log)			

Note: This is a core repositated at the Iowa Department of Natural Resources, Geological Survey Bureau.

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDMMSS)	Land-surface altitude (feet above sea level)	County
SW83	W-28318	72-32-09CCBB	410248-0943248	1,220	Adams
SW83 casing	0	to 130	Slotted		
	130	to 136			

Same location as SW78, see log for SW78 for description.

Table 1. Geologic logs of test holes and observation wells drilled in southwest Iowa, 1985-87--Continued

Southwest Iowa study identification number (fig. 1)	Geological Survey Bureau identification number	Township-range-section identification number	Latitude-longitude identification number (DDMMSS-DDDMMSS)	Land-surface altitude (feet above sea level)	County
SW84	W-28319	71-31-31ABDC	405437-0942732	1,158	Union
Stratigraphic unit	Depth interval (feet)			Description	
	0	to	4	Roadbed (driller's log)	
Quaternary deposits	4	to	10	Clay, very light gray, orange, silty	
	10	to	17	Clay, light gray, orange, silty	
	17	to	20	Silt, gray, argillaceous	
	20	to	27	Silt, medium light gray, argillaceous	
	27	to	30	Sand, colorless, dark, trace varicolored, coarse to fine, subrounded	
	30	to	35	Gravel, varicolored, subrounded	
Pleistocene deposits	35	to	42	Till, light brown-gray, unoxidized, unleached	
	42	to	60	Till, light gray, unoxidized, unleached	
	60	to	70	Till, medium light gray, unoxidized, unleached	
	70	to	80	Till, light olive-gray, unoxidized, unleached	
	80	to	90	Till, medium light gray, unoxidized, unleached	
	90	to	100	Till, light olive-gray, unoxidized, unleached	
	100	to	105	Till, medium light gray, unoxidized, unleached	
	105	to	115	Silt, medium light gray, argillaceous	
	115	to	118	Till, very light gray, oxidized, unleached	
	118	to	121	Till, gray, oxidized, unleached	
	121	to	130	Till, light olive-gray, unoxidized, unleached	
	130	to	160	Till, olive-gray, unoxidized, unleached	
	160	to	175	Till, medium light gray, unoxidized, unleached	
	175	to	180	Till, medium light brown, unoxidized, unleached	
	180	to	203	Till, gray, unoxidized, unleached, very sandy	
203	to	206	Gravel, varicolored, argillaceous, subrounded		
206	to	220	Till, brown-gray, unoxidized, unleached		
220	to	230	Till, medium light gray, unoxidized, unleached		
230	to	250	Till, light olive-gray, unoxidized, unleached		
250	to	255	Till, light gray, unoxidized, unleached		
Pennsylvanian rocks, undifferentiated	255	to	259	Shale, green, calcareous, very sandy	
	259	to	261	Limestone, very light gray, silt-grade to medium	
	261	to	262	Shale, green	
	262	to	272	Shale, gray, lumpy, calcareous	

Table 2. Ranges of hydraulic conductivity of selected earth materials (modified from Freeze and Cherry, 1979)

[ft/d, feet per day; >, greater than; <, less than]

Material	Hydraulic conductivity (ft/d)		
<u>Unconsolidated material</u>			
Glacial till	0.00000011	to	1.1
Silt, loess	.0011	to	13
Silty sand	.1	to	650
Clean sand	1.5	to	6,700
Gravel	650	to	> 150,000
<u>Bedrock</u>			
Shale	< .000000067	to	.00067
Limestone and dolostone	.00067	to	1.5
Sandstone	.000067	to	1.5

Table 3. U.S. Environmental Protection Agency drinking-water regulations

[MCL, maximum contaminant level; SMCL, secondary maximum contaminant level; --, no established regulation; mg/L, milligrams per liter; µg/L, micrograms per liter; pCi/L, picocuries per liter; source, U.S. Environmental Protection Agency, 1988a, 1988b, 1988c, 1988d, 1989]

Property or constituent	Primary regulation (MCL)	Secondary regulation (SMCL)
pH	--	6.5 - 8.5 pH units
Sulfate	--	250 mg/L
Chloride	--	250 mg/L
Fluoride	4.0 mg/L	2.0 mg/L
Dissolved solids	--	500 mg/L
Nitrate as nitrogen	10 mg/L	--
Arsenic	50 µg/L	--
Barium	1,000 µg/L	--
Cadmium	10 µg/L	--
Chromium	50 µg/L	--
Copper	--	1,000 µg/L
Iron	--	300 µg/L
Lead	50 µg/L	--
Manganese	--	50 µg/L
Mercury	2 µg/L	--
Selenium	10 µg/L	--
Silver	50 µg/L	--
Zinc	--	5,000 µg/L
Radium (radium-226 and radium-228 combined)	5 pCi/L	--
Gross-alpha activity (including radium-226 but not radon or uranium)	15 pCi/L	--
Gross-beta activity as Cesium 137	200 pCi/L	--
Endrin	.2 µg/L	--
Lindane	4 µg/L	--
Methoxychlor	100 µg/L	--
Toxaphene	5 µg/L	--
2,4-D	100 µg/L	--
2,4,5-TP (Silvex)	10 µg/L	--
Benzene	5 µg/L	--
Carbon tetrachloride	5 µg/L	--
1,2-dichloroethane	5 µg/L	--
1,1-dichloroethylene	7 µg/L	--
Paradichlorobenzene	75 µg/L	--
1,1,1-trichloroethane	200 µg/L	--
Trichloroethylene	5 µg/L	--
Vinyl chloride	2 µg/L	--

Table 4. Health advisory and risk-assessment concentrations for selected pesticides in drinking water

[$\mu\text{g/L}$, micrograms per liter; --, no data; source, U.S. Environmental Protection Agency, 1987, 1989]

	Health advisory ($\mu\text{g/L}$)	Risk-assessment concentration ($\mu\text{g/L}$)
Alachlor	0	0.15 - 1.5
Atrazine	3.0	--
Cyanazine	9.0	--
Metolachlor	10	--
Simazine	35	--

Table 5. Summary of nitrate analyses of samples from private wells, 1981-86

[Data from University of Iowa Hygienic Laboratory, written commun., 1988]

Year	Number of samples that exceeded primary drinking-water regulations	Percentage of samples exceeding primary drinking-water regulations of 10 milligrams per liter of nitrogen
<u>Adair County</u>		
1981	29	42
1982	33	57
1983	15	39
1984	20	44
1985	19	40
1986	23	41
<u>Adams County</u>		
1981	10	43
1982	8	29
1983	12	33
1984	16	33
1985	18	33
1986	14	37
<u>Cass County</u>		
1981	24	29
1982	29	31
1983	19	22
1984	20	26
1985	26	29
1986	26	30
<u>Fremont County</u>		
1981	13	30
1982	15	32
1983	13	45
1984	19	44
1985	20	34
1986	13	25
<u>Mills County</u>		
1981	14	25
1982	13	28
1983	16	39
1984	24	26
1985	22	26
1986	17	19

Table 5. Summary of nitrate analyses of samples from private wells, 1981-86--Continued

Year	Number of samples that exceeded primary drinking-water regulation	Percentage of samples exceeding primary drinking-water regulation of 10 milligrams per liter of nitrogen
<u>Montgomery County</u>		
1981	9	20
1982	16	33
1983	20	39
1984	36	53
1985	23	42
1986	16	26
<u>Page County</u>		
1981	11	48
1982	21	57
1983	18	44
1984	15	42
1985	14	35
1986	25	39
<u>Pottawattamie County</u>		
1981	25	21
1982	22	19
1983	36	28
1984	55	33
1985	39	23
1986	39	20
<u>Taylor County</u>		
1981	12	35
1982	7	26
1983	20	45
1984	19	39
1985	16	39
1986	11	26
<u>Statewide</u>		
1981	1,382	18
1982	1,449	21
1983	1,763	23
1984	1,568	21
1985	1,393	19
1986	1,632	18

Table 6. Stratigraphic units in the study area

[The stratigraphic nomenclature used herein is that of the Iowa Department of Natural Resources, Geological Survey Bureau]

Era	Period	Epoch	Formation	Member	Lithology
Cenozoic	Quaternary	Holocene			Alluvium, loess, and glacial drift
		Pleistocene			
	Tertiary	Pliocene			
Mesozoic	Cretaceous		Dakota	Woodbury	Shale, sandstone
				Nishnabotna	Sandstone, shale
Paleozoic	Pennsylvanian	(Late)	Undifferentiated (for this report)		Limestone, shale
	Mississippian		Undifferentiated (for this report)		Limestone, dolomite, shale
	Devonian		Undifferentiated (for this report)		Limestone, dolomite, shale
	Silurian		Undifferentiated (for this report)		Dolomite
	Ordovician		Undifferentiated (for this report)		Dolomite, shale, limestone, sandstone
	Cambrian		Undifferentiated (for this report)		Sandstone, shale, dolomite

Table 7. Water levels in selected observation wells, 1986-88

[Water levels in feet below land surface; MP, measuring point is the top of 2-inch-diameter pipe, in feet above land surface;

+, indicates water level in feet above land surface; a, indicates water level before well was developed;

U, shallow well at site; L, deep well at site. Location of observation wells shown in figure 1]

Date	Water level	Date	Water level	Date	Water level
SW-16U, Nishnabotna alluvial aquifer, location 74-37-30BBBBB1, altitude 1,090 feet, depth 42 feet, MP 2.35 feet					
7-21-86	16.13	5-01-87	15.65	8-30-87	16.05
8-07-86	17.54	5-21-87	17.15	9-01-87	16.25
8-12-86	18.09	6-01-87	11.69	9-03-87	16.53
10-23-86	13.80	7-07-87	15.05	9-05-87	16.84
12-09-86	16.97	8-03-87	16.05	9-07-87	16.50
2-05-87	18.65	8-26-87	16.68	10-12-87	16.80
4-01-87	16.96	8-28-87	15.90	11-05-87	17.92
Date	Water level	Date	Water level	Date	Water level
SW-16L, Nishnabotna alluvial aquifer, location 74-37-30BBBBB2, altitude 1,090 feet, depth 70 feet, MP 2.10 feet					
7-21-86	16.02	2-10-87	18.59	5-21-87	17.05
8-07-86	17.48	2-25-87	18.85	5-25-87	16.57
8-12-86	17.96	3-10-87	18.59	6-01-87	11.62
10-23-86	13.75	3-25-87	17.86	6-10-87	13.60
12-09-86	16.88	4-01-87	17.16	6-25-87	15.84
12-24-86	17.15	4-10-87	15.98	7-07-87	14.90
1-10-87	17.88	4-25-87	15.15	7-10-87	14.64
1-25-87	18.17	5-01-87	15.55	7-25-87	15.60
2-05-87	18.60	5-10-87	16.44	8-03-87	14.90

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-16L--Continued					
8-10-87	16.16	10-10-87	16.57	2-25-88	19.06
8-25-87	16.67	10-12-87	16.70	3-10-88	19.18
8-26-87	16.58	10-25-87	17.36	3-25-88	19.29
8-28-87	15.82	11-05-87	17.80	4-10-88	19.27
8-30-87	15.97	11-10-87	17.97	4-25-88	19.46
9-01-87	16.16	11-29-87	18.20	5-10-88	19.58
9-03-87	16.42	12-10-87	17.97	5-25-88	19.79
9-05-87	16.74	12-25-87	18.18	6-10-88	20.10
9-07-87	16.40	1-11-88	18.40	6-25-88	20.30
9-10-87	16.60	1-26-88	18.67		
9-24-87	15.05	2-10-88	18.89		
SW-17, Dakota aquifer, location 75-35-07BBBA, altitude 1,295 feet, depth 209 feet, MP 2.35 feet					
7-21-86	114.51	12-08-86	113.57	5-20-87	114.16
8-19-86	114.70	2-05-87	114.55	10-12-87	114.40
10-23-86	113.80				
SW-18, Pennsylvanian aquifer, location 77-37-13BBBB, altitude 1,298 feet, depth 201 feet, MP 2.20 feet					
7-21-86	117.09	12-08-86	115.90	10-12-87	117.70
8-15-86	117.71	2-05-87	116.00		
10-23-86	116.40	5-21-87	117.12		

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-21, Glacial-drift aquifer, location 74-39-01CCCC, altitude 1,245 feet, depth 206 feet, MP 2.32 feet					
7-22-86	a 110.71	2-24-87	126.74	8-25-87	125.86
8-15-86	a 109.20	3-11-87	126.84	9-29-87	125.78
8-20-86	129.38	3-18-87	126.05	10-12-87	125.73
10-23-86	127.08	4-15-87	126.23	11-12-87	125.36
12-09-86	127.04	4-21-87	126.67	11-17-87	125.15
12-10-86	127.09	5-21-87	126.19	12-16-87	125.71
12-15-86	127.02	5-27-87	126.19	1-03-88	125.45
1-02-87	126.71	6-01-87	126.09	2-24-88	125.66
1-12-87	126.75	6-18-87	126.16	4-04-88	124.87
1-22-87	126.56	7-15-87	125.97	5-16-88	125.38
2-02-87	126.53	8-03-87	126.08	6-28-88	125.52
2-04-87	127.02	8-18-87	125.97		
2-05-87	127.38				

Date	Water level	Date	Water level	Date	Water level
SW-32, Fremont buried-channel aquifer, location 76-40-04AAAA, altitude 1,177 feet, depth 340 feet, MP 1.85 feet					
8-07-86	a 33.53	12-09-86	13.32	5-21-87	13.15
10-23-86	13.00	2-05-87	13.25	10-06-87	13.52

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-33U, Nishnabotna alluvial aquifer, location 76-37-23DABB1, altitude 1,142 feet, depth 45 feet, MP 2.65 feet					
8-06-86	11.14	4-01-87	12.68	10-12-87	13.28
10-23-86	10.15	5-01-87	12.05	11-05-87	13.79
12-08-86	11.70	5-21-87	12.61		
2-05-87	13.30	6-01-87	11.20		
SW-33L, Glacial-drift aquifer, location 76-37-23DABB2, altitude 1,142 feet, depth 65 feet, MP 2.50 feet					
8-06-86	13.78	4-01-87	12.28	10-12-87	10.78
10-23-86	10.50	5-01-87	12.20	11-05-87	13.76
12-08-86	11.88	5-21-87	12.79		
2-05-87	13.30	6-01-87	11.15		
SW-34U, Nishnabotna alluvial aquifer, location 74-38-36BAAA1, altitude 1,073 feet, depth 25 feet, MP 2.50 feet					
8-06-86	6.30	6-01-87	2.06	9-03-87	5.44
10-23-86	3.75	7-07-87	4.90	9-05-87	5.69
12-09-86	5.47	8-03-87	4.90	9-07-87	5.44
2-05-87	7.10	8-26-87	4.72	10-12-87	6.04
4-01-87	6.01	8-28-87	4.39	11-05-87	6.98
5-01-87	5.21	8-30-87	4.84		
5-21-87	5.62	9-01-87	5.14		

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-34L, Nishnabotna alluvial aquifer, location 74-38-36BAAA2, altitude 1,073 feet, depth 39 feet, MP 2.20 feet					
8-06-86	6.39	5-21-87	5.69	9-05-87	5.75
10-23-86	3.80	5-25-87	5.00	9-07-87	5.51
12-09-86	5.54	6-01-87	2.11	9-10-87	5.81
12-24-86	5.94	6-10-87	3.97	9-24-87	5.08
1-10-87	6.68	6-25-87	5.47	10-10-87	6.16
1-25-87	6.87	7-07-87	5.80	10-12-87	6.13
2-05-87	7.20	7-10-87	3.57	10-25-87	6.57
2-10-87	7.29	7-25-87	5.30	11-05-87	6.98
2-25-87	7.55	8-03-87	4.80	11-10-87	6.98
3-10-87	7.29	8-10-87	5.03	11-29-87	7.14
3-25-87	6.64	8-25-87	5.49	12-10-87	6.89
4-01-87	6.31	8-26-87	4.78	12-25-87	7.22
4-10-87	5.64	8-28-87	4.46	1-11-88	7.34
4-25-87	5.17	8-30-87	4.89	1-26-88	7.49
5-01-87	5.36	9-01-87	5.20	2-10-88	7.58
5-10-87	5.86	9-03-87	5.50	2-25-88	7.74
SW-35U, Nishnabotna alluvial aquifer, location 72-38-20ACAA1, altitude 1,038 feet, depth 17 feet, MP 2.90 feet					
8-06-86	7.78	4-01-87	7.80	7-07-87	4.90
10-23-86	8.30	5-01-87	6.41	8-03-87	4.90
12-09-86	6.55	5-21-87	6.52	10-06-87	5.50
2-05-87	8.55	6-01-87	2.81	11-05-87	6.72

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-35L, Nishnabotna alluvial aquifer, location 72-38-20ACAA2, altitude 1,038 feet, depth 27 feet, MP 2.58 feet					
8-06-86	8.01	4-01-87	7.76	7-07-87	4.82
10-23-86	5.02	5-01-87	6.39	8-03-87	4.82
12-09-86	6.46	5-21-87	6.45	10-06-87	5.32
2-05-87	8.42	6-01-87	2.74	11-05-87	6.59
SW-36U, Nishnabotna alluvial aquifer, location 71-41-04AAAA1, altitude 997 feet, depth 44 feet, MP 2.73 feet					
8-06-86	12.58	4-01-87	10.40	8-03-87	5.67
10-23-86	8.47	5-21-87	5.95	10-06-87	6.97
12-09-86	9.53	6-01-87	2.12	11-04-87	6.09
2-05-87	10.52	7-07-87	5.67		
SW-36L, Nishnabotna alluvial aquifer, location 71-41-04AAAA2, altitude 997 feet, depth 62 feet, MP 2.50 feet					
8-06-86	10.64	4-01-87	10.11	8-03-87	6.70
10-23-86	8.20	5-21-87	8.48	10-06-87	8.50
12-09-86	9.17	6-01-87	3.03	11-04-87	9.53
2-05-87	10.20	7-07-87	6.70		

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-37, Fremont buried-channel aquifer, location 73-41-23BCCC, altitude 1,068 feet, depth 260 feet, MP 2.70 feet					
6-11-87	5.45+	9-16-87	5.00+		
SW-38U, Nishnabotna alluvial aquifer, location 70-41-32AABB1, altitude 960 feet, depth 38 feet, MP 2.25 feet					
8-13-86	18.48	5-01-87	15.92	7-07-87	16.95
10-23-86	18.35	5-21-87	16.93	8-03-87	16.95
12-09-86	18.06	6-01-87	12.46	10-06-87	17.05
2-05-87	19.10	6-10-87	14.00	11-04-87	18.20
4-01-87	17.10				
SW-38L, Nishnabotna alluvial aquifer, location 70-41-32AABB2, altitude 960 feet, depth 55 feet, MP 2.05 feet					
8-13-86	18.39	5-01-87	15.83	7-07-87	16.95
10-23-86	18.30	5-21-87	16.89	8-03-87	16.95
12-09-86	18.02	6-01-87	12.52	10-06-87	16.95
2-05-87	19.05	6-10-87	13.95	11-04-87	18.18
4-01-87	17.07				

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-39U, Fremont buried-channel aquifer, location 70-41-32AABB3, altitude 960 feet, depth 135 feet, MP 2.48 feet					
6-10-87	5.61+	8-26-87	4.68+		
7-07-87	5.38+	9-16-87	4.58+		
SW-39L, Fremont buried-channel aquifer, location 70-41-32AABB4, altitude 960 feet, depth 221 feet, MP 2.48 feet					
6-10-87	5.51+	8-26-87	4.50+		
7-07-87	5.20+	9-16-87	4.40+		
SW-40, Buried-channel aquifer, location 71-42-07BBCD, altitude 1,122 feet, depth 342 feet, MP 1.80 feet					
10-23-86	168.35	5-21-87	167.85	8-03-87	167.90
12-09-86	167.96	6-10-87	166.78	10-12-87	168.95
2-05-87	168.50	7-07-87	167.90		
SW-41, Buried-channel aquifer, location 71-42-24AAA, altitude 1,102 feet, depth 250 feet, MP 2.10 feet					
10-23-86	138.55	6-10-87	136.86	8-03-87	137.10
12-09-86	137.64	7-07-87	137.10	10-12-87	138.05
5-21-87	137.24				

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-55, Tarkio alluvial aquifer, location 70-37-06AADD, altitude 1,080 feet, depth 62 feet, MP 2.30 feet					
10-06-87	9.80	10-20-87	10.47	11-06-87	9.53
SW-56, Tarkio alluvial aquifer, location 69-38-11ABAB, altitude 1,040 feet, depth 54 feet, MP 2.00 feet					
10-06-87	10.80	10-21-87	11.00	11-06-87	11.17
SW-57, Tarkio alluvial aquifer, location 67-38-08DADD, altitude 980 feet, depth 51 feet, MP 2.60 feet					
10-06-87	26.60	10-21-87	27.33	11-06-87	27.65
SW-62, One Hundred and Two River alluvial aquifer, location 68-35-15BCDD, altitude 1,070 feet, depth 37 feet, MP 2.60 feet					
9-10-87	21.70	10-21-87	23.07		
10-06-87	22.90	11-06-87	23.09		

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-64, Nodaway alluvial aquifer, location 67-36-30DCCD, altitude 948 feet, depth 20 feet, MP 2.00 feet					
9-10-87	1.00	10-21-87	2.77		
10-06-87	2.80	11-06-87	1.69		
SW-65, Nodaway alluvial aquifer, location 71-36-32DDDD, altitude 1,021 feet, depth 42 feet, MP 2.40 feet					
9-10-87	11.90	10-21-87	13.50		
10-06-87	13.00	11-06-87	14.26		
SW-66, Nodaway alluvial aquifer, location 72-36-04CDDD, altitude 1,076 feet, depth 34 feet, MP 2.30 feet					
10-06-87	12.30	10-19-87	12.96	11-05-87	13.65
SW-67, Nodaway alluvial aquifer, location 72-35-12ACBC, altitude 1,085 feet, depth 17 feet, MP 2.10 feet					
10-06-87	8.20	10-20-87	9.44	11-05-87	9.91

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-71, Nodaway alluvial aquifer, location 73-34-27BCBB, altitude 1,108 feet, depth 30 feet, MP 1.90 feet					
10-06-87	17.50	10-20-87	17.57	11-05-87	17.60
SW-72, Nodaway alluvial aquifer, location 71-34-07DCCD, altitude 1,094 feet, depth 40 feet, MP 2.10 feet					
10-06-87	20.90	10-20-87	20.45	11-05-87	21.53
SW-73, Nodaway alluvial aquifer, location 71-36-01BDCCD, altitude 1,052 feet, depth 32 feet, MP 2.50 feet					
10-06-87	13.80	10-20-87	13.57	11-05-87	14.64
SW-77, Nodaway alluvial aquifer, location 72-32-09BBCC, altitude 1,168 feet, depth 40 feet, MP 2.20 feet					
10-12-87	2.30	11-04-87	1.65	11-06-87	1.75

Table 7. Water levels in selected observation wells, 1986-88--Continued

Date	Water level	Date	Water level	Date	Water level
SW-78, Albany buried-channel aquifer, location 72-32-09CCBB1, altitude 1,220 feet, depth 276 feet, MP 1.40 feet					
10-12-87	4.30	11-06-87	2.80	8-08-88	6.94
11-04-87	1.59				
Date	Water level	Date	Water level	Date	Water level
SW-83, Glacial-drift aquifer, location 72-32-09CCBB2, altitude 1,220 feet, depth 136 feet, MP 2.75 feet					
8-08-88	1.59				

Table 8. Water-quality properties and constituents, 1985-87

[All constituents are dissolved, except as indicated; ft, feet; $\mu\text{S}/\text{cm}$, microsiemens per centimeter at 25 degrees Celsius; $^{\circ}\text{C}$, degrees Celsius; CaCO_3 , calcium carbonate; mg/L , milligrams per liter; NO_2 , nitrite; NO_3 , nitrate; $\mu\text{g}/\text{L}$, micrograms per liter; pCi/L , picocuries per liter; --, no data; <, less than]

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Specific conductance ($\mu\text{S}/\text{cm}$)	pH (standard units)	Water temperature ($^{\circ}\text{C}$)	Total hardness (mg/L as CaCO_3)	Calcium (mg/L as Ca)	Magnesium (mg/L as Mg)	Sodium (mg/L as Na)	
<u>Surface water</u>												
West Nishnabotna River at Avoca	--	--	--	8-20-86	610	8.2	21.0	286	75	24	9.0	
East Nishnabotna River at Lorah	--	--	--	8-20-86	560	8.1	20.0	283	77	22	9.1	
Tarkio River at Blanchard	--	--	--	10-21-87	470	8.0	5.0	--	58	15	11	
West Nodaway River at Massena	--	--	--	10-27-87	420	7.7	10.0	--	50	16	8.4	
Middle Nodaway River at Fontanelle	--	--	--	10-22-87	460	7.9	8.0	--	58	15	8.0	
East Nodaway River at Prescott	--	--	--	10-20-87	410	7.8	8.0	--	48	14	11	
Nodaway River at Braddyville	--	--	--	10-21-87	460	8.1	7.0	--	57	15	9.7	
East Fork One Hundred and Two River at Bedford	--	--	--	10-21-87	440	8.0	10.0	--	53	14	14	
<u>West Nishnabotna River alluvium</u>												
SW36L	405911095302302	62.0	57 to 62	8-06-86	580	7.6	12.0	304	79	26	9.7	
SW38L	404946095344802	55.0	50 to 55	8-13-86	520	7.9	12.0	246	67	19	6.5	
Avoca 2	412812095211201	37.5	22.5 to 37.5	8-20-86	940	7.3	13.0	473	140	30	19	
Hancock 6	412327095215401	48.0	--	8-20-86	800	7.4	13.0	396	110	30	25	
Oakland 11	411838095252801	42.0	--	8-20-86	550	7.5	12.0	270	72	22	11	
Carson 2	411445095251601	26.8	21.8 to 26.8	8-20-86	660	7.3	12.5	332	90	26	10	
Macedonia 1	411201095252801	39.0	34 to 39	8-20-86	660	7.4	12.5	333	89	27	10	
Henderson 2	410630095253801	66.0	--	8-20-86	850	7.3	13.0	456	120	35	14	

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Specific conductance ($\mu\text{S/cm}$)	pH (standard units)	Water temperature ($^{\circ}\text{C}$)	Total hardness (mg/L as CaCO_3)	Calcium (mg/L as Ca)	Magnesium (mg/L as Mg)	Sodium (mg/L as Na)
<u>West Nishnabotna River alluvium--Continued</u>											
Hastings 1	410114095300001	53.0	48 to 53	8-20-86	660	7.2	13.0	311	82	26	19
Sidney 6 (8)	404432095361701	32.0	22 to 32	10-16-86	630	7.1	--	314	88	23	14
<u>East Nishnabotna River alluvium</u>											
SW16U	411117095091901	42.0	37 to 42	8-12-86	440	8.0	12.0	201	54	16	8.0
SW16L	411117095091902	70.0	59 to 70	8-11-86	380	8.1	12.0	173	48	13	6.8
SW33L	412204095035202	65.0	60 to 65	8-06-86	650	7.4	12.0	320	92	22	12
SW34L	411024095095502	39.0	34 to 39	8-06-86	310	7.4	11.0	159	44	12	10
SW35L	410134095141602	27.0	22 to 27	8-06-86	900	7.2	12.0	479	130	35	12
Essex 5	404957095183501	44.5	--	8-14-86	470	7.2	12.0	201	54	16	7.8
Shenandoah 17	404635095224901	73.3	--	8-14-86	980	7.8	13.5	460	120	36	21
Shenandoah 25	404521095235801	33.5	23.5 to 33.5	8-14-86	440	7.0	13.0	187	50	15	7.6
Riverton 2	404224095310601	57.0	47 to 57	8-14-86	710	7.6	--	314	83	26	14
<u>Tarkio River alluvium</u>											
SW55	405350095081701	62.0	59 to 62	10-20-87	1,000	6.9	12.0	--	110	26	14
SW56	404801095105301	54.0	50 to 54	10-21-87	720	7.2	13.5	--	75	20	41
<u>West Nodaway River alluvium</u>											
SW65	405403095004401	42.0	37 to 42	10-19-87	420	6.9	12.0	--	52	13	10
SW66	410103095594501	34.0	29 to 34	10-19-87	450	6.7	12.0	--	55	12	13
Massena 3 (79-1)	411503094465401	35.0	--	10-19-87	460	6.9	13.0	--	62	14	9.9
Shambaugh 3	403906095015001	--	--	10-19-87	490	6.6	--	--	60	11	19
Villisca 7	405559094591501	41.5	26.5 to 41.5	10-20-87	710	6.6	12.0	--	79	21	18
Villisca 8	405604094593701	41.5	25.5 to 40.5	10-20-87	480	6.6	12.0	--	62	13	16
<u>Middle Nodaway River alluvium</u>											
SW71	410548094452101	30.0	25 to 30	10-20-87	270	6.6	12.0	--	35	8.5	6.9
SW73	405850094561001	32.0	27 to 32	10-19-87	470	6.8	11.0	--	66	13	9.4

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Specific conductance ($\mu\text{S}/\text{cm}$)	pH units	Water temperature ($^{\circ}\text{C}$)	Total hardness (mg/L as CaCO_3)	Calcium (mg/L as Ca)	Magnesium (mg/L as Mg)	Sodium (mg/L as Na)
<u>East Nodaway River alluvium</u>											
SW72	405731094480801	40.0	35 to 40	10-20-87	580	7.2	12.0	--	78	16	16
SW77	410317094324801	40.0	35 to 40	11-04-87	580	6.6	10.5	--	53	16	30
Prescott 2	410115094362201	40.0	--	10-20-87	750	6.7	13.0	--	80	21	28
Nodaway 3	405631094560802	36.0	26 to 36	10-20-87	580	6.8	12.0	--	76	23	11
<u>Nodaway River alluvium</u>											
SW64	403446095010701	20.0	16 to 20	10-21-87	630	6.9	14.0	--	79	18	18
Braddyville 2	403445095011501	31.8	27 to 31.8	10-21-87	400	6.7	13.0	--	50	11	9.5
<u>West Fork One Hundred and Two River alluvium</u>											
SW62	404200094510901	40.0	29 to 37	10-21-87	510	7.5	13.0	--	68	12	13
<u>Glacial-drift aquifer</u>											
SW21	411359095171901	206.0	189 to 206	8-20-86	730	7.9	13.0	293	76	25	54
SW83	410247094324802	136.0	130 to 136	12-21-87	2,400	7.4	--	786	210	61	270
Minden 2	412812095322701	48.0	--	6-06-86	835	7.4	11.0	439	120	33	12
<u>Albany buried-channel aquifer</u>											
SW78	410247094324801	276.0	266 to 276	11-04-87	1,400	7.7	13.0	--	40	13	270
Blockton 1	403659094285301	271.0	--	8-25-85	1,700	7.8	10.0	130	36	10	330
<u>Fremont buried-channel aquifer</u>											
SW32	412505095262901	340.0	335 to 340	8-06-86	2,000	8.1	12.0	250	67	20	340
SW37	410636095321501	260.0	255 to 260	8-13-86	2,000	8.1	24.0	284	76	23	330
SW39U	404946095344601	135.0	130 to 135	8-13-86	640	8.0	12.0	239	66	18	38
SW39L	404946095344602	221.0	116 to 221	8-20-86	640	8.1	--	224	60	18	50
Treynor 3	411356095360801	250.0	232 to 250	8-06-85	940	7.8	12.5	370	100	29	73

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Specific conductance ($\mu\text{S}/\text{cm}$)	pH (standard units)	Water temperature ($^{\circ}\text{C}$)	Total hardness (mg/L as CaCO_3)	Calcium (mg/L as Ca)	Magnesium (mg/L as Mg)	Sodium (mg/L as Na)
					<u>Dakota aquifer</u>						
SW17	411900094530101	218.0	189 to 209	8-20-86	360	7.9	12.0	186	53	13	7.5
					<u>Pennsylvanian aquifer</u>						
SW18	412832095033501	201.0	196 to 201	8-20-86	3,100	7.9	--	1,590	420	130	220

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Alkalinity, total					Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)
		Potassium (mg/L)	(mg/L as CaCO ₃)	Bicarbonate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)			
<u>Surface water</u>									
West Nishnabotna River at Avoca	8-20-86	4.7	230	280	42	12	0.4	18	324
East Nishnabotna River at Lorah	8-20-86	4.5	190	230	34	15	.2	18	310
Tarkio River at Blanchard	10-21-87	3.5	190	--	19	9.0	.4	--	240
West Nodaway River at Massena	10-27-87	3.6	160	--	17	18	.4	--	216
Middle Nodaway River at Fontanelle	10-22-87	2.2	190	--	21	9.0	.4	--	260
East Nodaway River at Prescott	10-27-87	3.1	140	--	25	11	.4	--	202
Nodaway River at Braddyville	10-21-87	4.2	170	--	30	10	.4	--	218
East Fork One Hundred and Two River at Bedford	10-21-87	4.5	170	--	27	9.0	.4	--	228
<u>West Nishnabotna River alluvium</u>									
SW36L	8-06-86	4.0	90	350	18	2.0	.4	23	322
SW38L	8-13-86	4.9	240	290	28	1.0	.4	24	270
Avoca 2	8-20-86	4.9	290	350	170	37	.2	14	624
Hancock 6	8-20-86	3.8	280	350	85	33	.2	20	518
Oakland 11	8-20-86	3.6	58	320	26	6.0	.2	19	308
Carson 2	8-20-86	1.0	83	340	48	7.0	.4	17	390
Macedonia 1	8-20-86	<.1	250	300	77	7.0	.4	19	408
Henderson 2	8-20-86	4.6	330	410	64	25	.4	22	512
Hastings 1	8-20-86	4.4	220	270	65	21	.2	20	388
Sidney 6 (8)	10-16-86	2.6	290	350	40	6.0	.3	19	250

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Alkalinity, total				Chloride (mg/L)	Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)
		Potassium (mg/L)	(mg/L as CaCO ₃)	Bicarbonate (mg/L)	Sulfate (mg/L)				
<u>East Nishnabotna River alluvium</u>									
SW16U	8-12-86	3.0	200	240	20	12	0.4	20	202
SW16L	8-11-86	3.0	210	220	5.5	1.0	.2	19	180
SW33L	8-06-86	2.7	320	400	10	6.0	.2	22	330
SW34L	8-06-86	1.4	170	210	7.9	2.0	.2	20	178
SW35L	8-06-86	2.2	420	520	42	9.0	.2	28	538
Essex 5	8-14-86	3.7	150	180	57	12	.2	17	258
Shenandoah 17	8-14-86	4.7	290	350	210	34	.3	18	606
Shenandoah 25	8-14-86	4.4	150	180	58	6.0	.2	21	214
Riverton 2	8-14-86	4.8	36	410	32	4.0	.4	22	360
<u>Tarkio River alluvium</u>									
SW55	10-20-87	5.6	520	--	52	2.0	.2	--	606
SW56	10-21-87	5.3	370	--	9	7.0	.4	--	404
<u>West Nodaway River alluvium</u>									
SW65	10-19-87	1.0	160	--	49	4.0	.4	--	226
SW66	10-19-87	1.8	140	--	70	10	.3	--	286
Massena 3 (79-1)	10-19-87	1.8	220	--	20	5.0	.4	--	296
Shambaugh 3	10-22-87	1.9	150	--	44	47	.2	--	302
Villisca 7	10-20-87	3.4	140	--	120	61	.2	--	402
Villisca 8	10-20-87	3.0	120	--	95	6.0	.2	--	300
<u>Middle Nodaway River alluvium</u>									
SW71	10-20-87	<.1	110	--	23	2.0	.3	--	150
SW73	10-19-87	1.0	180	--	35	14	.3	--	280

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Alkalinity, total					Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)
		Potassium (mg/L)	(mg/L as CaCO ₃)	Bicarbonate (mg/L)							
<u>East Nodaway River alluvium</u>											
SW72	10-20-87	3.8	250	--	40	16	0.3	--	--	340	
SW77	11-04-87	2.8	250	--	59	4.0	.4	--	--	330	
Prescott 2	10-20-87	3.7	150	--	150	49	.3	--	--	482	
Nodaway 3	10-20-87	2.0	160	--	110	18	.2	--	--	354	
<u>Nodaway River alluvium</u>											
SW64	10-21-87	2.7	190	--	95	19	.2	--	--	344	
Braddyville 2	10-21-87	3.6	160	--	30	9.0	.2	--	--	218	
<u>West Fork One Hundred and Two River alluvium</u>											
SW62	10-21-87	2.3	180	--	52	10	.2	--	--	314	
<u>Glacial-drift aquifer</u>											
SW21	8-20-86	4.9	350	420	49	3.0	.5	24	24	440	
SW83	12-21-87	6.9	400	480	910	25	.2	19	19	1,900	
Minden 2	6-06-86	1.4	310	380	36	48	.3	19	19	468	
<u>Albany buried-channel aquifer</u>											
SW78	11-04-87	4.8	310	--	240	95	.7	--	--	970	
Blockton 1	8-25-85	2.8	420	510	240	109	.8	12	12	1,080	
<u>Fremont buried-channel aquifer</u>											
SW32	8-06-86	5.1	270	330	620	25	.4	18	18	1,410	
SW37	8-13-86	5.0	330	400	600	65	.2	17	17	1,320	
SW39U	8-13-86	4.6	320	390	21	2.0	.2	25	25	350	
SW39L	8-20-86	4.6	320	390	20	3.0	.2	28	28	312	
Treynor 3	8-06-85	3.8	380	470	140	3.5	.3	29	29	566	

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Potassium (mg/L)	Alkalinity, total			Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)
			(mg/L as CaCO ₃)	Bicarbonate (mg/L)						
SW17	8-20-86	3.2	<u>Dakota aquifer</u>			7.8	2.0	0.2	20	180
			180	220						
SW18	8-20-86	5.1	<u>Pennsylvanian aquifer</u>			1,700	22	.2	18	2,830
			200	250						

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Nitrogen NO ₂ + NO ₃ (mg/L as N)	Ammonia (mg/L as N)	Nitrogen organic (mg/L as N)	Nitrogen, khjedahl (mg/L as N)	Phosphorus (mg/L as PO ₄)	Chemical			Iron (µg/L)	Manganese (µg/L as N)
							oxygen demand, total (mg/L)	Carbon, organic (mg/L)			
<u>Surface water</u>											
West Nishnabotna River at Avoca	8-20-86	37	--	--	--	--	--	--	--	3,300	280
East Nishnabotna River at Lorah	8-20-86	46	--	--	--	--	--	--	--	2,600	20
Tarkio River at Blanchard	10-21-87	4.2	0.20	<0.10	0.20	0.40	16	2.3	<20	<20	70
West Nodaway River at Massena	10-27-87	4.3	<.10	.40	.40	<.10	8	3.6	<20	<20	270
Middle Nodaway River at Fontanelle	10-22-87	4.9	<.10	.40	.40	.30	12	4.0	300	300	240
East Nodaway River at Prescott	10-20-87	4.9	<.10	.30	.30	<.10	16	3.7	300	300	120
Nodaway River at Braddyville	10-21-87	2.2	<.10	.30	.30	.10	16	2.8	<20	<20	60
East Fork One Hundred and Two River at Bedford	10-21-87	1.0	<.10	.30	.30	<.10	16	4.6	<20	<20	140
<u>West Nishnabotna River alluvium</u>											
SW36L	8-06-86	.40	--	--	--	--	--	--	--	420	170
SW38L	8-13-86	.40	--	--	--	--	--	--	--	550	220
Avoca 2	8-20-86	.60	--	--	--	--	--	--	--	2,600	1,600
Hancock 6	8-20-86	7.2	--	--	--	--	--	--	--	30	300
Oakland 11	8-20-86	2.5	--	--	--	--	--	--	--	620	140
Carson 2	8-20-86	13	--	--	--	--	--	--	--	640	320
Macedonia 1	8-20-86	13	--	--	--	--	--	--	--	30	<20
Henderson 2	8-20-86	31	--	--	--	--	--	--	--	<20	<20
Hastings 1	8-20-86	33	--	--	--	--	--	--	--	<20	<20
Sidney 6 (8)	10-16-86	.30	.09	--	--	.23	--	--	--	1,300	250

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Nitrogen NO ₂ + NO ₃ (mg/L as N)	Ammonia (mg/L as N)	Nitrogen, organic (mg/L as N)	Nitrogen, kjedahl (mg/L as N)	Phosphorus (mg/L as PO ₄)	Chemical				
							oxygen demand, total (mg/L)	Carbon, organic (mg/L)	Iron (μg/L)	Manganese (μg/L as N)	
<u>East Nishnabotna River alluvium</u>											
SW16U	8-12-86	0.40	--	--	--	--	--	--	--	750	50
SW16L	8-11-86	7.4	--	--	--	--	--	--	--	290	20
SW33L	8-06-86	8.3	--	--	--	--	--	--	--	2,000	400
SW34L	8-06-86	1.2	--	--	--	--	--	--	--	170	<20
SW35L	8-06-86	20	--	--	--	--	--	--	--	480	50
Essex 5	8-14-86	3.4	--	--	--	--	--	--	--	220	40
Shenandoah 17	8-14-86	<.10	--	--	--	--	--	--	--	2,300	440
Shenandoah 25	8-14-86	5.9	--	--	--	--	--	--	--	60	<20
Riverton 2	8-14-86	.70	--	--	--	--	--	--	--	90	200
<u>Tarkio River alluvium</u>											
SW55	10-20-87	<.10	9.5	.10	9.6	1.7	40	14	20,000	670	
SW56	10-21-87	<.10	4.6	.10	4.7	.90	20	6.9	8,300	770	
<u>West Nodaway River alluvium</u>											
SW65	10-19-87	<.10	.10	.30	.40	.10	21	4.3	4,900	1,400	
SW66	10-19-87	<.10	.20	.20	.40	.60	8	1.3	11,000	1,300	
Massena 3	10-19-87	<.10	.40	.20	.60	.80	8	2.6	13,000	1,200	
Shambaugh 3	10-22-87	<.10	<.10	.70	.70	.50	12	1.3	4,100	340	
Villisca 7	10-20-87	<.10	.20	.10	.30	.40	13	1.4	14,000	2,000	
Villisca 8	10-20-87	<.10	<.10	.20	.20	.40	8	1.1	13,000	1,400	
<u>Middle Nodaway River alluvium</u>											
SW71	10-20-87	1.0	<.10	<.10	<.10	<.10	8	.5	<20	<20	
SW73	10-20-87	<.10	<.10	.20	.20	.30	4	.9	5,300	760	

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Nitrogen NO ₂ + NO ₃ (mg/L as N)	Ammonia (mg/L as N)	Nitrogen, organic (mg/L as N)	Nitrogen, kjijedahl (mg/L as N)	Phosphorus (mg/L as PO ₄)	Chemical			
							oxygen demand, total (mg/L)	Carbon, organic (mg/L)	Iron (µg/L)	Manganese (µg/L as N)
<u>East Nodaway River alluvium</u>										
SW72	10-20-87	< 0.10	0.90	1.1	2.0	0.40	21	2.2	2,700	530
SW77	11-04-87	< 0.10	1.0	.40	1.4	1.0	12	4.1	19,000	2,200
Prescott 2	10-20-87	< 0.10	.80	.40	1.2	.70	16	1.9	26,000	2,900
Nodaway 3	10-20-87	.80	< 0.10	.10	.10	.40	4	2.0	1,400	80
<u>Nodaway River alluvium</u>										
SW64	10-21-87	< 0.10	< 0.10	.20	.20	< .10	8	1.1	1,600	500
Braddyville 2	10-21-87	< 0.10	.70	.10	.80	.40	12	28	7,300	2,400
<u>West Fork One Hundred and Two River alluvium</u>										
SW62	10-21-87	< 0.10	.40	.10	.5	1.6	12	2.0	15,000	1,500
<u>Glacial-drift aquifer</u>										
SW21	8-20-86	.40	--	--	--	--	--	--	820	410
SW83	12-21-87	< 0.10	--	--	--	--	--	--	2,500	60
Minden 2	6-06-86	10	--	--	--	--	--	--	< 20	< 20
<u>Albany buried-channel aquifer</u>										
SW78	11-04-87	< 0.10	2.1	1.8	3.9	.20	36	.8	320	20
Blockton 1	8-25-85	< 0.02	--	--	--	--	--	--	650	40
<u>Fremont buried-channel aquifer</u>										
SW32	8-06-86	< 0.10	--	--	--	--	--	--	1,300	20
SW37	8-13-86	.20	--	--	--	--	--	--	830	50

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Nitrogen NO ₂ + NO ₃ (mg/L as N)	Ammonia (mg/L as N)	Nitrogen, organic (mg/L as N)	Nitrogen, kjedahl (mg/L as N)	Phosphorus (mg/L as PO ₄)	Chemical				
							oxygen demand, total (mg/L)	Carbon, organic (mg/L)	Iron (µg/L)	Manganese (µg/L as N)	
<u>Fremont buried-channel aquifer --Continued</u>											
SW39U	8-13-86	0.30	--	--	--	--	--	--	--	540	70
SW39L	8-20-86	1.0	--	--	--	--	--	--	--	810	80
Treynor 3	8-06-85	.20	1.8	--	--	0.09	--	--	--	360	200
<u>Dakota aquifer</u>											
SW17	8-20-86	.60	--	--	--	--	--	--	--	1,300	60
<u>Pennsylvanian aquifer</u>											
SW18	8-20-86	.40	--	--	--	--	--	--	--	2,900	1,500

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Gross alpha (pCi/L)	Gross beta (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)
<u>Surface water</u>					
West Nishnabotna River at Avoca	8-20-86	--	--	--	--
East Nishnabotna River at Lorah	8-20-86	--	--	--	--
Tarkio River at Blanchard	10-21-87	--	--	--	--
West Nodaway River at Massena	10-27-87	--	--	--	--
Middle Nodaway River at Fontanelle	10-22-87	--	--	--	--
East Nodaway River at Prescott	10-20-87	--	--	--	--
Nodaway River at Braddyville	10-21-87	--	--	--	--
East Fork One Hundred and Two River at Bedford	10-21-87	--	--	--	--
<u>West Nishnabotna River alluvium</u>					
SW36L	8-06-86	1.9	2.0	--	--
SW38L	8-13-86	1.0	<1.1	--	--
Avoca 2	8-20-86	2.1	<1.2	--	--
Hancock 6	8-20-86	5.5	2.0	0.3	1.0
Oakland 11	8-20-86	4.8	<1.0	.5	<1.0
Carson 2	8-20-86	4.5	7.0	.3	<1.0
Macedonia 1	8-20-86	1.8	1.0	--	--
Henderson 2	8-20-86	7.6	6.0	.5	<1.0
Hastings 1	8-20-86	3.3	4.0	.4	<1.0
Sidney 6 (8)	10-16-86	4.5	2.0	.5	1.2

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Gross alpha (pCi/L)	Gross beta (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)
<u>East Nishnabotna River alluvium</u>					
SW16U	8-12-86	2.4	5.0	--	--
SW16L	8-11-86	2.3	4.0	--	--
SW33L	8-06-86	9.2	<2.6	1.6	1.7
SW34L	8-06-86	1.5	3.0	--	--
SW35L	8-06-86	5.0	6.0	.2	2.1
Essex 5	8-14-86	6.8	<1.0	.7	<.9
Shenandoah 17	8-14-86	17	<1.4	1.4	<.9
Shenandoah 25	8-14-86	2.1	10	--	--
Riverton 2	8-14-86	59	17	1.2	<.9
<u>Tarkio River alluvium</u>					
SW55	10-20-87	--	--	--	--
SW56	10-21-87	--	--	--	--
SW65	10-19-87	--	--	--	--
SW66	10-19-87	--	--	--	--
Massena 3 (79-1)	10-19-87	--	--	--	--
Shambaugh 3	10-22-87	--	--	--	--
Villisca 7	10-20-87	--	--	--	--
Villisca 8	10-20-87	--	--	--	--
<u>Middle Nodaway River alluvium</u>					
SW71	10-20-87	--	--	--	--
SW73	10-19-87	--	--	--	--
<u>East Nodaway River alluvium</u>					
SW72	10-20-87	--	--	--	--
SW77	11-04-87	--	--	--	--
Prescott 2	10-20-87	--	--	--	--
Nodaway 3	10-20-87	--	--	--	--

Table 8. Water-quality properties and constituents, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Gross alpha (pCi/L)	Gross beta (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)
<u>Nodaway River alluvium</u>					
SW64 Braddyville 2	10-21-87	--	--	--	--
	10-21-87	--	--	--	--
<u>West Fork One Hundred and Two River alluvium</u>					
SW62	10-21-87	--	--	--	--
		<u>Glacial-drift aquifer</u>			
SW21 SW83 Minden 2	8-20-86	2.1	4.0	--	--
	12-21-87	--	--	--	--
	6-06-86	1.4	2.0	--	--
<u>Albany buried-channel aquifer</u>					
SW78 Blockton 1	11-04-87	--	--	--	--
	8-25-85	<.2	2.0	--	--
<u>Fremont buried-channel aquifer</u>					
SW32 SW37 SW39U SW39L Treyvor 3	8-06-86	4.9	<1.5	0.6	1.5
	8-13-86	4.6	2.0	.9	<.9
	8-13-86	2.0	3.0	--	--
	8-20-86	.9	<1.0	--	--
	8-06-85	2.8	<.5	--	--
<u>Dakota aquifer</u>					
SW17	8-20-86	2.2	<1.0	--	--
		<u>Pennsylvanian aquifer</u>			
SW18	8-20-86	2.9	11	--	--

Table 9. Concentrations of dissolved trace elements in selected wells, 1985-87

[ft, feet; <, less than; --, no data]

Well name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Dissolved trace element, micrograms per liter															
					Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Mercury	Selenium	Silver	Zinc						
<u>West Nishnabotna River alluvium</u>																				
SW36L	405911095302302	62	57 to 62	8-06-86	<10	260	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	
SW38L	404946095344802	55	50 to 55	8-13-86	<10	240	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Avoca 2	412812095211201	37.5	22.5 to 37.5	8-20-86	<10	180	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Carson 2	411445095251601	26.8	21.8 to 26.8	8-20-86	<10	260	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Hancock 6	412327095215401	48	--	8-20-86	<10	180	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Hastings 1	410114095300001	53	48 to 53	8-20-86	<10	140	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	30
Henderson 2	410830095253801	66	--	8-20-86	<10	190	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Macedonia 1	411201095252801	39	34 to 39	8-20-86	<10	90	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Oakland 11	411838095252801	42	--	8-20-86	<10	220	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Sidney 6 (8)	404432095361701	32	22 to 32	10-16-86	<10	210	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<20
<u>East Nishnabotna River alluvium</u>																				
SW16U	411117095091901	42	37 to 42	8-12-86	<10	160	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
SW16L	411117095091902	70	59 to 70	8-11-86	<10	110	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
SW33L	412304095035202	65	60 to 65	8-06-86	<10	660	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
SW34L	411024095095502	39	34 to 39	8-06-86	<10	90	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
SW35L	410134095141602	27	22 to 27	8-06-86	<10	260	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Essex 5	404957095183501	44.5	--	8-14-86	<10	180	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	20
Riverton 2	404224095310601	57	47 to 57	8-14-86	<10	350	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Shenandoah 17	404635095224901	73.3	--	8-14-86	<10	200	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Shenandoah 25	404521095235801	33.5	23.5 to 33.5	8-14-86	<10	90	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
<u>Glacial drift</u>																				
SW21	411359095171901	206	189 to 206	8-20-86	<10	350	<1	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
SW83	410247094324802	136	130 to 136	12-21-87	<10	<50	<1	<10	<10	10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
Minden 2	412812095322701	48	--	6-06-86	<10	340	<1	10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10

Table 9. Concentrations of dissolved trace elements in selected wells, 1985-87--Continued

Well name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Dissolved trace element, micrograms per liter									
					Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Mercury	Selenium	Silver	Zinc
<u>Fremont channel</u>														
SW32	412505095262901	340	335 to 340	8-06-86	<10	<50	<1	<10	<10	<10	<1	<10	<10	<10
SW37	410636095321501	260	255 to 260	8-13-86	<10	<50	<1	<10	<10	<10	<1	<10	<10	<10
SW39U	404946095344601	135	130 to 135	8-13-86	<10	140	<1	<10	<10	<10	<1	<10	<10	<10
SW39L	404946095344602	221	116 to 221	8-20-86	<10	100	<1	<10	<10	<10	<1	<10	<10	<10
Treynor 3	411356095360801	250	232 to 250	8-06-85	<10	<100	<1	<10	<10	<10	--	<10	<10	<10
<u>Albany channel</u>														
Blockton 1	403659094285301	271	--	8-20-85	<10	200	<1	<10	<10	<10	<1	<10	<10	10
<u>Dakota aquifer</u>														
SW17	411900094530101	218	189 to 209	8-20-86	<10	90	<1	<10	<10	<10	<1	<10	<10	<10
<u>Pennsylvanian aquifer</u>														
SW18	412832095033501	201	196 to 201	8-20-86	<10	20	<1	<10	<10	<10	<1	<10	<10	<10

Table 10. Concentrations of selected pesticides, 1985-87

[ft, feet; --, no data; <, less than]

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Pesticide concentration, in micrograms per liter						
					Aldrin	Atrazine	Alachlor	Alpha-BHC	Beta-BHC	Delta-BHC	Gamma-BHC
<u>Surface Water</u>											
West Nishnabotna River at Avoca	--	--	--	8-20-86	--	0.20	0.32	--	--	--	--
Nishnabotna River at Hamburg	--	--	--	10-27-87	--	<.10	<.10	--	--	--	--
East Nishnabotna River at Lora	--	--	--	8-20-86	--	.26	<.10	--	--	--	--
Tarkio River at Blanchard	--	--	--	10-21-87	--	<.10	<.10	--	--	--	--
West Nodaway River at Massena	--	--	--	10-27-87	--	<.10	<.10	--	--	--	--
Middle Nodaway River at Fontanelle	--	--	--	10-22-87	--	.18	<.10	--	--	--	--
East Nodaway River at Prescott	--	--	--	10-20-87	--	.10	<.10	--	--	--	--
Nodaway River at Braddyville	--	--	--	10-21-87	--	<.10	<.10	--	--	--	--
East Fork One Hundred and Two River at Bedford	--	--	--	10-21-87	--	<.10	<.10	--	--	--	--
<u>West Nishnabotna River alluvium</u>											
SW36L	405911095302302	62.0	57 to 62	8-06-86	--	<.10	<.10	--	<.04	--	--
SW38L	404946095344802	55.0	50 to 55	8-13-86	<.04	<.10	<.10	--	<.04	--	<.04
Avoca 2	412812095211201	37.5	22.5 to 37.5	8-20-86	--	.53	<.10	--	--	--	--
Hancock 6	412327095215401	48.0	--	8-20-86	--	.18	<.10	--	--	--	--
Oakland 8	411830095244701	30.0	20 to 30	6-01-87	--	<.10	<.10	--	--	--	--
Oakland 11	411838095252801	42.0	--	8-20-86	--	<.10	<.10	--	--	--	--
Oakland 11	411838095252801	42.0	--	6-01-87	--	<.10	<.10	--	--	--	--
Carson 2	411445095251601	26.8	21.8 to 26.8	8-20-86	--	<.10	<.10	--	--	--	--
Macedonia 1	411201095252801	39.0	34 to 39	8-20-86	--	.23	<.10	--	--	--	--
Henderson 2	410830095253801	66.0	--	8-20-86	--	<.10	<.10	--	--	--	--

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Pesticide concentration, in micrograms per liter						
					Aldrin	Atrazine	Alachlor	Alpha-BHC	Beta-BHC	Delta-BHC	Gamma-BHC
<u>West Nishnabotna River alluvium--Continued</u>											
Hastings 1	41011409530001	53.0	48 to 53	8-20-86	--	0.16	<0.10	--	--	--	--
Malvern 11	410007095330501	56.0	41 to 56	6-01-87	--	<0.10	<0.10	--	--	--	--
Sidney 6	404432095361701	32.0	22 to 32	10-16-86	<0.04	.15	<0.10	<0.04	<0.04	<0.04	<0.04
<u>East Nishnabotna River alluvium</u>											
SW16U	411117095091901	42.0	37 to 42	8-12-86	<0.04	<0.10	<0.10	<0.04	<0.04	<0.04	<0.04
SW33L	412204095035202	65.0	60 to 65	8-06-86	--	<0.10	<0.10	--	--	--	--
SW34L	411024095095502	39.0	34 to 39	8-06-86	--	<0.10	<0.10	--	--	--	--
SW35L	410184095141602	27.0	22 to 27	8-06-86	--	<0.10	<0.10	--	--	--	--
Essex 5	404957095183501	44.5	--	8-14-86	<0.04	<0.10	<0.10	<0.04	<0.04	<0.04	<0.04
Shenandoah 17	404635095224901	73.3	--	8-14-86	<0.08	<0.10	<0.10	<0.08	<0.08	<0.08	<0.08
Shenandoah 18	404618095233901	36.0	--	6-01-87	--	<0.10	<0.10	--	--	--	--
Shenandoah 25	404521095235801	33.5	23.5 to 33.5	8-14-86	<0.08	<0.10	<0.10	<0.08	<0.08	<0.08	<0.08
Shenandoah 26	404501095245101	36.0	26 to 36	3-16-87	--	.10	<0.10	--	--	--	--
Riverton 2	404224095310601	57.0	47 to 57	8-14-86	<0.04	<0.10	<0.10	<0.04	<0.04	<0.04	<0.04
<u>Tarkio River alluvium</u>											
SW55	405350095081701	62.0	59 to 62	10-20-87	--	<0.10	<0.10	--	--	--	--
SW56	404801095105301	54.0	50 to 54	10-21-87	--	<0.10	<0.10	--	--	--	--
<u>West Nodaway River alluvium</u>											
SW65	405403095004401	42.0	37 to 42	10-19-87	--	<0.10	<0.10	--	--	--	--
SW66	410103095594501	34.0	29 to 34	10-19-87	--	<0.10	<0.10	--	--	--	--
Massena 3	411503094465401	35.0	--	10-19-87	--	<0.10	<0.10	--	--	--	--
Shambaugh 3	403906095015001	--	--	10-22-87	--	<0.10	<0.10	--	--	--	--
Villisca 7	405559094591501	41.5	26.5 to 41.5	10-20-87	--	<0.10	<0.10	--	--	--	--
Villisca 8	405604094593701	41.5	25.5 to 40.5	--	--	<0.10	<0.10	--	--	--	--

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Pesticide concentration, in micrograms per liter					
					Aldrin	Atrazine	Alachlor	Alpha-BHC	Beta-BHC	Delta-BHC
<u>Middle Nodaway River alluvium</u>										
SW71	410548094452101	30.0	25 to 30	10-20-87	--	<0.10	<0.10	--	--	--
SW73	405850094561001	32.0	27 to 32	10-19-87	--	<0.10	<0.10	--	--	--
<u>East Nodaway River alluvium</u>										
SW72	405731094480801	40.0	35 to 40	10-20-87	--	<0.10	<0.10	--	--	--
SW77	410317094324801	40.0	35 to 40	11-04-87	--	<0.10	<0.10	--	--	--
Prescott 2	410115094362201	40.0	--	10-20-87	--	<0.10	<0.10	--	--	--
Nodaway 3	405631094560802	36.0	26 to 36	10-20-87	--	<0.10	<0.10	--	--	--
<u>Nodaway River alluvium</u>										
SW64	403446095010701	20.0	16 to 20	10-21-87	--	<0.10	<0.10	--	--	--
Braddyville 2	403445095011501	31.8	27 to 31.8	10-21-87	--	<0.10	<0.10	--	--	--
<u>West Fork One Hundred and Two River alluvium</u>										
SW62	404200094510901	40.0	29 to 37	10-21-87	--	<0.10	<0.10	--	--	--
<u>Glacial-drift aquifer</u>										
SW21	411359095171901	206.0	189 to 206	8-20-86	--	<0.10	<0.10	--	--	--
Minden 2	412812095322701	48.0	--	6-06-86	<0.04	<0.10	<0.10	<0.04	<0.04	<0.04
<u>Albany buried-channel aquifer</u>										
SW78	410247094324801	276.0	266 to 276	11-04-87	--	<0.10	<0.10	--	--	--
Blockton 1	403659094285301	271.0	--	8-20-85	<0.02	<0.10	<0.10	<0.02	<0.02	<0.01
<u>Fremont buried-channel aquifer</u>										
SW39U	404946095344601	135.0	130 to 135	8-13-86	<0.08	<0.10	<0.10	<0.08	<0.08	<0.08
Treynor 3	411356095360801	250.0	232 to 250	8-06-85	<0.02	<0.10	<0.10	<0.02	<0.02	<0.01

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Station ID	Well depth (ft)	Open interval (ft)	Date of sample	Pesticide concentration, in micrograms per liter							
					Aldrin	Atrazine	Alachlor	Alpha-BHC	Beta-BHC	Delta-BHC	Gamma-BHC	
SW17	4119000945530101	218.0	189 to 209	8-20-86	--	<0.10	<0.10	--	--	--	--	--
					<u>Dakota aquifer</u>							
SW18	412832095033501	201.0	196 to 201	8-20-86	--	<0.10	<0.10	--	--	--	--	--
					<u>Pennsylvanian aquifer</u>							

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter											
		Butylate	Carbofuran	Chloramben	Chlordane	Cyanazine	DDD	DDE	DDT	Dicamba	Dieldrin		
<u>Surface Water</u>													
West Nishnabotna River at Avoca	8-20-86	<0.10	--	--	--	0.10	--	--	--	--	--	--	--
Nishnabotna River at Hamburg	10-27-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
East Nishnabotna River at Lora	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Tarkio River at Blanchard	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
West Nodaway River at Massena	10-27-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Middle Nodaway River at Fontanelle	10-22-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
East Nodaway River at Prescott	10-20-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Nodaway River at Bradyville	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
East Fork One Hundred and Two River at Bedford	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
<u>West Nishnabotna River alluvium</u>													
SW36L	8-06-86	<0.10	--	--	--	<.10	--	--	--	--	--	--	--
SW38L	8-13-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Avoca 2	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Hancock 6	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Oakland 8	6-01-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Oakland 11	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Oakland 11	6-01-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Carson 2	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Macedonia 1	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Henderson 2	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Hastings 1	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Malvern 11	6-01-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
Sidney 6	10-16-86	<.10	<.10	<.10	<.20	<.10	<.04	<.04	<.1	<.04	<.04	<.1	<.04

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter										
		Butylate	Carbofuran	Chloramben	Chlordane	Cyanazine	DDD	DDE	DDT	Dicamba	Dieldrin	
<u>East Nishnabotna River alluvium</u>												
SW16U	8-12-86	<0.10	--	<0.10	<0.20	<0.10	<0.04	<0.04	<0.10	<0.04	<0.10	<0.04
SW33L	8-06-86	<0.10	--	--	--	<0.10	--	--	--	--	--	--
SW34L	8-06-86	<0.10	--	--	--	<0.10	--	--	--	--	--	--
SW35L	8-06-86	<0.10	--	--	--	<0.10	<0.04	<0.04	<0.10	<0.04	<0.10	<0.04
Essex 5	8-14-86	<0.10	<0.10	<0.10	<0.20	<0.10	<0.08	<0.08	<0.10	<0.08	<0.10	<0.08
Shenandoah 17	8-14-86	<0.10	<0.10	<0.10	<0.40	<0.10	--	--	--	--	--	--
Shenandoah 18	6-01-87	<0.10	<0.10	--	--	<0.10	<0.08	<0.08	<0.10	<0.08	<0.10	<0.08
Shenandoah 25	8-14-86	<0.10	<0.10	<0.10	<0.40	<0.10	<0.08	<0.08	<0.10	<0.08	<0.10	<0.08
Shenandoah 26	3-16-87	<0.10	--	--	--	<0.10	--	--	--	--	--	--
Riverton 2	8-14-86	<0.10	<0.10	<0.10	<0.20	<0.10	<0.04	<0.04	<0.10	<0.04	<0.10	<0.04
<u>Tarkio River alluvium</u>												
SW55	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
SW56	10-21-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
<u>West Nodaway River alluvium</u>												
SW65	10-19-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
SW66	10-19-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Massena 3	10-19-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Shambaugh 3	10-22-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Villisca 7	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Villisca 8	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
<u>Middle Nodaway River alluvium</u>												
SW71	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
SW73	10-19-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
<u>East Nodaway River alluvium</u>												
SW72	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
SW77	11-04-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Prescott 2	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--
Nodaway 3	10-20-87	<0.10	--	--	--	<0.10	--	--	<0.10	--	--	--

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter											
		Butylate	Carbofuran	Chloramben	Chlordane	Cyanazine	DDD	DDE	DDT	Dicamba	Dieldrin		
SW64 Braddyville 2	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
SW62	10-21-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
	8-20-86 6-06-86	<.10 --	-- <.10	-- <.10	-- <.20	<.10 <.10	-- <.04	-- <.04	-- <.04	-- <.10	-- <.04	-- <.07	-- <.02
SW78 Blockton 1	11-04-87	<.10	--	--	--	<.10	--	--	--	--	--	--	--
	8-20-85	--	--	--	<.10	<.10	--	--	--	<.04	<.02	<.04	<.02
SW39U Treyvor 3	8-13-86	<.10	--	<.10	<.40	<.10	<.08	<.08	<.08	<.08	<.10	<.07	<.08
	8-06-85	--	--	--	<.10	<.10	<.04	<.02	<.04	<.04	<.07	<.02	<.02
SW17	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--
	8-20-86	<.10	--	--	--	<.10	--	--	--	--	--	--	--

Nodaway River alluvium

West Fork One Hundred and Two River alluvium

Glacial-drift aquifer

Albany buried-channel aquifer

Fremont buried-channel aquifer

Dakota aquifer

Pennsylvanian aquifer

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter										
		Endosulfan I	Endosulfan II	Endosulfan sulfate	Endrin aldehyde	Endrin	Ethoprop	Fonofos	Heptachlor epoxide	Metolachlor		
<u>Surface water</u>												
West Nishnabotna River at Avoca	8-20-86	--	--	--	--	--	--	--	--	--	0.30	<.10
Nishnabotna River at Hamburg	10-27-87	--	--	--	--	--	--	--	--	--	<.10	<.10
East Nishnabotna River at Lorah	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Tarkio River at Blanchard	10-21-87	--	--	--	--	--	--	--	--	--	<.10	<.10
West Nodaway River at Massena	10-27-87	--	--	--	--	--	--	--	--	--	<.10	<.10
Middle Nodaway River at Fontanelle	10-22-87	--	--	--	--	--	--	--	--	--	<.10	<.10
East Nodaway River at Prescott	10-20-87	--	--	--	--	--	--	--	--	--	<.10	<.10
Nodaway River at Braddyville	10-21-87	--	--	--	--	--	--	--	--	--	<.10	<.10
East Fork One Hundred and Two River at Bedford	10-21-87	--	--	--	--	--	--	--	--	--	<.10	<.10
<u>West Nishnabotna River alluvium</u>												
SW36L	8-06-86	--	<.04	<.04	<.04	<.04	<.04	<.04	<.04	<.10	<.10	<.10
SW38L	8-13-86	<.04	<.04	<.04	<.04	<.04	<.04	<.04	<.04	<.10	<.10	<.10
Avoca 2	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Hancock 6	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Oakland 8	6-01-87	--	--	--	--	--	--	--	--	<.10	<.10	<.10
Oakland 11	8-20-86	--	--	--	--	--	--	--	--	<.10	<.10	<.10
Oakland 11	6-01-87	--	--	--	--	--	--	--	--	<.10	<.10	<.10
Carson 2	8-20-86	--	--	--	--	--	--	--	--	<.10	<.10	.14
Macedonia 1	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Henderson 2	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Hastings 1	8-20-86	--	--	--	--	--	--	--	--	--	<.10	<.10
Malvern 11	6-01-87	--	--	--	--	--	--	--	--	--	<.10	<.10
Sidney 6	10-16-86	<.04	<.04	<.04	<.04	<.04	<.04	<.04	<.04	<.10	<.10	<.10

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter									
		Endosulfan I	Endosulfan II	Endosulfan sulfate	Endrin aldehyde	Endrin	Ethoprop	Fonofos	Heptachlor epoxide	Metolachlor	
<u>East Nishnabotna River alluvium</u>											
SW16U	8-12-86	<0.04	<0.04	<0.04	<0.04	<0.04	<0.10	<0.10	<0.04	<0.10	<0.10
SW33L	8-06-86	--	--	--	--	--	--	--	--	<0.10	<0.10
SW34L	8-06-86	--	--	--	--	--	--	--	--	<0.10	<0.10
SW35L	8-06-86	--	--	--	--	--	--	--	--	<0.10	<0.10
Essex 5	8-14-86	<0.04	<0.04	<0.04	<0.04	<0.04	<0.10	<0.10	<0.04	<0.10	<0.10
Shenandoah 17	8-14-86	<0.08	<0.08	<0.08	<0.08	<0.08	<0.10	<0.10	<0.08	<0.10	<0.10
Shenandoah 18	6-01-87	--	--	--	--	--	<0.10	<0.10	--	<0.10	<0.10
Shenandoah 25	8-14-86	<0.08	<0.08	<0.08	<0.08	<0.08	<0.10	<0.10	<0.08	<0.10	<0.10
Shenandoah 26	3-16-87	--	--	--	--	--	--	--	--	<0.10	<0.10
Riverton 2	8-14-86	<0.04	<0.04	<0.04	<0.04	<0.04	<0.10	<0.10	<0.04	<0.10	<0.10
<u>Tarkio River alluvium</u>											
SW55	10-20-87	--	<0.10	--	--	--	--	--	--	--	<0.10
SW56	10-21-87	--	--	--	--	--	--	--	--	--	<0.10
<u>West Nodaway River alluvium</u>											
SW65	10-19-87	--	--	--	--	--	--	--	--	--	<0.10
SW66	10-19-87	--	--	--	--	--	--	--	--	--	<0.10
Massena 3	10-19-87	--	--	--	--	--	--	--	--	--	<0.10
Shambaugh 3	10-22-87	--	--	--	--	--	--	--	--	--	<0.10
Villisca 7	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
Villisca 8	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
<u>Middle Nodaway River alluvium</u>											
SW71	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
SW73	10-19-87	--	--	--	--	--	--	--	--	--	<0.10

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter									
		Endosulfan I	Endosulfan II	Endosulfan sulfate	Endrin aldehyde	Endrin	Ethoprop	Fonofos	Heptachlor epoxide	Metolachlor	
		<u>East Nodaway River alluvium</u>									
SW72	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
SW77	11-04-87	--	--	--	--	--	--	--	--	--	<0.10
Prescott 2	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
Nodaway 3	10-20-87	--	--	--	--	--	--	--	--	--	<0.10
		<u>Nodaway River alluvium</u>									
SW64	10-21-87	--	--	--	--	--	--	--	--	--	<0.10
Bradyville 2	10-21-87	--	--	--	--	--	--	--	--	--	--
		<u>West Fork One Hundred and Two River alluvium</u>									
SW62	10-21-87	--	--	--	--	--	--	--	--	--	<0.10
		<u>Glacial-drift aquifer</u>									
SW21	8-20-86	--	--	--	--	--	--	--	--	--	<0.10
Minden 2	6-06-86	<0.04	<0.04	<0.04	<0.04	<0.10	<0.10	<0.04	<0.04	<0.10	<0.10
		<u>Albany buried-channel aquifer</u>									
SW78	11-04-87	--	--	--	--	--	--	--	--	--	<0.10
Blockton 1	8-20-85	<0.02	<0.04	<0.04	<0.05	--	--	--	<0.10	<0.02	<0.10
		<u>Fremont buried-channel aquifer</u>									
SW39U	8-13-86	<0.08	<0.08	<0.08	<0.08	<0.10	<0.08	<0.10	<0.08	<0.08	<0.10
Treynor 3	8-06-85	<0.02	<0.04	<0.04	<0.05	--	--	--	<0.10	<0.02	<0.10
		<u>Dakota aquifer</u>									
SW17	8-20-86	--	--	--	--	--	--	--	--	--	0.10
		<u>Pennsylvanian aquifer</u>									
SW18	8-20-86	--	--	--	--	--	--	--	--	--	<0.10

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter										
		Metribuzin	Pendimethalin	Phorate	Propachlor	Terbufos	Toxaphene	Trifluralin	Silvex	Sulprofos	2,4-D	
<u>Surface water</u>												
West Nishnabotna River at Avoca	8-20-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Nishnabotna River at Hamburg	10-27-87	<.10	--	--	--	--	<.10	--	--	--	--	--
East Nishnabotna River at Lora	8-20-86	<.10	<.10	--	<.10	--	<.10	--	--	--	<.10	--
Tarkio River at Blanchard	10-21-87	<.10	--	--	--	--	<.10	--	--	--	--	--
West Nodaway River at Massena	10-27-87	<.10	--	--	--	--	<.10	--	--	--	--	--
Middle Nodaway River at Fontanelle	10-22-87	<.10	--	--	--	--	<.10	--	--	--	--	--
East Nodaway River at Prescott	10-20-87	<.10	--	--	--	--	<.10	--	--	--	--	--
Nodaway River at Bradyville	10-21-87	<.10	--	--	--	--	<.10	--	--	--	--	--
East Fork One Hundred and Two River at Bedford	10-21-87	<.10	--	--	--	--	<.10	--	--	--	--	--
<u>West Nishnabotna River alluvium</u>												
SW36L	8-06-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
SW38L	8-13-86	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10
Avoca 2	8-20-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Hancock 6	8-20-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Oakland 8	6-01-87	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10
Oakland 11	8-20-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Oakland 11	6-01-87	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10
Carson 2	8-20-86	<.10	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Macedonia 1	8-20-86	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10
Henderson 2	8-20-86	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Hastings 1	8-20-86	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--
Malvern 11	6-01-87	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10
Sidney 6	10-16-86	<.10	--	<.10	--	<.10	--	<.10	--	<.10	--	<.10

Table 10. Concentrations of selected pesticides, 1985-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter										
		Metribuzin	Pendimethalin	Phorate	Propachlor	Terbufos	Toxaphene	Trifluralin	Silvex	Sulprofos	2,4-D	
<u>East Nishnabotna River alluvium</u>												
SW16U	8-12-86	<.10	--	<.10	--	<.10	<.5	<.10	<.10	<.10	--	<.10
SW33L	8-06-86	<.10	<.10	--	<.10	--	--	<.10	<.10	<.10	<.10	--
SW34L	8-06-86	<.10	<.10	--	<.10	--	--	<.10	<.10	<.10	<.10	--
SW35L	8-06-86	<.10	<.10	--	<.10	--	--	<.10	<.10	<.10	<.10	--
Essex 5	8-14-86	<.10	<.10	<.10	--	<.10	<.5	<.10	<.10	<.10	--	<.10
Shenandoah 17	8-14-86	<.10	<.10	<.10	--	<.10	<.10	<.10	<.10	<.10	--	<.10
Shenandoah 18	6-01-87	<.10	--	<.10	--	<.10	--	<.10	<.10	<.10	--	--
Shenandoah 25	8-14-86	<.10	--	<.10	--	<.10	<.10	<.10	<.10	<.10	--	<.10
Shenandoah 26	3-16-87	<.10	<.10	--	<.10	--	--	<.10	<.10	<.10	<.10	--
Riverton 2	8-14-86	<.10	--	<.10	--	<.10	<.5	<.10	<.10	<.10	--	<.10
<u>Tarkio River alluvium</u>												
SW55	10-20-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
SW56	10-21-87	--	--	--	--	--	--	<.10	<.10	--	--	--
<u>West Nodaway River alluvium</u>												
SW65	10-19-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
SW66	10-19-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
Massena 3	10-19-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
Shambaugh 3	10-22-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
Villisca 7	10-20-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
Villisca 8	<.10	<.10	--	--	--	--	--	<.10	<.10	--	--	--
<u>Middle Nodaway River alluvium</u>												
SW71	10-20-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--
SW73	10-19-87	<.10	--	--	--	--	--	<.10	<.10	--	--	--

Table 10. Concentrations of selected pesticides, 1965-87--Continued

Well or surface-water name (fig. 9)	Date of sample	Pesticide concentration, in micrograms per liter										
		Metribuzin	Pendimethalin	Phorate	Propachlor	Terbufos	Toxaphene	Trifluralin	Silvex	Sulprofos	2,4-D	
<u>East Nodaway River alluvium</u>												
SW72	10-20-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
SW77	11-04-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
Prescott 2	10-20-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
Nodaway 3	10-20-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
<u>Nodaway River alluvium</u>												
SW64	10-21-87	<0.10	--	--	--	--	--	--	--	--	--	--
Braddyville 2	10-21-87	--	--	--	--	--	--	<0.10	--	--	--	--
<u>West Fork One Hundred and Two River alluvium</u>												
SW62	10-21-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
<u>Glacial-drift aquifer</u>												
SW21	8-20-86	<0.10	<0.10	--	<0.10	--	--	<0.10	<0.5	--	<0.10	--
Minden 2	6-06-86	<0.10	--	<0.10	--	<0.10	--	<0.05	<0.10	--	<0.10	<0.10
<u>Albany buried-channel aquifer</u>												
SW78	11-04-87	<0.10	--	--	--	--	--	<0.10	--	--	--	--
Blockton 1	8-20-85	<0.05	<0.10	--	--	--	--	<0.05	<0.05	<0.05	--	<0.07
SW39U	8-13-86	<0.10	<0.10	--	--	--	--	<0.10	<1.0	<0.10	--	<0.10
Treynor 3	8-06-85	<0.05	<0.10	--	--	--	--	<0.05	<0.5	<0.05	--	<0.02
<u>Dakota aquifer</u>												
SW17	8-20-86	<0.10	<0.10	--	<0.10	--	--	<0.10	--	--	<0.10	--
<u>Pennsylvanian aquifer</u>												
SW18	8-20-86	<0.10	<0.10	--	<0.10	--	--	<0.10	--	--	<0.10	--

Table 11. Statistical summary of historical, 1950-86, water-quality properties and constituents for alluvial aquifers

[Data from Iowa Department of Natural Resources, Geological Survey Bureau; all constituents are dissolved, except as indicated; $\mu\text{S}/\text{cm}$, microsiemens per centimeter at 25 degrees Celsius; CaCO_3 , calcium carbonate; mg/L , milligrams per liter; $\mu\text{g}/\text{L}$, micrograms per liter; <, less than; --, no data]

	Specific conductance, laboratory ($\mu\text{S}/\text{cm}$)	pH,	Total hardness, story (mg/L)	Calcium (mg/L)	Magne- sium (mg/L)	Sodium (mg/L)	Potas- sium (mg/L)	Bicarb- onate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Dissolved solids (mg/L)	Nitrogen, NO_3 (mg/L as N)	Iron ($\mu\text{g}/\text{L}$)	Manga- nese ($\mu\text{g}/\text{L}$)
<u>West Nishnabotna River alluvial aquifer</u>															
Maximum	1,100	8.0	600	160	52	54	8.0	470	280	130	0.6	809	10	6,700	4,300
Minimum	450	6.5	200	54	17	7.4	0	200	10	1	0	272	<.10	<200	<10
Mean	708	--	370	100	29	13	2.7	340	82	16	.3	457	1.5	1,220	630
Number of samples	124	127	120	130	130	127	120	130	130	130	130	122	130	127	127
<u>East Nishnabotna River alluvial aquifer</u>															
Maximum	1,400	8.3	750	180	72	29	11.4	460	280	100	0.6	963	22	8,800	20,000
Minimum	263	6.5	150	38	8.7	6.4	.9	140	5	<.5	.2	193	<.10	<200	<10
Mean	689	--	330	900	27	15	2.7	260	110	21	.3	457	2.6	1,630	580
Number of samples	89	88	88	89	89	88	83	88	89	89	89	82	89	89	89
<u>Tarkio River alluvial aquifer</u>															
Maximum	788	7.6	320	96	22	27	5.0	200	150	70	0.4	524	1.4	18,000	2,000
Minimum	500	6.7	210	63	13	22	2.3	130	82	16	.2	348	.20	1,300	1,600
Mean	629	--	280	76	18	25	3.0	170	110	43	.3	426	.90	10,000	1,700
Number of samples	7	7	7	7	7	7	7	7	7	7	7	6	6	7	7
<u>Nodaway River alluvial aquifer</u>															
Maximum	940	7.7	450	130	41	40	5.0	430	280	100	1.1	695	22	30,000	5,500
Minimum	300	6.2	120	31	9.2	8.5	.1	70	16	1.5	.2	199	<.10	<200	<10
Mean	596	--	280	74	20	17	2.0	200	99	26	.3	407	2.4	7,100	1,100
Number of samples	52	53	50	54	54	53	53	49	54	54	54	54	54	54	54

Table 11. Statistical summary of historical, 1950-86, water-quality properties and constituents for alluvial aquifers--Continued

	Specific conductivity, laboratory (µS/cm)	pH,	Total hardness, laboratory (standard units)	Total hardness, (mg/L CaCO ₃)	Magnesium		Sodium (mg/L)	Potassium (mg/L)	Bicarbonate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Dissolved solids (mg/L)	Nitrogen, NO ₃ as N (mg/L)	Iron (µg/L)	Manganese (µg/L)
					Calcium (mg/L)	ium (mg/L)										
<u>One Hundred and Two River alluvial aquifer</u>																
Maximum	720	7.6	330	83	21	38	2.1	360	180	42	0.6	476	0.40	26,000	3,900	
Minimum	450	6.5	180	48	9.7	13	.2	160	9	1	.1	276	<.10	800	500	
Mean	559	--	250	69	17	23	1.4	250	67	15	.3	368	.10	12,600	1,800	
Number of samples	15	16	16	16	16	15	15	16	16	16	16	16	15	16	16	
<u>Inter-till sand and gravel aquifers</u>																
Maximum	860	7.4	490	130	38	22	4.5	860	97	48	.4	600	120	8,000	1,200	
Minimum	330	6.6	150	42	11	8.2	.8	170	6	<.6	.2	176	<.10	<10	<10	
Mean	608	--	350	96	25	14	2.4	280	39	24	.3	430	38	1,140	170	
Number of samples	15	17	16	17	17	17	17	17	17	17	17	17	17	17	17	
<u>Basal sand and gravel aquifers</u>																
Maximum	750	7.5	360	91	26	15	2.3	310	58	5.5	.4	482	79	310	<10	
Minimum	500	7.0	260	70	19	7.9	<.1	220	10	<.5	.2	313	6.2	<10	<10	
Mean	575	--	290	78	22	11	1.4	260	20	2.1	.3	351	25	60	<10	
Number of samples	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	
<u>Albany buried-channel aquifer</u>																
Maximum	3,400	7.9	1,500	350	140	350	11	510	1,900	110	.8	3,200	.20	7,800	370	
Minimum	1,600	7.3	130	34	9.8	310	2.8	300	240	18	.2	1,040	<.10	500	20	
Mean	2,360	--	670	160	62	330	6.4	390	870	71	.6	1,920	.12	3,500	150	
Number of samples	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	

Table 11. Statistical summary of historical, 1950-86, water-quality properties and constituents for alluvial aquifers--Continued

	Specific conductivity laboratory (µS/cm)	pH	Total hardness, laboratory (standard units)	Calcium (mg/L)	Magnesium (mg/L)	Sodium (mg/L)	Potassium (mg/L)	Bicarbonate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Dissolved solids (mg/L)	Nitrogen, NO ₃ as N (mg/L)	Iron (µg/L)	Manganese (µg/L)
Maximum	980	7.8	380	100	31	78	3.8	470	150	8.0	0.3	619	16	1,800	290
Minimum	610	7.1	310	83	25	26	2.7	320	23	1.5	.2	352	<.10	270	120
Mean	798	--	340	93	28	51	3.3	380	80	3.9	.3	488	3.6	680	230
Number of samples	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Fremont buried-channel aquifer

Table 12. Selected pesticide analyses for water samples from the Nishnabotna River system, 1985-87

[Data from the Iowa Department of Natural Resources, Geological Survey Bureau; <, less than; --, no data]

Site name (fig. 9)	Sample date	Pesticide concentration, in micrograms per liter						
		Atrazine	Alachlor	Cyanazine	Metolachlor	Metribuzin	Simazine	
<u>Surface water</u>								
West Nishnabotna River near Avoca	6-01-87	1.3	0.35	4.10	< 0.10	0.28	--	
	7-01-87	.21	<.10	.11	<.10	<.10	--	
West Nishnabotna River near Sidney	6-01-87	3.7	.73	7.10	.93	.33	--	
	7-01-87	.33	<.10	.16	<.10	<.10	--	
East Nishnabotna River near Lorah	6-01-87	.90	.39	1.40	.84	<.10	--	
	7-01-87	.13	<.10	<.10	<.10	<.10	--	
East Nishnabotna River near Shenandoah	6-01-87	4.15	.35	3.40	1.20	.28	--	
	7-01-87	.35	<.10	.18	<.10	<.10	--	
<u>West Nishnabotna River alluvium</u>								
Avoca 2	6-19-86	0.29	<.10	<.10	<.10	<.10	--	
	8-20-86	.53	<.10	<.10	<.10	<.10	--	
Avoca 3	5-04-87	.39	<.10	<.10	<.10	<.10	--	
	6-01-87	.17	<.10	<.10	<.10	<.10	0.98	
Avoca (treated water)	1-07-87	.26	<.20	<.20	<.20	<.20	--	
Hancock 6	8-20-86	.18	<.10	<.10	<.10	<.10	--	
Oakland 11	7-01-87	.16	<.10	1.70	<.10	<.10	--	
Carson 2	6-09-86	<.10	<.10	<.10	.10	<.10	--	
Carson 2	8-20-86	<.10	<.10	<.10	.14	<.10	--	
Macedonia 1	8-20-86	.23	<.10	<.10	<.10	<.10	--	
Macedonia 2	8-06-85	.24	<.10	<.10	<.10	<.05	--	
Macedonia (treated water)	6-17-87	.31	.87	<.20	.64	<.20	--	
Hastings 1	8-19-86	.16	<.10	<.10	<.10	<.10	--	
Sidney 6	10-16-86	.15	<.10	<.10	<.10	<.10	--	
Randolph (treated water)	9-22-87	.88	<.20	<.20	<.20	<.20	--	

Table 13. Selected pesticide analyses for water samples from the Tarkio, Nodaway, and One Hundred and Two River systems, 1986-87

[Data from Iowa Department of Natural Resources, Geological Survey Bureau; <, less than; --, no data]

Site name (fig. 9)	Sample date	Pesticide concentration, in micrograms per liter				
		Atrazine	Alachlor	Cyanazine	Metolachlor	2,4-D
<u>Surface water</u>						
Middle Nodaway River at Fontanelle	10-22-87	0.10	<0.10	<0.10	<0.10	--
East Nodaway River at Prescott	10-20-87	.10	<.10	<.10	<.10	--
<u>Tarkio River alluvium</u>						
Blanchard (treated water)	11-18-86	.25	<.20	<.20	<.20	<0.20
<u>Middle Nodaway River alluvium</u>						
Fontanelle 5	8-15-86	.28	.10	<.10	<.10	<.10
	4-04-87	.11	<.10	<.10	<.10	--
<u>One Hundred and Two River alluvium</u>						
Gravity 3	7-11-86	<.10	.32	<.10	.36	<.10
Gravity (treated water)	4-13-87	<.20	<.20	<.20	<.20	.25
Conway 1	7-18-86	.31	.73	<.10	<.10	<.10
	8-04-87	1.4	2.1	<.10	<.10	--
Conway	11-12-86	<.20	1.1	<.20	<.20	<.20

Table 14. Thickness of glacial drift in southwest Iowa

County	Thickness (feet)
Adair	50-293
Adams	11-329
Cass	18-260
Fremont	24-398
Mills	40-263
Montgomery	6-230
Page	25-220
Pottawattamie	6-452
Taylor	20-274

Table 15. Water levels and potential yields of the Dakota aquifer

[ft, feet; gal/min, gallons per minute; ft²/d, feet squared per day; >, greater than; --, no data]

Location	Aquifer thickness (feet)	Altitude of water level (feet above sea level)	Average yield to well (gal/min)	Estimated average transmissivity (ft ² /d)
Anita area	15 to >32	1,200	--	--
Anita town wells	24 to 36	1,200	90 to 120	1,765
Atlantic area	10 to 103	1,150 to 1,200	7 to 50	--
Atlantic town wells	40 to >47	1,125	175 to 230	3,074
Cass County areas	5 to 52	1,150 to 1,200	10 to 60	--
Cumberland area	15 to >67	1,125 to 1,175	10 to 20	--
Cumberland town wells	27 to >52	1,175	25 to 100	--
Elliott area	10 to 95	1,075 to >1,250	0 to 20	--
Elliott town well	>63	1,075	150	2,763
Griswold area	5 to 88	1,100 to 1,175	15 to 30	--
Griswold town wells	19 to 88	--	125 to 450	--
Neola area	30 to >57	1,080	--	--
Neola town wells	>41	1,075	90	1,706
Red Oak area	4 to >122	1,075 to 1,100	--	--
Red Oak town wells	50 to >122	1,050 to 1,100	135 to 900	3,026
Stanton area	40 to >113	1,120	--	--
Stanton town wells	>113	1,115	120 to 250	1,945
Wiota area	15 to >50	1,200	16 to >25	--
Wiota town well	15	1,181	80	6,211

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer

[Data from Iowa Department of Natural Resources, Geological Survey Bureau; all constituents are dissolved, except as indicated; $\mu\text{S}/\text{cm}$, microsiemens per centimeter at 25 degrees Celsius; $^{\circ}\text{C}$, degrees Celsius; CaCO_3 , calcium carbonate; mg/L , milligrams per liter; $\mu\text{g}/\text{L}$, micrograms per liter; pCi/L , picocuries per liter; $<$, less than; $-$, no data]

Specific con- duct- ance, laboratory ($\mu\text{S}/\text{cm}$)	pH, lab- oratory (stand- ard units)	Temper- ature, water ($^{\circ}\text{C}$)	Total hard- ness, (mg/L as CaCO_3)	Cal- cium (mg/L)	Magne- sium (mg/L)	Sodium (mg/L)	Potas- sium (mg/L)	Alka- linity, laboratory (mg/L as CaCO_3)	Bicarb- onate (mg/L)	Sulfate (mg/L)	Chlo- ride (mg/L)	Fluo- ride (mg/L)	Silica (mg/L)	Dis- solved solids (mg/L)	Nitro- gen, NO_3 (mg/L as N)	Iron ($\mu\text{g}/\text{L}$)	Manga- nese ($\mu\text{g}/\text{L}$)
Anika																	
Maximum	1,300	7.7	11.0	640	180	47	76	290	350	430	2.0	0.5	27	1,040	0.09	170	1,000
Minimum	650	7.1	10.0	280	78	17	26	260	310	81	.5	.4	20	384	<.02	<10	430
Mean	877	--	11.0	410	120	29	39	270	330	160	1.0	.5	23	619	--	--	590
Number of samples	6	6	4.0	6	6	6	5	6	6	5	5	5	6	6	5	5	5
Atlantic																	
Maximum	830	7.3	25.0	410	100	34	20	180	220	200	36	.4	30	614	11	12,000	1,400
Minimum	260	6.1	11.0	110	27	8.8	5.4	92	110	17	<.5	.1	20	167	<.10	<10	<50
Mean	425	--	12.5	200	53	16	9.8	130	160	65	--	.3	24	290	--	--	--
Number of samples	51	51	50	52	51	51	50	51	50	52	52	51	49	50	50	51	51

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Arsenic (µg/L)	Barium (µg/L)	Cadmium (µg/L)	Chromium (µg/L)	Copper (µg/L)	Lead (µg/L)	Mercury (µg/L)	Selenium (µg/L)	Silver (µg/L)	Zinc (µg/L)	Total alpha radia- tion (pCi/L)	Total beta radia- tion (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)	Radon 222 (pCi/L)	
	<u>Anita</u>															
Maximum	<10	<10	<10	<10	20	<10	<1	<10	<10	40	3	7	2.3	--	0	
Minimum	<10	<10	<1	<10	<10	<10	<1	<10	<10	<10	.7	4	2.3	--	0	
Mean	--	--	--	--	--	--	--	--	--	--	2	6	2.3	--	0	
Number of samples	4	4	4	4	4	4	4	4	4	4	4	4	1	0	1	
	<u>Atlantic</u>															
Maximum	<10	200	<10	<10	170	<10	<1	10	<10	40	4	4	--	1.8	<10	
Minimum	<10	<100	<1	<10	<10	<10	<1	<10	<10	<10	.3	1	--	1.8	<10	
Mean	--	--	--	--	--	--	--	--	--	--	2	2	--	1.8	--	
Number of samples	22	22	22	22	22	22	11	11	12	22	12	10	0	1	1	

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer—Continued

Specific con- duct- ance, laboratory ($\mu\text{S}/\text{cm}$)	pH, lab- oratory (stand- ard units)	Temper- ature, water ($^{\circ}\text{C}$)	Total hard- ness, (mg/L as CaCO_3)	Cal- cium (mg/L)	Magne- sium (mg/L)	Sodium (mg/L)	Potas- sium (mg/L)	Alka- linity, laboratory (mg/L as CaCO_3)	Bicarb- onate (mg/L)	Sulfate (mg/L)	Chlo- ride (mg/L)	Fluo- ride (mg/L)	Silica (mg/L)	Dis- solved solids (mg/L)	Nitro- gen, NO_3 (mg/L as N)	Iron ($\mu\text{g}/\text{L}$)	Manga- nese ($\mu\text{g}/\text{L}$)
Maximum	390	7.3	200	56	16	19	2.9	200	250	36	5.0	0.4	25	247	0.44	12,000	290
Minimum	340	6.7	190	51	12	9	1.3	180	220	6.7	<.5	.2	21	218	<.02	130	<50
Mean	378	--	190	53	14	11	1.9	190	230	19	--	.3	23	232	--	2,000	--
Number of samples	9	9	9	9	9	9	8	9	9	9	9	9	7	8	9	7	9
<u>Cumberland</u>																	
<u>Elliott</u>																	
Maximum	360	7.2	180	51	14	9.2	2.0	150	190	18	3.0	.3	25	219	4.4	580	<50
Minimum	320	6.6	160	42	8.7	6.4	.7	130	160	9.7	1.0	.2	21	193	2.9	<10	<10
Mean	342	--	160	46	12	7.8	1.2	150	180	15	3.0	.2	23	211	3.6	--	--
Number of samples	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Arsenic (µg/L)	Barium (µg/L)	Cadmium (µg/L)	Chromium (µg/L)	Copper (µg/L)	Lead (µg/L)	Mercury (µg/L)	Selenium (µg/L)	Silver (µg/L)	Zinc (µg/L)	Total alpha radia- tion (pCi/L)	Total beta radia- tion (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)	Radon 222 (pCi/L)
<u>Cumberland</u>															
Maximum	<10	200	<10	<10	<10	<10	<1	<10	<10	30	3	7	--	--	--
Minimum	<10	200	<10	<10	<10	<10	<1	<10	<10	20	3	1	--	--	--
Mean	--	200	--	--	--	--	--	--	--	25	3	4	--	--	--
Number of samples	2	2	2	2	2	2	2	2	2	2	2	2	0	0	0
<u>Elliott</u>															
Maximum	<10	500	<10	<10	90	<10	<1	<10	<10	22	--	--	--	--	--
Minimum	<10	500	<10	<10	10	<10	<1	<10	<10	<10	--	--	--	--	--
Mean	--	500	--	--	56	--	--	--	--	--	--	--	--	--	--
Number of samples	3	3	3	3	3	3	1	1	1	3	0	0	0	0	0

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

Specific con- duct- ance, laboratory ($\mu\text{S}/\text{cm}$)	pH, lab- oratory (stand- ard units)	Temper- ature, water ($^{\circ}\text{C}$)	Total hard- ness, (mg/L as CaCO_3)	Cal- cium (mg/L)	Magne- sium (mg/L)	Sodium (mg/L)	Potas- sium (mg/L)	Alka- linity, laboratory (mg/L as CaCO_3)	Bicarb- onate (mg/L)	Sulfate (mg/L)	Chlo- ride (mg/L)	Fluo- ride (mg/L)	Silica (mg/L)	Dis- solved solids (mg/L)	Nitro- gen, NO_3 (mg/L as N)	Iron ($\mu\text{g}/\text{L}$)	Manga- nese ($\mu\text{g}/\text{L}$)
Maximum	430	7.3	220	55	20	7.2	1.8	160	200	24	8.5	0.4	28	266	7.1	280	120
Minimum	316	6.4	150	35	12	5.0	.7	130	160	8.2	1	.2	19	165	3.1	<10	<10
Mean	354	--	180	45	16	6.5	1.0	150	180	16	3.6	.3	22	222	4.6	--	--
Number of samples	11	11	11	10	10	10	10	11	10	11	11	11	10	10	11	10	11
<u>Griswold</u>																	
Maximum	979	7.9	470	130	78	23	3.5	360	430	140	36	.4	30	629	4.9	2,500	2,900
Minimum	670	7.0	350	95	28	7.9	1.2	320	390	42	1.0	.2	14	427	<.02	<10	450
Mean	788	--	410	110	38	14	2.6	340	400	79	13	.3	25	493	--	--	1,600
Number of samples	8	8	8	8	8	8	8	8	7	8	8	8	8	8	8	8	8
<u>Neola</u>																	

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Arsenic (µg/L)	Barium (µg/L)	Cadmium (µg/L)	Chromium (µg/L)	Copper (µg/L)	Lead (µg/L)	Mercury (µg/L)	Selenium (µg/L)	Silver (µg/L)	Zinc (µg/L)	Total alpha radia- tion (pCi/L)	Total beta radia- tion (pCi/L)	Radium 226 (pCi/L)	Radium 228 (pCi/L)	Radon 222 (pCi/L)
<u>Griswold</u>															
Maximum	<10	200	<10	<10	30	<10	<1	<10	<10	20	1	4	--	--	--
Minimum	<10	<100	<1	<10	<10	<10	<1	<10	<10	<10	.3	1	--	--	--
Mean	--	--	--	--	--	--	--	--	--	--	.6	2	--	--	--
Number of samples	6	6	6	6	6	6	4	4	4	6	4	3	0	0	0
<u>Neola</u>															
Maximum	10	400	<10	<10	40	<10	<1	<10	<10	70	6	10	1.9	1.7	<10
Minimum	<10	200	<1	<10	<10	<10	<1	<10	<10	<10	1	4	.6	1.3	<10
Mean	--	300	--	--	--	--	--	--	--	--	3	8	1.1	1.5	--
Number of samples	5	5	5	5	5	5	4	4	4	5	4	4	3	2	1

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

Specific conductance, laboratory (µS/cm)	pH, laboratory (standards and units)	Temperature, water (°C)	Total hardness, (mg/L CaCO ₃)	Calcium (mg/L)	Magnesium (mg/L)	Sodium (mg/L)	Potassium (mg/L)	Alkalinity, laboratory (mg/L CaCO ₃)	Bicarbonate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)	Nitrogen, NO ₃ as N (mg/L)	Iron (µg/L)	Manganese (µg/L)	
Maximum	450	7.9	220	66	16	26	1.7	230	280	38	7.0	1.9	26	278	4.0	520	10	
Minimum	372	6.6	180	48	9.7	7.6	1.1	150	180	8.0	<.1	.2	18	221	.10	<.10	<.10	
Mean	411	--	200	57	14	11	1.4	190	230	19	--	.5	21	244	2.4	--	--	
Number of samples	20	20	20	20	20	20	17	20	20	20	20	20	14	19	20	14	20	
<u>Red Oak</u>																		
Maximum	540	8.0	270	77	19	18	4.0	280	340	22	13	1.1	26	332	.67	16,000	560	
Minimum	440	6.5	230	61	15	8.8	.7	230	280	4.8	<.5	.3	12	270	<.02	1,500	<.10	
Mean	514	--	260	72	18	14	2.2	260	310	16	--	.4	23	306	--	3,800	--	
Number of samples	12	12	12	12	12	12	12	12	12	12	12	12	11	12	12	11	12	
<u>Stanton</u>																		

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Arsenic, Barium, Cadmium, Chromium, Copper, Lead, Mercury, Selenium, Silver, Zinc, (µg/L)	Total alpha radiation, (pCi/L)	Total beta radiation, (pCi/L)	Radium 226, (pCi/L)	Radium 228, (pCi/L)	Radon 222, (pCi/L)					
	<u>Red Oak</u>										
Maximum	<10	300	<10	<1	<10	30	2	5	--	--	--
Minimum	<10	<100	<1	<1	<10	<10	<10	.8	--	--	--
Mean	--	--	--	--	--	--	--	2	3	--	--
Number of samples	9	9	9	5	5	9	5	5	5	0	0
	<u>Stanton</u>										
Maximum	10	800	4	<1	<10	940	14	7	4.0	--	<10
Minimum	<10	400	<1	<1	<10	10	.9	1	2.8	--	<10
Mean	--	587	--	--	--	172	6	3	3.4	--	--
Number of samples	7	7	7	5	5	7	5	4	3	0	1

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Specific conductivity laboratory (μS/cm)	pH, laboratory (standard units)	Temperature, water (°C)	Total hardness, (mg/L CaCO ₃)	Calcium (mg/L)	Magnesium (mg/L)	Sodium (mg/L)	Potassium (mg/L)	Alkalinity, laboratory (mg/L CaCO ₃)	Bicarbonate (mg/L)	Sulfate (mg/L)	Chloride (mg/L)	Fluoride (mg/L)	Silica (mg/L)	Dissolved solids (mg/L)	Nitrogen, NO ₃ as N (mg/L)	Iron (μg/L)	Manganese (μg/L)
Maximum	510	7.4	14.5	250	73	18	11	1.4	150	180	50	24	0.3	23	330	13	580	140
Minimum	403	6.8	5.5	220	61	12	5.8	.8	140	170	25	10	.2	20	273	9.3	20	<10
Mean	465	--	11.5	230	67	16	8.4	1.1	140	180	37	17	.3	22	298	11	127	--
Number of samples	6	7	6	7	7	7	7	7	7	6	7	7	7	6	7	7	6	7

Wiota

Table 16. Statistical summary of historical, 1950-86, water-quality properties and constituents and trace-element and radionuclide concentrations for nine municipalities using the Dakota aquifer--Continued

	Arsenic, (µg/L)	Barium, (µg/L)	Cadmium, (µg/L)	Chromium, (µg/L)	Copper, (µg/L)	Lead, (µg/L)	Mercury, (µg/L)	Selenium, (µg/L)	Silver, (µg/L)	Zinc, (µg/L)	Total alpha radia- tion, (pCi/L)	Total beta radia- tion, (pCi/L)	Radium 226, (pCi/L)	Radium 228, (pCi/L)	Radon 222, (pCi/L)
Maximum	<10	300	<10	<10	50	<10	<1	<10	<10	210	3	3	--	--	65
Minimum	<10	100	<1	<10	<10	<10	<1	<10	<10	20	.4	3	--	--	65
Mean	--	192	--	--	--	--	--	--	--	70	2	3	--	--	65
Number of samples	4	4	4	4	4	4	3	3	3	4	3	2	0	0	1

Wiota

Table 17. Water use by category, 1984

[Mgal/d, million gallons per day; gal/d, gallons per day; --, no estimate; NA, not applicable]

County and source of water	Municipal and rural systems					Estimated domestic rural use ¹ (Mgal/d)	Total domestic average use (Mgal/d)
	Population	Population served	Percent of county population	Average use (Mgal/d)	Maximum use (Mgal/d)		
Adair	9,509	6,230	65.5	0.560	1.091	0.328	0.888
All aquifers		3,571	37.6	.314	.648	.328	.642
Alluvial aquifers		998	10.5	.070	.177	--	.070
Adams	5,731	2,473	43.2	.282	.596	.326	.608
All aquifers		534	9.3	.032	.098	.326	.358
Alluvial aquifers		534	9.3	.032	.098	--	.032
Cass	16,932	11,827	69.8	1.458	2.335	.511	1.969
All aquifers		11,827	69.8	1.458	2.335	.511	1.969
Alluvial aquifers		680	4.0	.060	.170	--	.060
Fremont	9,401	5,800	61.7	.757	1.837	.360	1.117
All aquifers		3,564	37.9	.685	1.234	.360	1.045
Alluvial aquifers		3,564	37.9	.685	1.234	--	.685
Mills	13,406	8,279	61.8	.973	3.585	.513	1.486
All aquifers		2,488	18.6	.973	.695	.513	1.486
Alluvial aquifers		1,986	14.8	.897	.433	--	.897
Montgomery	13,413	9,602	71.6	1.474	2.829	.381	1.855
All aquifers		9,484	70.7	1.464	2.829	.381	1.845
Alluvial aquifers		1,681	12.5	.276	.481	--	.276
Page	19,063	16,993	89.1	1.906	3.557	.207	2.113
All aquifers		8,079	42.4	1.002	1.879	.207	1.209
Alluvial aquifers		8,079	42.4	1.002	1.879	--	1.002
Pottawattamie	86,561	68,574	79.2	9.295	18.176	1.799	11.094
All aquifers		8,582	9.9	4.945	2.577	1.799	6.744
Alluvial aquifers		4,612	5.3	4.584	1.566	--	4.584
Taylor	8,353	4,831	57.8	.544	.874	.352	.896
All aquifers		618	7.4	.037	.063	.352	.389
Alluvial aquifers		338	4.0	.022	.048	--	.022
TOTAL:							
All counties	182,369	134,609	73.8	17.249	34.880	4.777	22.026
All aquifers		48,747	26.7	10.910	12.358	4.777	15.687
Alluvial aquifers		22,472	12.3	7.628	6.086	--	7.628

Table 17. Water use by category, 1984--Continued

County	Total livestock (Mgal/d)	Irrigation, permitted, ground water (Mgal/d)	Irrigation, permitted, surface water (Mgal/d)	Industrial permitted, ground water (Mgal/d)	Industrial permitted, surface water (Mgal/d)	Feedlots, permitted, ground water (Mgal/d)	Feedlots, permitted, surface water (Mgal/d)
Adair	1.708	0	0	0	3.655	0	0
All aquifers	--	0	NA	0	NA	0	NA
Alluvial aquifers	--	0	NA	0	NA	0	NA
Adams	.988	0	0	0	2.116	0	0
All aquifers	--	0	NA	0	NA	0	NA
Alluvial aquifers	--	0	NA	0	NA	0	NA
Cass	1.264	.521	1.435	0	4.564	0	0
All aquifers	--	.521	NA	0	NA	0	NA
Alluvial aquifers	--	0	NA	0	NA	0	NA
Fremont	.681	6.725	1.583	.241	.089	.144	0
All aquifers	--	6.725	NA	.241	NA	.144	NA
Alluvial aquifers	--	6.725	NA	.241	NA	0	NA
Mills	.661	6.075	1.039	0	.313	.145	0
All aquifers	--	6.075	NA	0	NA	.145	NA
Alluvial aquifers	--	6.075	NA	0	NA	.145	NA
Montgomery	.881	0	.193	0	.295	.085	.150
All aquifers	--	0	NA	0	NA	.085	NA
Alluvial aquifers	--	0	NA	0	NA	.085	NA
Page	1.062	0.914	1.192	0	4.104	0	0
All aquifers	--	.914	NA	0	NA	0	NA
Alluvial aquifers	--	.914	NA	0	NA	0	NA
Pottawattamie	1.983	6.056	1.179	3.534	3.096	.299	0
All aquifers	--	6.056	NA	3.534	NA	.299	NA
Alluvial aquifers	--	6.056	NA	3.534	NA	0	NA
Taylor	1.051	0	.006	0	.045	0	0
All aquifers	--	0	NA	0	NA	0	NA
Alluvial aquifers	--	0	NA	0	NA	0	NA
TOTAL:							
All counties	10.285	20.291	6.627	3.775	18.278	.673	.150
All aquifers	--	20.291	NA	3.775	NA	.673	NA
Alluvial aquifers	--	19.609	NA	3.775	NA	.230	NA

Table 17. Water use by category, 1984--Continued

County	Miscellaneous permitted, ground water (Mgal/d)	Miscellaneous permitted, surface water (Mgal/d)	Total, permitted use (Mgal/d)	Total permitted, without feedlots (Mgal/d)	Total water use (Mgal/d)
Adair	0	0	3.656	3.656	6.258
All aquifers	0	NA	0	0	² 6.42
Alluvial aquifers	0	NA	0	0	² 0.70
Adams	0	0	2.116	2.116	3.712
All aquifers	0	NA	0	0	² 3.58
Alluvial aquifers	0	NA	0	0	² 0.32
Cass	0	0	6.520	6.520	9.753
All aquifers	0	NA	.521	.521	² 2.490
Alluvial aquifers	0	NA	0	0	² 0.60
Fremont	.947	4.192	13.921	13.777	15.575
All aquifers	.947	NA	8.057	7.913	² 8.958
Alluvial aquifers	.947	NA	7.752	7.752	² 8.437
Mills	.108	.002	7.682	7.537	9.684
All aquifers	.108	NA	6.328	6.183	² 7.669
Alluvial aquifers	.108	NA	6.328	6.183	² 7.080
Montgomery	0	0	.723	.488	3.224
All aquifers	0	NA	.085	0	² 1.845
Alluvial aquifers	0	NA	.085	0	² 2.76
Page	0.055	0	6.265	6.265	9.440
All aquifers	.055	NA	.969	.969	² 2.178
Alluvial aquifers	.055	NA	.969	.969	² 1.971
Pottawattamie	.060	5.112	19.336	19.037	32.114
All aquifers	.060	NA	9.949	9.650	² 16.394
Alluvial aquifers	.060	NA	9.650	9.650	² 14.234
Taylor	0	0	.051	.051	1.998
All aquifers	0	NA	0	0	² 3.89
Alluvial aquifers	0	NA	0	0	² 0.22
TOTAL:					
All counties	1.170	9.306	60.270	59.447	91.758
All aquifers	1.170	NA	25.909	25.236	² 40.923
Alluvial aquifers	1.154	NA	24.768	24.538	² 32.166

¹ Domestic rural use estimated as 100 gallons per day per capita for those not served by water systems.

² Does not include livestock use.

Table 18. Water source and use for municipal and rural-water systems in southwest Iowa

[Mgal/d, million gallons per day; --, no data]

Municipal water use	Water source	Source (percent of total)	Population served during 1980	Average use during 1984 (Mgal/d)	Maximum use during 1984 (Mgal/d)
<u>Adair County</u>					
Adair	Cambrian/Ordovician aquifer	90	883	0.094	0.181
	Silurian/Devonian aquifer	10	--	--	--
Bridgewater	West Fork Middle Nodaway River alluvium	100	233	.019	.096
Fontanelle	West Fork Middle Nodaway River alluvium	95	805	.054	.085
	Albany channel	5	--	--	--
Greenfield	Lake Nodaway and Lake Greenfield	100	2,243	.203	.388
Orient	Lake Orient	100	416	.044	.055
Stuart	Cambrian/Ordovician aquifer	90	1,650	.147	.286
	Inter-till sand and gravel aquifer	10	--	--	--
<u>Adams County</u>					
Corning	Lake Binder, city reservoir, and Lake Icaria	100	1,939	.250	.498
Nodaway	East Nodaway River alluvium	100	185	.011	.048
Prescott	East Nodaway River alluvium	100	349	.021	.050
<u>Cass County</u>					
Anita	Dakota aquifer	100	1,153	.139	.239
Atlantic	Dakota aquifer	100	7,789	.919	1.35
Cumberland	Dakota aquifer	75	351	.026	.070
	Inter-till sand and gravel aquifer	25	--	--	--
Griswold	Dakota aquifer	100	1,176	.250	.400
Lewis	Glacial drift aquifer	100	497	.042	.080
Marne	Camp Creek alluvium	100	162	.013	.018
Massena	West Nodaway River alluvium	100	518	.047	.152
Wiota	Dakota aquifer	100	181	.023	.025

Table 18. Water source and use for municipal and rural-water systems in southwest Iowa--Continued

Municipal water use	Water source	Source (percent of total)	Population served during 1980	Average use during 1984 (Mgal/d)	Maximum use during 1984 (Mgal/d)
<u>Fremont County</u>					
Farragut	East Nishnabotna River alluvium	100	603	0.055	0.404
Hamburg	Missouri River alluvium	100	1,597	.240	.475
Imogene	Nodaway River; from Page I Rural Water Association	100	188	.052	--
Randolph	West Nishnabotna River alluvium	100	223	.037	.167
Riverton	East Nishnabotna River alluvium	100	342	.006	.103
Sidney	West Nishnabotna River alluvium	100	1,308	.184	.360
Tabor	West Nishnabotna River alluvium	100	1,088	.125	.200
Thurman	Missouri River alluvium	100	221	.038	.110
Page I Rural Water Association	Nodaway River; from Clarinda	100	230	.020	--
<u>Mills County</u>					
Emerson	Basal sand and gravel aquifer	100	502	.076	.262
Glenwood	Missouri River alluvium	100	5,280	.711	2.89
Hastings	West Nishnabotna River alluvium	100	215	.010	.065
Henderson	West Nishnabotna River alluvium	100	236	.022	.103
Malvern	West Nishnabotna River alluvium	90	1,244	.123	.229
	Silver Creek alluvium	10	--	--	--
Pacific Junction	Missouri River alluvium; from Glenwood	100	511	--	--
Silver City	Silver Creek alluvium	100	291	.031	.036
<u>Montgomery County</u>					
Elliott	East Nishnabotna River alluvium	50	493	.099	.079
	Dakota aquifer	50	--	--	--
Red Oak	Dakota aquifer	100	6,810	1.049	2.19
Stanton	Dakota aquifer	100	747	.089	.120
Villisca	West Nodaway River alluvium	100	1,434	.226	.441

Table 18. Water source and use for municipal and rural-water systems in southwest Iowa--Continued

Municipal water use	Water source	Source (percent of total)	Population served during 1980	Average use during 1984 (Mgal/d)	Maximum use during 1984 (Mgal/d)
<u>Montgomery County--Continued</u>					
Page I Rural Water Association	Nodaway River; from Clarinda	100	118	0.011	--
<u>Page County</u>					
Blanchard	Tarkio River alluvium	100	101	.007	0.030
Braddyville	Nodaway River alluvium	100	199	.016	.063
Clarinda	Nodaway River	100	5,458	.625	1.68
Coin	Nodaway River; from Page I Rural Water Association	100	316	--	--
College Springs	Inter-till sand and gravel aquifer	100	307	.020	.020
Essex	East Nishnabotna River alluvium	100	1,001	.122	.220
Shambaugh	West Nodaway River alluvium	100	197	.014	.046
Shenandoah	East Nishnabotna River alluvium	100	6,274	.824	1.50
Page I Rural Water Association	Nodaway River; from Clarinda	100	3,140	.279	--
<u>Pottawattamie County</u>					
Avoca	West Nishnabotna River alluvium	100	1,650	.215	.392
Carson	West Nishnabotna River alluvium	100	716	.098	.218
Carter Lake	from Omaha, Nebraska	100	3,438	.350	1.05
Council Bluffs	Missouri River	50	56,449	8.000	4.5
	Missouri River alluvium	50	--	--	--
Crescent	Pigeon Creek alluvium	100	547	.043	.089
Hancock	West Nishnabotna River alluvium	100	254	.025	.076
Macedonia	West Nishnabotna River alluvium	100	279	.009	.063
Minden	Inter-till sand and gravel aquifer	100	419	.038	.088
Neola	Dakota aquifer	93.3	839	.093	.154
	Mosquito Creek alluvium	6.7	--	--	--
Oakland	West Nishnabotna River alluvium	87.5	1,552	.156	.450
	Silurian/Devonian aquifer	12.5	--	--	--

Table 18. Water source and use for municipal and rural-water systems in southwest Iowa--Continued

Municipal water use	Water source	Source (percent of total)	Population served during 1980	Average use during 1984 (Mgal/d)	Maximum use during 1984 (Mgal/d)
<u>Pottawattamie County--Continued</u>					
Treynor	Fremont channel aquifer	100	981	0.076	0.225
Underwood	Mosquito Creek alluvium	33.4	448	.068	.617
	Inter-till sand and gravel aquifer	33.3	--	--	--
	Basal sand and gravel aquifer	33.3	--	--	--
Walnut	Ordovician aquifer	66.5	897	.095	.204
	Cambrian/Ordovician aquifer	33.5	--	--	--
Shelby County Rural Water District	West Nishnabotna River alluvium in Shelby County	99.5	105	.028	.048
	Mississippian aquifer in Shelby County	.5	--	--	--
<u>Taylor County</u>					
Bedford	East Fork One Hundred and Two River, East Branch One Hundred and Two River, and Lake of Three Fires	100	1,692	0.176	0.383
Blockton	Albany channel aquifer	100	280	.015	--
Clearfield	Platte River alluvium	100	433	.092	.127
Conway	East Fork One Hundred and Two River alluvium	100	93	.010	.024
	Middle Fork One Hundred and Two River alluvium	100	245	.012	.024
Lenox	East reservoir, West reservoir, and Mahary Lake	100	1,338	.188	.203
New Market	Nodaway River; from Page I Rural Water Association	100	554	.035	.050
Clearfield Rural Water District	Platte River alluvium	100	84	.011	.049
Page I Rural Water Association	Nodaway River; from Clarinda	100	112	.010	--