

Please do not destroy or throw away this publication. If you have no further use for it write to the Geological Survey at Washington and ask for a frank to return it

DEPARTMENT OF THE INTERIOR

Ray Lyman Wilbur, Secretary

U. S. GEOLOGICAL SURVEY

George Otis Smith, Director

WATER-SUPPLY PAPER 603

SURFACE WATER SUPPLY OF THE  
UNITED STATES

1925

PART III. OHIO RIVER BASIN

NATHAN C. GROVER, Chief Hydraulic Engineer

A. W. HARRINGTON, A. H. HORTON, LASLEY LEE, H. E. GROSBACH

W. R. KING, and E. D. BURCHARD, District Engineers

Prepared in cooperation with the

STATES OF NEW YORK, WEST VIRGINIA, OHIO, VIRGINIA  
ILLINOIS, TENNESSEE, NORTH CAROLINA, AND ALABAMA



U. S. GEOL. SURVEY  
C/O 10400 DET. HYD. RES. DIV.  
IOWA CITY, IOWA



















September, on the other hand, the only stored water available for run-off is possibly a small quantity in the ground; therefore the run-off for the year beginning October 1 is practically all derived from precipitation within that year.

The base data collected at gaging stations consist of records of stage, measurements of discharge, and general information used to supplement the gage heights and discharge measurements in determining the daily flow. The records of stage are obtained either from direct readings on a staff or chain gage or from a water-stage recorder that gives a continuous record of the fluctuations. Measurements of discharge are made with a current meter by the general methods outlined in standard textbooks on the measurement of river

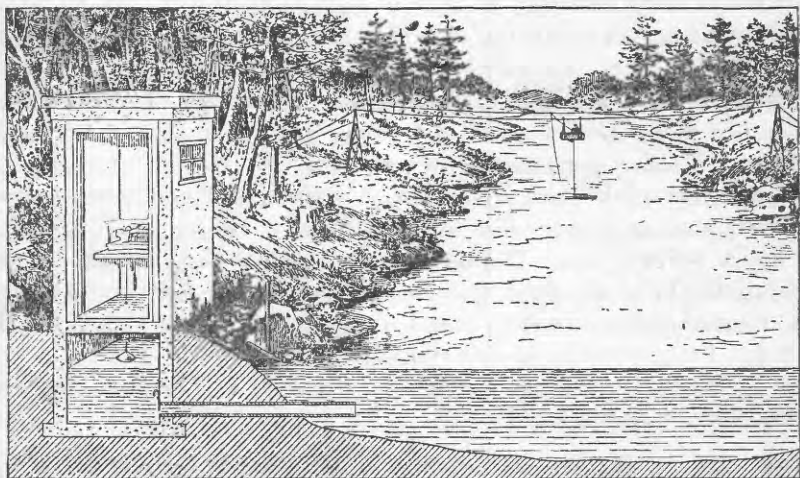


FIGURE 1.—Typical gaging station

discharge. A typical gaging station, equipped with water-stage recorder and measuring cable and car, is shown in Figure 1.

From the discharge measurements rating tables are prepared that give the discharge for any stage. The application of the daily gage heights to these rating tables gives the discharge from which the monthly and yearly mean discharge is determined.

The data presented for each gaging station in the area covered by this report comprise a description of the station, a table giving records of discharge measurements, a table giving the daily discharge of the stream, and a table of monthly and yearly discharge and run-off.

If the base data are insufficient to determine the daily discharge, tables giving daily gage height and records of discharge measurements are published.

The description of the station gives, in addition to statements regarding location and equipment, information in regard to any condition that may affect the permanence of the stage-discharge

relation, covering such subjects as the occurrence of ice, the use of the stream for log driving, shifting of control, and the cause and effect of backwater. It gives also information as to diversions that decrease the flow at the gage, artificial regulation, maximum and minimum recorded stages, and the accuracy of the records.

The table of daily discharge gives, in general, the discharge in second-feet corresponding to the mean of the gage heights read each day. At stations on streams subject to sudden or rapid diurnal fluctuation the discharge obtained from the rating table and the mean daily gage height may not be the true mean discharge for the day. If such stations are equipped with water-stage recorders, the mean daily discharge may be obtained by averaging discharge at regular intervals during the day or by use of the discharge integrator, an instrument operating on the principle of the planimeter and containing as an essential element the rating curve of the station.

In the table of monthly discharge the column headed "Maximum" gives the mean flow for the day when the mean gage height was highest. As the gage height is the mean for the day it does not indicate correctly the stage when the water surface was at crest height and the corresponding discharge was consequently larger than given in the maximum column. Likewise, in the column headed "Minimum" the quantity given is the mean flow for the day when the mean gage height was lowest. The column headed "Mean" is the average flow in cubic feet per second during the month. On this average flow are based computations recorded in the remaining columns, which are defined on page 2.

#### ACCURACY OF FIELD DATA AND COMPUTED RESULTS

The accuracy of stream-flow data depends primarily (1) on the permanence of the stage-discharge relation, and (2) on the accuracy of observation of stage, measurements of flow, and interpretation of records.

A paragraph in the description of the station gives information regarding the (1) permanence of the stage-discharge relation, (2) precision with which the discharge rating curve is defined, (3) refinement of gage readings, (4) frequency of gage readings, and (5) methods of applying daily gage height to the rating table to obtain the daily discharge.

For the rating tables "well defined" indicates, in general, that the rating is probably accurate within 5 per cent; "fairly well defined," within 10 per cent; "poorly defined," within 15 to 25 per cent. These notes are very general and are based on the plotting of the individual measurements with reference to the mean rating curve.

The monthly means for any station may represent with high accuracy the quantity of water flowing past the gage, but the figures





























































































































































































































































































































































































































































































































































































































































































































































































