




A, Minnesota River near Carver, Minn.



B, Black River near Galesville, Wis.

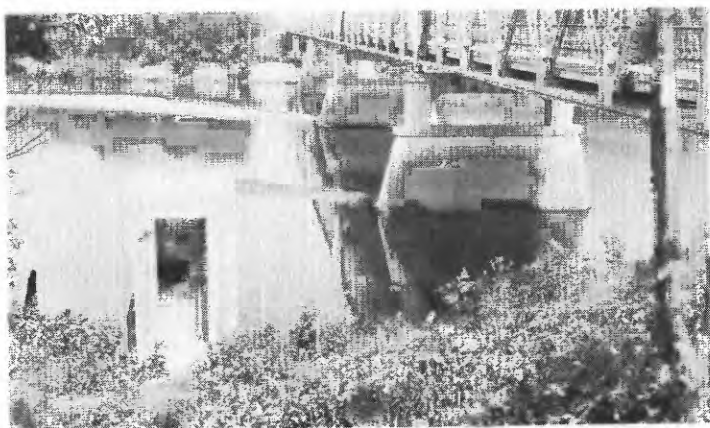

C, Mississippi River at McGregor, Iowa

FIGURE 1.—GAGING-STATION STRUCTURES

the winter, and it becomes impossible to compute the discharge in the usual manner. Discharge for periods of ice effect is computed on the basis of the gage-height record and occasional winter discharge measurements, consideration being given to the available information on temperature and precipitation, notes by gage observers and engineers, and comparable records of discharge for other stations in the same or nearby basins. If the stage-discharge relation is affected by ice, this information is given in a note to the table. No mention is made of occasional days of ice effect if the degree of accuracy of daily records is not changed.

The data herein presented generally comprise a description of the station, a skeleton rating table, and a table showing the daily discharge and monthly and yearly discharge and runoff of the stream.

The description of the station gives the location, drainage area, records available, type and history of gages, average discharge, extremes of discharge, general remarks, and notations of revisions of the previously published record. The location of the gaging station and the drainage area are obtained from the most accurate maps available. River mileage, given under "Location" for some stations, is that determined and used by the Corps of Engineers unless otherwise noted. Under "Gage" are given the type of gage currently in use and the datum of the present gage above mean sea level, and a condensed history of the types of gages, locations, and datums of previous gages for which discharge records are generally equivalent to those at the present site. Under "Average discharge" is given the average discharge for the number of years indicated. It is not given for stations having fewer than five complete years of record or for stations where changes in water development during the period of record cause the figure to have little significance. Under "Extremes" are given the maximum discharge and gage height; the minimum discharge if there is little or no regulation; the minimum daily discharge if there is extensive regulation (also the minimum discharge if useful); and the minimum gage height (unless it is of no importance). Unless otherwise qualified, the maximum discharge corresponds to the crest stage obtained by use of a water-stage recorder, a crest-stage indicator, or a non-recording gage read at the time of the crest. If the maximum gage height did not occur at the same time as the maximum discharge, it is given separately. Information pertaining to the accuracy of the records and conditions which affect the natural flow at the gaging station is given under "Remarks."

Previously published records of some stations have been found to be in error on the basis of data or information later obtained. Revisions of such records are usually published along with the current records in one of the annual reports. In order to make it easier to find such revised records, a paragraph headed "Revisions (water years)" has been added to the description of all stations for which revised records have been published. Listed therein are all the reports in which revisions have been published, each followed by the water years for which figures are revised in that report. In listing the report number, "W" means water-supply paper. In listing the water years only one number is given; for instance, 1933 stands for the water year October 1, 1932, to September 30, 1933. If no daily, monthly, or annual figures of discharge are concerned in the revision, that fact is brought out by notations after the year dates as follows: "(M)" means that

only the instantaneous maximum discharge was revised; "(m)" that only the instantaneous minimum was revised; and "(p)" that only peak discharges were revised. If the drainage area has been revised, the report in which the revised figure was first published is given. It should be noted that for all stations for which cubic feet per second per square mile and runoff, in inches, are published, a revision of the drainage area necessitates corresponding revision of all figures based on the drainage area. Revised figures of cubic feet per second per square mile and runoff, in inches, resulting from a revision of the drainage area only are usually not published in the annual series of reports.

Skeleton rating tables are published for all stations except those at which the daily discharge for the greater part of the open-water period was determined by the shifting-control method, the slope method, or other special methods involving an equivalent adjustment to the gage height of more than one-tenth foot.

For stations equipped with water-stage recorders, except those on streams subject to sudden or rapid fluctuation, the daily table gives the discharge corresponding to the daily mean gage height. For stations subject to such fluctuation the daily mean gage height may not indicate the true daily mean discharge, which must be obtained by averaging the discharge for parts of the day or by using the discharge integrator, an instrument for obtaining the daily mean discharge from a continuous gage-height graph and containing, as an essential element, a curve representing the stage-discharge relation at the station. For stations equipped with nonrecording gages, the table of daily discharge gives the discharge corresponding to once-daily readings of the gage, or to the mean of twice-daily readings, or to the mean gage height determined from gage-height graphs based on gage readings. For periods of rapidly changing stage, the daily mean discharge is determined from gage-height graphs based on gage readings, the frequency of which is stated in the station description.

In the table of daily discharge, the values for the maximum day and the minimum day for each month are underlined. If the value is repeated, it is underlined only on the first day of its occurrence.

In the monthly summary below the daily table, the line headed "Total" gives the sum of the daily values; it is the total cfs-days for the month. The line headed "Mean" gives the average flow in cubic feet per second during the month. Runoff for the month may be expressed in cubic feet per second per square mile (line headed "Cfsm"), or in inches (line headed "In."), or in acre-feet (line headed "Ac-ft"). Values for cubic feet per second per square mile and runoff, in inches, are omitted if the drainage area includes large noncontributing areas, or if the average annual rainfall over the drainage basin is usually less than 20 inches.

In the yearly summary below the monthly summary, the values of maximum are the maximum daily discharges, not the momentary discharges when the water was at crest stage. Likewise, the minimums in this summary are the minimum daily discharges.

Peak discharges and the times of their occurrence and corresponding gage heights of most stations are listed below the table of daily and monthly discharge. All independent peaks above the selected base are given. The base discharge, which is given in parentheses, is selected so that an average of about three peaks a year will be presented.

Peak discharges are not published for canals, ditches, drains, or for any stream for which the peaks are subject to substantial control by man.

Footnotes to the table of daily discharge indicate periods when discharge was computed or estimated by unusual or special methods during periods of no gage-height record and ice effect, or by other effects that reduce the degree of accuracy of the records. Days on which discharge measurements were made are indicated by asterisk and footnote unless they were made at frequent regular intervals, in which instance the general frequency of discharge measurements is given under "Remarks" in the station description.

For most gaging stations on lakes and reservoirs the data presented comprise a description of the station and a monthly summary table of stage and contents. For some reservoirs a table showing daily contents or stage is given. A skeleton table of capacity at given stages is usually given in the first report in which data for the reservoir are published, but it is omitted from succeeding reports.

ACCURACY OF FIELD DATA AND COMPUTED RESULTS

The accuracy of streamflow data depends primarily on (1) the stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements, and (2) the accuracy of observations of stage, measurements of discharge, and interpretation of records.

The station description states the degree of accuracy of the records. "Excellent" indicates that, in general, the error in the daily records is believed to be less than 5 percent; "good," less than 10 percent; "fair," less than 15 percent; and "poor," probably more than 15 percent. The records of monthly and yearly mean discharge and runoff are, in general, more nearly accurate than the daily records.

Runoff at some stations, as indicated by the monthly mean, may vary widely from natural runoff, owing to diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, values of cubic feet per second per square mile and runoff, in inches, are not published unless storage or diversion records are included to indicate the extent of the regulation or diversion, or unless satisfactory adjustments can be made for changes in contents of reservoirs or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur when relatively large negative adjustments are made or when evaporation is large in comparison with the observed discharge.

Many gaging stations on streams in the irrigated areas of the United States are situated above most of the diversions from those streams, and therefore the discharge recorded does not actually show the water supply available at the stations for further development, because water must first be supplied to existing irrigation systems.

PUBLICATIONS

To facilitate publication of the annual series of reports, the area of the United States is divided into 14 parts whose boundaries coincide with certain natural drainage lines. Formerly, the results of streamflow measurements were published in 14 volumes, one

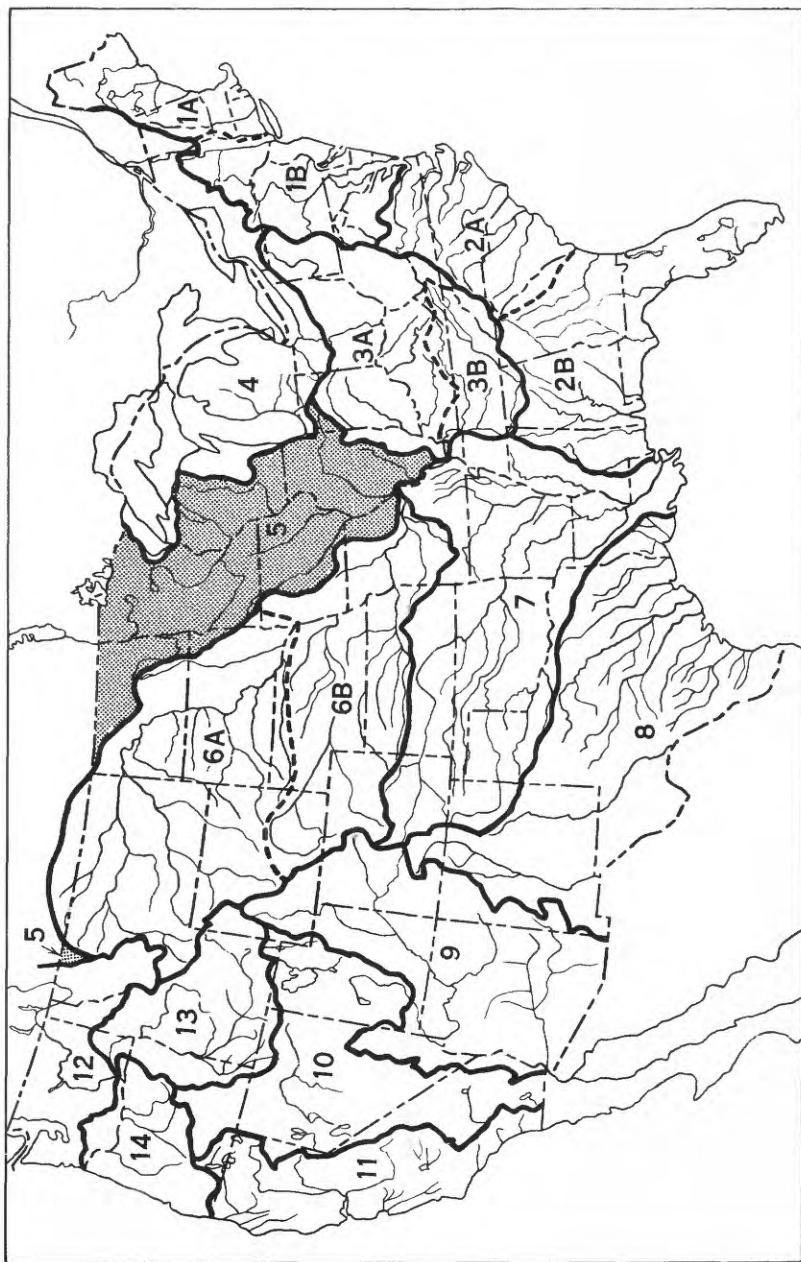


Figure 2.--Map of the United States showing areas covered by the 18 annual volumes on surface water supply. The area covered by this report is shaded.

for each of the 14 parts. Beginning with the reports for 1951, the records are published in 18 volumes, there being 2 volumes each for Parts 1, 2, 3, and 6. The boundaries of the various parts are indicated by the following list and the map in figure 2.

- Part 1. North Atlantic slope basins, in two volumes:
 A, North Atlantic slope basins, Maine to Connecticut.
 B, North Atlantic slope basins, New York to York River.
2. South Atlantic slope and eastern Gulf of Mexico basins, in two volumes:
 A, South Atlantic slope basins, James River to Savannah River.
 B, South Atlantic slope and eastern Gulf of Mexico basins, Ogeechee River to Pearl River.
3. Ohio River basin, in two volumes:
 A, Ohio River basin except Cumberland and Tennessee River basins.
 B, Cumberland and Tennessee River basins.
4. St. Lawrence River basin.
5. Hudson Bay and upper Mississippi River basins.
6. Missouri River basin, in two volumes:
 A, Missouri River basin above Sioux City, Iowa.
 B, Missouri River basin below Sioux City, Iowa.
7. Lower Mississippi River basin.
8. Western Gulf of Mexico basins.
9. Colorado River basin.
10. The Great Basin.
11. Pacific slope basins in California.
12. Pacific slope basins in Washington and upper Columbia River basin.
13. Snake River basin.
14. Pacific slope basins in Oregon and lower Columbia River basin.

Water-supply papers and other publications of the Geological Survey containing data on the water resources of the United States may be purchased or consulted as follows:

1. Copies may be purchased from the Superintendent of Documents, Government Printing Office, Washington 25, D. C., who will, on application, furnish lists giving prices. A list of Geological Survey publications may also be obtained by applying to the Director, Geological Survey, Washington, D. C.

2. Sets of the reports may be consulted in the libraries of the principal cities in the United States.

3. Sets are available for consultation in the offices of the Water Resources Division of the Geological Survey. Addresses of the offices in the area covered by this report are given on page 2.

Early records of the flow of streams in the United States are published in the reports listed below. In many of these reports records for years earlier than those indicated have been included for some streams.

Streamflow data for the years 1864-1901, in reports of the Geological Survey

(A = Annual Report; B = Bulletin; W = Water-Supply Paper)

Report	Character of data	Year
10th A, pt. 2	Descriptive information only.	
11th A, pt. 2	Monthly discharge and descriptive information.....	1864 to September 1890.
12th A, pt. 2do.....	1864 to June 30, 1891.
13th A, pt. 3do.....	1864-92.
14th A, pt. 2	Monthly discharge.....	1868-93.
B 131.....	Descriptions, measurements, gage heights, and ratings.....	1893-94.
16th A, pt. 2	Descriptive information only.	
B 140.....	Descriptions, measurements, gage heights, ratings, and monthly discharge.....	1895.
W 11.....	Gage heights.....	1896.
18th A, pt. 4	Descriptions, measurements, ratings, and monthly discharge..	1895-96.
W 15.....	Descriptions, measurements, and gage heights of streams east of the Mississippi River, and Missouri River and tributaries above Kansas River.	1897.
W 16.....	Descriptions, measurements, and gage heights of streams west of the Mississippi River, except Missouri River and tributaries above Kansas River.	1897.
19th A, pt. 4	Descriptions, measurements, ratings, and monthly discharge.	1897.
W 27.....	Measurements, ratings, and gage heights of streams east of the Mississippi River, and Missouri River and tributaries.	1898.
W 28.....	Measurements, ratings, and gage heights of streams west of the Mississippi River, except Missouri River and tributaries.	1898.
20th A, pt. 4	Monthly discharge.....	1898.
W 35 to 39...	Descriptions, measurements, gage heights, and ratings.....	1899.
21st A, pt. 4	Monthly discharge.....	1899.
W 47 to 52...	Descriptions, measurements, gage heights, and ratings.....	1900.
22d A, pt. 4	Monthly discharge.....	1900.
W 65, 66.....	Descriptions, measurements, gage heights, and ratings.....	1901.
W 75.....	Monthly discharge.....	1901.

Reports on surface-water supply containing records from 1899 to date for drainage basins in this report are listed below. The data for any particular gaging station will, in general, be found in the reports covering the years during which the station was maintained.

Numbers of water-supply papers containing results of stream measurements in Hudson Bay and upper Mississippi River basins, 1899-1952

Year	W.S.P.	Year	W.S.P.	Year	W.S.P.	Year	W.S.P.	Year	W.S.P.
1899	36	1911	305	1923	565	1933	745	1943	975
1900	49	1912	325	1924	585	1934	760	1944	1005
1901	a65,66,75	1913	355	1925	605	1935	785	1945	1035
1902	a83,85	1914	365	1926	625	1936	805	1946	1055
1903	a98,99,100	1915	405	1927	645	1937	825	1947	1085
1904	a128,130	1916	435	1928	685	1938	855	1948	1115
1905	171	1917	455	1929	685	1939	875	1949	1145
1906	207	1918	475	1930	700	1940	895	1950	1175
1907-8	245	1919-20	505	1931	715	1941	925	1951	1208
1909	265	1921	525	1932	730	1942	955	1952	1238
1910	285	1922	545						

a Tributaries of Mississippi River from east.

b Hudson Bay only.

The records at most of the stations discussed in these reports extend over many years. Miscellaneous measurements at many points other than regular gaging stations have been made each year and are published under "Miscellaneous discharge measurements" at the end of each report. The streams and points of measurement are listed in the same order as the streams and gaging stations in the body of the report. An index of the records obtained before 1904 has been published in Water-Supply Paper 119.

Each of the reports on the surface water supply for the year 1939 (Water-Supply Paper 875 for Hudson Bay and upper Mississippi River basins) contains, for the area included in that report, a summary of yearly discharge at gaging stations at which 10 or more complete years of record had been collected. These summaries were reprinted separately.

Reports also have been published that are compilations of records for various areas, usually a single State or drainage basin. These reports contain records previously published (some of which may have been revised), as well as some records not contained in the annual series of water-supply papers. The only such report for any part of the area covered by this report is Water-Supply Paper 156, "Water power of northern Wisconsin."

Records of discharge have been published also in State reports. Some of these are not contained in the publications of the Geological Survey or are revisions of records previously published in its water-supply papers. The following table contains a list of these reports for the area covered by this report.

State reports containing compilations of records of discharge

State	Period	Report	Issued by
Illinois.....	1906-11	Water resources of Illinois.....	Rivers and Lakes Commission.
Do.....	1900-1934	Streamflow data of Illinois.....	Division of Waterways.
Indiana.....	1925-27	Pub. 72, Surface water supply of Indiana...	Department of Conservation.
Do.....	1927-30	Pub. 112, Surface water supply of Indiana...	Do.
Iowa.....	1873-1932	Streamflow records of Iowa.....	State Planning Board.
Do.....	1873-1940	Water-Supply Bull. 1, Summaries of yearly and flood flow relating to Iowa streams.	Iowa Geological Survey.
Do.....	1941-42	Water-Supply Bull. 2, Surface water resources of Iowa.	Do.
Do.....	1943-50	Water-Supply Bull. 3, Surface water resources of Iowa.	Do.
Minnesota....	1909-12	Water-resources investigations of Minnesota	State Drainage Commission.
Do.....	1892-46	Bull. 1, Magnitude and Frequency of Floods in Minnesota.	Department of Conservation,
Do.....	1863-1949	Bull. 5, Surface water supplies of the Mesabi Iron Range.	Division of Waters.
Missouri.....	1857-1926	Vol. 20, 2d series, Water resources of Missouri.	Do.
Do.....	1927-39	Vol. 25, 2d series, Surface waters of Missouri.	Missouri Bureau of Geology and Mines.
Do.....	1940-49	Vol. 34, 2d series, Surface waters of Missouri.	Missouri Geological Survey and Water Resources.
			Do.

State reports containing compilations of records of discharge--Continued

State	Period	Report	Issued by
Montana.....	1889-1911	5th biennial report.....	Office of the State Engineer.
Do.....	1881-1938	Special Rept. 10, vols. 1-4, Water resources of Montana.	Montana Agricultural Experiment Station.
North Dakota.	1919-21	Report to Governor of North Dakota on flood control.	State chief engineer.
Do.....	1882-1938	Surface water in North Dakota.....	State Planning Board.
Do.....	1882-1944	Supplement B, 4th biennial report.....	State Water Conservation Commission.
Wisconsin....	1886-1914	1st report of Railroad Commission of Wisconsin to Legislature on water powers.	Railroad Commission of Wisconsin.
Do.....	1914-23	2d report of Railroad Commission of Wisconsin to Legislature on water powers.	Do.

Note.--In addition to records contained in reports listed above, the following States have issued annual or biennial reports in which are contained records of discharge: Indiana, Missouri, Montana, North Dakota, and South Dakota.

The reports listed in the foregoing tables contain the customary records of discharge collected during the systematic operation of gaging stations. Detailed information on the stage and discharge of many streams during major floods has been included in special reports on these floods published by the Geological Survey. The more recent of these special reports also contain other pertinent hydrologic information and analyses and compilations of data relating to earlier notable floods. The following list gives the numbers and titles of these reports:

Water-Supply Paper	Title
162.....	Destructive floods in the United States in 1905.
771.....	Floods in the United States, magnitude and frequency.
838.....	Floods of Ohio and Mississippi Rivers, January-February, 1937.
847.....	Maximum discharges at stream-measurement stations through September 1938.
1137-B.....	Floods of 1950 in the Red River of the North and Winnipeg River basins.
1137-G.....	Floods of 1950 in the upper Mississippi River and Lake Superior basins in Minnesota.

RECORDS OF DISCHARGE COLLECTED BY AGENCIES OTHER THAN THE GEOLOGICAL SURVEY

The table below contains a list of gaging stations for the area covered by this report, at which records of discharge were collected during the water year October 1951 to September 1952 by agencies other than the Geological Survey. The records of these stations are not contained in publications of the Geological Survey, nor have they been published elsewhere.

Records of discharge collected by agencies other than the Geological Survey

Stream	Location	Period	Collected by
Beaver Creek.....	Eldora, Iowa.....	1950-52	Corps of Engineers.
Blue Earth River.....	Near Rapidan, Minn., at Rapidan hydroelectric plant.	1911-52	Northern States Power Co.
Cannon River.....	Near Cannon Falls, Minn., at Cannon Falls hydroelectric plant.	1921-52	Do.
Clear Creek.....	Tiffin, Iowa.....	1951-52	Corps of Engineers.
Deer Creek.....	Toledo, Iowa.....	1950-52	Do.
Honey Creek.....	Bangor, Iowa.....	1950-52	Do.
Iowa River.....	Homestead, Iowa.....	1951-52	Do.
Do.....	Lone Tree, Iowa.....	1950-52	Do.
Iowa River, South Fork.	New Providence, Iowa.....	1950-52	Do.
Minerva Creek.....	Clemons, Iowa.....	1950-52	Do.
Minnesota River.....	Near Granite Falls, Minn., at Minnesota Falls hydroelectric plant.	1928-52	Northern States Power Co.
Mississippi River.....	Near Anoka, Minn., at Coon Rapids hydroelectric plant.	1918-52	Do.
Do.....	Minneapolis, Minn., at lower-dam hydroelectric plant.	1900-1952	Do.
Do.....	St. Cloud, Minn., at St. Cloud hydroelectric plant.	1924-52	Do.
Do.....	St. Paul, Minn., at Twin City Lock and Dam.	1925-52	Ford Motor Co.

Records of discharge collected by agencies other than the Geological Survey--Continued

Stream	Location	Period	Collected by
Old Man Creek.....	Iowa City, Iowa.....	1951-52	Corps of Engineers.
Richland Creek.....	Haven, Iowa.....	1950-52	Do.
Timber Creek.....	Marshalltown, Iowa.....	1950-52	Do.
Walnut Creek.....	Hartwick, Iowa.....	1951-52	Do.

Note.--The Soil Conservation Service of the United States Department of Agriculture has collected records of runoff from five areas in Wisconsin, four in Illinois, and one in Iowa. One area in Wisconsin, comprising less than 5 acres, is near La Crosse (records begin in 1932), and the other four, comprising less than 330 acres each, are near Fennimore (records begin in 1938). The four areas in Illinois, comprising less than 300 acres each, are near Edwardsville (records begin in 1938). The area in Iowa, comprising 3.5 sq mi, is near Iowa City (records begin in 1925). These records are in the files of the Soil Conservation Service.

HYDROLOGIC CONDITIONS

The water year 1952 was characterized by above normal runoff over most of the Hudson Bay and upper Mississippi River basins. Record-breaking floods occurred during April in the Mississippi and Minnesota River basins in the State of Minnesota and in the upper headwaters of the Red River of the North basin. These floods are described in Water-Supply Paper 1260-C, "Floods of 1952 in the upper Mississippi and Red River of the North basins," now in preparation. For three key gaging stations in the area covered by this report, a comparison of the monthly and yearly mean discharge during the 1952 water year with the median discharge for the 25-year period 1921-45 is shown in figure 3 on the following page.

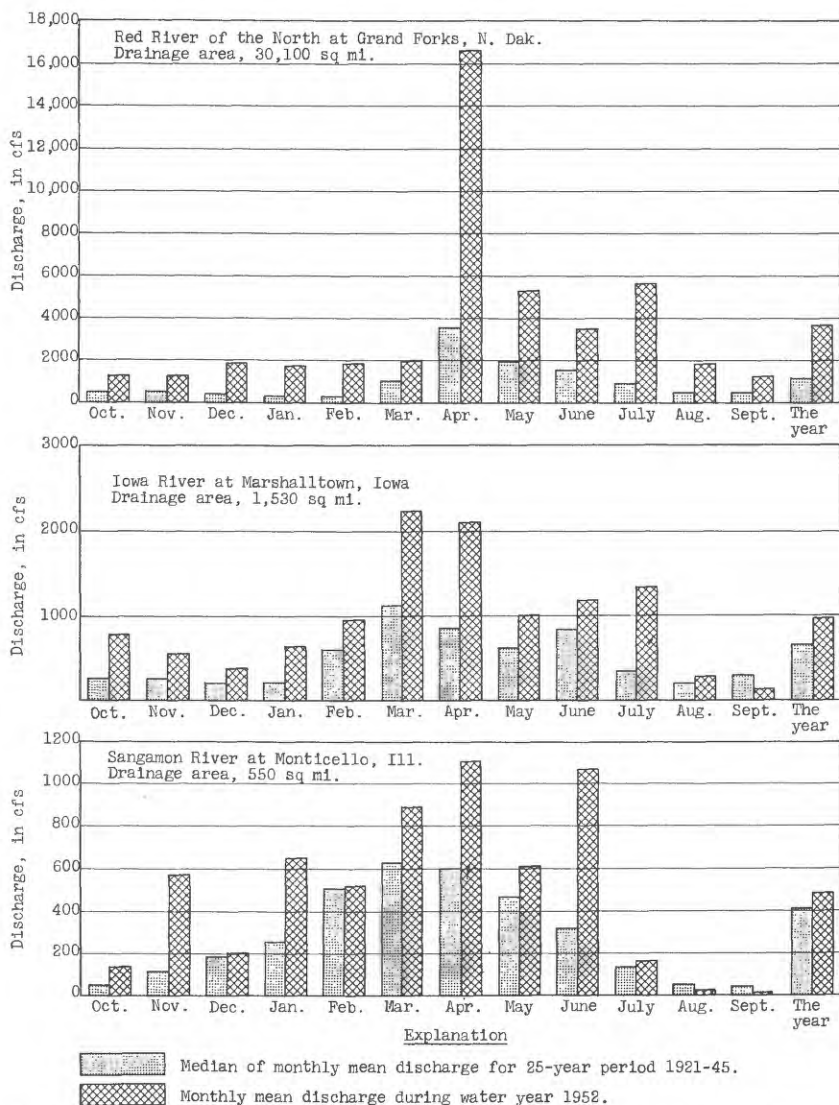


Figure 3.--Comparison of discharge at three key gaging stations during 1952 water year with median discharge for 25-year period.

