A. **Otselic River at Upper Lisle, N. Y.**

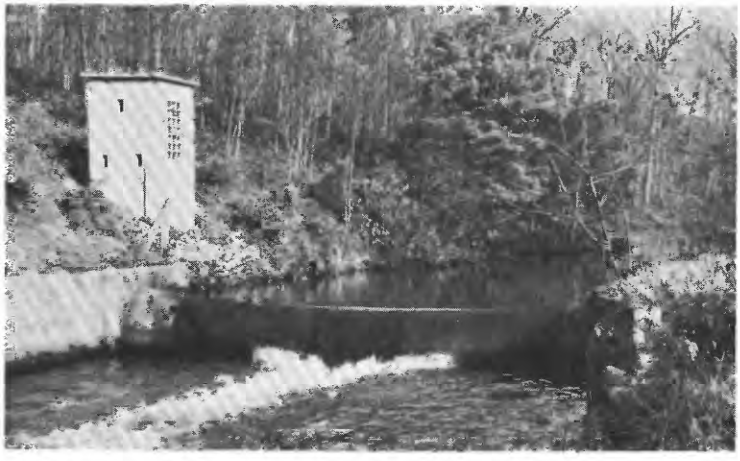

B. **Clark Creek near Carsonville, Pa.**

C. **Mattaponi River near Bowling Green, Va.**

FIGURE 1.—GAGING-STATION STRUCTURES

At some gaging stations the stage-discharge relation is affected by backwater from reservoirs, tributary streams, or other sources. This necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in determining discharge. Information requisite for determining the slope or fall is obtained by means of an auxiliary gage set at some distance from the base gage. At some stations the stage-discharge relation is affected by changing stage. If so, the rate of change in stage is used as a factor in the determination of discharge.

At most gaging stations in the northern part of the United States and at some in the mountainous regions of other parts the stage-discharge relation is affected by ice during the winter, and it becomes impossible to compute the discharge in the usual manner. Discharge for periods of ice effect is computed on the basis of the gage-height record and occasional winter discharge measurements, consideration being given to the available information on temperature and precipitation, notes by gage observers and engineers, and comparable records of discharge for other stations in the same or nearby basins. If the stage-discharge relation is affected by ice, this information is given in a note to the table. No mention is made of occasional days of ice effect if the degree of accuracy of daily records is not changed.

The data herein presented generally comprise a description of the station, a skeleton rating table, and a table showing the daily discharge and monthly and yearly discharge and runoff of the stream. Records are published for the water year which begins on October 1 and ends on September 30. A calendar for the water year 1953 is shown on page IV for the purpose of finding the day of the week for any date.

The description of the station gives the location, drainage area, records available, type and history of gages, average discharge, extremes of discharge, general remarks, and notations of revisions of the previously published record. The location of the gaging station and the drainage area are obtained from the most accurate maps available. River mileage, given under "Location" for some stations, is that determined and used by the Corps of Engineers unless otherwise noted. Under "Records available" are given the periods for which there are published records generally equivalent to those at the present site. Under "Gage" are given the type of gage currently in use and the datum of the present gage above mean sea level, and a condensed history of the types, locations, and datums of previous gages used during the period of records available. Under "Average discharge" is given the average discharge for the number of years indicated. It is not given for stations having fewer than five complete years of record or for stations where changes in water development during the period of record cause the figure to have little significance. Under "Extremes" are given the maximum discharge and gage height; the minimum discharge if there is little or no regulation; the minimum daily discharge if there is extensive regulation (also the minimum discharge if useful); and the minimum gage height (unless it is of no importance). Unless otherwise qualified, the maximum discharge corresponds to the crest stage obtained by use of a water-stage recorder, a crest-stage indicator, or a nonrecording gage read at the time of the crest. If the maximum gage height did not occur at the same time as the maximum discharge, it is given separately. Information pertaining to the accuracy of the records and conditions which affect the natural flow at the gaging station is given under "Remarks."