

U.S. Geological Survey public-access version of the following article:

From Anecdotes to Quantification: Advances in Characterizing Volcanic Eruption Impacts on The Built Environment

By Natalia Irma Deligne¹, Susanna F. Jenkins^{2,3}, Elinor S. Meredith^{2,3}, George T. Williams^{2,3}, Graham S. Leonard⁴, Carol Stewart^{5,6}, Thomas M. Wilson⁷, Sébastien Biass², Daniel M. Blake⁸, Russell J. Blong⁹, Costanza Bonadonna¹⁰, Rodrigo Calderon B.⁷, Josh L. Hayes², David M. Johnston⁶, Ben M. Kennedy⁷, Christina R. Magill⁴, Robin Spence¹¹, Kristi L. Wallace¹¹, John Wardman¹³, Alana M. Weir⁷, Grant Wilson¹⁴, Giulio Zuccaro¹⁵

Published in: *Bulletin of Volcanology*, volume 84, article number 7, December 2021

Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government

Although this information product, for the most part, is in the public domain, it also may contain copyrighted materials as noted in the text. Permission to reproduce copyrighted items must be secured from the copyright owner.

USGS release date (this version): April 2024

For link to publisher's version, see <https://pubs.usgs.gov/publication/70226950> for Publications Warehouse citation page.

Supplementary data to this article can be found online at <https://doi.org/10.1007/s00445-021-01506-8>.

¹Hawaiian Volcano Observatory, US Geological Survey, PO Box 627, Hilo, HI 96721, USA

²Earth Observatory of Singapore, Nanyang Technological University, 50 Nanyang Ave, Singapore, Singapore

³Asian School of the Environment, Nanyang Technological University, 50 Nanyang Ave, Singapore, Singapore

⁴GNS Science, PO Box 30368, Lower Hutt 5040, New Zealand

⁵School of Health Sciences, Massey University, PO Box 756, Wellington 6140, New Zealand

⁶Joint Centre for Disaster Research, Massey University, PO Box 756, Wellington 6140, New Zealand

⁷School of Earth and Environment, University of Canterbury, Private Bag 4800, Christchurch 8140, New Zealand

⁸Derby, UK

⁹Risk Frontiers, 8/33 Chandos St, St Leonards, NSW 2065, Australia

¹⁰Department of Earth Sciences, University of Geneva, 13 rue des Maraîchers, 1205 Geneva, Switzerland

¹¹Cambridge Architectural Research Ltd, 25 Gwydir Street #6, Cambridge CB1 2LG, UK

¹²Alaska Volcano Observatory, US Geological Survey, 4230 University Dr. STE 100, Anchorage, AK 99508, USA

¹³AXA XL, 20 Gracechurch St, London EC3V 0BG, UK

¹⁴National Emergency Management Agency, PO Box 5010, Wellington 6040, New Zealand

¹⁵PLINIVS Study Centre, University of Naples Federico II, Via Toledo 402, 80134 Napoli, Italy

Abstract

Over the past 20 years, our understanding of volcanic eruption impacts on the built environment has transformed from being primarily observational with small datasets to one grounded in field investigations, laboratory experiments, and quantitative modeling, with an emphasis on stakeholder collaboration and co-creation. Here, we summarize key advances and knowledge gaps of impacts across volcanic hazards and built environment types from the past 20 + years. Studies have concentrated on impacts from tephra fall (ash) and to buildings, with less examination of other hazards' impacts to critical infrastructure. As we look to the next decade, we speculate on likely research directions, including the increasing role of new technologies, higher resolution modeling, transdisciplinary collaborations, and evidence-based mitigative solutions.

Introduction

For millennia, societies have faced a variety of volcanic eruption impacts, from nuisance to major disruption to loss of life, home, and livelihoods. Today, over 1 billion people live within 100 km of an active volcano (Freire et al. 2019), and societies farther afield can experience physical and disruptive consequences from volcanic activity (Wilson et al. 2012). This contribution focuses on advances over the last 20 + years to characterize the impacts of volcanic eruptions on the built environment, where built environment is defined as “[person]-made or modified structures that provide people with living, working, and recreational spaces” (EPA 2020), including buildings and critical infrastructure (energy, water, transportation, telecommunication). We consider both direct (damage to specific asset or component) and indirect (system functionality loss) impacts (Merz et al. 2010). Not covered here are impacts to aviation (Mastin et al. in press), health (Stewart et al. this issue), agriculture (Craig et al. 2016; Wilson et al. 2011), or economies (e.g., Cardwell et al. 2021; Rodriguez et al. 2017; Zuccaro et al. 2013), or advances in hazard modeling.

While all volcanic hazards can adversely impact the built environment, most of the research effort to date has focused on tephra fall (ash) impacts (Figs. 1 and 2). This is due to a combination of factors, including high-profile explosive eruptions with large tephra deposits, comparatively frequent and larger ash footprints (relative to other hazards) that affect more communities, diverse impacts and impact mechanisms that can be gradational (contrary to perceived binary flow hazards: untouched/destroyed), and mitigative solutions beyond avoidance (Wilson et al. 2014a). Documentation of the 1980 Mount St. Helens eruption impacts was foundational (Blong 1984), and subsequent twentieth century research similarly focused on describing impacts from notable volcanic eruptions (Fig. 1), with some early attempts to identify systemic drivers of volcanic impacts (Johnston et al. 2000). In the last 20 years, such work has continued, accompanied by more approaches (see next section) to understand the causes and ramifications of specific impacts and wider systemic drivers. There has been a concerted effort to apply this knowledge to forecast eruption impacts from volcanoes around the world (Fig. 2). More recently, there is a growing focus on understanding dynamic, multi-hazard and cascading impacts, and their associated consequences for livelihoods and habitability, as well as quantifying damage ranges, interdependencies, and evidence-based mitigation.


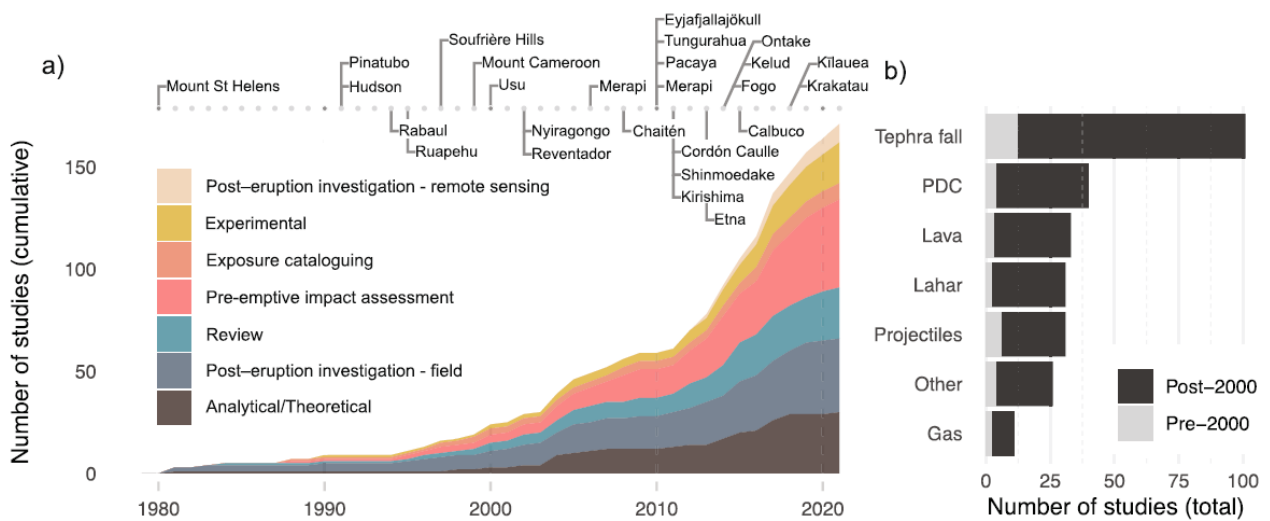


Fig. 1. Approaches used and hazards studied in articles on volcanic impacts to the built environment, published since 1980 (limited to English language publications; see [Supplementary Information](#) for selection methodology). a Stacked area chart timeline of approaches used, arranged by order of appearance in the literature. Volcanoes that have erupted since 1980 and been studied in these articles are highlighted. b Number of articles for a particular volcanic hazard. “Other” includes volcanic earthquakes, ground deformation, volcanogenic tsunami, edifice building, and sector collapse. A single study can adopt multiple approaches and study multiple hazards. Half of the articles since 1980 have been published in the last 7 years (2014 onwards). The 140 studies contributing to this analysis are indicated in [Supplementary Information](#).

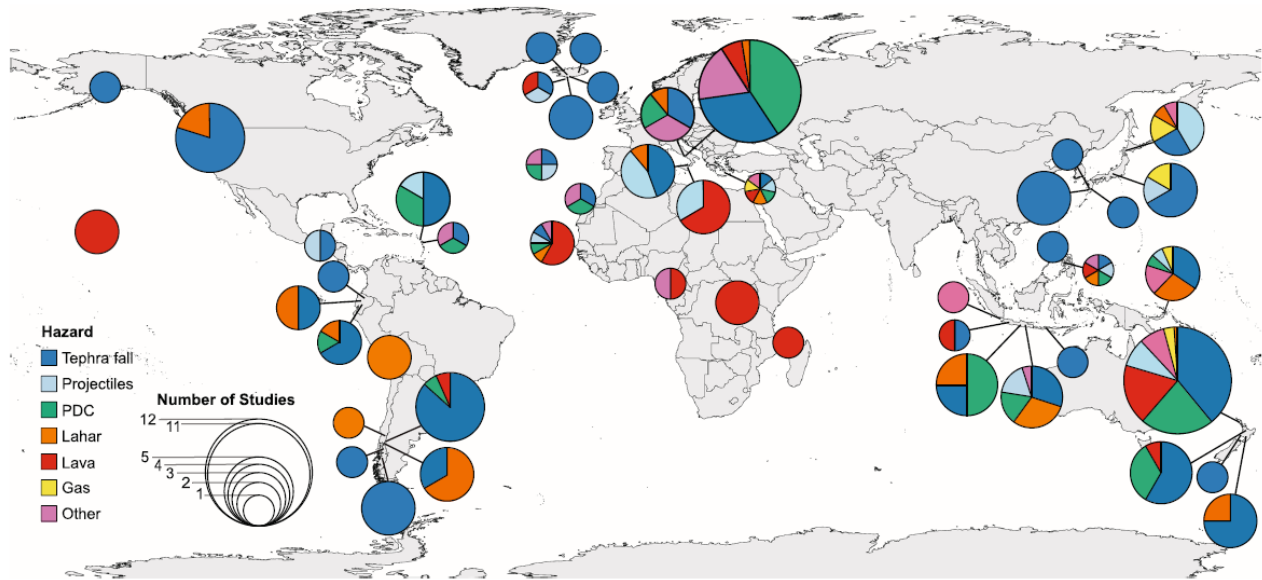

Approaches

Previous approaches for identifying and characterizing the causes of volcanic impacts to the built environment (Fig. 1) include:

- Post-eruption investigations**—identifying and describing eruption consequences, including both qualitative and quantitative data, with comprehensive observations and data generally collected during dedicated impact investigation visits (e.g., Baxter et al. 2005; Blong 1984, 2003; Jenkins et al. 2013; Johnston et al. 2000; Magill et al. 2013; Spence et al. 1996; Wantim et al. 2018);
- Controlled experiments**—primarily laboratory studies, generally with “real” materials, removing the requirement for post-experiment scaling (e.g., Blake et al. 2016; Spence et al. 2004; Wardman et al. 2014);
- Engineering calculations and theoretical modeling**— often based on standards/approaches developed for other natural hazards (e.g., Petrazzuoli and Zuccaro 2004; Valentine 1998; Zuccaro and Ianniello 2004); and
- Review**—synthesis of observational, experimental, and modeling data (e.g., Stewart et al. 2006; Wilson et al. 2014a, 2012).

Across these approaches, there has been a push to identify and correlate key hazard intensity metrics (HIMs)—an often numeric characterization of the relationship between the severity of a hazard in a given location—to consequence, as described using a damage state or other ordinal scale or a numeric ratio, such as damage ratio. Numerous studies have developed vulnerability (% damage/loss relative to specified “worst-case” outcome) and fragility (probability of exceeding specified impact/damage state) functions (Rossetto et al. 2013) using data derived from one or more of the approaches catalogued above (e.g., Blake et al. 2017a; Blong et al. 2017; Wilson et al. 2017).

In parallel, several approaches have been used to pre- pare for and explore the potential ramifications of volcanic impacts to the built environment:

- Cataloguing exposure**—identifying assets that may be exposed to future volcanic activity (e.g., Jenkins et al. 2014; Marti et al. 2008; Pomonis et al. 1999);
- Scenario development and analysis**—exploring consequences of credible eruption scenarios (e.g., Blong and Aislabie 1988; Deligne et al. 2017; Spence et al. 2008; Zuccaro and De Gregorio 2019);
- Risk modeling**—probabilistic assessment of the likelihood of adverse impacts occurring (e.g., Biass et al. 2016; Magill and Blong 2005; McDonald et al. 2017); and
- Systems analysis**—identifying and characterizing interdependencies, particularly between various critical infrastructure networks (Sword-Daniels et al. 2015; Wild et al. 2019), but sometimes also between volcanic hazards in the context of impact severity (e.g., Williams et al. 2019; Zuccaro et al. 2008, 2018).

Additionally, considerable effort has gone towards making research findings useful and usable, through the development of sector-specific educational posters (Wilson et al. 2014b), now available in several languages (<https://www.gns.cri.nz/Home/Learning/Science-Topics/Volcanoes/Global-Ash-Impact-Posters>), web resources (https://volcanoes.usgs.gov/volcanic_ash/), and the coordinated availability of the research community to provide expert knowledge to responders during multiple crises within the last several years.

Advances

Below is a brief review of findings thus far, framed by consequence severity (Figs. 3 and 4). While much of the earlier work was focused on severe consequences, more recent studies consider a wider range of potential impacts. The following summaries are cumulative (e.g., *functionality loss* findings also encompass results from *nuisance*).



Fig. 3. Photos of impacts to the built environment at different consequence severity and for different volcanic hazards: **(a)** Nuisance: minor corrosion to farming equipment that occurred *overnight* (observed by the photographer and confirmed by the farmer) as a result of gas and/or tephra during the explosive phase of the 2010 eruption of Eyjafjallajökull, Iceland (credit: SF Jenkins); **(b)** Functionality loss: tephra induced flashover (short-circuiting) across a porcelain insulator during laboratory experiments (left) and the thin layer of damp tephra responsible (right) (credit: JB Wardman and G Wilson); **(c)** Asset damage: cracked window glass and melting of plastic components such as light fixtures (center), plastic piping and water tank (upper right), and PVC sheet roofs (rear of property) by low-energy, dilute pyroclastic density currents during the 2010 eruption of Merapi, Indonesia (credit: SF Jenkins); **(d)** Asset destruction: roof collapse and structural damage to walls from ~ 50 cm of tephra fall on a timber frame building during the 1994 eruption of Rabaul, Papua New Guinea (credit: RJ Blong)

	Edifice	Gas & A.R.	Lahar	Lava	Projectiles	PDC	Tephra	Edifice	Gas & A.R.	Lahar	Lava	Projectiles	PDC	Tephra
Buildings	Presence		Dynamic pressure, Scour, Dep. thick.	Thickness, Temperature	Kinetic energy	Dynamic pressure	Static load	I	Tephra	Tephra	P	Tephra	EQs, Tephra	EQs, Gas & A.R., Projectiles, PDC
Electricity generation				Presence	Kinetic energy	N	N	P	I	I	I	P	I	I
Electricity trans. & distr.			Dynamic pressure, Scour, Dep. thick.	N		N	N	P		I	P		P	P
Water supply treatment				Presence					Tephra	I	I		I	Gas & A.R.
Water supply trans. & distr.				N		N				I	I		P	P
Wastewater treatment				Presence						I	I		P	P
Wastewater transimion				N						I	I		P	P
Stormwater				N							I		P	P
Roads & bridges			Dynamic pressure, Scour, Dep. thick.	Presence		N	N	P	P	P	P		P	P
Rail			N	Presence			N			I	I		P	P
Marine port			Deposit thickness, flooding							I	P		P	P
Airport				Presence		Deposit thick	N			I	I		I	I
Telecommunication				Presence						I	I		P	P
	↑↑ Hazard Intensity metrics (HIMs) ↑↑							↑↑ Handling of multi-hazard impacts ↑↑						
	↓↓ Types of studies ↓↓							↓↓ Function availability ↓↓						
Buildings	GJ	LGJ	GEJ	GRJ	LGEJ	LGREJ	LGREJ	VDA	A	VFDTA	VDTA	FDTA	VFDTA	VFDTA
Electricity generation	J	J	GEJ	GJ	GJ	GJ	LGEJ			VDTA	DTA	A	DTA	FDTA
Electricity trans. & distr.	J		GJ	GJ	G	GJ	LGEJ			DTA	DTA	A	VDTA	FDTA
Water supply treatment		GEJ	GJ	J		J	GEJ		A	DTA	DT		DT	FDTA
Water supply trans. & distr.			GJ	LGJ	G	GJ	GEJ			DTA	DTA	A	DTA	VFDTA
Wastewater treatment			J	J		J	GJ			DT	DT		DTA	FDTA
Wastewater transimion			J	LJ		J	GEJ			DT	DT		DT	VDTA
Stormwater				L		J	GJ							TA
Roads & bridges	GJ	G	GEJ	GJ	G	GJ	LGEJ	A	A	VFDA	DTA	A	VDTA	VFDTA
Rail		G	GJ	GJ		J	GJ		A	DTA	DTA		DT	FDTA
Marine port			GEJ	GJ		J	GJ			DTA	A		DT	FDTA
Airport		G	GEJ	GJ		GJ	LGJ		A	DA	A		A	FDTA
Telecommunication			GEJ	J	G	GJ	GJ			DTA	DT	A	DTA	DTA

Quadrant key	HIM	Types of studies	Handling of multi-haz. impacts	Function availability
HIM (Dark Blue)	Listed (1 dominant HIM)	L (Laboratory experiments)	Listed (Multi-hazard interaction with 1+ hazard(s))	V (Vulnerability functions)
HIM (Blue)	Listed (2-3 dominant HIMs)	G (Observational (ground based))	P (Other hazards in parallel, interaction not studied)	F (Fragility functions)
Studies (Red)	N (Numeous/variable HIMs)	R (Observational (remote sensing))	I (Hazard studied in isolation)	D (Damage states)
Functions (Purple)	Other factors more important	E (Analytical / engineering calculations)		T (Critical thresholds)
Blank = no studies / data		J (Expert judgement)		A (Anecdotal)

Fig. 4. Summary across built environment type (rows) and hazard (columns) combinations of impacts considering four areas, (1) (top left quadrant; blue) dominance of one or a few hazard intensity metrics (HIM) in accounting for the impact consequence, (2) (bottom left quadrant; red) types of studies undertaken, (3) (top right quadrant; green) handling of multi-hazard impacts, and (4) (bottom right quadrant; purple) status of quantitative and qualitative function development. In hazards, “edifice” refers to edifice formation (for example, vent opening, cinder cone formation), while “A.R.” stands for acid rain. Darker colors indicate greater dominance of a single HIM (HIM quadrant), more sophisticated treatment (multi-hazard quadrant), or more rigorous quantitative study (remainder). Empty cells reflect no study. For HIMs, if one (dark blue) or two to three (blue) HIMs account for the majority of impact, the HIM is listed. Light blue corresponds to several or variable HIMs required, and a slash indicates that other factors, such as network design, are more important. Types of studies include laboratory experiments (L), observations on ground (O) or by remote sensing (R), analytical /engineering studies (E), or studies reliant on expert judgment (J). For multi-hazard handling, dark green corresponds to studies that consider the compounding effects of hazard impacts (M). For example, such a study might examine how the impact changes depending on whether tephra fall occurs before or after ballistics; if compounding impacts are considered, the other concerned hazard(s) are listed. Also, in the multi-hazard quadrant, medium green corresponds to several hazards considered in parallel (P), reflecting the multi-hazard nature of volcanic eruptions, but without consideration of compounding and cascading effects of hazards and impacts. Light green indicates hazards have only been studied in isolation (I). Finally, for function development, dark purple indicates existing fragility (F) and/or vulnerability (V) functions, purple indicates critical thresholds (T) and/or damage state scales (D) are established, and light purple indicates only anecdotal (A) or qualitative data is available. A single study will often contribute to several quadrants and can contribute several designations within the bottom two quadrants. Built-environment systems are often complex and so require bespoke approaches to assessing volcanic impacts; an absence of vulnerability model in this figure does not necessarily imply lack of knowledge on this topic. The studies contributing to this analysis are indicated in [Supplementary Information](#).

Nuisance impacts can occur with small quantities of tephra or distal lahars, either primary or remobilized, and accompanying gases. Considerable time and resources can be required for the increased, and at times constant and costly, maintenance of infrastructure systems, service provision, and clean-up (Hayes et al. 2015; Wilson et al. 2012), although pre-event planning is rarely undertaken.

Functionality loss across critical infrastructure sectors can occur with minimal to no permanent asset damage and with low hazard intensity (Wilson et al. 2014a). For example, electrical transmission lines can flashover (short circuit) with as little as 3 mm of tephra accumulation, resulting in electricity disruption “downstream” (Wardman et al. 2012c, 2014). While physical damage is unlikely, clean-up is often required for service restoration. Likewise, tephra deposits as thin as 0.5 mm can obscure road markings, reducing road network functionality (Blake et al. 2016; Magill et al. 2013). Controlled laboratory experiments have been invaluable for identifying and validating thresholds at which functionality loss occurs for various asset types (e.g., Blake et al. 2017b; Wardman et al. 2012b; Williams et al. 2017).

Asset damage can occur with minimal to high hazard intensity. Several studies have proposed hazard-specific damage state scales, used to categorize observed damage and to forecast future damage given exposure (e.g., Hayes et al. 2019; Jenkins et al. 2015; Williams et al. 2020; Wilson et al. 2014a). Much effort has focused on identifying suitable hazard intensity metrics for various built environment and hazard combinations. This is possible for some combinations (e.g., residential building damage is well described by tephra loading) but has poor success for others (e.g., wastewater treatment plant design is a stronger control on damage than any tephra HIM). Interestingly, recent work documents that pyroclastic density currents (PDCs) and lava flows—generally considered binary impact hazards—can cause partial but incomplete damage of a structure (Jenkins et al. 2017, 2013).

Asset destruction studies have mostly been concerned with tephra, lava flows, PDCs, and lahars. There is no single mechanism of destruction—volcanic hazards can destroy through burial, removal, incineration, and collapse, among others. Cataloguing post-eruption damage has been invaluable in informing pre-eruption impact assessments, e.g., through fragility functions. However, there has been limited work on engineered solutions to reduce the likelihood of asset damage destruction (Willingham 2005; Zuccaro and Leone 2012); more emphasis is placed on hazard avoidance and/or redesign of infrastructure networks (Sword-Daniels et al. 2011).

While most volcanic hazards can cause destruction of the built environment, in terms of **life-safety concerns** it is more likely that people are killed by the volcanic hazard (unlike for earthquakes where collapsed buildings can be an important cause of fatalities). Buildings can in some situations decrease the severity of projectile and PDC exposure, offering some (unreliable) protection to inhabitants (e.g., Fitzgerald et al. 2017; Jenkins et al. 2013; Williams et al. 2019). However, buildings can also offer a false sense of security or compel individuals to remain behind and protect assets in the face of a life-threatening hazard. Life-safety concerns can also arise from disruption to critical service provision for vulnerable persons or from clean-up activities, such as falls from roofs (Brown et al. 2017; Wardman et al. 2012a).

Opportunities

Figure 4 provides a visual gap analysis (lighter/empty cells) highlighting opportunities for further study. Tephra impacts across the built environment and building impacts across the various hazards are comparatively well studied, while gas/ acid rain and proximal hazard impacts to critical infrastructure have had limited examination.

While great strides have been made in understanding the causes and ramifications of impacts to the built environment, this knowledge has limited applicability without detailed asset data—a usable inventory of buildings and critical infrastructure networks populated with relevant up-to-date information. Such databases are very difficult to obtain/ maintain but are required to correctly identify the range of damage in a post-eruption assessment and, importantly, to support assessments *before* or *during* a crisis to identify likely impacts and inform mitigative solutions.

Further, volcanic eruptions are multi-hazard events that can last seconds through to decades: there has been nascent work on multi-hazard and dynamic interactions, or cascading and compounding impacts (Fig. 4). The spatio-temporal dynamism of exposure and vulnerability also remains an important, but underdeveloped, research area.

Each eruption with documented impacts improves our fundamental understanding of how volcanic eruptions affect the built environment. However, this knowledge has not yet been translated into regulatory codes or widespread policy adoption beyond land-use avoidance. It may be that such risk management is inappropriate or cost prohibitive for the built environment in volcanic settings, but it is an area for future exploration and transdisciplinary study.

Future Directions

In the next decade, we anticipate the continuation of studies applying similar methods as described in Approaches, leading to more robust observational datasets and an enhanced understanding of the causes, ranges, and ramifications of impacts. Particularly, we expect validation, refinement, and/ or calibration of the quantitative relationships between hazard intensity and impact.

In addition, we anticipate several important growth areas:

1. Expanded role of **big Earth data and data science to fully exploit satellite and UAV technologies; stake- holder, media, and crowdsourced data** for asset inventories; rapid hazard and damage mapping; and loss estimation.
2. **Higher spatial and temporal resolution modeling**, considering eruption narratives, multi-hazard interactions, cascading and compounding events, systemic response and dynamic changes in exposure and vulnerability.
3. **Transdisciplinary collaborations** exploring the role of engineering, policy, insurance, crisis management, and habitability considerations to improve the lived experience of volcanic eruptions in the context of the built environment.
4. Development of more **evidence-based mitigative solutions**, applicable in pre-, syn-, and post-eruptive settings.

The international volcanological community has a critical role in reducing the societal damage that can be caused by volcanic eruptions. As part of this role, we encourage consideration of a funded, rapid, international response team with a mandate to offer evidence-based information and support concerning the impacts of volcanic eruptions to the built environment.

The last 20 + years has been an era of remarkable growth in knowledge concerning impacts of volcanic eruptions on the built environment. We look forward to continued momentum and discoveries over the next decade and more.

Supplementary Information

The online version contains supplementary material available at <https://doi.org/10.1007/s00445-021-01506-8>.

Acknowledgements

The manuscript was improved by comments by two anonymous reviewers, Associate Editor Jon Fink, and internal US Geological Survey reviewer Chris Waythomas, and Tina Neal.

Author Contribution

NID conceived of the review, led content organization, wrote the manuscript, drafted Fig. 4, coordinated with all co-authors, provided feedback and guidance on Figs. 1, 2, and 3, and contributed to the organization of the extended reference list. SFJ assisted with review conception and content, contributed to writing, drafted Fig. 3, and provided feedback and guidance on Figs. 1 and 2. ESM and GTW drafted Fig. 1 (GTW) and Fig. 2 (ESM), contributed to the organization of the extended reference list, and provided feedback on the manuscript. CS assisted with review conception and content organization and contributed to the writing. GSL and TMW assisted with review conception, content organization, and editing. SB, DMB, RB, CB, RCB, JLH, DMJ, BMK, CRM, RS, KLW, JW, AMW, GW, and GZ provided feedback on content organization, figures, references, and/or a draft of the manuscript. All authors read and approved the final manuscript.

Funding

SFJ, ESM, GTW, SB, and JLH acknowledge funding from the Earth Observatory of Singapore via its funding from the National Research Foundation Singapore, and the Singapore Ministry of Education under the Research Centres of Excellence initiative (research contribution no. 379). SFJ and JLH are also grateful to funding from the AXA Joint Research Initiative under the project “Volcanic Risk Assessment in Asia.” GSL, CS, TMW, RCB, DMJ, BMK, CRM, and AMW acknowledge funding from New Zealand’s Resilience to Nature’s Challenges National Science Challenge.

Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

References

- Baxter PJ, Boyle R, Cole P, Neri A, Spence RJS, Zuccaro G (2005) The impacts of pyroclastic surges on buildings at the eruption of the Soufrière Hills volcano. *Montserrat Bull Volcanol* 67(4):292–313. <https://doi.org/10.1007/s00445-004-0365-7>.
- Biass S, Falcone J-L, Bonadonna C, Di Traglia F, Pistolesi M, Rosi M, Lestuzzi P (2016) Great balls of fire: a probabilistic approach to quantify the hazard related to ballistics — a case study at La Fossa volcano, Vulcano Island, Italy. *J Volcanol Geotherm Res* 325:1–14. <https://doi.org/10.1016/j.jvolgeores.2016.06.006>.
- Blake DM, Wilson TM, Gomez C (2016) Road marking coverage by volcanic ash: an experimental approach. *Environ Earth Sci* 75(20). <https://doi.org/10.1007/s12665-016-6154-8>.
- Blake DM, Deligne NI, Wilson TM, Wilson G (2017a) Improving volcanic ash fragility functions through laboratory studies: example of surface transportation networks. *J Appl Volcanol* 6(1). <https://doi.org/10.1186/s13617-017-0066-5>.
- Blake DM, Wilson TM, Cole JW, Deligne NI, Lindsay JM (2017b) Impact of volcanic ash on road and airfield surface skid resistance. *Sustainability* 9(8). <https://doi.org/10.3390/su9081389>.
- Blong RJ (1984) *Volcanic hazards: a sourcebook on the effects of eruptions*. Academic Press, Sydney
- Blong RJ (2003) Building damage in Rabaul, Papua New Guinea, 1994. *Bull Volcanol* 65(1):43–54. <https://doi.org/10.1007/s00445-002-0238-x>.
- Blong RJ, Aislabie C (1988) *The Impact of Volcanic Hazards at Rabaul Papua New Guinea*. Institute of National Affairs Discussion Paper No. 33 Institute of National Affairs, Port Moresby, Papua New Guinea, 207 pp

- Blong RJ, Grasso P, Jenkins SF, Magill CR, Wilson TM, McMullan K, Kandlbauer J (2017) Estimating building vulnerability to volcanic ash fall for insurance and other purposes. *J Appl Volcanol* 6(1). <https://doi.org/10.1186/s13617-017-0054-9>.
- Brown SK, Jenkins SF, Sparks RSJ, Odbert H, Auken MR (2017) Volcanic fatalities database: analysis of volcanic threat with distance and victim classification. *J Appl Volcanol* 6(1). <https://doi.org/10.1186/s13617-017-0067-4>.
- Cardwell RJ, McDonald GW, Wotherspoon L, Lindsay JM (2021) Simulation of post volcanic eruption land use and economic recovery pathways over a period of 20 years in the Auckland region of New Zealand. *J Volcanol Geotherm Res* 415. <https://doi.org/10.1016/j.jvolgeores.2021.107253>.
- Craig HM, Wilson TM, Stewart C, Outes V, Villarosa G, Baxter PJ (2016) Impacts to agriculture and critical infrastructure in Argentina after ashfall from the 2011 eruption of the Cordón Caulle volcanic complex: an assessment of published damage and function thresholds. *J Appl Volcanol* 5(1). <https://doi.org/10.1186/s13617-016-0046-1>.
- Deligne NI, Fitzgerald RH, Blake DM, Davies AJ, Hayes JL, Stewart C, Wilson G, Wilson TM, Castelino R, Kennedy BM, Muspratt S, Woods R (2017) Investigating the consequences of urban volcanism using a scenario approach I: development and application of a hypothetical eruption in the Auckland Volcanic Field, New Zealand. *J Volcanol Geotherm Res* 336:192–208. <https://doi.org/10.1016/j.jvolgeores.2017.02.023>.
- EPA (2020) Basic information about the built environment. <https://www.epa.gov/smm/basic-information-about-built-environment>. Accessed 3 Jun 2021
- Fitzgerald RH, Kennedy BM, Wilson TM, Leonard GS, Tsunematsu K, Keys H (2017) The communication and risk management of volcanic ballistic hazards. In: Fearnley CJ, Bird DK, Haynes K, McGuire WJ, Jolly GE (eds) *Observing the volcano world*. Springer, Cham, Barcelona, pp 121–147
- Freire S, Florczyk A, Pesaresi M, Sliuzas R (2019) An improved global analysis of population distribution in proximity to active volcanoes, 1975–2015. *ISPRS Int J Geo Inf* 8(8). <https://doi.org/10.3390/ijgi8080341>.
- Hayes JL, Wilson TM, Magill CR (2015) Tephra fall clean-up in urban environments. *J Volcanol Geotherm Res* 304:359–377. <https://doi.org/10.1016/j.jvolgeores.2015.09.014>.
- Hayes JL, Calderón BR, Deligne NI, Jenkins SF, Leonard GS, McSparran AM, Williams GT, Wilson TM (2019) Timber-framed building damage from tephra fall and lahar: 2015 Calbuco eruption, Chile. *J Volcanol Geotherm Res* 374:142–159. <https://doi.org/10.1016/j.jvolgeores.2019.02.017>.
- Jenkins SF, Komorowski J-C, Baxter PJ, Spence RJS, Picquout A, Lavigne F, Surono (2013) The Merapi 2010 eruption: an interdisciplinary impact assessment methodology for studying pyroclastic density current dynamics. *J Volcanol Geotherm Res* 261:316–329. <https://doi.org/10.1016/j.jvolgeores.2013.02.012>.
- Jenkins SF, Spence RJS, Fonseca JFBD, Solidum RU, Wilson TM (2014) Volcanic risk assessment: quantifying physical vulnerability in the built environment. *J Volcanol Geotherm Res* 276:105–120. <https://doi.org/10.1016/j.jvolgeores.2014.03.002>.
- Jenkins SF, Phillips JC, Price R, Feloy K, Baxter PJ, Hadmoko DS, de Bézilal E (2015) Developing building-damage scales for lahars: application to Merapi volcano, Indonesia. *Bull Volcanol* 77(9). <https://doi.org/10.1007/s00445-015-0961-8>.
- Jenkins SF, Day SJ, Faria BVE, Fonseca JFBD (2017) Damage from lava flows: insights from the 2014–2015 eruption of Fogo, Cape Verde. *J Appl Volcanol* 6(1). <https://doi.org/10.1186/s13617-017-0057-6>.
- Johnston DM, Houghton BF, Neall VE, Ronan KR, Paton D (2000) Impacts of the 1945 and 1995–1996 Ruapehu eruptions, New Zealand: an example of increasing societal vulnerability. *Geol Soc Am Bull* 12(5):720–726. [https://doi.org/10.1130/0016-7606\(2000\)112%3c720:IOTARE%3e2.0.CO;2](https://doi.org/10.1130/0016-7606(2000)112%3c720:IOTARE%3e2.0.CO;2).

- Magill CR, Blong RJ (2005) Volcanic risk ranking for Auckland, New Zealand. II: Hazard consequences and risk calculation. *Bull Volcanol* 67(4):340–349. <https://doi.org/10.1007/s00445-004-0375-5>.
- Magill CR, Wilson TM, Okada T (2013) Observations of tephra fall impacts from the 2011 Shinmoedake eruption. *Japan Earth Planets Space* 65(6):677–698. <https://doi.org/10.5047/eps.2013.05.010>.
- Marti J, Spence RJS, Calogero E, Ordoñez A, Felpeto A, Baxter PJ (2008) Estimating building exposure and impact to volcanic hazards in Icod de los Vinos, Tenerife (Canary Islands). *J Volcanol Geotherm Res* 178(3):553–561. <https://doi.org/10.1016/j.jvolgcores.2008.07.010>.
- Mastin LG, Pavlonis M, Engwell S, Clarkson R, Witham C, Brock G, Lisk I, Guffanti M, Tupper A, Schneider DJ, Beckett F, Casadevall T, Rennie G (in press). Progress in protecting air travel from volcanic ash clouds. *Bull Volcanol*. <https://doi.org/10.1007/s00445-021-01511-x>.
- McDonald GW, Smith NJ, Kim J-h, Cronin SJ, Proctor JN (2017) The spatial and temporal ‘cost’ of volcanic eruptions: assessing economic impact, business inoperability, and spatial distribution of risk in the Auckland region, New Zealand. *Bull Volcanol* 79(7). <https://doi.org/10.1007/s00445-017-1133-9>.
- Merz B, Kreibich H, Schwarze R, Thielen A (2010) Review article “Assessment of economic flood damage.” *Nat Hazards Earth Syst Sci* 10(8):1697–1724. <https://doi.org/10.5194/nhess-10-1697-2010>.
- Petrazzuoli SM, Zuccaro G (2004) Structural resistance of reinforced concrete buildings under pyroclastic flows: a study of the Vesuvian area. *J Volcanol Geotherm Res* 133(1–4):353–367. [https://doi.org/10.1016/s0377-0273\(03\)00407-4](https://doi.org/10.1016/s0377-0273(03)00407-4).
- Pomonis A, Spence RJS, Baxter PJ (1999) Risk assessment of residential buildings for an eruption of Furnas Volcano, São Miguel, the Azores. *J Volcanol Geotherm Res* 92(1–2):107–131. [https://doi.org/10.1016/S0377-0273\(99\)00071-2](https://doi.org/10.1016/S0377-0273(99)00071-2).
- Rodriguez F, Toulkeridis T, Sandoval W, Padilla O, Mato F (2017) Economic risk assessment of Cotopaxi volcano, Ecuador, in case of a future lahar emplacement. *Nat Hazard* 85(1):605–618. <https://doi.org/10.1007/s11069-016-2589-1>.
- Rossetto T, Ioannou I, Grant DN (2013) Existing empirical vulnerability and fragility functions: compendium and guide for selection. GEM Technical Report
- Spence RJS, Pomonis A, Baxter PJ, Coburn AW, White M, Dayrit M, Team FETP (1996) Building damage caused by the Mount Pinatubo Eruption of 15 June 1991. In: Newhall CG, Punongbayan RS (eds) *Fire and mud: eruptions and lahars of Mount Pinatubo, Philippines*. University of Washington Press, London, pp 1055–1061
- Spence RJS, Komorowski J-C, Saito K, Brown A, Pomonis A, Toyos G, Baxter PJ (2008) Modelling the impact of a hypothetical sub-Plinian eruption at La Soufrière of Guadeloupe (Lesser Antilles). *J Volcanol Geotherm Res* 178(3):516–528. <https://doi.org/10.1016/j.jvolgcores.2008.03.016>.
- Spence RJS, Zuccaro G, Petrazzuoli SM, Baxter PJ (2004) Resistance of buildings to pyroclastic flows: analytical and experimental studies and their application to Vesuvius. *Nat Hazards Rev* 5(1). [https://doi.org/10.1061/\(ASCE\)1527-6988\(2004\)5:1\(48\)](https://doi.org/10.1061/(ASCE)1527-6988(2004)5:1(48)).
- Stewart C, Johnston DM, Leonard GS, Horwell CJ, Thordarson T, Cronin SJ (2006) Contamination of water supplies by volcanic ashfall: a literature review and simple impact modelling. *J Volcanol Geotherm Res* 158(3–4):296–306. <https://doi.org/10.1016/j.jvolgcores.2006.07.002>.
- Stewart C, Damby DE, Horwell CJ, Elias T, Ilyinskaya E, Tomašek I, Longo BM, Schmidt A, Carlsen HK, Mason E, Baxter PJ, Cronin S, Witham C (this issue) Volcanic air pollution and human health: recent advances and future directions. *Bull Volcanol*. <https://doi.org/10.1007/s00445-021-01513-9>.
- Sword-Daniels VL, Rossetto T, Wilson TM, Sargeant S (2015) Interdependence and dynamics of essential services in an extensive risk context: a case study in Montserrat, West Indies. *Nat Hazards Earth Syst Sci* 15(5):947–961. <https://doi.org/10.5194/nhess-15-947-2015>.

- Sword-Daniels VL, Wardman JB, Stewart C, Wilson TM, Johnston DM, Rossetto T (2011) Infrastructure impacts, management and adaptations to eruptions at Volcan Tungurahua, Ecuador, 1999–2010. GNS Science Report 2011/24
- Valentine GA (1998) Damage to structures by pyroclastic flows and surges, inferred from nuclear weapons effects. *J Volcanol Geotherm Res* 87(1–4):117–140. [https://doi.org/10.1016/S0377-0273\(98\)00094-8](https://doi.org/10.1016/S0377-0273(98)00094-8).
- Wantim MN, Bonadonna C, Gregg CE, Menoni S, Frischknecht C, Kervyn M, Ayonghe SN (2018) Forensic assessment of the 1999 Mount Cameroon eruption, West-Central Africa. *J Volcanol Geotherm Res* 358:13–30. <https://doi.org/10.1016/j.jvolgcores.2018.06.007>.
- Wardman JB, Wilson TM, Bodger PS, Cole JW, Johnston DM (2012b) Investigating the electrical conductivity of volcanic ash and its effect on HV power systems. *Phys Chem Earth A/B/C* 45–46:128–145. <https://doi.org/10.1016/j.pce.2011.09.003>.
- Wardman JB, Wilson TM, Bodger PS, Cole JW, Stewart C (2012c) Potential impacts from tephra fall to electric power systems: a review and mitigation strategies. *Bull Volcanol* 74(10):2221–2241. <https://doi.org/10.1007/s00445-012-0664-3>.
- Wardman JB, Wilson TM, Hardie S, Bodger P (2014) Influence of volcanic ash contamination on the flashover voltage of HVAC outdoor suspension insulators. *IEEE Trans Dielectr Electr Insul* 21(3):1189–1197. <https://doi.org/10.1109/TDEI.2014.6832265>.
- Wardman JB, Sword-Daniels VL, Stewart C, Wilson TM (2012a) Impact assessment of the May 2010 eruption of Pacaya volcano, Guatemala. GNS Science Report 2012/009
- Wild AJ, Wilson TM, Bebbington MS, Cole JW, Craig HM (2019) Probabilistic volcanic impact assessment and cost-benefit analysis on network infrastructure for secondary evacuation of farm livestock: a case study from the dairy industry, Taranaki, New Zealand. *J Volcanol Geotherm Res* 387. <https://doi.org/10.1016/j.jvolgeores.2019.106670>.
- Williams GT, Kennedy BM, Wilson TM, Fitzgerald RH, Tsunematsu K, Teissier A (2017) Buildings vs. ballistics: quantifying the vulnerability of buildings to volcanic ballistic impacts using field studies and pneumatic cannon experiments. *J Volcanol Geotherm Res* 343:171–180. <https://doi.org/10.1016/j.jvolgcores.2017.06.026>.
- Williams GT, Kennedy BM, Lallemand D, Wilson TM, Allen N, Scott A, Jenkins SF (2019) Tephra cushioning of ballistic impacts: quantifying building vulnerability through pneumatic cannon experiments and multiple fragility curve fitting approaches. *J Volcanol Geotherm Res* 388. <https://doi.org/10.1016/j.jvolgeores.2019.106711>.
- Williams GT, Jenkins SF, Biass S, Wibowo HE, Harijoko A (2020) Remotely assessing tephra fall building damage and vulnerability: Kelud Volcano, Indonesia. *J Appl Volcanol* 9(1). <https://doi.org/10.1186/s13617-020-00100-5>.
- Willingham WF (2005) The Army Corps of Engineers' short-term response to the eruption of Mount St. Helens. *Or Hist Q* 106(2):174–203
- Wilson TM, Cole JW, Stewart C, Cronin SJ, Johnston DM (2011) Ash storms: impacts of wind-remobilised volcanic ash on rural communities and agriculture following the 1991 Hudson eruption, southern Patagonia, Chile. *Bull Volcanol* 73(3):223–239. <https://doi.org/10.1007/s00445-010-0396-1>.
- Wilson TM, Stewart C, Sword-Daniels VL, Leonard GS, Johnston DM, Cole JW, Wardman JB, Wilson G, Barnard ST (2012) Volcanic ash impacts on critical infrastructure. *Phys Chem Earth A/B/C* 45–46:5–23. <https://doi.org/10.1016/j.pce.2011.06.006>.
- Wilson G, Wilson TM, Deligne NI, Cole JW (2014a) Volcanic hazard impacts to critical infrastructure: a review. *J Volcanol Geotherm Res* 286:148–182. <https://doi.org/10.1016/j.jvolgeores.2014.08.030>.
- Wilson TM, Stewart C, Wardman JB, Wilson G, Johnston DM, Hill D, Hampton SJ, Villemure M, McBride S, Leonard GS, Daly M, Deligne NI, Roberts L (2014b) Volcanic ashfall preparedness poster series: a

- collaborative process for reducing the vulnerability of critical infrastructure. *J Appl Volcanol* 3(10). <https://doi.org/10.1186/s13617-014-0010-x>.
- Wilson G, Wilson TM, Deligne NI, Blake DM, Cole JW (2017) Framework for developing volcanic fragility and vulnerability functions for critical infrastructure. *J Appl Volcanol* 6(1). <https://doi.org/10.1186/s13617-017-0065-6>.
- Zuccaro G, De Gregorio D (2019) Impact assessments in volcanic areas—the Vesuvius and Campi Flegrei cases studies. *Ann Geophys* 62(1):V002. <https://doi.org/10.4401/ag-7827>.
- Zuccaro G, Ianniello D (2004) Interaction of pyroclastic flows with building structures in an urban settlement: a fluid-dynamic simulation impact model. *J Volcanol Geotherm Res* 133(1–4):345–352. [https://doi.org/10.1016/s0377-0273\(03\)00406-2](https://doi.org/10.1016/s0377-0273(03)00406-2).
- Zuccaro G, Leone MF (2012) Building technologies for the mitigation of volcanic risk: Vesuvius and Campi Flegrei. *Nat Hazard Rev* 13(3):221–232. [https://doi.org/10.1061/\(ASCE\)NH.1527-6996.0000071](https://doi.org/10.1061/(ASCE)NH.1527-6996.0000071).
- Zuccaro G, Cacace F, Spence RJS, Baxter PJ (2008) Impact of explosive eruption scenarios at Vesuvius. *J Volcanol Geotherm Res* 178(3):416–453. <https://doi.org/10.1016/j.jvolgeores.2008.01.005>.
- Zuccaro G, Leone MF, Del Cogliano D, Sgroi A (2013) Economic impact of explosive volcanic eruptions: a simulation-based assessment model applied to Campania region volcanoes. *J Volcanol Geotherm Res* 266:1–15. <https://doi.org/10.1016/j.jvolgeores.2013.09.002>.
- Zuccaro G, De Gregorio D, Leone MF (2018) Theoretical model for cascading effects analyses. *Int J Disaster Risk Reduct* 30:199–215. <https://doi.org/10.1016/j.ijdrr.2018.04.019>.