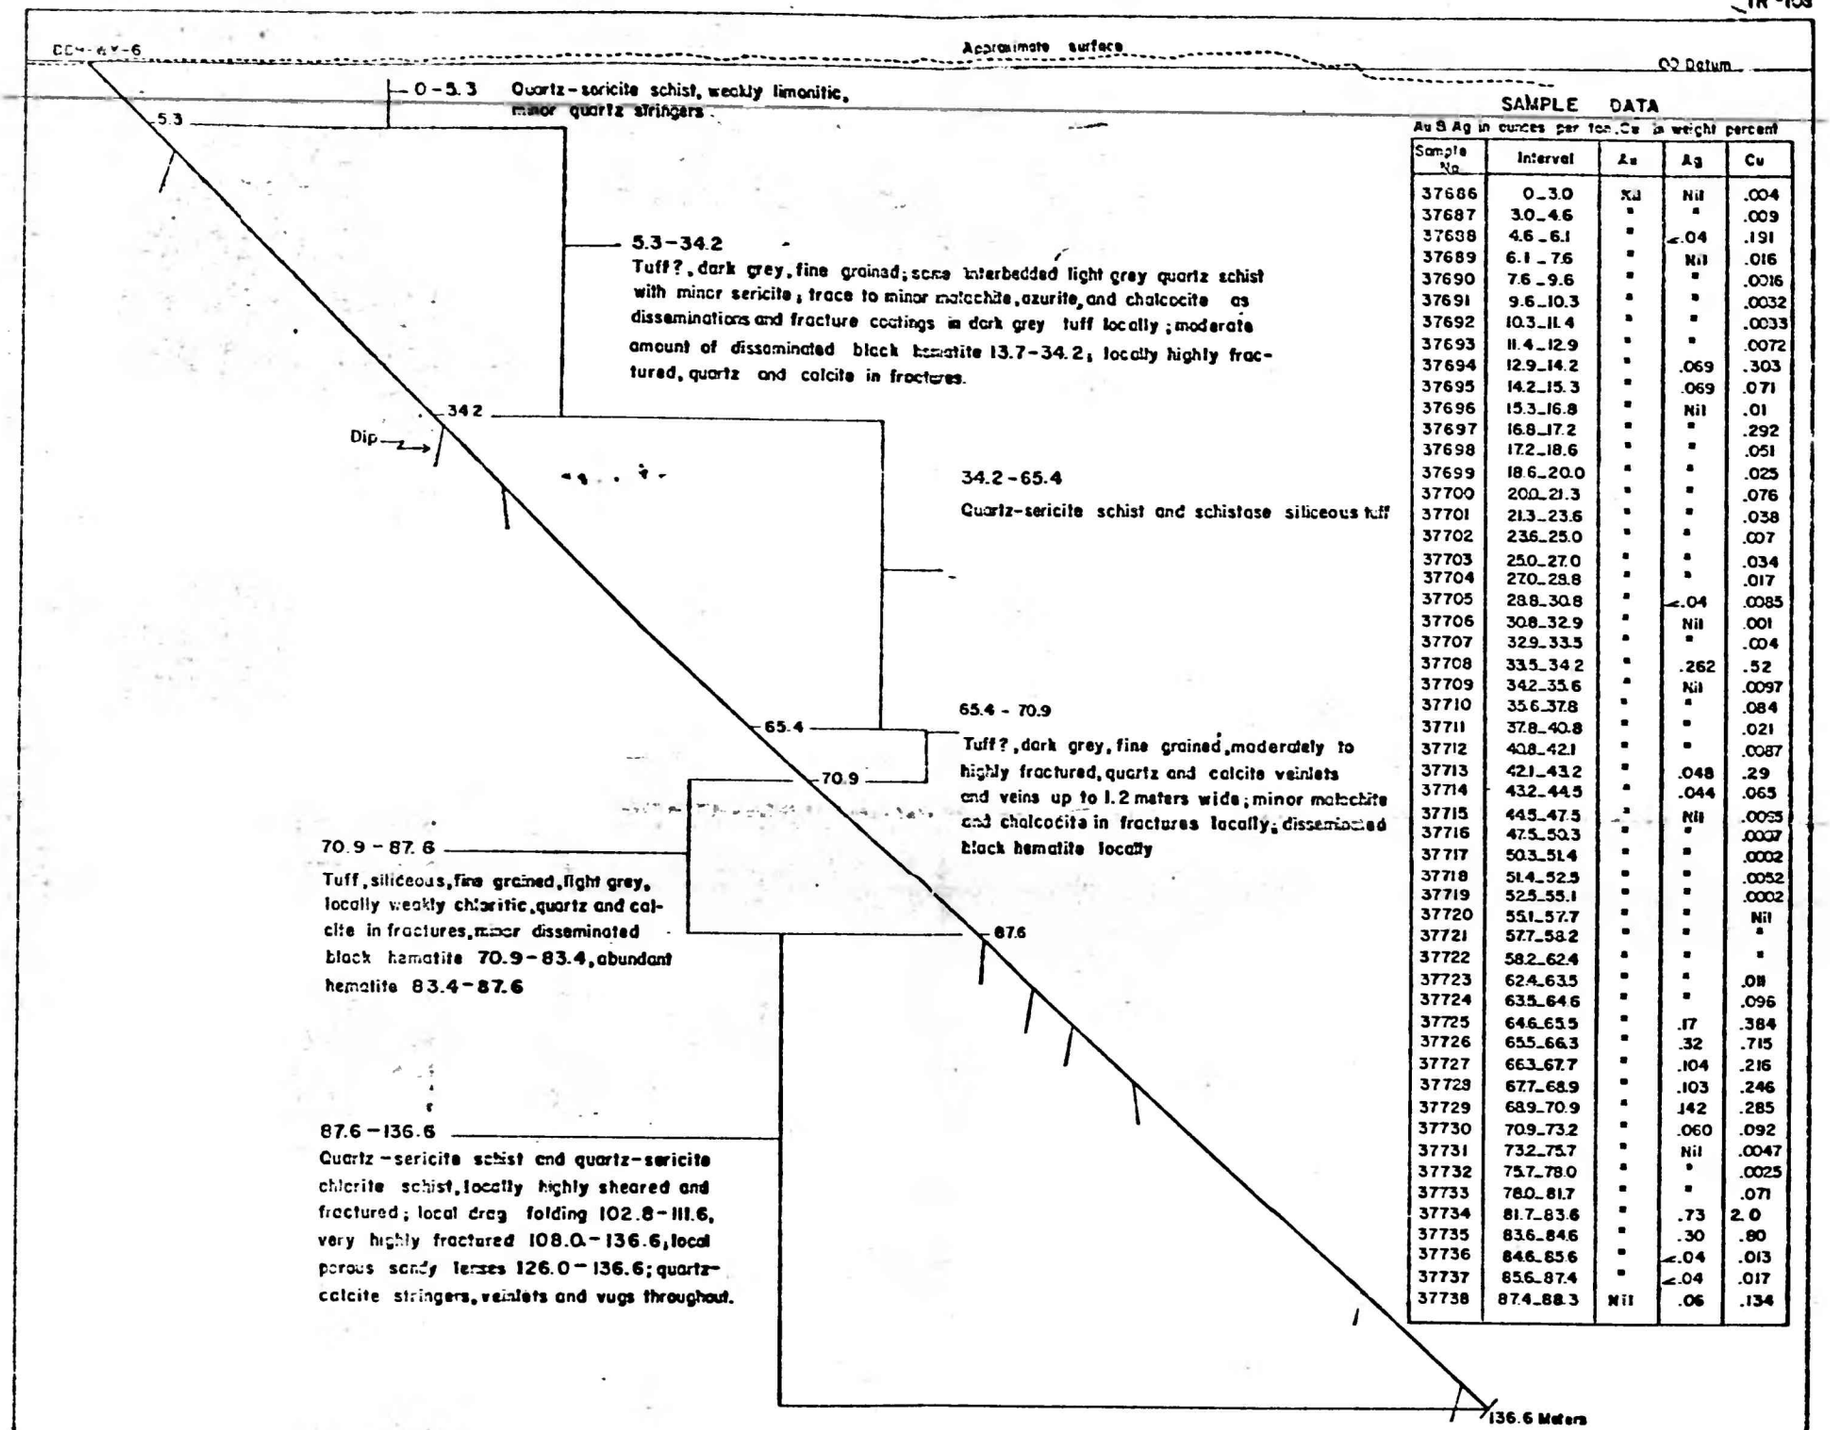

SAMPLE DATA

Au & Ag in ounces per ton, Cu in weight percent

Sample No.	Interval	Au	Ag	Cu
37686	0-3.0	Nil	Nil	.004
37687	3.0-4.6	"	"	.009
37688	4.6-6.1	"	<.04	.191
37689	6.1-7.6	"	Nil	.016
37690	7.6-9.6	"	"	.0016
37691	9.6-10.3	"	"	.0032
37692	10.3-11.4	"	"	.0033
37693	11.4-12.9	"	"	.0072
37694	12.9-14.2	"	.069	.303
37695	14.2-15.3	"	.069	.071
37696	15.3-16.8	"	Nil	.01
37697	16.8-17.2	"	"	.292
37698	17.2-18.6	"	"	.051
37699	18.6-20.0	"	"	.025
37700	20.0-21.3	"	"	.076
37701	21.3-23.6	"	"	.038
37702	23.6-25.0	"	"	.007
37703	25.0-27.0	"	"	.034
37704	27.0-28.8	"	"	.017
37705	28.8-30.8	"	<.04	.0085
37706	30.8-32.9	"	Nil	.001
37707	32.9-33.5	"	"	.004
37708	33.5-34.2	"	.262	.52
37709	34.2-35.6	"	Nil	.0097
37710	35.6-37.8	"	"	.084
37711	37.8-40.8	"	"	.021
37712	40.8-42.1	"	"	.0087
37713	42.1-43.2	"	.048	.29
37714	43.2-44.5	"	.044	.065
37715	44.5-47.5	"	Nil	.0035
37716	47.5-50.3	"	"	.0007
37717	50.3-51.4	"	"	.0002
37718	51.4-52.5	"	"	.0052
37719	52.5-55.1	"	"	.0002
37720	55.1-57.7	"	"	Nil
37721	57.7-58.2	"	"	"
37722	58.2-62.4	"	"	"
37723	62.4-63.5	"	"	.011
37724	63.5-64.6	"	"	.096
37725	64.6-65.5	"	.17	.384
37726	65.5-66.3	"	.32	.715
37727	66.3-67.7	"	.104	.216
37728	67.7-68.9	"	.103	.246
37729	68.9-70.9	"	.142	.285
37730	70.9-73.2	"	.060	.092
37731	73.2-75.7	"	Nil	.0047
37732	75.7-78.0	"	"	.0025
37733	78.0-81.7	"	"	.071
37734	81.7-83.6	"	.73	2.0
37735	83.6-84.6	"	.30	.80
37736	84.6-85.6	"	<.04	.013
37737	85.6-87.4	"	<.04	.017
37738	87.4-88.3	Nil	.06	.134

COMPILATION OF SIGNIFICANT VALUES

64.6m - 70.9m - 6.3m at .33% Cu .15 ounces of silver per ton

81.7m - 84.6m - 2.9m at 1.56% Cu .58 ounces of silver per ton

DRILL HOLE DATA

Date drilled _ February 1968

Total depth _ 136.6 meters

Percent core recovered _ 84.0%

Drill hole inclinations _ -45° at collar, -42° at 122 Meters

Bearing S 47° E

Scale 1:500

April 1968

FIGURE 9.- Section, diamond drill hole WY-6, looking Northeast