

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

RESULTS OF EXPLORATORY DRILLING AT POINT MACKENZIE, ALASKA, 1981

By Leslie Patrick

---

U.S. GEOLOGICAL SURVEY

OPEN-FILE REPORT 81-1072

Prepared in cooperation with the  
MATANUSKA-SUSITNA BOROUGH and  
ALASKA DEPARTMENT OF NATURAL RESOURCES,  
DIVISION OF GEOLOGIC AND GEOPHYSICAL SURVEYS

Anchorage, Alaska  
1981

UNITED STATES DEPARTMENT OF THE INTERIOR

JAMES G. WATT, Secretary

GEOLOGICAL SURVEY

Dallas Peck, Director

---

For additional information write to:

U.S. Geological Survey  
Water Resources Division  
733 West 4th Avenue, Suite 400  
Anchorage, Alaska 99501

## CONTENTS

|                           | Page |
|---------------------------|------|
| Abstract -----            | 1    |
| Introduction -----        | 1    |
| Aquifers -----            | 1    |
| Water quality -----       | 6    |
| Saltwater intrusion ----- | 6    |
| Summary -----             | 6    |
| Reference cited -----     | 6    |

## ILLUSTRATIONS

|  |   |
|--|---|
| Figure 1. Map showing location of test wells near Point MacKenzie ----                               | 2 |
| 2. Graphs showing water levels in wells 21585 and 21586 and the tidal fluctuations of Knik Arm ----- | 7 |

## TABLES

|   |   |
|---|---|
| Table 1. Well construction information -----            | 3 |
| 2a. Lithologic log of well 21585 -----                  | 4 |
| 2b. Lithologic log of well 21586 -----                  | 5 |
| 3. Chemical analysis of water from the test wells ----- | 8 |

## CONVERSION FACTORS

| <u>Multiply inch-pound units</u> | <u>by</u> | <u>to obtain SI units</u> |
|----------------------------------|-----------|---------------------------|
| inches (in.)                     | 25.40     | millimeters (mm)          |
| feet (ft)                        | 0.3048    | meters (m)                |
| gallons per minute (gal/min)     | 0.06309   | liters per second (L/s)   |

National Geodetic Vertical Datum of 1929 (NGVD of 1929): A geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, formerly called "Mean Sea Level." NGVD of 1929 is referred to as sea level in this report.

# RESULTS OF EXPLORATORY DRILLING AT POINT MACKENZIE, ALASKA, 1981

By Leslie Patrick

## ABSTRACT

The Matanuska-Susitna Borough anticipates industrial development near Point MacKenzie, Alaska. Because little hydrologic information is available for the area, the Borough contracted for the drilling of two test wells. It was found that:

- Both wells penetrated unconsolidated stratified clay, silt, sand, and gravel.
- Each well penetrated a shallow unconfined and deeper confined aquifers.
- The water levels in the wells rise and fall with the tide.
- The chemical analyses indicate that the water quality meets the Alaska Drinking Water Standards, except for slightly high levels of manganese and pH.
- The potential for saltwater intrusion should be evaluated as part of future studies.

## INTRODUCTION

The Matanuska-Susitna Borough expects industrial development in the Point MacKenzie area, approximately 4 mi north of Anchorage, (fig. 1). Because little information has been available on the subsurface geology and aquifer conditions in the area, the Borough hired DOWL Engineers to initiate and monitor the drilling of test wells. As part of a cooperative program between the Borough and the U.S. Geological Survey, the Survey sampled the water for chemical analysis and helped monitor the drilling.

M-W Drilling Company of Anchorage constructed the wells in February and March 1981. Both wells were drilled using the air rotary method. However, a cable-tool rig was used to complete the final 20 feet of well 21586 because of heaving sand at approximately 340 ft below land surface datum (LSD). Well construction information is presented in table 1.

## AQUIFERS

Both wells penetrated stratified unconsolidated clay, silt, sand, and gravel. Tables 2a and 2b present a synthesis of data recorded by the drillers and the author.

Both wells penetrated shallow and deep aquifers. The principal aquifer in well 21585 consists of layers of sand and gravel and of silty sand and gravel extending from 219 ft below LSD to an unknown depth. This well did not penetrate the bottom of the aquifer. The principal aquifer in well 21586 is similar in composition and extends from 219 to 349 ft below land surface.

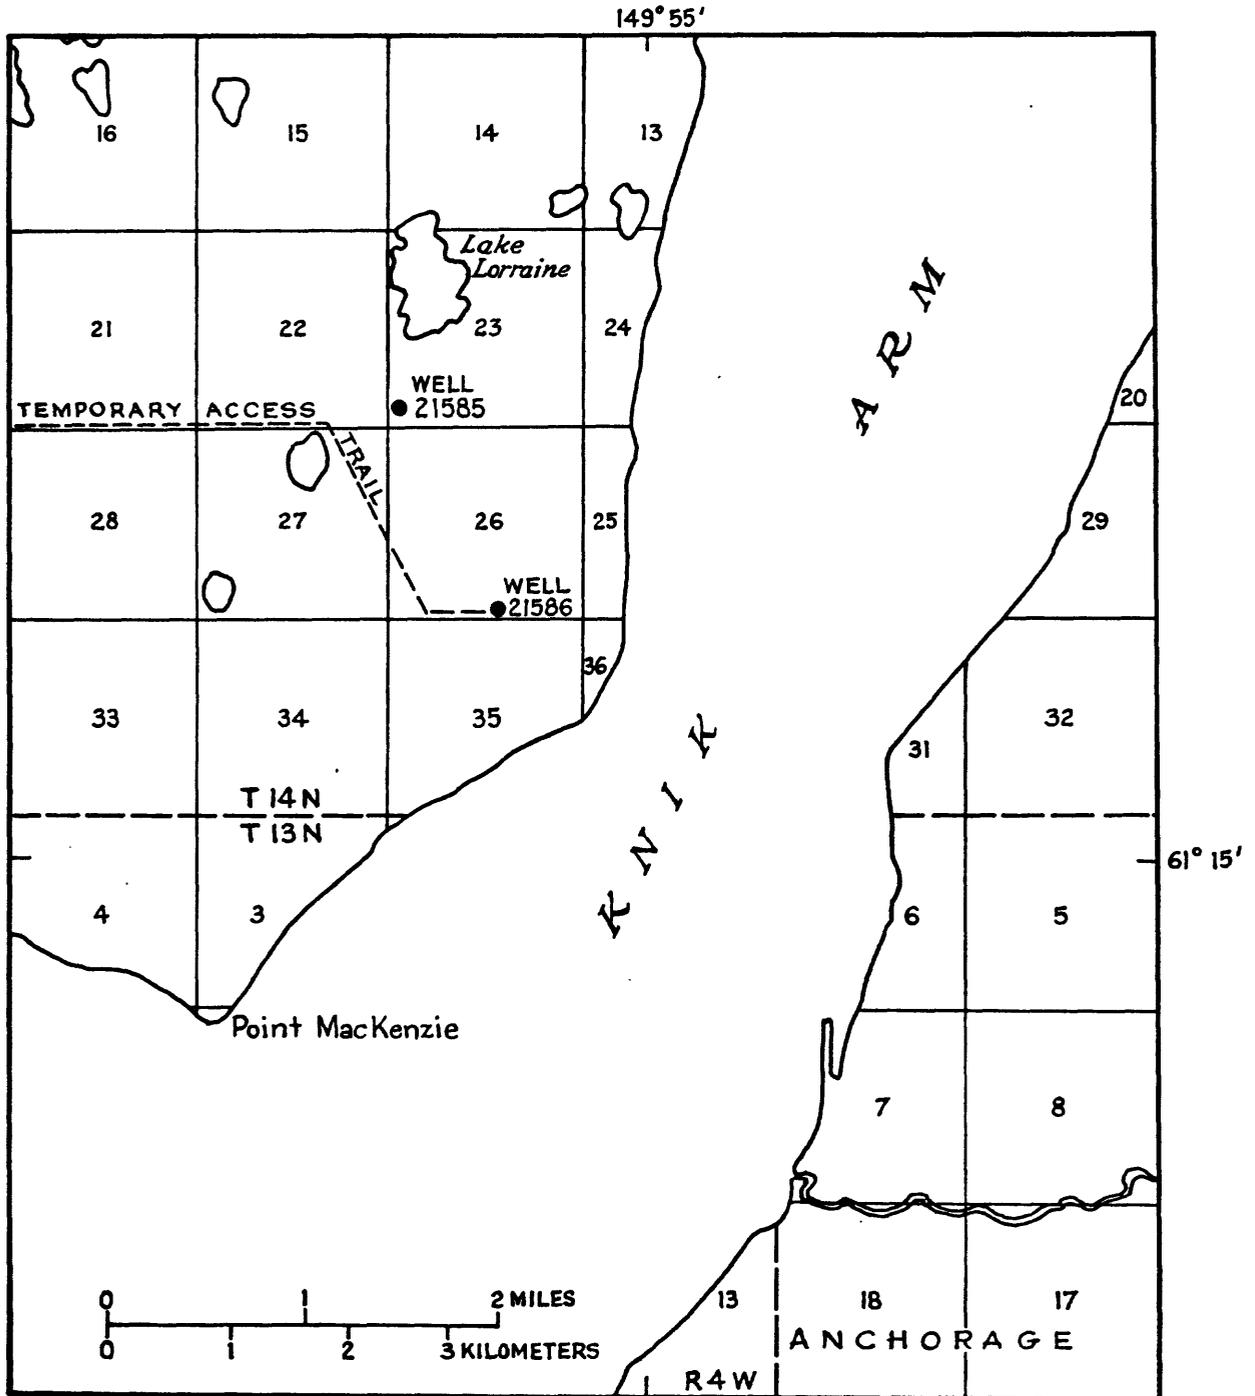
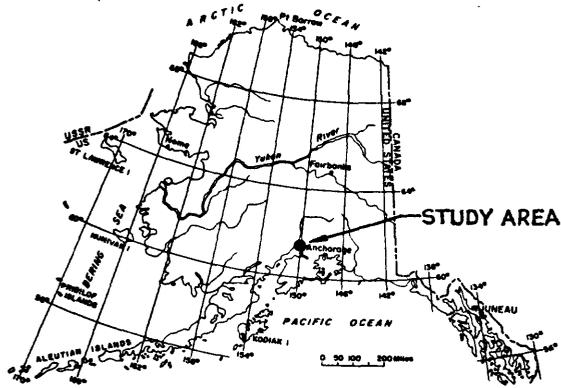


Figure 1. -- Location of the test wells in the Point MacKenzie area.

Table 1.--Well construction information

|  |   |   |
|--|---|---|
| <u>Well number</u>                     | 21585   | 21586   |
| <u>Land net location</u>               | Southwest 1/4 of the southwest 1/4 of the southwest 1/4 of Township 14 North, Range 4 West, Section 23<br>Seward Meridian | Southwest 1/4 of the southwest 1/4 of the southeast 1/4 of Township 14 North, Range 4 West, Section 26<br>Seward Meridian |
| <u>Latitude/Longitude</u> <sup>1</sup> | 61°16'59"N 149°57'20"W  | 61°16'07"N 149°56'22"W  |
| <u>Altitude</u> <sup>2</sup>           | 130 ft above sea level  | 152 ft above sea level  |
| <u>Maximum depth of hole</u>           | 398 ft below LSD  | 358 ft below LSD  |
| <u>Finished depth of well</u>          | 398 ft below LSD  | 358 ft below LSD  |
| <u>Diameter of casing</u>              | 8 in. to 30 ft below LSD<br>6 in. to 380 ft below LSD   | 8 in. to 30 ft below LSD<br>6 in. to 352 ft below LSD   |
| <u>Well finish</u>                     | 100 slot, wire wound screen from 379 to 398 ft below LSD  | 12 shot perforations from 318 to 323 ft below LSD   |
| <u>Date begin construction</u>         | February 18, 1981   | February 10, 1981   |
| <u>Date end construction</u>           | March 18, 1981  | March 3, 1981   |

1 - Latitude and longitude are calculated for plotted points on a USGS reference map. These may not be the exact locations of the well sites.

2 - Altitude surveyed by DOWL Engineers.

Table 2a.--Lithologic log of well 21585

| Depth below<br>LSD (ft) |     | Depth below<br>above sea<br>level (ft) |      | Thickness<br>(ft) | *Water level<br>below LSD<br>(ft) | *Water level<br>above sea<br>level (ft) | Significant<br>aquifers | Lithologic description  |
|-------------------------|-----|--|------|-------------------|-----------------------------------|---|-------------------------|---|
| from                    | to  | from                                   | to   |                   |                                   |   |                         |   |
| 1                       | 4   | 129                                    | 126  | 3                 | 4                                 | 126                                     | Unconfined              | Silty, sand and gravel<br>Silty, sand and gravel - water<br>Silty sand - water<br>Clay<br>Silty, sandy clay - damp<br>Clay<br>Hardpan<br>Silty, sand and gravel - water<br>Sand and gravel - water<br>Clay                    |
| 4                       | 15  | 126                                    | 115  | 11                |                                   |   |                         |   |
| 15                      | 26  | 115                                    | 104  | 11                |                                   |   |                         |   |
| 26                      | 35  | 104                                    | 95   | 9                 |                                   |   |                         |   |
| 35                      | 55  | 95                                     | 75   | 20                |                                   |   |                         |   |
| 55                      | 63  | 75                                     | 67   | 8                 |                                   |   |                         |   |
| 63                      | 125 | 67                                     | 5    | 62                |                                   |   |                         |   |
| 125                     | 130 | 5                                      | 0    | 5                 |                                   |   |                         |   |
| 130                     | 170 | 0                                      | -40  | 40                | 113                               | 17                                      |                         |   |
| 170                     | 188 | -40                                    | -58  | 18                |                                   |   |                         |   |
| 188                     | 197 | -58                                    | -67  | 9                 |                                   |   | Confined                | Gravelly clay<br>Clayey, silty sandy gravel<br>Sand and gravel - water<br>Sand - water<br>Sand and gravel - water<br>Gravelly sand - water<br>Silty sand - water<br>Silty, sand and gravel - water<br>Sand and gravel - water |
| 197                     | 219 | -67                                    | -89  | 22                |                                   |   |                         |   |
| 219                     | 284 | -89                                    | -154 | 65                | 112                               | 19                                      |                         |   |
| 284                     | 294 | -154                                   | -164 | 10                |                                   |   |                         |   |
| 294                     | 309 | -164                                   | -179 | 15                |                                   |   |                         |   |
| 309                     | 312 | -179                                   | -182 | 3                 |                                   |   |                         |   |
| 312                     | 323 | -182                                   | -193 | 11                |                                   |   |                         |   |
| 323                     | 338 | -193                                   | -208 | 15                |                                   |   |                         |   |
| 338                     | 398 | -208                                   | -268 | 60                | 106                               | 24                                      |                         |   |

\*Water level measured when the well was drilled to the depth indicated. This water level was taken approximately one-half an hour after drilling and blowing the formation with air. Therefore, this measurement may not reflect the true static level.

Table 2b.--Lithologic log of well 21586

| Depth below<br>LSD (ft) |     | Depth below<br>above sea<br>level (ft) |      | Thickness<br>(ft) | *Water level<br>below LSD<br>(ft) | *Water level<br>above sea<br>level (ft) | Signficant<br>aquifer | Lithologic description                 |
|-------------------------|-----|--|------|-------------------|-----------------------------------|---|-----------------------|--|
| from                    | to  | from                                   | to   |                   |                                   |   |                       |  |
| 1                       | 8   | 151                                    | 144  | 7                 |                                   |   |                       | Sand and gravel                        |
| 8                       | 18  | 144                                    | 134  | 10                |                                   |   |                       | Silty sand                             |
| 18                      | 23  | 134                                    | 129  | 5                 |                                   |   | Unconfined            | Sand - water                           |
| 23                      | 31  | 129                                    | 121  | 8                 |                                   |   |                       | Grey clay                              |
| 31                      | 106 | 121                                    | 46   | 75                |                                   |   |                       | Grey gravelly clay                     |
| 106                     | 116 | 46                                     | 36   | 10                |                                   |   |                       | Clayey gravel                          |
| 116                     | 156 | 36                                     | -4   | 40                |                                   |   |                       | Silty gravel                           |
| 156                     | 166 | -4                                     | -14  | 10                | 136                               | 16                                      | Confined              | Sand and gravel - water                |
| 166                     | 185 | -14                                    | -33  | 19                |                                   |   |                       | Hard dry silt                          |
| 185                     | 198 | -33                                    | -46  | 13                |                                   |   | Confined              | Sand and gravel - water                |
| 198                     | 203 | -46                                    | -51  | 5                 |                                   |   |                       | Sand - water                           |
| 203                     | 219 | -51                                    | -67  | 16                |                                   |   |                       | Silt, sand and gravel                  |
| 219                     | 225 | -67                                    | -73  | 6                 |                                   |   | Confined              | Gravelly sand - water                  |
| 225                     | 238 | -73                                    | -86  | 13                |                                   |   |                       | Gravel - water                         |
| 238                     | 328 | -86                                    | -176 | 90                | 142                               | 10                                      |                       | Sand and gravel - water                |
| 328                     | 339 | -176                                   | -187 | 11                |                                   |   |                       | Heaving sand - water                   |
| 339                     | 349 | -187                                   | -197 | 10                | 151                               | 1                                       |                       | Heaving silty, sand and gravel - water |
| 349                     | 351 | -197                                   | -199 | 2                 |                                   |   |                       | Silty gravel                           |
| 351                     | 352 | -199                                   | -200 | 1                 |                                   |   |                       | Cemented, sand and gravel              |
| 352                     | 358 | -200                                   | -206 | 6                 |                                   |   |                       | Sticky clay                            |

\*Water level measured when the well was drilled to the depth indicated. This water level was taken approximately one-half an hour after drilling and blowing the formation with air. Therefore, this measurement may not reflect the true static level.

Prior to test pumping, a recorder continuously monitored the water levels in each well for about a week. The records indicate a tidal fluctuation effect in the order of 0.2 ft in well 21585 and 2 ft in well 21586 (fig. 2).

Well 21585 was pumped at a constant rate of 310 gal/min for 24 hours. This resulted in a maximum drawdown of 27.28 ft in well 21585 and no discernable drawdown in well 21586 located 1 mi away. However, the information from the test is not sufficient to calculate the storage coefficient and transmissivity of the aquifer.

### WATER QUALITY

A  $\frac{1}{2}$ -horsepower submersible pump was used to collect water samples from several depths in each well as drilling progressed. Water was pumped from the open-end casing, without, screen or perforations, at about 5-6 gal/min for 45-165 minutes prior to sampling. The samples were analyzed at the U.S. Geological Survey laboratory in Denver, Colo. Table 3 lists the results of the analyses.

The water quality meets the Alaska Drinking Water Standards, except for slightly high pH in well 21585, and for slightly high manganese levels in all samples except the shallow sample from well 21586. The analyses from well 21585 indicate calcium bicarbonate water in the shallow sample trending toward sodium bicarbonate type in the deepest sample. Both samples from well 21586 are generally sodium bicarbonate water. The water in well 21585 ranges from moderately hard to hard. Both samples from well 21586 are moderately hard (Hem, 1970).

### SALTWATER INTRUSION

The 24-hour test pumping of well 21585 lowered the water level in the well to approximately 3 ft below sea level. This is cause for concern because pumping industrial quantities of water might produce a greater drawdown, and possibly could induce saltwater intrusion into the present freshwater zone. Current data are not sufficient to calculate either the rate of the possible saltwater migration or pumping rates that would preclude this migration. However, because the actual movement of the saltwater would be slow, the appearance of saltwater in a well would probably not occur for several years. The potential for saltwater intrusion should be evaluated as part of future studies.

### SUMMARY

- Two wells were drilled
- Both wells penetrated unconsolidated stratified clay, silt, sand and gravel.
- Each well penetrated a shallow unconfined and deeper confined aquifers.
- The water levels in the wells rise and fall with the tide.
- The chemical analyses indicate that the water quality meets the Alaska Drinking Water Standards, except for slightly high levels of manganese and pH.
- The potential for saltwater intrusion should be evaluated as part of future studies.

### REFERENCE CITED

Hem, J. D., Study and interpretation of the chemical characteristics of natural water, Second Edition: U.S. Geological Survey Water-Supply Paper 1473, 363 p.

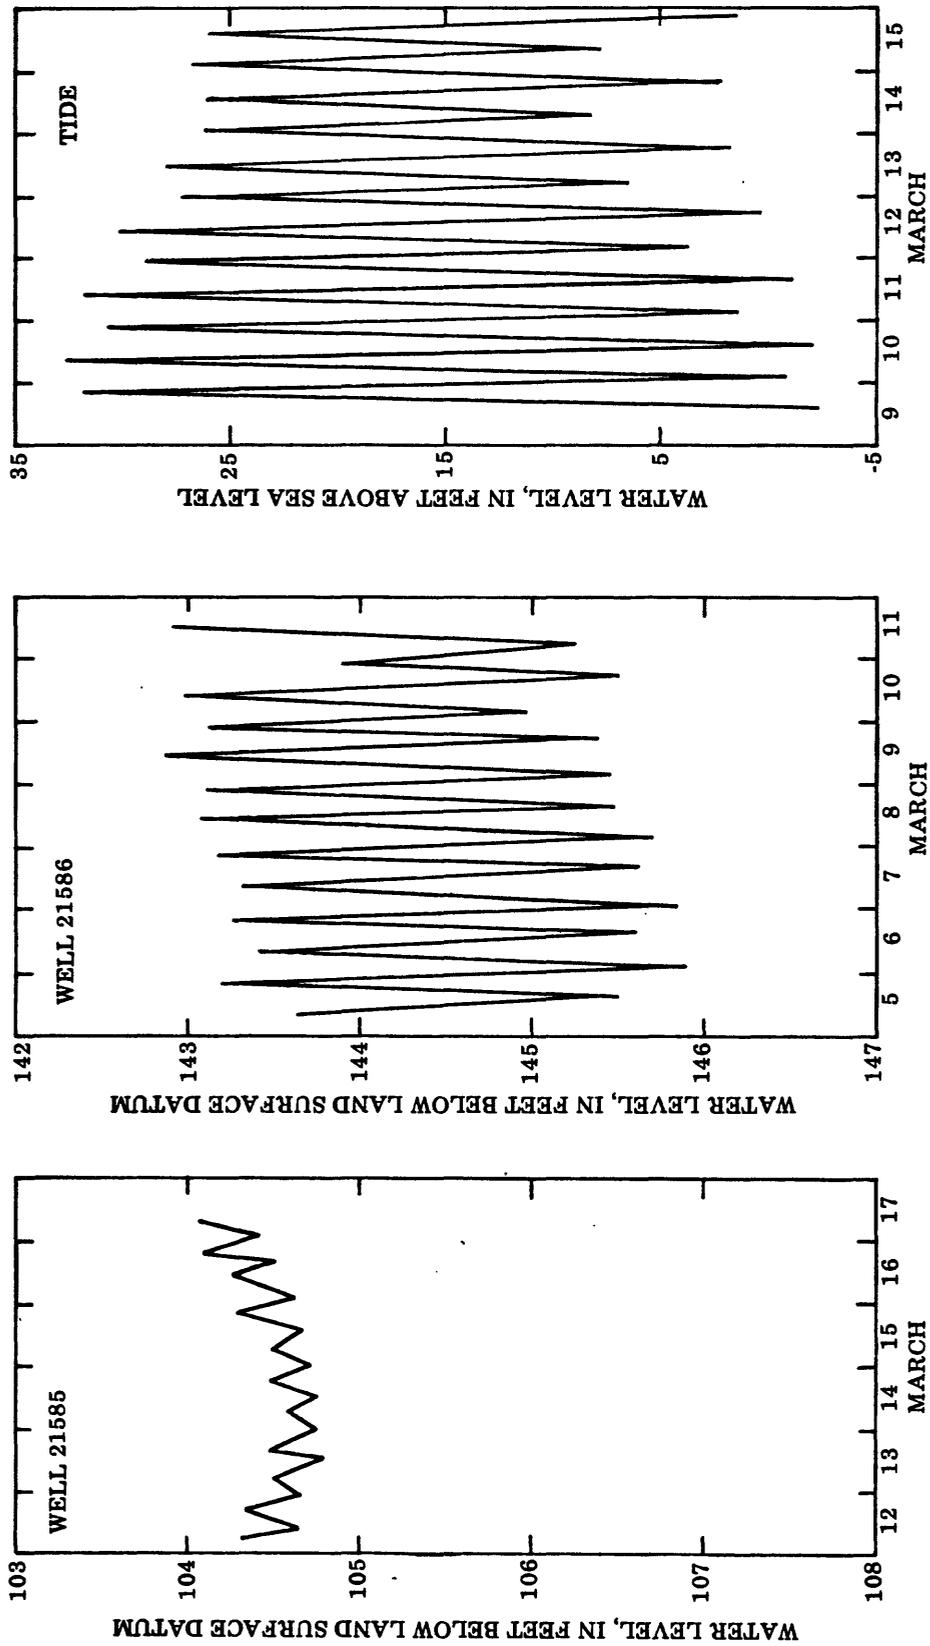


Figure 2. -- Water-level fluctuation for wells 21585 and 21586 and tidal fluctuations in Knik Arm, The well graphs are computer generated from the high and low values which were picked from continuous recorder readings. The tide graph is computer generated for the high and low tide values reported in the 1981 tide tables published by Elliott Sales Corporation, Tacoma, Washington.

Table 3.--Chemical analysis of water from the test wells. All values are dissolved except where noted.

| Well  | Depth - top of water zone (ft) | Depth - bottom of water zone (ft) | Depth of sample (ft) | Pump period, estimated (minutes) | Conductance, field (µmhos) | Water temperature (°C) | pH, field (units) | Silica (mg/L) | Sum of dissolved solids (mg/L) | Hardness as CaCO <sub>3</sub> (mg/L) | Hardness, noncarbonate as CaCO <sub>3</sub> (mg/L) | Calcium (mg/L) | Magnesium (mg/L) | Sodium (mg/L) | Sodium (percent) | Potassium (mg/L) | Alkalinity as CaCO <sub>3</sub> (mg/L) | Sulfate (mg/L) | Chloride (mg/L) | Fluoride (mg/L) | Nitrogen NO <sub>2</sub> +NO <sub>3</sub> as N (mg/L) | Phosphorus (mg/L) | Arsenic (µg/L) | Boron (µg/L) | Cadmium (µg/L) | Chromium (µg/L) | Copper (µg/L) | Iron (µg/L) | Lead (µg/L) | Manganese (µg/L) | Mercury (µg/L) | Selenium (µg/L) | Zinc (µg/L) | Sodium absorption ratio |
|-------|--------------------------------|-----------------------------------|----------------------|----------------------------------|----------------------------|------------------------|-------------------|---------------|--------------------------------|--------------------------------------|--|----------------|------------------|---------------|------------------|------------------|--|----------------|-----------------|-----------------|---|-------------------|----------------|--------------|----------------|-----------------|---------------|-------------|-------------|------------------|----------------|-----------------|-------------|-------------------------|
| 21585 | 130                            | 170                               | 137                  | 60                               | 250                        | 3.0                    | 8.3               | 13            | 150                            | 110                                  | 0  | 24             | 13               | 12            | 18               | 2.9              | 130                                    | 9.5            | 3.1             | 0.1             | 0.00  | 0.06              | 13             | 90           | <1             | 20              | 3             | 30          | 0           | 100              | 0.0            | 0               | 7           | .5                      |
| 21585 | 219                            | --                                | 277                  | 45                               | 400                        | 4.0                    | 8.8               | 12            | 252                            | 140                                  | 0  | 31             | 15               | 45            | 41               | 3.1              | 210                                    | 8.7            | 16              | 0.2             | 0.00  | .07               | 22             | 170          | <1             | 20              | 2             | 40          | 0           | 90               | 0.0            | 0               | 20          | 1.7                     |
| 21585 | 219                            | --                                | 347                  | 165                              | 675                        | 4.0                    | 8.8               | 11            | 388                            | 83                                   | 0  | 22             | 6.8              | 120           | 75               | 2.5              | 200                                    | 14             | 97              | 0.2             | 0.00  | .06               | 6              | 200          | <1             | 0               | 1             | 60          | 1           | 60               | 0.0            | 0               | 330         | 5.7                     |
| 21586 | 156                            | 166                               | 158                  | 45                               | 340                        | 3.5                    | 8.2               | 9.1           | 204                            | 72                                   | 0  | 15             | 8.5              | 54            | 61               | 1.9              | 180                                    | 9.1            | 3.3             | 0.5             | 0.00  | .04               | 8              | 410          | <1             | 10              | 1             | 20          | 1           | 40               | 0.0            | 0               | 20          | 2.8                     |
| 21586 | 219                            | 349                               | 240                  | 70                               | 340                        | 3.5                    | 8.1               | 12            | 204                            | 93                                   | 0  | 22             | 9.2              | 43            | 49               | 2.9              | 150                                    | 7.3            | 17              | 0.2             | 0.00  | .04               | 9              | 160          | <1             | 10              | 2             | 40          | 2           | 80               | 0.0            | 0               | 20          | 1.9                     |