YOUNGER

LAVA FLOW ·

UPPER SANTA FE GROUP

SEDIMENTS

DESCRIPTION OF MAP UNITS

[Due to the addition of a shaded-relief base, colors in the Description of Map Units and

the Correlation of Map Units many not exactly match unit colors on the map when that

SURFICIAL DEPOSITS

ARTIFICIAL FILL DEPOSITS

af Artificial fill deposits (latest Holocene)—Compacted fill material composed

POND DEPOSITS

ALLUVIAL DEPOSITS

Qsw Sheetwash deposits (Holocene and late? Pleistocene)—Chiefly slightly

is 1 meter (m) to 10 m

sheetwash deposits (Qsw)

thickness is 1–10 m

is about 3–6 m (Connell, 2006)

(Qby1) into thin sheetwash deposits (Qsw)

mainly of silt, sand, and rock fragments. Mapped chiefly beneath and

near segments of Interstate 40 and in levees on the east side of the Rio

locally includes small areas of disturbed ground where the land was

material could not be recognized, but little or no fill was emplaced. The

eastern and northeast parts of the map area along and near the Rio Grande

locally include extensive areas overlain by thin and discontinuous area of

artificial fill that are not shown on the geologic map. Estimated thickness

that accumulated in man-made basins along and near drainage ways that

were designed to detain flood runoff and retain associated flood-borne

modified by earth-moving equipment so that the original geologic

Pond deposits (latest Holocene)—Mostly lenses of sand and pebble gravel

sediments. Thickness unknown; probably greater than 1 m thick

Valley-floor alluvium of the Rio Grande (Holocene)—Active and inactive

and lenses of silt and clayey silt. Luminescence dating of fine sand

area, suggests that deposition of the upper part of unit Qar occurred

collected in a construction site, about 1 kilometer (km) east of the map

about 3 or 4 thousand years ago (ka) (Cole and others, 2007b), during the

late Holocene. Thickness is locally greater than 15 m (Connell, 2006)

pebbly to pebbly sand, sand, and silty sand. Small, unmapped deposits

locally overlie young alluvial-slope deposits (Qay). Unit Qsw locally

includes small unmapped deposits of valley-floor alluvium of

Sheetwash deposits over old alluvial-slope deposits—Ongoing slope

Sheetwash deposits over younger lava flow unit 1—Ongoing slope

Sheetwash deposits over younger lava flow unit 2—Ongoing slope

deposits (Qby2) into thin sheetwash deposits (Qsw)

Valley-floor alluvium of intermittent streams (Holocene and late?

gravel and locally includes minor sheetwash deposits (Qsw).

processes have reworked old alluvial-slope deposits (Qao) into thin

processes have reworked younger volcanic deposit lava flow unit 1

processes have reworked younger volcanic deposit lava flow unit 2

Pleistocene)—Chiefly poorly sorted sand and sandy pebble gravel in

about 5 m above channels of intermittent streams mainly in the western

part of the map area. Unit locally contains thin lenses of cobbly pebble

in the northeastern part of the map area suggests that deposition of the

upper part of unit Qa in this arroyo occurred about 4.5 ka (Cole and

Young terrace alluvium of the Rio Grande (late Pleistocene)—Chiefly

Intermediate-age terrace alluvium of the Rio Grande (late or middle

others, 2007b), during the late part of the middle Holocene. Estimated

slightly pebbly to pebbly sand, and clast-supported pebble gravel and

lenses of cobbly pebble gravel on the west side of the Rio Grande. Unit

small to show at map scale. Unit Qry underlies the Primero Alto surface

is locally overlain by thin, discontinuous deposits of eolian sand too

of Bryan and McCann (1938), which is about 15–20 m above the Rio

Grande. Luminescence dating suggests that deposition of the upper part

Pleistocene)—Chiefly sand, silty sand, and clayey silt as well as thin

minor lenses of pebbly sand and pebble gravel on the west side of the

consist of beds and lenses of very fine to coarse sand 20–420 centimeters

(cm) thick; silty, very fine sand 10–290 cm thick; clayey silt 2–105 cm

thick; and minor lenses of pebble gravel as much as about 20 cm thick.

(1938), which is about 44 m above the Rio Grande. Unit Qri is locally

overlain by thin, discontinuous deposits of eolian sand too small to show

at map scale. Luminescence dating suggests that deposition of the upper

part of unit Qri may have occurred as early as 160 ka or as late as 60 ka

(about 120-190 ka; Sharp and others, 2003; Pierce, 2004; Licciardi and

Pierce, 2008; Schweinsberg and others, 2016) during the late or middle

pebble gravel and cobbly pebble gravel that forms discontinuous terrace

eroded Tercero Alto terrace surface of Machette (1985), which is about 65

deposits on the west side of the Rio Grande. Unit Qro underlies the

m above the Rio Grande. The upper part of unit Qri locally contains the

Lava Creek B tephra (Smith and Kuhle, 1998; Connell and Love, 2001),

which is 631.3±4.3 ka (Matthews and others, 2015). Unit Qro is locally

overlain by thin, discontinuous sheetwash deposits (Qsw) too small to

show at map scale. Thickness is commonly about 3–5 m (Connell, 2006)

Valley-floor alluvium of intermittent streams and young alluvial-slope

deposits, undivided (Holocene and late Pleistocene)—Alluvium in

above), and young alluvial-slope deposits (Qay, described below) are

mapped as an undivided unit in the northwestern part of the map area.

Young alluvial-slope deposits (Holocene and late Pleistocene)—Chiefly

pebbly sand, pebble gravel, and locally, thin lenses of cobbly pebble

gravel on gently sloping surfaces. These sediments are derived in part

consists chiefly of stream alluvium and minor fan deposits that locally

are overlain by thin unmapped sheetwash deposits (Qsw). Unit Qay

and younger than unit Qao, and grades into and locally includes

locally mantles valley sides and hill slopes. It is topographically lower

unmapped deposits of valley-floor alluvium of intermittent streams (Qa).

from the gravel unit of upper Santa Fe Group sediments (Ng). Unit Qay

channels of intermittent streams and beneath low terraces (Qa. described

Old terrace alluvium of the Rio Grande (middle Pleistocene)—Chiefly

Pleistocene. Thickness is about 50 m (Connell, 2006)

ALLUVIAL AND COLLUVIAL DEPOSITS

Estimated thickness is 1–15 m

Estimated thickness is 1–15 m

(Cole and others, 2007b). The older luminescence ages suggest that unit

Unit Qri underlies the Segundo Alto surface of Bryan and McCann

Rio Grande. At the Adobe Cliffs section of Lambert (1968) unit Qri

of unit Qry occurred about 47–40 ka (Cole and others, 2007b). Thickness

stream channels and beneath treads of discontinuous terraces as much as

Luminescence dating near the mouth of Arroyo de las Calabacillas


intermittent streams (Qa). Estimated thickness is 1–5 m

channel and flood plain deposits composed chiefly of pebbly sand, sand,

Grande but also present locally in the north part of the map area. Unit af

layer is active

SURFICIAL DEPOSITS

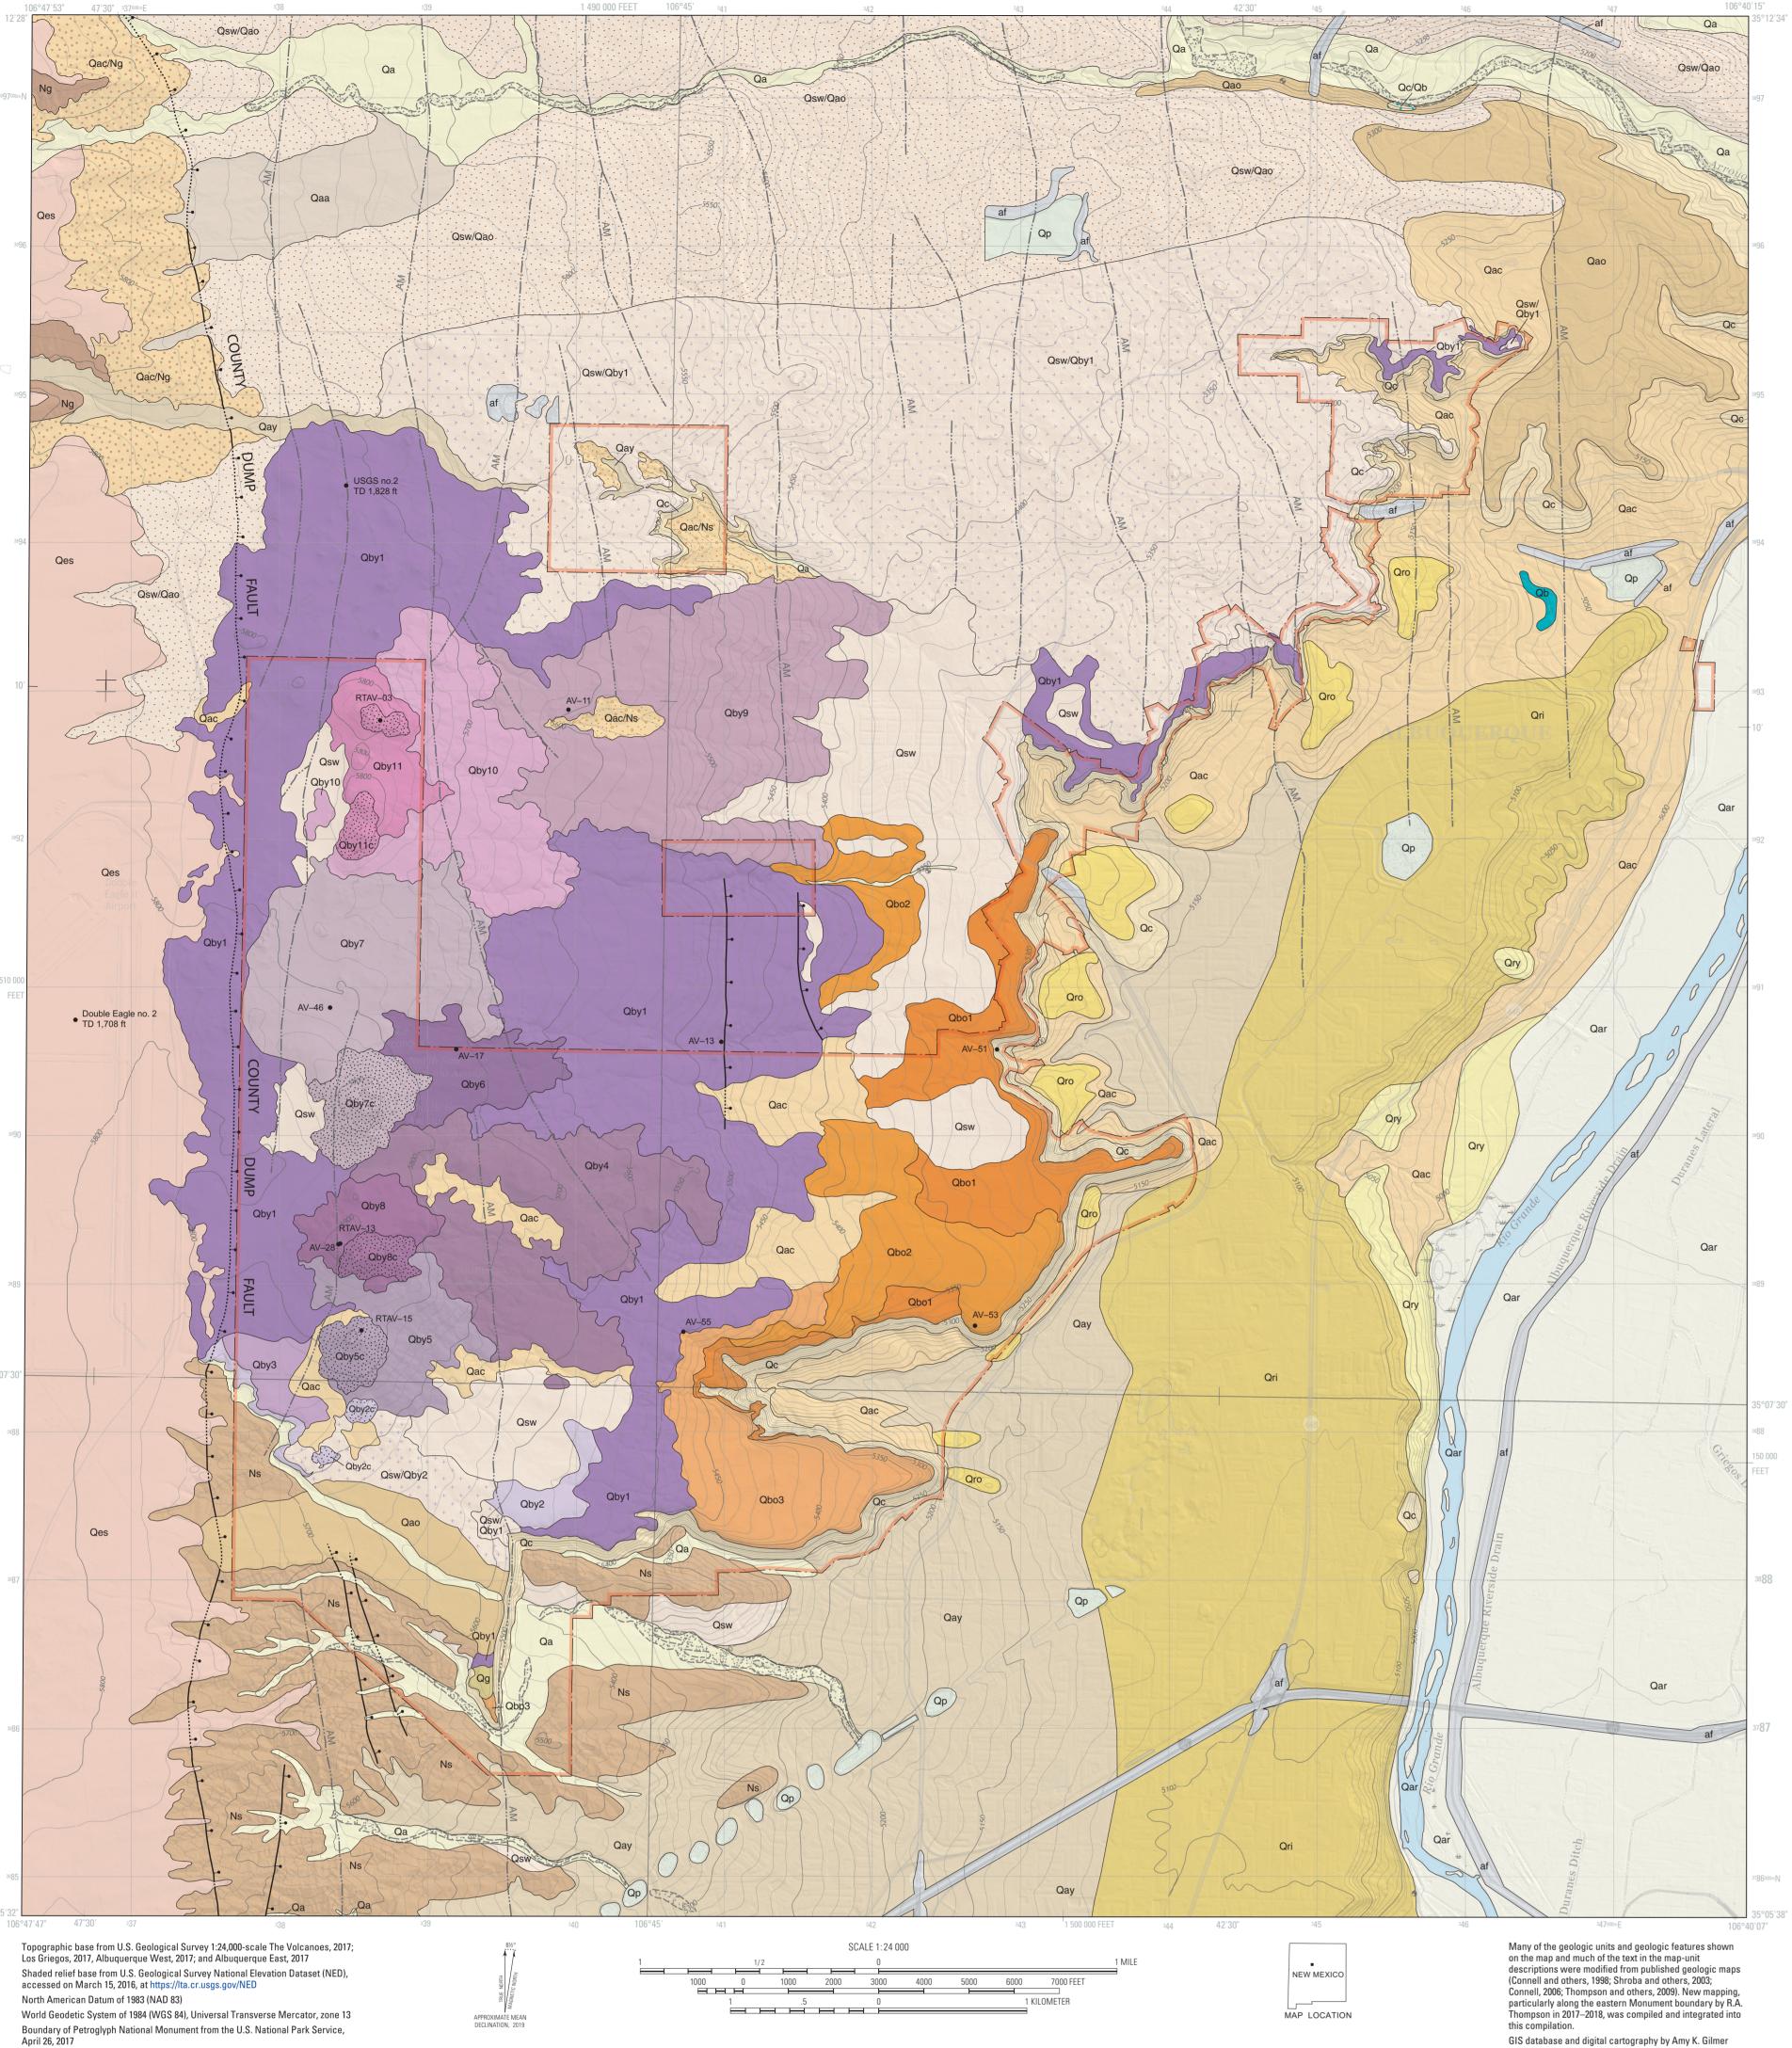

PETROGLYPH

Figure 2. Shaded relief index map of the map area. Petroglyph National Monument (PNM) shown in green. Major

MF 2416

(Shroba and others, 2003) others, 1998)

NMBG&MR 0F–DM–17

LA MESITA ALBUQUERQUE ALBUQUERQUE New Mexico Bureau of Geology

yellow, and adjacent 7.5' U.S.

Geological Survey (USGS) quadrangles. For USGS

publications, the publication

number, author(s) and year of

agency, author(s), and year of

publication are shown. NMBG&MR;

publication are shown. For non-USGS publications, the

and Mineral Resources.

Universal Transverse Mercator projection, zone 13N; North American Datum of 1983

canyons and volcanic vent areas of the monument are labeled.

This map is not a legal document. Boundaries may be generalized at this map scale.

Private lands within government reservations may not be shown. Obtain permission

Figure 1. Geographic setting of the Petroglyph Monument geologic map area. Map area boundary

roded flow fronts of tholeiitic lava flows within older lava flow units (Qbo deposits).

CONVERSION FACTORS

0.3861

0.2399

International System of Units to U.S. customary units

centimeters

meters (m)

kilometers (km)

square kilometer (km²)

cubic kilometer (km³)

Photograph by Ren A. Thompson, 1996. Rock hammer, visible in left center of photo, for scale.

inches (in.)

inches (in.)

mile (mi)

before entering private lands.


eographic coordinate system, decimal degrees

North American Datum of 1983

show by black rectangle.

Manuscript approved for publication December 28, 2019 **EXPLANATION** trachyandesite Albuquerque Volcanoes (ABQ Servilleta Basalt andesite SiO, weight in percentage Figure 3. Total alkali (Na,0+K,0) vs. silica diagram of Le Bas and others (1986). Data are recalculated volatile free and total iron as FeO. The Albuquerque Volcanoes (ABQ) have low alkalis and are

Edit and digital cartographic production by Lisa J. Binder

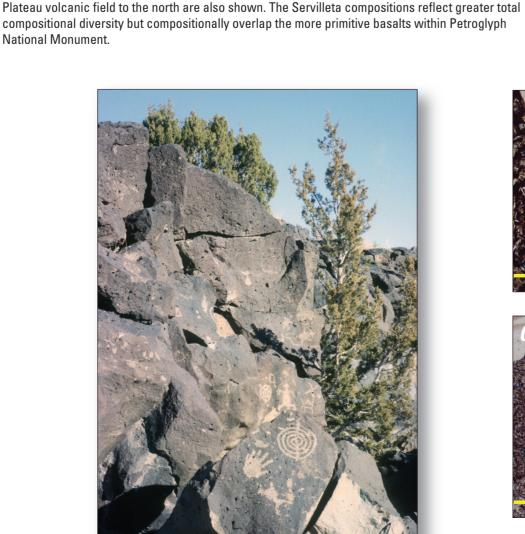

Petroglyphs etched into eroded faces of lava flows along


field. Photograph by Ren A. Thompson, 1996.

the eastern margin of the Albuquerque Volcanoes volcanic

dominated by olivine tholeiite basalts. For comparison, Servilleta Basalt compositions from the Taos





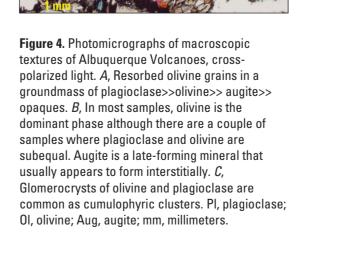

six lava flows and correlate associated paleomagnetic data with the Pringle Falls geomagnetic excursion. No sample locations are reported for this study. A uranium/thorium (²³⁸U/²³⁰Th) isochron determination for three whole- rock samples from units Qby2, Qby9, and Qby11 yielded a mean age of 0.156±0.029 Ma (Peate and others, 1996). Lava flows and associated near-vent pyroclastic deposits were delineated in the map area. At the southern edge of the volcanic field, intercalated gravel of inferred middle Pleistocene age, lacking obvious soils, separates older cliff-forming basalt flows from younger flows (Shroba and others, 2003). Younger flows (units Qby1–11) above the middle Pleistocene gravels are designated as young (for example, Qby1, young lava flow unit 1). Where mapped eruptive units (Qby1–Qby11) are non-contiguous or stratigraphic position is obscured by poor exposure, even relative age between some units is uncertain. Consequently, the numbering scheme used to designate deposits of any given eruptive event does not necessarily imply relative age. Lava flows underlying the unconformity marked by the local gravel deposit are mapped as four lava flow units of the older lava flow sequence (Qb, Qbo1, Qbo2, and Qbo3). Lava flows and related deposits (Pleistocene)—Medium- to dark-gray tholeiitic lava flows (47–52 weight [wt] percent silicon dioxide [SiO₂], and up to 3.75 wt percent sodium oxide+ potassium oxide [Na₂O+K₂O], <1.5 wt percent titanium dioxide [TiO₂]) and near-vent pyroclastic deposits associated with Hawaiian-type fissure eruptions (fig. 3; table 2). Deposits proximal to vents include cinder deposits, spatter deposits, spatter agglutinate, breccia and clastogenic lava flows, and locally, thin

oxides, augite, and interstitial glass (fig. 4) YOUNGER LAVA FLOW UNITS

pahoehoe lava flows that typically are radially distributed around small

cones and cone remnants. The lava flows vary in thickness from <1 m to

several meters. Both near-vent deposits and lava flows contain ubiquitous

phenocrysts (<1–2 millimeters [mm]) of olivine and plagioclase in a

fine-grained intergranular matrix of plagioclase, iron-titanium (Fe-Ti)

(MIDDLE PLEISTOCENE) [Units containing near vent deposits are indicated using a black stipple pattern overlay and "c" in the unit label here and on the map]

Oby11 Lava flow unit 11—Near-vent pyroclastic deposits and intercalated lava flows of Bond Volcano (fig. 2). Lava flows are predominantly shelly pahoehoe with locally developed as flow texture. Lava tubes are common as are push-up structures and rafted pyroclastic deposits. Near-vent deposits (Qby11c) are heterogeneous and include cinder, spatter, agglutinate, and clastogenic lava flows. Thickness is 40 m Qby10 Lava flow unit 10—Medium- to dark-gray discontinuous shelly pahoehoe to aa lava flows (<1- to 2-m-thick) erupted from vents at or near the current location of Bond Volcano based on lava flow distribution. Forms broad plateau east of Bond and Butte Volcanoes (fig. 2). Lava tubes and ramp structures are common. Thickness is 1–2 m Qby9 Lava flow unit 9—Discontinuous, rubbly, dark-gray, thin (1–2 m), vesicular

lava flows in the south-central part of the map area. Lava flows are early

eruptive products from vents near Bond and Butte Volcanoes (fig. 2).

Thickness is 2–3 m Qby8 Lava flow unit 8—Medium- to dark-gray proximal lava flows and near-vent (Qby8c) pyroclastic deposits of Black Volcano (fig. 2). Lower flows are dark-gray, hummocky, and scoriaceous. Two overlying cones consist of cinders, scoria, spatter, agglutinate and intercalated lava flows (Kelley Alluvium and colluvium, undivided, over gravel unit of upper Santa Fe and Kudo, 1978). The northernmost flanks of Black Volcano consist **Group sediments**—Ongoing slope processes have reworked gravel unit predominantly of cinders and have been removed by mining. Thickness

Qby7 Lava flow unit 7—Proximal lava flows and associated near-vent pyroclastic Alluvium and colluvium, undivided, over upper Santa Fe Group deposits of Vulcan Volcano (fig. 2). Medium- to dark-gray lava flows **sediments, undivided**—Ongoing slope processes have reworked compose a broad highland north of prominent central cone. Lava flows undivided upper Santa Fe Group sediments (Ns) into thin undivided are predominantly shelly pahoehoe with locally developed as flow alluvium and colluvium deposits (Qac) textures. Lava tubes are common as are push-up structures and rafted Qao Old alluvial-slope deposits (middle? Pleistocene)—Gently sloping deposits pyroclastic deposits. Near-vent deposits (Qby7c) are heterogeneous and composed chiefly of pebbly sand, pebble gravel, and, locally, thin lenses locally include cinder, spatter, agglutinate, clastogenic lava flows and of cobbly pebble gravel near the northern part of the map area. Unit Qao minor columnar jointed flows exposed in breached lava ponds (Smith is derived in part from upper Santa Fe Group sediments (Ng and Ns). and others, 1999). Locally these deposits are cut by small dikes typically Unit Qao consists chiefly of stream alluvium and minor fan deposits that less than a meter in width. Near-vent deposits on quarried north side of are commonly mantled by sheetwash deposits (Qsw). Commonly Vulcan Volcano contain abundant partially melted, vesiculated xenoliths mapped as fractional unit Qsw/Qao. Unit Qao commonly forms a broad of sandstone. Thickness is 50 m alluvial surface and is topographically higher and older than unit Qay. Lava flow unit 6—Discontinuous, rubbly, dark-gray, thin (1–2 m), vesicular

Alluvium and colluvium, undivided (Holocene and late Pleistocene)—Unit

Qac commonly ranges from pebbly, very fine to medium sand to poorly

sorted, clast- and matrix-supported, slightly cobbly, pebble gravel that

has a sand matrix. Undifferentiated sheetwash deposits, stream-channel

deposits that locally overlie upper Santa Fe Group sediments (Ng and

of upper Santa Fe Group sediments (Ng) into thin undivided alluvium

calcic soils and sediments and probably were moved upward by

burrowing animals. Some or much of the sand probably was deflated

Unit Qes locally includes small, unmapped deposits of valley-floor

alluvium of intermittent streams (Qa) and locally may include small,

COLLUVIAL DEPOSITS

Colluvial deposits, undivided (Holocene to middle? Pleistocene)—

from upper Santa Fe Group sediments that are exposed along the western

escarpment of the Llano de Albuquerque west of the map area and was

deposited by southwesterly or westerly winds (Shroba and others, 2003).

unmapped deposits of active eolian sand. Estimated thickness is 1–10 m

Nonsorted and non-stratified, mostly matrix-supported, sandy sediment

and basaltic rock debris locally characterized by hummocky topography.

Deposits range from pebbly silty sand to bouldery rubble that has a

sandy matrix. Unit Qc overlies upper Santa Fe Group sediments (Ns)

downslope of basaltic lava flows near the base of the escarpment in the

northeastern, central, and southwestern parts of the map area. Unit Qc

also debris-flow deposits, as defined by Cruden and Varnes (1996).

reactivation due to natural processes and human-induced processes.

sheetwash, and other surface runoff processes. Maximum thickness

Some of the sand in unit Qc probably was deposited by overland flow,

Ongoing slope processes have reworked an undifferentiated lava flow

The Albuquerque Volcanoes is a 10-km-long chain of basalt cones

and associated lava flows that erupted from multiple fissure vents,

north-south trending faults in the Albuquerque Basin (fig. 1). The

resulting from magma intrusion along conduits following the prominent

volcanic field forms the Llano de Albuquerque in most of the map area.

number of vent-related features. However, satellite vents formed along

the entire length of the inferred fissure. Lava flows erupted from vents

and flowed predominantly eastward for distances as great as 5 km. These

flows formed a prominent basalt plateau that covers 60 square kilometers

(km²) of the Llano de Albuquerque geomorphic surface. Basalt flows are

exposed prominently along the escarpment on the eastern eroded margin

of the Llano de Albuquerque, where their base is about 70-100 m above

Volcanic map units are delineated on the basis of lithology, morph-

ology, and stratigraphic position. Units composed primarily of lava flows

typically represent individual eruptive events; they are characterized by

one or more flows that consist of multiple flow lobes. Locally, the volcanic

map units include interbedded pyroclastic deposits. Temporally equivalent

denoted by a black stipple pattern overlay. Detailed descriptions of facies

A middle Pleistocene age assignment for the volcanic rocks is based

near-vent pyroclastic deposits associated with lava flow eruptions are

textures of pyroclastic deposits and lava flows are given in Kelley and

on three independent dating techniques. Analytical uncertainty for

units suggest all mapped volcanic units were emplaced within a

analyses reported by each technique exceed the total range of reported ages and none of the ages reflect relative stratigraphic position based on

mapping within the map area. The preserved morphology of lava flows

and the absence of significant erosional unconformities between eruptive

relatively short time interval. Geissman and others (1990) also reported

directions of remanent magnetization of near-vent deposits and proximal

lava flows that are statistically indistinguishable from those determined

atypical directions reported suggest a short duration of magmatic activity

million years (Ma) was reported by Bachman and Mehnert (1978) from

precludes identification of the original sample location or map unit

Albuquerque Volcanoes; however, an erroneous reported sample location

dated. Geissman and others (1990) reported a weighted mean whole-rock

K/Ar age of 0.155±0.047 Ma, based on determinations for three samples

with reported ages ranging from <0 to 0.17±0.05 Ma but report no sample

locations. Singer and others (2008) report an average whole-rock 40 Ar/39 Ar

Divisions of Quaternary and Neogene time used in this report¹

Pleistocene

Albuquerque-Rio Rancho

metropolitan area and vicinity

Ceja Formation

Upper sandy subuni Atrisco member

Ceja Formation

Atrisco member

Ceja Formation

Navaio Draw Member

Cerro Conejo Formation

Figure 5. Generalized stratigraphic relations of Sante Fe Group sediments mapped in the map area (from

Arroyo Ojito Formation

Geologic map of The Volcanoes quadrangle,

rnalillo and Sandoval Counties, New Mexico

an sand and clay un

of the upper Santa F

Group sediments (unit Tsc)

Thompson and others, 2009).

ges of time boundaries are those of the U.S. Geological Survey Geologic Names

Valker and others (2012) and the late-middle Pleistocene boundary and middle-early pleistocene boundary, which are those of Richmond and Fullerton (1986). Ages are

essed in ka for kilo-annum (thousand years) and Ma for mega-annum (million years)

0-4.2 ka

4.2–8.2 ka

132-788 ka

8.2 ka-11.7 Ma 11.7–132 ka

788 ka-2.588 Ma 2.588-5.332 Ma

5.332-23.03 Ma

ma Barbon Member

"Middle red" formation

Albuquerque 30'× 60' Part of the Ceja del Rio Puerco area

Arroyo Ojito Formation

Loma Barbon Member

A whole-rock potassium/argon (K/Ar) determination of 0.19±0.04

for distal flows at the base of the volcanic section. The consistent but

during one of the Brunhes Chron polarity excursions.

Kudo (1978), Smith and others (1999), and Crumpler (1999).

Kelley and Kudo (1978) identified five prominent cinder cones and a

These deposits may be susceptible to continued movement or

Colluvial deposits, undivided, over lava flow, undifferentiated—

(Qb) into thin, undivided colluvium deposits (Qc)

LAVA FLOWS AND RELATED DEPOSITS

OF THE ALBUQUERQUE VOLCANOES

includes debris-slide, soil-creep, and block-stream deposits, and probably

deposits of intermittent streams, minor fan deposits, and colluvial

Ns). Estimated thickness is 1–5 m

and colluvium deposits (Qac)

Estimated thickness is 1–15 m

LAVA FLOWS AND RELATED DEPOSITS

OF ALBUQUERQUE VOLCANOES

[Units containg near vent deposits are indicated using

a stipple pattern overlay and "c" in the unit label subscript

in the Description of Map Units and on the map]

LAVA FLOW

UNITS

lava flows; early eruptive products from vents of Volcan Volcano (fig. 2). Gravelly alluvium (middle Pleistocene)—Poorly sorted, pebbly silty sand to moderately well sorted, clast-supported, slightly cobbly, pebble gravel Qby5 Lava flow unit 5—Medium- to dark-gray vesicular lava flows exposed along that overlies and underlies basaltic lava flows (Qbo3 and Qby1, the northern and eastern flanks of cone J A (Kelley and Kudo, 1978) and respectively) at the southern limit of the volcanic field. A thin (about 30 southern flanks of vent areas of Black Volcano (fig. 2) (Kelley and Kudo, cm), sandy, pumice-bearing layer is present near the middle of the unit. The 1978). Lava flows typically are thin (1–2 m), and locally are interbedded pumice fragments in this layer probably were reworked from older deposits. with near-vent deposits (Qby5c, scoria, cinders, and spatter associated Much of the sand and gravel is likely reworked from the upper Santa Fe with fire fountain eruptions from J A Volcano and Black Volcano). Group sediments (units Ng and Ns). Thickness is approximately 3 m Locally, ramp structures, push-up features, and small lava tubes are EOLIAN AND ALLUVIAL DEPOSITS common. Exposed thickness is 4–5 m in map area; base is generally

covered or not well exposed Qes Inactive eolian sand and sheetwash deposits, undivided (Holocene and Lava flow unit 4—Discontinuous, rubbly, dark-gray, thin (1–2m), vesicular late Pleistocene)—Quartz-rich, non-calcareous to calcareous, mostly lava flows; early eruptive products from vents of Black Volcano (fig. 2). very fine to medium sand that supports a sparse cover of grasses, shrubs, and annual plants. Scattered pebbles, cobbles, and carbonate-cemented soil fragments in unit Qes probably were derived from the underlying Qby3 Lava flow unit 3—Discontinuous, rubbly, thin (1–3 m) dark-gray vesicular lava flows immediately west of J A Volcano (fig. 2). The unit forms an indistinct

> low- relief apron around fissure vents and above cliff-forming flows of Push-up structures and rafted pyroclastic deposits are common. Exposed thickness in map area is 2 m; base is generally covered or not well exposed Qby2 Lava flow unit 2—Medium- to dark-gray lava flows exposed along an unnamed wash on the southwest margin of the volcanic field, east of the County Dump fault. The typically, thin (1–2 m) lava flows exhibit transitional pahoehoe to aa surface forms. (The Qby2c units are the cinder deposits on the lava flow). Thickness is 2–6 m

Qby1 Lava flow unit 1—Medium- to dark-gray lava flows. Typically, thin (1–2 m) lava flows characterized by surface forms transitional from pahoehoe to aa, parallel to low-relief flow lobes along flow direction. Largest volume eruptive unit in the map area, likely erupted from vent areas obscured by younger eruptions (Qby2–Qby11). Overlying gravel near southern limit of volcanic field (Shroba and others, 2003). Wilkins (1987) reports a thickness of 34 feet (ft) (10 m) in U.S. Geological Survey well 2 (table 1). Thickness is 3–10 m

OLDER LAVA FLOW UNITS

(MIDDLE PLEISTOCENE) Lava flow unit 3—Medium- to dark-gray lava flows underlying gravel near southern limit of basalt in the southeast map area. Typically, thin (1–2 m) lava flows characterized by flow textures transitional from pahoehoe to aa. Best exposed on the south side of Rinconada Canyon (fig. 2). Inferred to have been derived from vent areas to the west now buried by younger

lava flow units. Thickness is 3–10 m **Lava flow unit 2**—Medium- to dark-gray, thin (1–3m), discontinuous lava flows in central part of map area. Best exposed along the northern canyon ledge of Rinconada Canyon (fig. 2) forming thin sequence of flows between basal and uppermost lavas. Poorly exposed in canyons and locally covered, or partially covered by colluvium. Thickness is 3–12 m **Lava flow unit 1**—Medium- to dark-gray lava flows. Typically, thin (1–3 m)

lava flows characterized by flow textures transitional from pahoehoe to aa. Well exposed as the basal lava flow sequence on the north side of Rinconada Canyon and the Llano de Albuquerque escarpment to the north (fig. 2). Inferred to have been derived from vent areas to the west now buried by younger lava flow units (Qby). Base is often not exposed or is poorly exposed, often covered by colluvium (Qc). Thickness is 3–8 m **Old lava flows, undivided**—Medium- to dark-gray, thin (1–3 m), discontinuous lava flows in central part of map area. Isolated outcrop does not allow discrimination between assignment to younger or older lava flow unit deposits. Locally covered, or partially covered by

colluvium. Exposed thickness is 5–7 m **UPPER SANTA FE GROUP SEDIMENTS**

Gravel unit of upper Santa Fe Group sediments (Pliocene)—Sandy, pebble- and cobble-gravel interbedded with pebbly, medium to coarse sand and sparse coarse gravel that locally contains abundant cobbles and rare boulders as long as 1–1.5 m. Gravel is mostly clast supported. Gravel and sand beds and lenses are moderately well sorted. Most of the deposits are poorly indurated; locally, they contain carbonate cement. Pebbles and cobbles are composed chiefly of sandstone, porphyritic volcanic rock, red granite, gneiss, foliated granite, chert (including Pedernal chert of Maldonado and Kelley, 2009), and sparse quartzite, petrified wood, and basalt. Estimated thickness is 40 m Upper Santa Fe Group sediments, undivided, (Pliocene and upper?

Miocene)—Poorly exposed deposits composed chiefly of slightly cobbly, pebble gravel, pebbly sand, and sand. Much of the sand is very fine to very coarse. Sand contains thin (5–50 cm) lenses of pebbly sand and gravel and, locally, thin (5 cm) lenses of silty clay. Clasts are chiefly subangular to rounded granite, chert (including chert fragments from the Pedernal Chert Member of the Abiquiu Formation), sandstone, petrified wood, and basalt. Unit Ns locally includes the gravel unit (Ng); locally includes deposits composed chiefly of pebbly sand; and locally includes beds rich in silt and clay (Lambert, 1968). Estimated thickness is 120 m

EXPLANATION

Normal fault—Dashed where inferred from aerial photographs, dotted where concealed; bar and ball on apparent downthrown side --- Aeromagnetic survey—Inferred normal fault located using aeromagnetic survey. Sense of displacement uncertain ——— Petroglyph National Monument (PNM) boundary

Cinder deposits—Indicated by a "c" at the end of the unit label AV–46 • Sample location—With sample number Double Eagle no. 2 TD 1 708 ft • Well location—With name and total depth (TD) in feet (ft)

> Table 1. Thickness of geologic materials penetrated in deep drill-holes in and near the map area (modified from Thompson and others, 2009). [USGS, U.S. Geological Survey, ---, not described; >, greater than; ~, approximately. All elevations and material thicknesses are in feet; well locations are in latitude and longitude coordinates. Sources of information: L, Lozinsky, 1994; T, Thompson and others, 2009; ST, Stone and others, 1998; W, Wilkins, 1987]

Well name	Shell Oil Mesa Federal¹	USGS Well	Black Ranch Test Well ¹	City of Albuquerque Soil Amendment Facility ¹	Double Eagle	USGS 98th Street core hole ¹
Well number	1	2		1	2	2
Latitude (N)	35°10'06"	35°10'46"	35°12'44"	35°08'53"	35°08'48"	35°05'24"
Longitude (W)	106°46'59"	106°46'27"	106°49'05"	106°49'28"	106°47'36"	106°44'52"
Ground surface elevation (ft)	5,775	5,730	5,920	5,865	5,805	5,320
Total Depth (TD, ft)	19,375	1,828	3,030	2,428	1,708	1,560
	Thickness (ft)					
Surficial deposits		8				19
Basalt		34				
Santa Fe Group						
Gravelly sediment	~200	196	220	233	203	78
Medium to coarse sand	~180	592	181	454	300	344
Silty sediment	~400	443	407	675	388	346
Medium sand	~1,600	555	778	1,066	694	
Fine to medium sand	6,170		1,444		123	773
Unit of Isleta no. 2	>1,170					
Galisteo Formation	~1,110					
Cretaceous Rocks, undivided	~1,655					
Jurassic rocks, undivided	~900					
Total thickness of Santa Fe Group	~8,550	>1,786	>3,030	>2,428	>1,708	>1,541
Sources of information	L, T	W, T	T	T	T	ST

Petroglyph National Monument and immediately adjacent areas in Bernalillo County, New Mexico. The Monument is underlain dominantly by Quaternary basalts of the Albuquerque Volcanoes volcanic field, and is composed of a series of basin-filling volcanic flows and associated vents from a monogenetic volcanic highland along the eastern margin of the Llano de Albuquerque (figs. 1 and 2), (Kelley and Kudo, 1978; Geissman and others, 1990; Crumpler, 1999; Smith and others, 1999; Singer and others, 2008; Thompson and others, 2009). Outcrops of these basaltic lava flows host hundreds of petroglyphs from which the monument derives its name (National Park Service [NPS], 2019). Underlying deposits of the upper Santa Fe Group are exposed in the western part of the map area. Informal nomenclature for Santa Fe Group stratigraphy is used for these units. Drill hole data for well sites indicated on the map are summarized in table 1.

Many of the geologic units and geologic features shown on the map and much of the (USGS) ScienceBase data release accompanies this report and can be accessed at https://doi.org/10.5066/P9LW817K (Thompson and others, 2019).

This geologic map emphasizes the distribution of Quaternary volcanic vent areas and lava flow deposits which were incompletely mapped in previous publications. varying map unit distributions, names and descriptions presented previously.

interpretation of lidar (light detection and ranging) data acquired during September, 2010 (OpenTopography, http://opentopo.sdsc.edu/usiei?id=ID_10281). Fractional map symbols (for example, Qsw/Qao) are used where ongoing slope processes have reworked old alluvial-slope deposits (Qao) into thin sheetwash deposits (Qsw). This fractional unit is not described here; instead refer to the individual units in the Descriptions of Map Units section of this report. Fractional units are not shown on the Correlation of Map Units diagram either but are equivalent in age to the unit shown in the numerator of the unit. Extensive building, landscaping, and paving, as well as the placement of thin discontinuous deposits of artificial fill at and near constructions sites, have modified the upper part of surficial deposits throughout the map area. Areas of human-modified land are not shown on the geologic map with the exception of artificial fill (af) and pond deposits (Qp). Terrace deposits of the Rio Grande (Qry, Qri, and Qro) are rich in stream-transported clasts composed of quartz-rich Proterozoic metamorphic rocks and porphyritic volcanic rocks of felsic and intermediate composition suitable for aggregate. The reader is referred to Cole and others (2007a) for more detailed descriptions of gravels.

STRATIGRAPHY OF DEEP DRILL HOLES IN THE MAP AREA

Six deep drill holes in and near the map area provide significant information concerning subsurface Santa Fe Group sediments (table 1). The deepest hole (West Mesa Federal 1) was drilled for hydrocarbon exploration in Cretaceous units beneath Santa Fe Group sediments. The other five drill holes are water wells.

All colors used in map descriptions are informal field designations of these lithologies.

Shell Oil Company drilled West Mesa Federal 1 in 1983 to a total depth of 19,375 ft (5,905 m). Lithologic descriptions and a generalized cross section indicate that the drill hole penetrated at least 16,830 ft (5,133 m) of Tertiary sediments and bottomed in Mesozoic rocks (table 1). The Tertiary sediments consist of about 8,550 ft (2,608 m) of Santa Fe Group sediments, 7,170 ft (2,187 m) of a unit of Isleta no. 2 of Lozinsky (1988, 1994), and 1,110 ft (338 m) of Galisteo Formation (Lozinsky, 1994). In the Albuquerque basin, Lozinsky's unit of Isleta no. 2 commonly consists of purplish-red to gray, wellthat contains interbeds of claystone and silicic- to intermediate-volcanic flows and tuffs (Lozinsky, 1994). The drill hole also penetrated about 1,655 ft (504 m) of Cretaceous rocks and about 900 ft (274 m) of Jurassic rocks. Inferred thicknesses of lithologic units in the Santa Fe Group are based on interpretation of cuttings from a nearby water well. The U.S. Geological Survey drilled well 2 in 1981 to a total depth of 1,828 ft (557 m). Lithologic logs and grain-size analyses of the cuttings suggest that the drill hole penetrated (from top to bottom) 8 ft (2 m) of surficial deposits, 34 ft (10 m) of basalt, and >1,786 ft (544 m) of Santa Fe Group sediments. The upper 746 ft (228 m) of the Santa Fe Group sediments commonly contains 10–30 percent granules plus gravel (>2 mm), whereas the lower 1,040 ft (317 m) consists of sand and finer material. The greatest amount of sand and coarser material (about 90 percent >0.062 mm) is in the upper 291 ft (89 m) of the Santa Fe Group sediments. These coarse-grained sediments may be equivalent to gravel unit (Tg) and the pebbly sand unit (Tps) of the Santa Fe Group sediments mapped near the western boundary of the map area (fig. 5). The content of silt plus clay (<0.062 mm) varies with depth, and is about 10 percent at 42–333 ft (13–101 m), 20–30 percent at 333–788 ft (101–240 m), 40–60 percent at 788–1,289 ft (240–393

Albuquerque West 7.5-minute quadrangle. It is about 190 m east and about 3,660 m south

ACKNOWLEDGMENTS

REFERENCES CITED Bachman, G.O., and Mehnert, H.H., 1978, New K-Ar dates and the late Pliocene to Holocene geomorphic history of the central Rio Grande region, New Mexico: Geological Society of America Bulletin, v. 89, p. 283–292. [Also available at https://doi.org/10.1130/0016-7606(1978)89%3C283:NKDATL%3E2.0.CO;2.] Bryan, K., and McCann, F.T., 1938, The Ceja del Rio Puerco—A border feature of the Basin and Range Province in New Mexico, Part II, Geomorphology: Journal of Geology, v. 46, no. 1, p 1–16. [Also available at https://doi.org/10.1086/624618.] Cole, J.C., Mahan, S.A., Stone, B.D., and Shroba, R.R., 2007a, Ages of Quaternary Rio Grande terrace-fill deposits, Albuquerque area, New Mexico, supplemental material—Clast compositions in Rio Grande terrace-fill deposits: New Mexico

Connell, S.D., 2006, Preliminary geologic map of the Albuquerque–Rio Rancho metropolitan area and vicinity Bernalillo and Sandoval Counties, New Mexico: New Mexico Bureau of Mines and Mineral Resources Open-file Report 496, scale 1:50,000. [Superseded by GM–78, available at https://geoinfo.nmt.edu/publications/maps/geologic/gm/78/.] Connell, S.D., Allen, B.D., Hawley, J.W., and Shroba, R.R., 1998, Geologic map of the

Pahoehoe lava flow textures typical of tholeiitic basalt lava

flows. Photograph by Ren A. Thompson, 1996.

This geologic map depicts and briefly describes geologic units underlying

text in the map-unit descriptions were compiled from published geologic maps (Connell and others, 1998; Shroba and others, 2003; Connell, 2006; Thompson and others, 2009). New mapping, particularly along the eastern Monument boundary (fig. 2), was compiled and integrated into this compilation to provide a seamless, uniform geologic map and geographic information system (GIS) database of the area. This U.S. Geological Survey

Surficial deposits are simplified, but uniformly mapped and described in contrast to The mapped distribution of some of the map units is based in part on the

m), and about 35 percent at 1,289–1,828 ft (393–557 m) (Wilkins, 1987). The other three water wells (Black Ranch Test Well, City of Albuquerque Soil Amendment Facility 1, and Double Eagle 2) penetrated Santa Fe Group sediments to total depths of 1,708–3,030 ft (521–924 m). See table 1 for additional information concerning Santa Fe Group lithologic units penetrated.

The 98th Street core hole is located just north of Interstate 40 in the adjacent

of the southeast corner of the The Volcanoes 7.5-minute quadrangle. The core hole was drilled by the USGS in 1996 to a total depth of 1,560 ft (476 m) to determine the lithostratigraphy and hydrogeologic characteristics of the aquifer system. Sampling recovered 760.6 ft (231.8 m) of core. The core hole penetrated about 19 ft (6 m) of Quaternary eolian sand and alluvium; 78 ft (24 m) of the upper gravelly unit of the Santa Fe Group; and at least 1,463 ft (446 m) of the middle unit of the Santa Fe Group (Stone and others, 1998). The upper gravelly unit of the Santa Fe Group consists chiefly of sand, gravel, and lenses of pebbly sand, silt, and clay. The middle unit of the Santa Fe Group is mostly interbedded sand, silty sand, silty clay, and clay (Stone and others, 1998). The upper gravelly unit of the Santa Fe Group probably is laterally equivalent to the gravel unit of the upper Santa Fe Group sediments (Tg) and the pebbly sand unit of the upper Santa Fe Group sediments (Tps) in The Volcanoes quadrangle, the Ceja Member of the Santa Fe Formation of Kelley (1977), and the Sierra Ladrones Formation (Stone and

This report was greatly improved by helpful reviews by Kenzie Turner and Cal Ruleman of the USGS. We thank the National Park Service and Petroglyph National Monument staff for assistance and access to Monument resources. This geologic investigation was carried out with the support of the USGS National Cooperative Geologic Mapping Program.

Geology, v. 29, no. 4, 5 p., [Also available at http://geoinfo.nmt.edu/publications/periodicals/nmg/home.html.] Cole, J.C., Mahan, S.A., Stone, B.D., and Shroba, R.R., 2007b, Ages of Quaternary Rio Grande terrace-fill deposits, Albuquerque area, New Mexico: New Mexico Geology, v. 29, no. 4, p. 122–132, [Also available at http://geoinfo.nmt.edu/publications/periodicals/nmg/home.html.]

Albuquerque West quadrangle, Santa Fe and Sandoval Counties, New Mexico (revised February 4, 2000): New Mexico Bureau of Mines and Mineral Resources

Open-file Geologic Map OF–DM–17, scale 1:50,000. [Also available at

https://geoinfo.nmt.edu/publications/maps/geologic/ofgm/details.cfml?volume=17.]

Lowe, J.J., Newnham, R.M., Rasmussen, S.O., and Weiss, H., 2012, Formal subdivision of the Holocene Series/Epoch—A discussion paper by a working group of INTIMATE (Integration of ice-core, marine and terrestrial records) and the Subcommission on Quaternary Stratigraphy (International Commission on Stratigraphy): Journal of Quaternary Science, v. 27, no. 7, p. 649–659. [Als available at https://doi.org/10.1002/jqs.2565.] Wilkins, D.W., 1987, Characteristics and properties of the basin-fill aquifer determined from three test wells west of Albuquerque, Bernalillo County, New Mexico: U.S. Geological Survey Water-Resources Investigations Report 86–4187, 78 p. [Also available at https://doi.org/10.3133/wri864187.

development of the Rio Grande valley, northern Albuquerque Basin, central New

Mexico, in Plio-Pleistocene stratigraphy and geomorphology of the central part of

the Albuquerque Basin, Friends of the Pleistocene, Rocky Mountain Cell, 45th Field

Conference, Oct. 12–14, 2001, Isleta Lakes, New Mexico: New Mexico Bureau of

https://geoinfo.nmt.edu/publications/openfile/downloads/400-499/454/ofr 454c-d.pdf.]

R.L., and Krizek, R.J., eds., Landslides—Investigation and mitigation: Washington,

D.C., National Academy Press, Transportation Research Board Special Report 247,

Mines and Mineral Resources, Open-file Report 454C, p. C–1–C–12. [Also

Cruden, D.M., and Varnes, D.J., 1996, Slope movement types and process, in Schuster,

Crumpler, L.S., 1999, Ascent and eruption at the Albuquerque Volcanoes—A physical

Geissman, J.W., Brown, L., Turrin, B.D., McFadden, L.D., and Harlan, S.S., 1990,

Brunhes Chron excursion/polarity episode recorded during the late Pleistocene,

Albuquerque Volcanoes, New Mexico, USA: Geophysical Journal International,

Kelley, V.C., 1977, Geology of the Albuquerque basin, New Mexico: Socorro, New Mex.,

Kelley, V.C., and Kudo, A.M., 1978, Volcanoes and related basalts of Albuquerque Basin,

New Mexico: Socorro, New Mex., New Mexico Bureau of Mines and Mineral

https://geoinfo.nmt.edu/publications/monographs/circulars/downloads/156/

Lambert, P.W., 1968, Quaternary stratigraphy of the Albuquerque area, New Mexico:

Le Bas, M.J., Le Maitre, R.W., Streckeisen, A, and Zanettin, B., 1986, A chemical class-

ification of volcanic rocks based on the total alkali-silica diagram: Journal of

Licciardi, J.M., and Pierce, K.L., 2008, Cosmogenic exposure-age chronologies of

USA: Quaternary Science Reviews, v. 27, p. 814–831. [Also available at

Lozinsky, R.P., 1988, Stratigraphy, sedimentology, and sand petrology of the Santa Fe

Group and pre-Santa Fe Tertiary deposits in the Albuquerque basin, central New

Mexico: Socorro, New Mex., New Mexico Institute of Mining and Technology,

Ph.D. dissertation, 298 p. [Also available through the New Mexico Tech Skeen

history of the Albuquerque basin, central New Mexico, in Keller G.R., and Cather,

setting: Geological Society of America Special Paper 291, p. 73–82. [Also available

S.M., eds., Basins of the Rio Grande Rift—Structure, stratigraphy, and tectonic

Machette M.N., 1978, Geologic map of the San Acacia quadrangle, Socorro County, New

Machette, M.N., 1985, Calcic soils of the southwestern United States, in Weide, D.L., ed.,

Soils and Quaternary geology of the southwestern United States: Boulder, Colo.,

Maldonado, F., and Kelley, S.A., 2009, Revisions to the stratigraphic nomenclature of the

Abiquiu Formation, Abiquiu and contiguous areas, north-central New Mexico: New

supercruption and magma chamber assembly at Yellowstone based on 40Ar/39Ar and

Mexico: U.S. Geological Survey Geologic Quadrangle Map GQ-1415, scale

1:24,000. [Also available at https://doi.org/10.3133/gq1415.]

Geological Society of America Special Paper 203, p. 1–21

Mexico Geology, v. 31, no. 1, p. 3–8. [Also available at

Geosystems, v. 16, p. 2508–2528, accessed Nov. 7, 2016, at

Matthews, N.E., Vazquez, J.A., and Calvert, A.T., 2015, Age of the Lava Creek

U-Pb dating of sanidine and zircon crystals: Geochemistry, Geophysics,

National Park Service, 2019, Petroglyph National Monument, New Mexico: National

Park Service, accessed August 2019, at https://www.nps.gov/petr/index.htm.

v. 23, p. 2271–2274. [Also available at https://doi.org/10.1029/96GL02064.]

Pierce, K.L., 2004, Pleistocene glaciation of the Rocky Mountains, in Gillespie, A.R.,

1996, ²³⁸U-²³⁰Th dating of a geomagnetic excursion in Quaternary basalts of the

Porter, S.C., and Atwater, B.F., eds., The Quaternary period in the United States:

Richmond, G.M., and Fullerton, D.S., 1986, Introduction to Quaternary glaciations in the

United States of America, in Richmond, G.M., and Fullerton, D.S., eds., Quaternary

glaciations in the United States of America: Quaternary Science Reviews, v. 5, p.

https://www.sciencedirect.com/journal/quaternary-science-reviews/vol/5/suppl/C.

K.A., and Russell, C.M., 2016. Pinedale glacial history of the upper Arkansas River

Schweinsberg, A.D., Briner, J.P., Shroba, R.R., Licciardi, J.M., Leonard, E.M., Brugger,

valley—New moraine chronologies, modeling results, and geologic mapping,

chap. 14 of Keller, S.M., and Morgan, M.L., eds., Unfolding the Geology of the

accessed Nov. 11, 2016, at https://pubs.geoscienceworld.org/books/book/1995/

Sharp, W.D., Ludwig, K.R., Chadwick, O.A., Amundson, R., and Glaser, L.L., 2003,

Wyoming: Quaternary Research, v. 59, p. 139–150. [Also available at

Shroba, R.R., Thompson, R.A. Schmidt, D.L., Personius, S.F., Maldonado, F., and

Studies Map MF–2416, scale: 1:24,000, 2 sheets, 12 p. [Also available at

Singer, B.S., Jicha, B.R., Kirby, B.T., Geissman, J.W., and Jerrero-Bervera, E., 2008,

Smith, G.A., Florence, P.S., Castrounis, M.L., Moore, J.D., Throne, J., and Zelley, K.,

1999, Basaltic near-vent facies of Vulcan Cone, Albuquerque Volcanoes, New

Mexico, in Pazzaglia, F.J., and Lucas, S.G., eds., Albuquerque Geology, Sept.

[Also available at https://nmgs.nmt.edu/publications/guidebooks/downloads/

quadrangle, Sandoval County, New Mexico: New Mexico Bureau of Mines and

Mineral Resources Open File Geologic Map OF–DM–15, scale 1:24,000. [Also

Stone, B.D., Allen, B.D., Mikolas, Marlo, Hawley, J.W., Haneberg, W.C., Johnson, P.S.,

Allred, Barry, and Thorn, C.R., 1998, Preliminary lithostratigraphy, interpreted

geophysical logs, and hydrogeologic characteristics of the 98th Street core hole,

Fedford, R.H., and Barghoorn, S., 1999, Santa Fe Group (Neogene), Ceja del Rio Puerco,

Γhompson, R.A., Shroba, R.R., Menges, Christopher, Schmidt, D.L., Personius, S.F., and

Brandt, T.R., 2009, Geologic map of The Volcanoes quadrangle, Bernalillo and

geospatial map database, and geochemistry data for geologic map of Petroglyph

National Monument and vicinity, Bernalillo County, New Mexico: U.S. Geological

Major chronostratigraphic and geochronologic units: U.S. Geological Survey Fact

Thompson, R.A., Chan, C.F., Gilmer, A.K., and Shroba, R.R., 2020, Data release of

U.S. Geological Survey Geologic Names Committee, 2018, Divisions of geologic time—

Walker, M.J.C., Berkelhammer, M., Björck, S., Cwynar, L.C., Fisher, D.A., Long, A.J.,

Sandoval Counties New Mexico: U.S. Geological Survey Scientific Investigations

and Lucas, S.G., eds., Albuquerque geology: New Mexico Geological Society

Annual Field Conference Guidebook, v. 50, p. 327–335. [Available at

northwestern Albuquerque basin, Sandoval County, New Mexico, in Pazzaglia, F.J.,

Albuquerque, New Mexico: U.S. Geological Survey Open-File Report 98-210, 82 p.

https://geoinfo.nmt.edu/publications/maps/geologic/ofgm/details.cfml?volume=15.]

Smith, G.A., and Kuhle, A.J., 1998, Geologic map of the Santo Domingo Pueblo

Dating fluvial terraces by ²³⁰Th/U on pedogenic carbonate, Wind River basin,

Brandt, T.R., 2003, Geologic map of the La Mesita Negra SE quadrangle, Bernalillo

⁴⁰Ar/³⁹Ar dating links Albuquerque Volcanoes to the Pringle Falls excursion and the

22–25, 1999: New Mexico Geological Society Fall Field Guidebook 50, p. 211–219.

geomagnetic instability time scale: Earth and Planetary Science Letters, v. 267,

County, New Mexico (version 1.0): U.S. Geological Survey Miscellaneous Field

chapter/16277561/Pinedale-glacial-history-of-the-upper-Arkansas.

https://doi.org/10.1016/S0033-5894(03)00003-6.

issues 3–4, p. 584–595. [Also available at

https://doi.org/10.1016/j.epsl.2007.12.009.]

[Also available at https://doi.org/10.3133/ofr98210.]

https://nmgs.nmt.edu/publications/guidebooks/50/.]

Map 3083, scale: 1:24,000, 1 sheet. [Also available at

Survey data release, https://doi.org/10.5066/P9LW817K.

Sheet 2018–3054, 2 p., accessed August 1, 2019, at

https://pubs.usgs.gov/sim/3083/.]

https://doi.org/10.3133/fs20183054.

https://doi.org/10.3133/mf2416.

50/50 p0211 p0219.pdf.]

West: Boulder, Colo., Geological Society of America Field Guide 44, p. 335–353,

Albuquerque Volcanoes field, New Mexico (USA): Geophysical Research Letters,

Peate, D.W., Chen, J.H., Wasserburg, G.J., Papanastassiou, D.A., and Geissman, J.W.,

Lozinsky, R.P., 1994, Cenozoic stratigraphy, sandstone petrology, and depositional

Petrology, v. 27, p. 745–750. [Also available at https://doi.org/10.1093/petrology/

Pinedale and Bull Lake glaciations in greater Yellowstone and the Teton Range,

Albuquerque, University of New Mexico, Ph.D. dissertation, 329 p. [Also available

New Mexico Bureau of Mines and Mineral Resources Memoir 33, 59 p. [Also

https://geoinfo.nmt.edu/publications/monographs/memoirs/downloads/33/

Guidebook 50, p. 221–233. [Also available at

https://doi.org/10.1111/j.1365-246X.1990.tb00531.x.]

Resources Circular 156, 30 p. [Also available at

from the University of New Mexico Libraries.]

https://doi.org/10.1016/j.quascirev.2007.12.005.]

at https://doi.org/10.1130/SPE291.1

https://doi.org/10.1002/2015GC005881.

Amsterdam, Elsevier, p. 63–76.

3–10. [Also available at

v. 102, p. 73–88. [Also available at

Memoir-33.pdf.1


Circular-156.pdf.1

volcanology perspective, in Pazzaglia, F.J., and Lucas, S.G., eds., Albuquerque

geology, Sept. 22–25, 1999: New Mexico Geological Society Fall Field Conference

https://nmgs.nmt.edu/publications/guidebooks/downloads/50/50 p0221 p0233.pdf.]

Williams, P.L., and Cole, J.C., compilers, 2007, Geologic map of the Albuquerque 30'×60' quadrangle, north-central New Mexico: U.S. Geological Survey Scientific Investigations Map 2946, 31 p., scale 1:100,000, accessed Oct. 15, 2014, at https://doi.org/10.3133/sim2946.

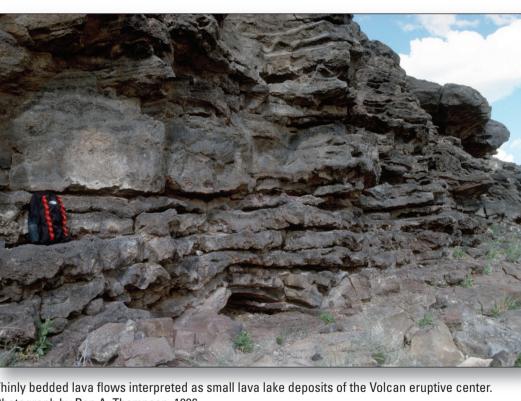

Photograph by Ren A. Thompson, 1996.

Table 2. Representative bulk-rock chemical analyses for select samples from the map area.

"Sample outcrops may be too small to show at map scale and may appear to be in a surrounding mapped unit.

N, north; W, west] 106°43'35" 106°44'53" 106°44'45" 106°46'19" 106°45'55" 106°46'29" 106°46'25" 106°46'25" 106°46'27" 106°46'17"

ISSN 2329-132X (online)

https://doi.org/10.3133/sim3447

18.5 17.7 17.8 17.6 22.8 18.1 24 18.3 24 17.4 18.4 90.5 84.6 84.7 84.7 115 94.9 129 98.7 123 81.7 88.6

[Units are in weight percent (wt%) for major oxides and parts per million (ppm) for trace elements. LOI, loss on ignition; latitude and longitude in World Geodetic System 1983 (WGS 83);

Any use of trade, product, or firm names in this publication is for descriptive purposes only and does not imply endorsement by the U.S. Government that, because of differences in rendering processes and pixel resolution, some sligh an electronic plotter, even when it is viewed or printed at its intended publication scale Digital files available at https://doi.org/10.3133/sim3447

Beologic map of Petroglyph National Monument and vicinity, Bernalillo County, Ne Mexico: U.S. Geological Survey Scientific Investigations Map 3447, scale 1:24,00 Associated data for this publication: Thompson, R.A., Chan, C.F., Gilmer, A.K., and Shrob R.R., 2020, Geologic map of Petroglyph National Monument and vicinity, Bernalillo Cou New Mexico: U.S. Geological Survey data release, https://doi.org/10.5066/P9LW817K.

Geologic Map of Petroglyph National Monument and Vicinity, Bernalillo County, New Mexico