



IPL FILE ID 77 12 05 01934  
TALE NO. 007  
JET PROPULSION LABORATORY


Interior-Geological Survey, Reston, Va., 1982-G81145

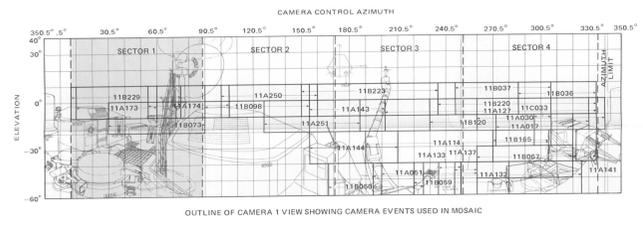

OUTLINE OF CAMERA 1 VIEW SHOWING CAMERA EVENTS USED IN MOSAIC

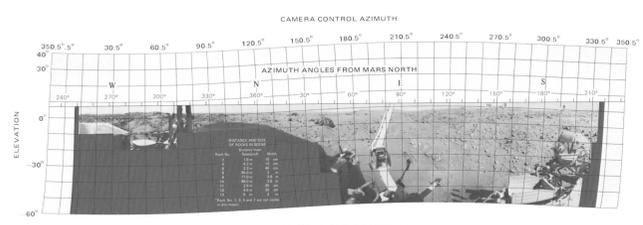

COMPLETE MOSAIC, EVENING SCENE, CAMERA 1  
(Corrected for tilt)

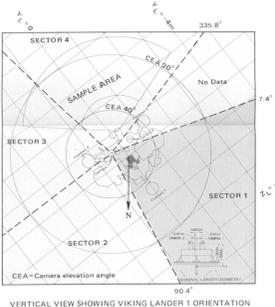

VERTICAL VIEW SHOWING VIKING LANDER 1 ORIENTATION  
Grid is in spacecraft coordinates

DESCRIPTION OF SCENE

This view is seen over the top of the lander which faces southeast. A prominent ridge (line 100, sample 1300) dominates the horizon at the center of the scene. The ridge is part of the rim of Crater H, 100 m in diameter. The large rock (line 90, sample 1155) resting on the rim is about 50 cm across and 52 m from the lander. The lander is tilted down 3° to the northeast.

At the right center is the tubular mast of the high-gain 8-band antenna (line 100, sample 1930) that was used to communicate directly with Earth. The bright objects on each side of the mast are covers of the Radiosonde Thermoelectric Generators (RTGs) (line 350, sample 200, line 350, sample 2300). Other parts of the lander visible in the scene are one of three calibration charts for the cameras (line 400, sample 950), VHF relay antenna (line 430, sample 1100), and set-monometer (line 580, sample 1230).

THE VIKING MISSION

Two Viking spacecraft, each consisting of an orbiter and lander, were launched from Kennedy Space Center on August 20 and September 9, 1975. The Viking 1 spacecraft arrived at Mars on June 19, 1976, and was placed in a highly elliptic orbit around the planet at a perapsis altitude of nearly 1500 km. The orbiter camera was used in conjunction with other instrumental methods to find a suitable landing site for the lander. After about 30 days in orbit, the lander was separated from the orbiter, and on July 20, 1976, Viking Lander 1 touched down on the surface of Mars at lat. 22°48' N. and long. 47°06' W. (Morris and Jones, 1980) on the west edge of a large basin called Chryse Planitia. It landed in a slight position at a 3° tilt downward in the direction 284.9° clockwise from north.

The site of the lander on which the two cameras are mounted faces southeast. When the cameras are pointed in a direction normal to the front of the lander, the viewing direction is 141.5° clockwise from north along the horizon. The first picture from the surface of Mars, of an area near the lander's footpad 3, was taken immediately after landing by camera 2. During the ensuing 43 days, the camera responded to all commands and successfully carried out their assigned mission. On September 2, the activities of Lander 1 were reduced to accommodate the planned receipt of data from Viking Lander 2.

On September 3, 1976, Viking Lander 2 successfully landed on Utopia Planitia of Mars (47°36' N., 232°36' W.), more than 6000 km northeast of Lander 1 (Mayo and others, 1977; Davies and others, 1978). Lander 2 faces approximately north and tilts 8.2° downward in the direction of 277.4° clockwise from north. The viewing direction of its camera when pointed in a direction normal to the front of the lander is 29.0° clockwise from north along the horizon. The cameras on Viking Lander 2 operated successfully for 61 days until the primary mission of both landers was completed on November 15, 1976, at solar conjunction.

During the primary mission, 454 pictures of the Martian surface were processed from Viking Lander 1 data and 542 pictures from Viking Lander 2 data. The extended mission of Viking began December 15, after solar conjunction, and ended in June 1978. During this period, an additional 1636 pictures were obtained from Lander 1 data and 1311 pictures from Lander 2 data. A comprehensive description of the Viking primary mission and the results of eight scientific experiments on board the landers were published in the *Journal of Geophysical Research* (v. 82, no. 28, Sept. 30, 1977; see References).

VIKING LANDER MOSAICS

The Viking Lander camera acquired many high-resolution pictures of the Chryse Planitia and Utopia Planitia landing sites. Each picture is the product of computer processing on Earth of digital image data transmitted from Mars as a result of "camera events" carried out by one of the lander camera systems. Further computer processing of data from a selected number of these events yielded a total of 10 mosaics. Two pairs of mosaics from Lander 1 (one mosaic from each camera) consisted of one pair made from data taken in the morning (0700-0800 hours) and one pair made with data acquired in mid-afternoon (1400-1530 hours). Similarly, three pairs of mosaics from the Lander 2 site consisted of one pair between 0700 and 0800 hours, one pair at noon, and one pair between 1700 and 1800 hours.

Procedures used for processing the Viking Lander camera data were described by Levinthal and others (1977). The individual camera events used in each mosaic are identified in the outline of the accompanying camera view. Detailed descriptions and reproductions of these camera events were given by Tucker (1978). Copies of the Viking Lander pictures can be obtained from the National Space Science Data Center, Goddard Space Flight Center, Greenbelt, MD, 20771.

The Lander camera system (Huck and others, 1975a) has selectable focus settings for a depth of field from 1.2 m to infinity in the high-resolution (0.04° instantaneous field of view) mode. The survey (low-resolution) mode has an instantaneous field of view of 0.12°; this mode was used in the mosaics only where no high-resolution data were acquired. Each complete mosaic extends 342.5° in azimuth, from approximately 5° above the horizon to 60° below. A complete mosaic incorporates approximately 15 million picture elements (pixels). In order to manage the processing of such large data files, each mosaic was compiled from four individual azimuthal sectors.

Most of the data used in the mosaics were selected from the primary mission coverage was absent or where the surface was obscured by the sampler or other obstructions made on the basis of optimum focus.

The image data were obtained from corrected (Huck and others, 1975b; Patterson and others, 1977; Wolfe and others, 1979) for differences caused by various exposure times for solarlighting differences caused by minor time-of-day variations in the picture of the set. The geometry was then transformed to a local Mars horizon and corrected for geometric camera errors (Patterson and others, 1977; Wolfe, 1979). The corrected picture composing a sector were then combined by the computer into a single image, and an optimum contrast correction was applied.

The mosaics are composites of the best pixels of all the Lander pictures used for each sector. In the computer mosaicking process, the image data derived from the camera events for each sector were assigned priorities on the basis of quality or detail. These data were examined by the computer in sequence according to the priorities, and the best pixel of each data set were used for the mosaic.

The computer formatting of the Viking Lander mosaics was done at the Image Processing Laboratories of the Jet Propulsion Laboratory of the California Institute of Technology, Pasadena, Calif., under the general supervision of Elliott C. Central of the Department of Geology, Stanford University, who represented the Viking Lander Imaging Team. A detailed description of the multiple steps involved in the construction of the Viking Lander mosaics and an acknowledgment of the many people who assisted in the project were given by Levinthal (1980).

GEOMETRY OF THE MOSAICS

The cameras on the Viking Lander acquire data by sampling in equal increments of elevation and azimuth angle. In the accompanying mosaic, 8 mm subtends a 1° horizontal or vertical angle, regardless of the place of measurement within the panorama. If the Martian surface were flat, one pixel (0.04° on the surface) would be 1 mm wide at 60° camera elevation and 2 m wide at the horizon 3 km away. Characteristically for this type of imaging system, most straight lines in the scene appear curved in the reconstruction. This representation of the picture data differs from that of a conventional camera having "point perspective" picture geometry, in which rays are projected from object space through the perspective point in the camera lens, to an image plane in the camera.

The geometry of the Lander pictures is complicated by additional factors. Because both landers are tilted with respect to the horizon, the uncorrected pictures the horizon resembles a sine curve. Computer rectification of the pictures results in a straight horizon along which vertical angles can be measured with respect to the local gravity vector, and horizontal angles can be measured from Martian north. These angles are not related in any simple way to the azimuth and elevation angles given in "camera event" data for the uncorrected pictures.

There are other geometric distortions due to the camera optic path distortion that affects a light ray after it passes the camera windows, and camera-system distortions, or "bold-down" errors, that are caused by the way the cameras are mounted on the lander. The geometric transformation used in creating the mosaics took into account the optic path distortion but not the "bold-down" errors. However, along the horizon, the error in azimuth angle is equal to the notational "bold-down" error for each camera to an accuracy of less than 1 pixel. The scale "azimuth angles from Mars north" has been adjusted to take into account this correction.

The residual azimuth angle errors are less than 1 pixel along the horizon and become larger with steeper elevation angles and larger lander tilts. For the worst case, Lander 2 camera 1, this error is a maximum of 5.7 ± 1 pixels at 60° elevation. The somewhat sinusoidal azimuth-dependent residual elevation error is a maximum of 3 ± 1 pixels for Lander 2 camera 1, and approximately 1 pixel for the other cameras.

REFERENCES

Davies, M. E., Katayama, F. Y., and Roth, J. A., 1978, Control net of Mars: February 1978; Rand Corp. R-2309; NASA SP-8.

Huck, J. O., McCall, H. J., Patterson, W. R., and Taylor, G. R., 1975, The Viking Mars Lander camera. *Space Science Instruments*, v. 1, no. 2, p. 189-241.

Huck, J. O., Burchett, E. J., Taylor, E. J., and Wall, S. D., 1975b, Radiometric performance of the Viking Mars Lander cameras. *US National Aeronautics and Space Administration Technical Memorandum TM-7802*.

Levinthal, E. C., and Jones, K. L., 1980, The mosaics of Mars as seen by the Viking Lander cameras. *Journal of Geophysical Research*, v. 82, no. 28, p. 4274-4303.

Morris, J. C., and Jones, K. L., 1980, Viking 1 Lander on the surface of Mars: Revised location. *Icarus*, v. 44, no. 1, p. 217-222.

Patterson, W. R., Huck, J. O., Wall, S. D., and Wolfe, M. R., 1977, Calibration and performance of the Viking Lander cameras. *Journal of Geophysical Research*, v. 82, no. 28, p. 4491-4499.

Tucker, R. B., 1978, Viking Lander imaging investigation: picture catalog of primary mission experiment data record. *National Aeronautics and Space Administration Reference Publication 1007*, 558 p.

de Vaucouleurs, G. D., Davies, M. E., and Strom, S. M., Jr., 1973, The Mariner 9 stereographic coordinate system. *Journal of Geophysical Research*, v. 78, no. 20, p. 4395-4404.

Wolfe, M. R., 1979, Viking Lander camera geometric calibration report. California Institute of Technology, Jet Propulsion Laboratory, in press.

Wolfe, M. R., Atwood, D. L., and Morfill, M. E., 1977, Viking Lander camera radiometry calibration report. California Institute of Technology, Jet Propulsion Laboratory Publication 77-62, v. 1, 90 p.