

1 Landslide susceptibility and land modified by man map of part of  
2 the Baden 7-1/2-minute quadrangle,  
3 Allegheny County and vicinity, Pennsylvania

4 By J. S. Pomeroy

5- The purpose of this map is to identify areas with potential slope-  
6 stability problems significant to development. Essentially, it is a  
7 guide to areas of past landslide and present landslide susceptibility.  
8 The map is not designed to replace detailed studies of specific sites  
9 by competent technical personnel. Rather, it delineates areas where  
10- such detailed studies are most vital to the safety and welfare of the  
11 general public. In these areas, site examinations are necessary in  
12 order to seek firm evidence of the degree of difficulty that slope  
13 instability may pose to a contemplated land use, and so to define  
14 whether costs of hazard prevention are commensurate with the value of  
15- the contemplated use. Preparation of the map was sponsored by the  
16 Appalachian Regional Commission (ARC contract no. 74-31).

17 The map is based on an interpretation of large-scale (1:12,000)  
18 aerial photographs (series GS-VDGY) taken on April 14, 1973. One day  
19 of field work during late 1973 supplemented the aerial photograph  
20- interpretations.

21 Information from soil surveys by the Soil Conservation Service  
22 (U.S. Dept. of Agriculture, 1973) was integrated with data from an  
23 early geologic map (Munn, 1911) and other reports listed in the  
24 references.

25- U. S. Geological Survey  
OPEN FILE MAP 74-21

1           The rocks exposed in the Baden quadrangle are more or less flat-  
2 lying shales, mudstones, sandstones, siltstones, and minor coal beds  
3 and limestones of the Conemaugh Group of Pennsylvanian age. Of these,  
4 nonbedded red mudstone and related residual and colluvial soils are  
5- particularly susceptible to landsliding. Most areas with moderate to  
6 severe slope stability problems are underlain by the principal red  
7 mudstone horizon, the "Pittsburgh redbeds," which ranges from 20 feet  
8 (6.1 m) to 65 feet (18.8 M) thick north of the Ohio River (Winters,  
9 1969).

10-           It can be inferred that most slopes in the quadrangle are rela-  
11 tively stable under natural conditions, but, as is shown on the map,  
12 many slopes are sensitive and their natural equilibrium can be readily  
13 upset. By far, the greatest number of landslides in the region occur  
14 when a slope is oversteepened, overloaded, or otherwise modified by  
15- man in the course of development of housing, roads, pipelines, and  
16 other features.

### Selected references

- Ackenheil, A. C., 1954, A soil mechanics and engineering geology analysis of landslides in the area of Pittsburgh, Pennsylvania: Univ. Pittsburgh unpub. Ph.D. thesis, 120 p.
- Fisher, S. P., Fanaff, A. S., and Picking, L. W., 1968, Landslides of southeastern Ohio: Ohio Jour. Sci., v. 68, no. 2, p. 65-80.
- Hamel, J. V., and Flint, N. K., 1969, Analysis and design of highway cuts in rock--a slope stability study on Interstate routes 279 and 79 near Pittsburgh, Pennsylvania: Pennsylvania Dept. Highways Bur. Materials, Testing and Research Rept., 130 p.
- Munn, M. J., 1911, Sewickley folio, Pennsylvania: U.S. Geol. Survey Geol. Atlas, no. 176, 16 p.
- U. S. Department of Agriculture, Soil Conservation Service, 1973, Soil survey maps for Allegheny County, Pennsylvania.
- Winters, D. M., 1972, Pittsburgh redbeds--stratigraphy and slope stability in Allegheny County, Pennsylvania: Univ. Pittsburgh unpub. M.S. thesis, 49 p.

OPEN FILE MAP

This map is preliminary and has not been edited for conformity with Geological Survey standards or nomenclature.

EXPLANATION


Additional information is contained in a leaflet accompanying this map.

HIGHLY SENSITIVE TO DISTURBANCE BY MAN



PREHISTORIC LANDSLIDES

Dominantly earth slumps and earth flows characterized by hummocky topography and slump benches; relatively stable in natural state but can be reactivated by excavation, loading and changes in ground and surface water conditions. Includes some probable recent landslides not covered by records examined.




SLOPES WITH CONSPICUOUS SOIL CREEP

Clayey soils, generally less than 5 ft thick, commonly underlain by weathered shale; characterized by shallow, slow but distinct, downslope movement that can be greatly accelerated by overloading from fills or structures.




OUTCROP AREA OF THICK "RED BEDS" AND ASSOCIATED ROCKS

Rock weathers rapidly on exposure; weathered rock and related soil commonly result in soil creep and landslides; cuts and fills in "red beds" generally not stable.



RELATIVELY STABLE GROUND

Most slopes have little susceptibility to landsliding unless extensively modified by man; slight soil creep common on undisturbed slope.




#### MAN-MADE FILL

Heterogeneous soil and rock material; variable susceptibility to slope failure depending on nature of materials, foundation conditions, design and construction. Fills in older urbanized areas mapped only where associated with recent landslides. Fills too small to be shown by pattern identified by letter "F".

#### NOTE


Variations in slope sensitivity may occur at any specific point within a unit. Boundaries largely are inferred and information given is intended as a general guide and should not be construed as applicable to all localities within the area shown. This map cannot be used as a substitute for detailed engineering investigations of specific sites.

#### LAND DEVELOPMENT MODIFICATIONS



#### URBAN DEVELOPMENT


Land modified for housing, commercial, educational, and industrial uses. Modifications, primarily after 1969, include: removal of vegetation; removal and redistribution of topsoil; some excavation of bedrock at industrial and commercial developments; and placement of impervious streets and parking lots. Major fills symbolized separately.



#### EARTH AND ROCK FILLS

Primarily at industrial, commercial, educational, and housing sites and along transportation routes; old fills in urban areas and narrow yard fills adjacent to houses generally not mapped. Fills too small to be shown by pattern identified by letter "F".

OTHER MODIFICATIONS



WATER IMPOUNDMENTS

Primarily farm ponds, reservoirs, and settling basins; dams generally too small to be shown on the map.



GULLIED LAND

Primarily on cleared slopes and unprotected faces of fills.

1 FACTORS AFFECTING LANDSLIDE SUSCEPTIBILITY

2 IN ALLEGHENY COUNTY, PENNSYLVANIA

3 (to accompany U.S. Geological Survey open-file

4 landslide-susceptibility maps of Allegheny County)

5- Significant factors bearing on landslide susceptibility include:

6 (1) rock types; (2) nature of rock layering: (3) rock fracturing:  
7 (4) attitude of rock layers: (5) composition and thickness of soil  
8 cover: (6) permeability of rocks and soils: and (7) steepness of  
9 slopes.

10- 1. Rock types.--Outcropping rocks are largely sandstone, silt-  
11 stone, shale (or claystone), and limestone. Coal, though only a  
12 relatively small part of the total rock volume, is widespread and  
13 significant. Sandstone and limestone commonly are harder, more  
14 resistant to weathering, than are siltstone and shale. This differ-  
15- ential weathering explains why sandstone and limestone crop out on  
16 many slopes as ledges and cliffs, whereas siltstone and shale are  
17 rarely well exposed except in cut banks of streams, in other very  
18 steep natural slopes, and in manmade exposures such as highway cuts.

19 2. Rock layering.--The rocks form layers commonly 1 to 10 ft (3m)  
20- thick, but in places layers exceed 30 ft. (9.1m) For example, a 2-ft layer (0.6m)  
21 of limestone may rest on 7 ft of shale which in turn rests on a sand- (2.1m)  
22 stone layer 10 ft thick. (3m) It is also common to find that a layer of  
23 shale as thin as 1 inch (0.2m) lies between two layers of sandstone each many  
24 feet thick. If a shale layer is decomposed to some depth by weathering,  
25- then overlying hard rock is less firmly supported and tends to move  
down slope in response to gravity.

1           Some rock layers are continuous over a number of miles, but most  
2 sandstone layers, for example, probably grade laterally into another  
3 rock type, perhaps siltstone, in shorter distances, and some conspicu-  
4 ous lateral changes are seen within a single outcrop.

5-           3. Rock fractures.--Two types of rock fracture occur: faults,  
6 fractures along which rocks on one side are offset from rocks on the  
7 other side; and joints, fractures, some tight, some open, along which  
8 little or no evidence of movement can be seen. Faults are relatively  
9 rare in Allegheny County. The harder rock layers, sandstone and lime-  
10- stone, are well jointed in outcrop, with joints commonly open and one  
11 to several feet apart. Joints also occur in siltstone and shale layers  
12 but the joints are chiefly tight rather than open. Most joints are  
13 more or less perpendicular to the plane of layering.

14           Joints contribute to landslide susceptibility, for if rock layers  
15- were not jointed, their tendency to fail when underlying rocks are  
16 removed would be less. Joints are also an important factor in rock  
17 permeability.

18           4. Attitude of rock layering.--In Allegheny County, most rock  
19 layers dip at such small angles that their attitudes can best be meas-  
20- ured in feet per mile rather than in degrees or in percent of grade.  
21 In some areas, layers dip more than 200 ft per mile <sup>(60 ft per km)</sup> (about 2° or 4 per-  
22 cent grade), but most layers have gentler dips, and locally they are  
23 horizontal. In Allegheny County, rock attitude is most critical to  
24 landsliding on overdip slopes, where rock layers dip in the same general  
25- direction as the slopes but at lesser angles than the slopes.

1           5. Soil cover.--Soils are composed chiefly of fine-grained mineral  
2 constituents derived from rock decomposition during weathering. How-  
3 ever, soil means different things to different people. For example,  
4 to a soil scientist, soil supports plant life and has undergone near-  
5- surface zonation resulting from the interaction of climate and living  
6 matter, conditioned by slope and relief. An agricultural soil rarely  
7 is more than 6 ft <sup>(1.8m)</sup> deep and may rest on and be developed from a parent  
8 material that is itself decomposed rock. In contrast, to an engineer,  
9 soil includes all unconsolidated material above hard bedrock, and so  
10- includes the parent material of many agricultural soils. Only where  
11 depth to bedrock is relatively shallow will there be virtual agreement  
12 between a soil scientist and an engineer as to thickness and composi-  
13 tion of a soil. For present purposes, soil is used in the engineering  
14 sense; it applies not only to material resulting from rock weathering  
15- in place, but also to masses of fragmented and decomposed rock particles  
16 that have been transported and redeposited elsewhere. Examples of  
17 transported soils are colluvium and alluvial terrace deposits, both  
18 of which can be subject to landsliding.

19           In Allegheny County, soils of the hill tops are relatively thin,  
20- less than 6 ft <sup>(1.8m)</sup> thick in many areas. Soils of hill slopes are absent  
21 where bedrock crops out, are relatively thin on many upper slopes, and  
22 are made up of more than 20 ft <sup>(6m)</sup> of colluvium near and at the base of  
23 many slopes. Valley-bottom soils generally have nearly level surfaces  
24 and so are not a significant factor in most landsliding; they may  
25- exceed 100 ft <sup>(30.4m)</sup> in thickness.

1 Most soils contain a large proportion of silt and clay, some soils  
2 are composed entirely of clay, and others are relatively coarse grained,  
3 containing large proportions of sand and rock fragments. The composi-  
4 tion of a soil reflects the composition of the rock from which the soil  
5- was derived, for a sandstone will weather to a sandy soil, a shale to a  
6 clayey soil, and hard blocky rocks may weather to a rocky soil. Because  
7 soils result from weathering of rock particles, they commonly are finer  
8 grained near the surface than they are at depth. Most soils are loose  
9 to moderately cohesive. They will not stand long on steep slopes, and  
10- are subject to landsliding if affected by undercutting, overloading, or  
11 other processes. Clayey soils when dry commonly are friable and rela-  
12 tively low in weight per unit volume. When wetted, clay soils retain  
13 water and so become heavier, become plastic, and depending on their  
14 mineral composition may become very slippery.

15-

16

17

18

19

20-

21

22

23

24

25-

1           6. Permeability of rocks and soils.--Permeability as used here is  
2 the capacity of bedrock and soil to transmit water. Sandstone in Alle-  
3 gheny County commonly is moderately permeable; water may pass around  
4 grains of sand and through intergrain voids in many of these rocks. In  
5- addition, sandstone layers may have closely spaced joints that facili-  
6 tate passage of water. Although limestone is fine grained and is  
7 inherently more or less impermeable, most limestone layers are permeable  
8 because they are closely jointed, and these joints commonly are enlarged  
9 by solution and removal of minerals by moving ground water. In contrast,  
10- siltstone and shale are fine grained, inherently less permeable than  
11 most coarser grained rocks, and joints in siltstone and shale layers  
12 commonly are relatively tight. Thus, sandstone and limestone layers  
13 in southwestern Pennsylvania are more likely avenues for movement of  
14 ground water than are siltstone and shale layers. Similarly, most  
15- sandy and rocky soils are appreciably more permeable than are soils  
16 composed largely or entirely of clay. Saturation of rocks and soils by  
17 water is most likely to be complete in zones where permeable materials  
18 overlie relatively impermeable materials. This saturation, coupled  
19 with lateral movement of water in these zones, enhances lubrication,  
20- and so potential instability.

21           Because water is a key agent in landslide susceptibility, perme-  
22 ability of rocks and soils, or the relative lack of it, is of particular  
23 importance.  
24  
25-

1       7. Steepness of slopes.--Allegheny County is a land of hills and  
2 ridges each of which is more or less the same height as its neighbor.  
3 Separating these hills are valleys through which streams and rivers  
4 flow at levels commonly 300<sup>(91.2m)</sup> to 400<sup>(121.6m)</sup> ft and locally more than 600 ft (182.4m)  
5 below adjacent ridge crests. The valley walls are relatively steep;  
6 slopes of 25 percent (about 14°) or greater occupy more than one-tenth  
7 of the area. This large incidence of steep natural slopes is a leading  
8 factor in the prevalence of landslides.


9       Relative importance of factors.--All of the above factors are  
10 interrelated. At a given place one factor may be the chief control of  
11 landslide susceptibility, whereas at another place the same factor may  
12 be less important than others. For example, where a major stream is  
13 undercutting its bank, oversteepening will occur and slope failure  
14 ultimately will ensue, whether the bank material is rock or soil; where  
15 a thick soil cover becomes saturated with water, failure may occur even  
16 on relatively gentle slopes. Some reverse-dip slopes, contrary to what  
17 might be expected, can be consistent landslide hazards because of  
18 natural or manmade steepness or excessive rock fracturing; some over-  
19 dip slopes, on the other hand may be less susceptible to landsliding  
20 because only one type of rock is present.

1        Credits.--This text is abstracted with minor changes from Briggs  
2 (1974). The following illustrations are adapted with minor modifications  
3 from Nilsen (1972), Eckel (1958), and from the pioneering text by  
4 Sharpe (1938). They illustrate nomenclature of landslides, types of  
5- landslides found in Allegheny County, and features of creep, which is  
6 a widespread feature of Allegheny County slopes.


7  
8  
9  
10-  
11  
12  
13  
14  
15-  
16  
17  
18  
19  
20-  
21  
22  
23  
24  
25-

Selected references


- 1  
2 Ackenheil, A.C., 1954, A soil mechanics and engineering analysis of  
3 landslides in the area of Pittsburgh, Pennsylvania: Univ. Pittsburgh  
4 Ph.D dissert., 121 p.
- 5- Briggs, R.P., 1974, Map of overdip slopes than can affect landsliding  
6 in Allegheny County, Pennsylvania: U.S. Geol. Survey Misc. Field  
7 Studies Map MF-543.
- 8 Eckel, E.B., ed., 1958, Landslides and engineering practice: Highway  
9 Research Board Spec. Rept. 29, NAS-NRC 544, Washington, D.C., 232 p.
- 10- Gray, R.E., 1970, Landslides, in Wagner, W.R., and others, Geology of  
11 the Pittsburgh area: Pennsylvania Geol. Survey, 4th ser., Gen. Geol.  
12 Rept. G-59.
- 13 Nilsen, T.H., 1972, Preliminary photointerpretation map of landslide  
14 and other surficial deposits of parts of the Los Gatos, Morgan Hill,  
15- Gilroy Hot Springs, Pacheco Pass, Quien Sabe, and Hollister 15' quad-  
16 rangles, Santa Clara County, California: U.S. Geol. Survey Misc.  
17 Field Studies Map MF-416, 2 sheets.
- 18 Sharpe, C.F.S., 1938, Landslides and related phenomena; a study of  
19 mass-movements of soil and rock: New York, Columbia Univ. Press,  
20- 136 p. [repr. 1960, Paterson, New Jersey, Pageant Books].
- 21 Winters, D.M., 1972, Pittsburgh red beds--stratigraphy and slope  
22 stability in Allegheny County, Pennsylvania: Univ. Pittsburgh M.S.  
23 dissert., 49 p.  
24  
25-

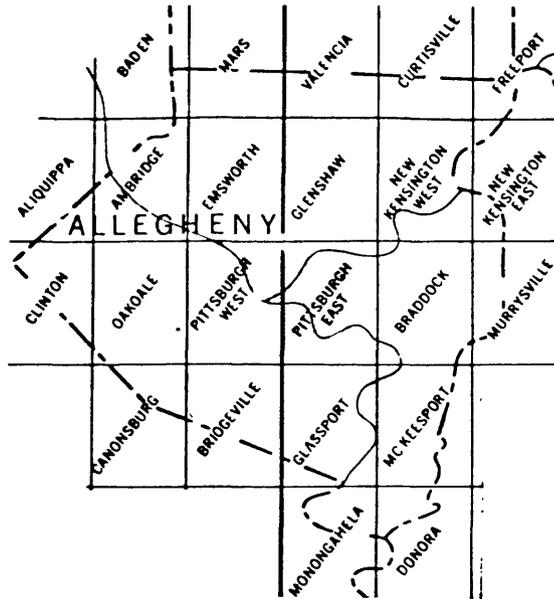


Index to 7½' quadrangle maps  
of Allegheny County, Pennsylvania

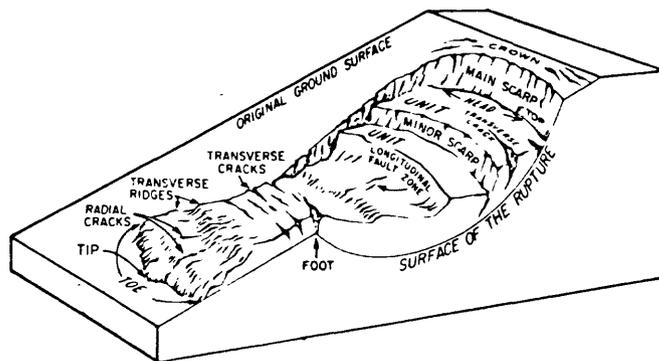


Nomenclature of parts of a landslide (from Eckel, 1958):

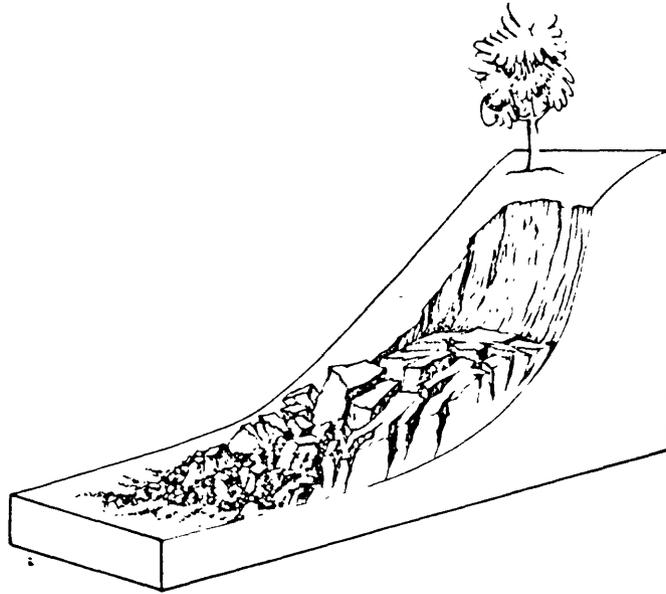


Debris slide: incoherent or broken masses of rock and other debris that move downslope by sliding on a surface that underlies the deposit.

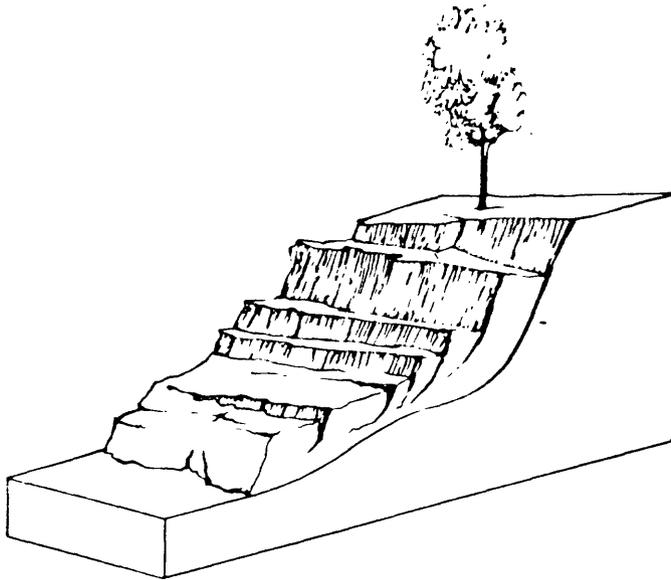


Slump: coherent or intact masses that move downslope by rotational slip on surfaces that underlie as well as penetrate the landslide deposit.

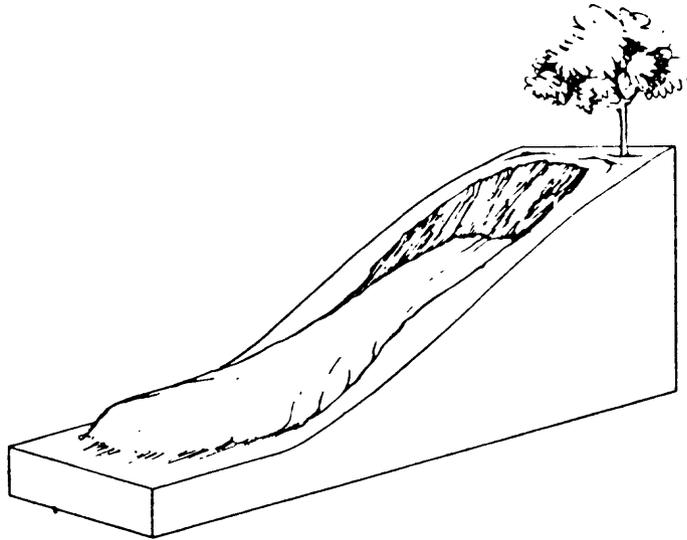

Earthflow: colluvial materials that move downslope in a manner similar to a viscous fluid.

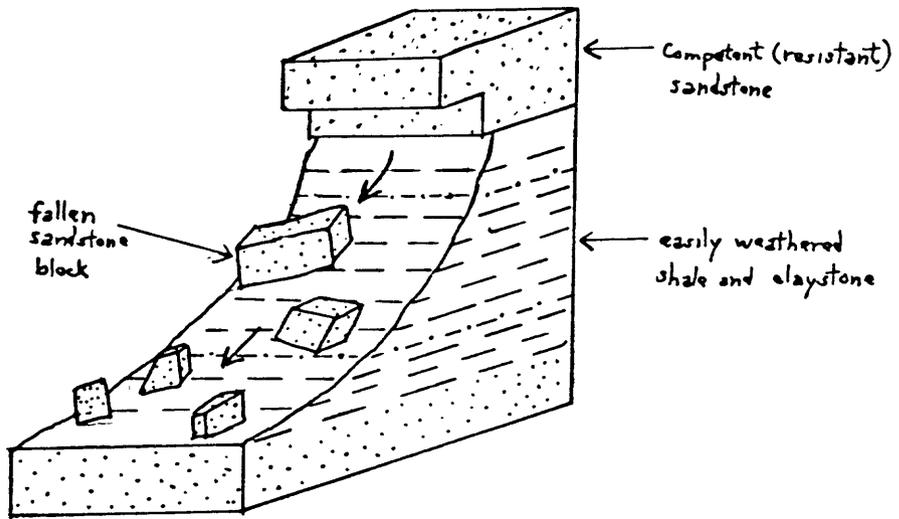

ROCKFALL

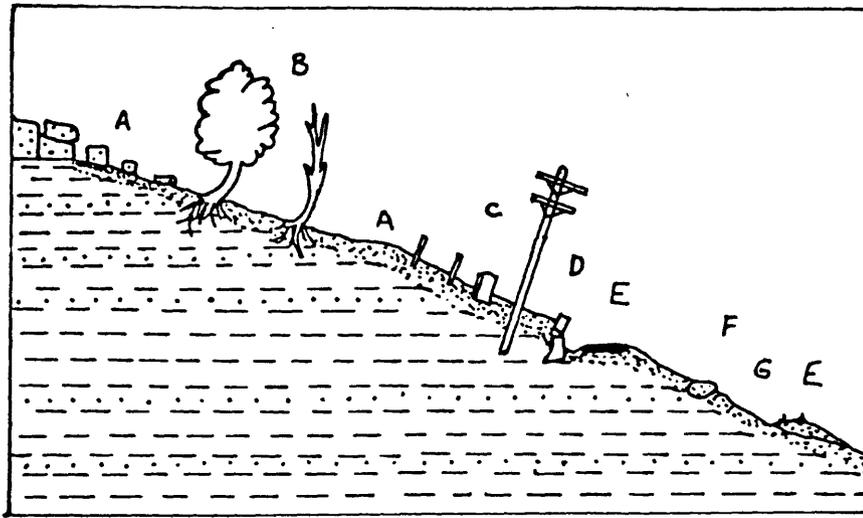

Creep: Common evidences - (A) Moved joint blocks of layered rock; (B) trees with curved trunks concave upslope; (C) displaced posts, poles, and monuments; (D) broken or displaced retaining walls and foundations; (E) roads and railroads moved out of alignment; (F) turf rolls downslope from creeping boulders; (G) stone-line at approximate base of creeping soil.