

EXPLANATION


— 25 —
— 15 —
ISOPACHS OF COAL BED—Showing thickness in feet. Isopach interval 5 feet.

• 28
DRILL HOLE—Showing thickness of coal bed, in feet.


— 10 —
MINING-RATIO CONTOUR FOR COAL BED—Number indicates cubic yards of overburden per ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the stripping limit.

↑ SL ↑
STRIPPING-LIMIT LINE—Boundary for surface mining of coal bed (in this quadrangle, the 500-foot-overburden isopach). Arrows point toward the area suitable for surface mining. Recovery factor of 95 percent within that area in this quadrangle.

To convert feet to meters multiply feet by 0.3048.

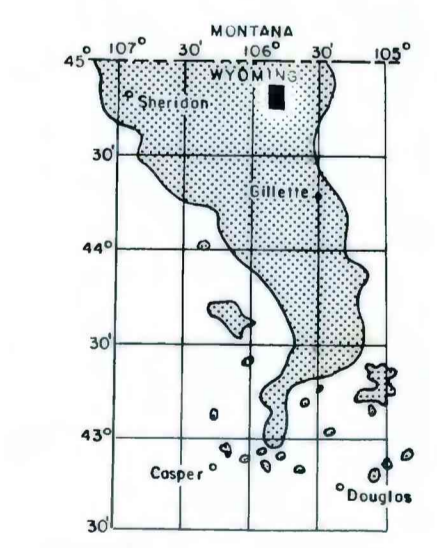

MAP SHOWING LOCATION OF THE RESERVOIR CREEK QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

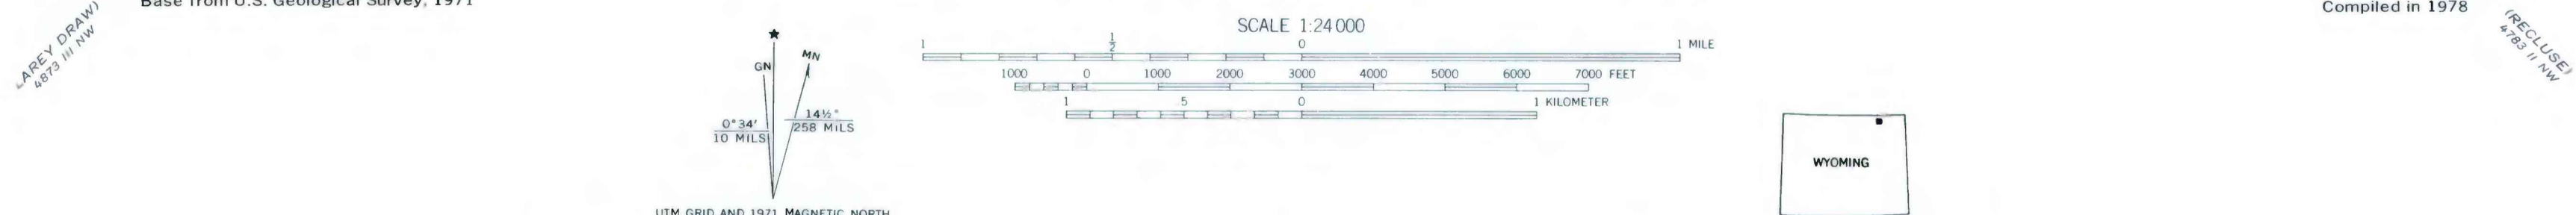

COAL RESOURCE OCCURRENCE MAP OF THE RESERVOIR CREEK QUADRANGLE, CAMPBELL COUNTY, WYOMING

BY
IntraSearch
1978

PLATE 24
ISOPACH AND MINING RATIO MAP OF THE WALL COAL BED

This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.