

EXPLANATION


● 31 ○ 32  
DRILL HOLE-Showing coal thickness in feet.

— 20 —  
— 25 —  
ISOPACHS OF COAL BED-Showing thickness in feet. Isopach interval 5 feet.




MINING RATIO VALUE-Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Mining ratio value shown only in area suitable for surface mining within the stripping limit.

— SL —  
STRIPPING LIMIT LINE-500 foot overburden isopach boundary for surface mining of coal. Arrows point toward area suitable for surface mining.

To convert feet to meters, multiply feet by 0.3048.

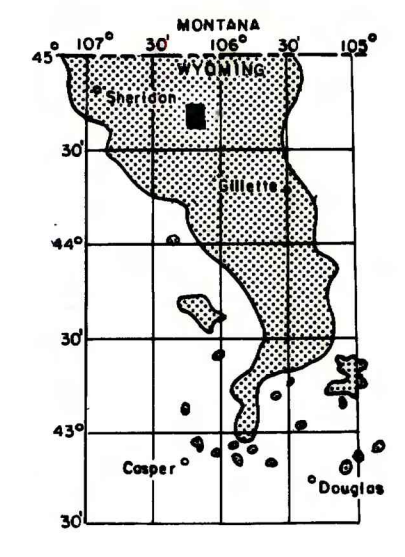

MAP SHOWING LOCATION OF THE ARVADA QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

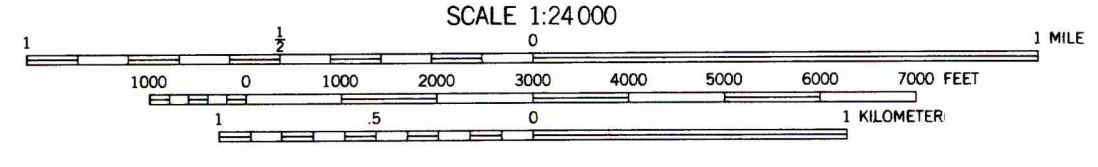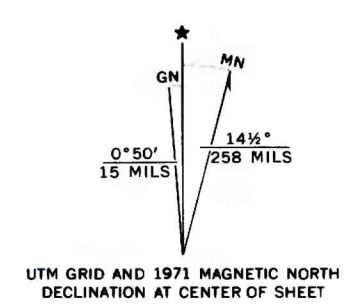

COAL RESOURCE OCCURRENCE MAP OF THE ARVADA QUADRANGLE, SHERIDAN COUNTY, WYOMING

BY  
IntraSearch  
1980

PLATE 19  
ISOPACH AND MINING-RATIO  
MAP OF  
ANDERSON AND UPPER CANYON COAL BEDS

This report has not been edited for conformity with U. S. Geological Survey editorial standards or stratigraphic nomenclature.