



EXPLANATION



ISOPACHS OF COAL BED—Showing thickness in feet, isopach interval 2 feet. Dashed where coal is burned or eroded.




MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.



TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Arrow points toward the coal-bearing area. Coal bed dashed where inferred or projected.

To convert feet to meters, multiply feet by 0.3048.



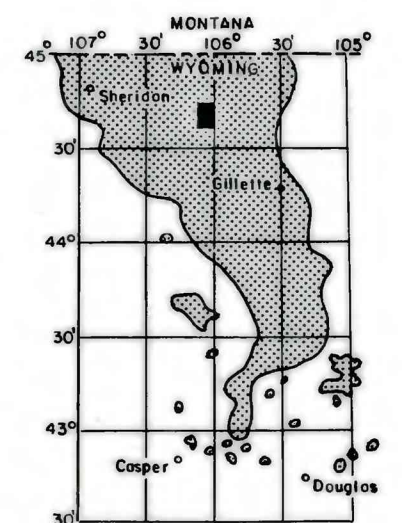


MAP SHOWING LOCATION OF THE ARVADA NE QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

This report has not been edited for conformity with U. S. Geological Survey editorial standards or stratigraphic nomenclature.

COAL RESOURCE OCCURRENCE MAP OF THE ARVADA NE
QUADRANGLE, SHERIDAN AND CAMPBELL COUNTIES, WYOMING

BY
intraSearch
1980

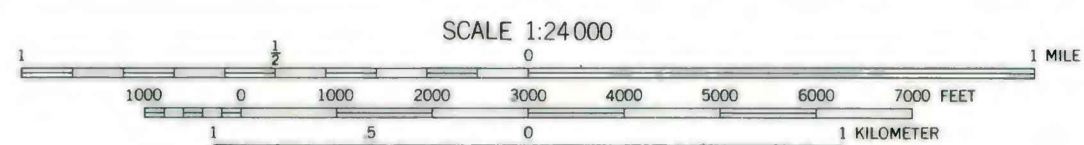

4773 I SE (CABIN CREEK SE) R. 76 W. 4773 II NW (LAREY DRAW) 4873 III NW (LAREY DRAW) 4773 II SE (WELL DRAW) 4773 I SW (WELL DRAW)

4773 I SE (CABIN CREEK SE) R. 76 W. 4773 II NW (LAREY DRAW) 4873 III NW (LAREY DRAW) 4773 II SE (WELL DRAW) 4773 I SW (WELL DRAW)

Base from U.S. Geological Survey, 1971

Compiled in 1980